

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331592-930

Luminaire Tested: **S122DIW-S1005D710U930-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331592-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIW-S1005D710U930-4F0-1E-UDD-A1  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 710 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5594.2 lumens  
Efficiency: N/A  
Efficacy: 93.5 lumens/watt  
Spacing Criteria (0/90/45): 1.08 / 1.16 / 1.23  
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 59.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331592-930

CATALOG NUMBER: S122DIW-S1005D710U930-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

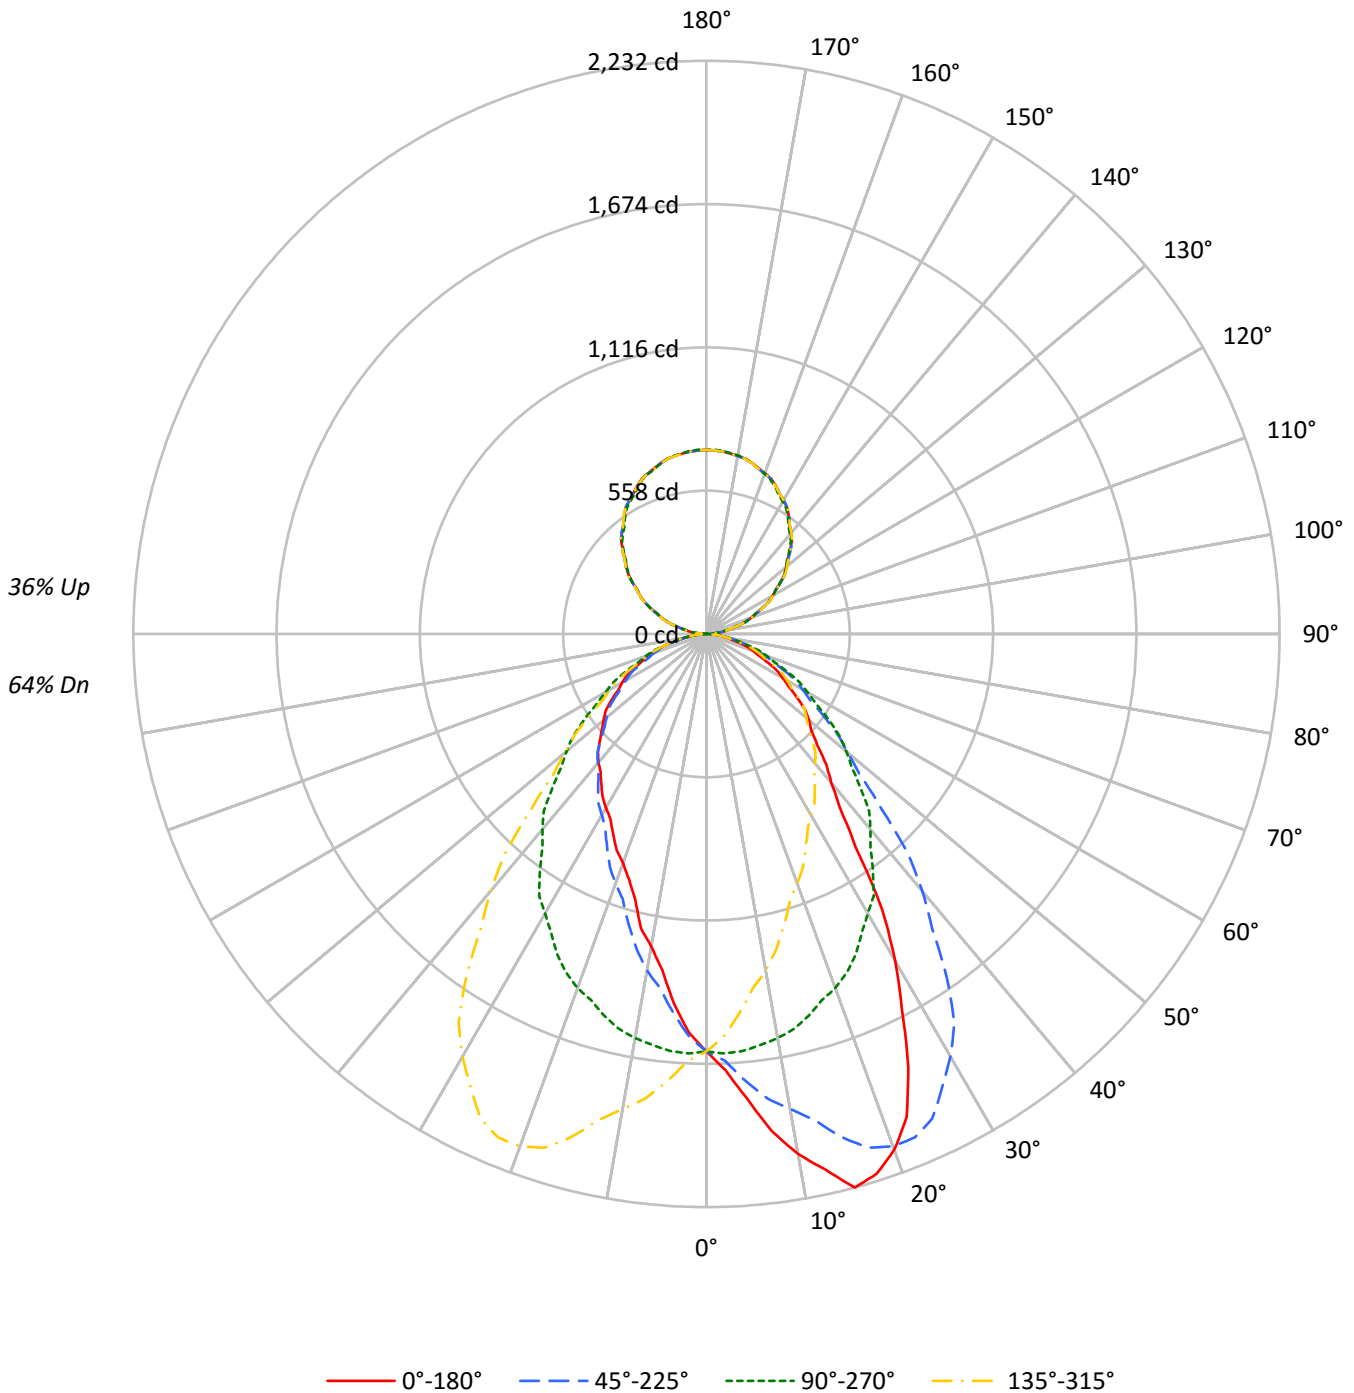



TEST NUMBER: P331592-930

CATALOG NUMBER: S122DIW-S1005D710U930-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	91	91	91	80	80	80	69	69	69	64
1	102	97	94	90	95	92	88	85	81	79	76	71	69	68	62	61	60	55
2	93	86	80	75	87	81	76	71	72	68	64	63	60	58	55	53	51	47
3	85	76	69	63	80	72	65	60	64	59	55	56	53	49	50	47	44	41
4	78	68	60	54	73	64	57	52	57	52	47	51	46	43	45	41	39	36
5	72	61	53	47	68	58	50	45	52	46	41	46	41	38	41	37	34	31
6	67	55	47	41	63	52	45	40	47	41	36	42	37	33	37	33	30	28
7	62	50	42	36	58	47	40	35	43	37	32	38	33	30	34	30	27	25
8	58	45	38	32	54	43	36	31	39	33	29	35	30	27	31	28	25	22
9	54	42	34	29	51	40	33	28	36	30	26	33	28	24	29	25	22	20
10	51	38	31	26	48	37	30	26	33	28	24	30	26	22	27	23	21	19

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	26248	26248	26248	26248
5°	29428	26420	23412	26420
10°	33721	26202	20261	26202
15°	37305	25723	17901	25723
20°	36737	25206	16318	25206
25°	33127	24522	15316	24522
30°	27374	23426	14585	23426
35°	19951	22277	14063	22277
40°	15934	20925	13774	20925
45°	13924	19358	13381	19358
50°	13089	17844	13122	17844
55°	12065	16304	12769	16304
60°	11057	14667	12226	14667
65°	10074	13200	11694	13200
70°	9144	11769	10914	11769
75°	8110	10175	9669	10175
80°	6974	8424	7782	8424
85°	6262	6262	4631	6262



TEST NUMBER: P331592-930

CATALOG NUMBER: S122DIW-S1005D710U930-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	154.8	2.8
10°-20°	450.1	8.0
20°-30°	653.3	11.7
30°-40°	689.3	12.3
40°-50°	610.4	10.9
50°-60°	487.1	8.7
60°-70°	331.1	5.9
70°-80°	169.7	3.0
80°-90°	43.8	0.8
90°-100°	45.4	0.8
100°-110°	141.1	2.5
110°-120°	241.2	4.3
120°-130°	317.1	5.7
130°-140°	356.0	6.4
140°-150°	349.0	6.2
150°-160°	292.8	5.2
160°-170°	194.2	3.5
170°-180°	67.9	1.2
0°-30°	1258.2	22.5
0°-40°	1947.5	34.8
0°-60°	3045.0	54.4
0°-90°	3589.6	64.2
90°-120°	427.7	7.6
90°-150°	1449.8	25.9
90°-180°	2005.0	35.8
0°-180°	5594.2	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1626	1626	1626	1626	1626	
5°	1816	1630	1444	1630	1816	181
15°	2232	1539	1071	1539	2232	616
25°	1860	1376	860	1376	1860	840
35°	1012	1130	714	1130	1012	658
45°	610	848	586	848	610	480
55°	429	579	454	579	429	384
65°	264	346	306	346	264	262
75°	130	163	155	163	130	139
85°	34	34	25	34	34	37
90°	20	1	20	1	20	11
95°	38	32	38	32	38	42
105°	134	130	134	130	134	141
115°	242	242	242	242	242	239
125°	353	352	353	352	353	315
135°	461	456	461	456	461	355
145°	559	553	559	553	559	349
155°	637	632	637	632	637	293
165°	688	688	688	688	688	194
175°	713	716	713	716	713	68
180°	717	717	717	717	717	



TEST NUMBER: P331592-930

CATALOG NUMBER: S122DIW-S1005D710U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1700.7	1701.2	1702.2	1694.2	1693.2	1693.2	1686.2	1680.3	1673.2	1663.7	1664.8
5°	1815.7	1822.5	1825.0	1817.5	1806.3	1805.1	1794.5	1776.9	1760.7	1747.6	1738.2
7.5°	1952.9	1955.7	1949.5	1939.7	1931.3	1916.3	1896.5	1877.1	1850.1	1825.2	1806.7
10°	2056.8	2060.6	2050.0	2035.6	2023.7	2006.3	1977.5	1948.2	1912.5	1878.2	1850.6
12.5°	2135.8	2145.1	2131.4	2129.6	2109.3	2085.2	2051.0	2036.1	1986.0	1938.1	1908.7
15°	2231.8	2231.1	2232.5	2220.5	2205.5	2201.8	2165.6	2126.2	2055.6	2027.5	1978.7
17.5°	2204.1	2213.5	2217.9	2217.8	2217.5	2215.1	2203.4	2178.6	2143.2	2097.6	2041.3
20°	2138.1	2150.6	2152.5	2166.8	2175.0	2185.6	2190.0	2183.0	2161.2	2123.1	2074.4
22.5°	2036.1	2039.6	2045.5	2067.8	2085.5	2112.1	2126.0	2149.0	2140.7	2122.1	2081.4
25°	1859.5	1853.2	1875.0	1886.3	1926.9	1969.4	2000.0	2033.8	2063.8	2081.9	2070.0
27.5°	1647.2	1637.9	1670.6	1700.5	1733.5	1779.5	1827.2	1883.5	1930.4	1989.0	2009.1
30°	1468.3	1473.9	1505.1	1537.0	1587.0	1652.0	1705.7	1767.6	1834.4	1900.1	1945.6
32.5°	1275.4	1297.0	1316.7	1365.5	1409.6	1482.1	1560.7	1638.1	1721.5	1796.1	1866.7
35°	1012.2	1037.1	1064.7	1100.2	1162.1	1234.0	1310.8	1415.2	1528.9	1630.8	1714.5
37.5°	852.0	848.0	863.7	889.5	939.6	997.6	1086.1	1189.1	1323.0	1442.7	1560.7
40°	756.0	753.5	764.8	788.5	826.6	869.1	946.6	1037.1	1161.5	1307.7	1448.3
42.5°	690.1	691.5	697.8	714.5	740.6	775.6	833.6	910.7	1024.6	1162.3	1313.4
45°	609.8	614.2	621.1	629.2	644.2	672.9	705.4	760.4	850.4	965.3	1114.0
47.5°	552.0	552.2	559.2	566.3	575.2	591.4	617.9	652.4	715.9	809.5	937.3
50°	521.1	516.7	521.7	527.3	536.7	548.0	565.4	597.9	640.4	716.0	822.9
52.5°	483.1	483.2	487.7	489.8	498.2	509.5	525.5	548.0	586.4	645.6	733.4
55°	428.6	431.7	434.2	438.0	445.5	453.6	466.1	481.1	511.1	555.5	620.4
57.5°	377.4	378.4	380.9	388.0	392.7	400.2	412.1	425.7	445.2	478.1	526.9
60°	342.4	342.4	347.4	350.5	356.8	364.3	373.7	386.8	404.2	431.1	470.5
62.5°	310.4	309.9	311.9	317.0	321.8	328.8	338.1	349.3	365.7	389.6	422.0
65°	263.7	262.4	266.2	267.4	272.4	279.3	286.8	298.6	311.8	329.3	358.0
67.5°	218.7	220.2	222.2	224.5	227.3	234.6	239.5	247.9	259.0	273.5	293.0
70°	193.7	193.7	193.7	195.6	199.3	203.1	208.1	214.9	225.6	238.1	255.5
72.5°	165.7	167.7	169.7	168.6	173.3	175.5	181.6	185.5	195.6	203.6	219.1
75°	130.0	130.0	130.0	133.1	134.9	136.8	140.6	144.3	149.4	159.3	167.5
77.5°	96.9	96.7	97.3	98.1	100.1	102.3	103.5	106.8	111.5	116.1	122.9
80°	75.0	76.2	76.9	78.1	78.1	79.3	80.0	84.4	87.5	90.6	95.0
82.5°	58.0	58.2	58.4	58.6	59.1	59.8	61.5	62.9	64.0	66.6	70.0
85°	33.8	33.1	33.1	34.3	33.8	33.8	35.0	36.2	36.2	36.9	38.7
87.5°	17.1	17.1	17.5	17.0	17.0	17.5	17.5	17.1	17.7	18.3	18.1
90°	20.5	20.5	20.3	20.1	20.1	20.1	20.4	20.6	20.9	21.2	18.2
92.5°	19.6	19.6	19.6	19.5	19.5	19.5	19.4	19.3	19.3	19.2	18.5
95°	37.5	37.7	38.1	38.3	38.6	38.7	38.7	38.7	38.7	38.7	38.5
97.5°	65.0	65.0	65.1	65.1	65.1	65.1	65.1	65.1	65.1	65.1	64.6
100°	82.9	83.0	83.2	83.3	83.4	83.5	83.5	83.5	83.5	83.5	83.1
102.5°	103.2	103.4	103.5	103.6	103.8	103.8	103.6	103.5	103.5	103.3	102.8
105°	134.3	134.3	134.3	134.3	134.3	134.2	133.9	133.6	133.4	133.1	132.8
107.5°	163.6	164.2	164.9	165.4	166.1	166.3	166.2	166.1	166.0	165.9	165.9
110°	186.4	186.7	187.1	187.5	187.9	188.2	188.2	188.2	188.2	188.2	188.2



TEST NUMBER: P331592-930

CATALOG NUMBER: S122DIW-S1005D710U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	208.1	208.4	208.7	209.0	209.3	209.6	209.9	210.3	210.6	210.9	211.0
115°	242.0	242.4	242.8	243.2	243.6	243.9	244.0	244.2	244.3	244.4	244.7
117.5°	274.3	274.7	275.1	275.5	275.9	276.3	276.6	277.0	277.3	277.6	278.3
120°	297.0	297.4	297.8	298.2	298.6	298.9	298.9	298.9	298.9	298.9	299.9
122.5°	319.4	319.6	319.9	320.2	320.5	320.8	321.1	321.5	321.8	322.1	322.9
125°	353.4	353.4	353.6	353.8	353.8	354.1	354.5	354.9	355.3	355.7	356.1
127.5°	384.3	384.7	385.1	385.6	386.0	386.5	386.9	387.4	387.9	388.4	388.9
130°	406.6	407.1	407.6	408.1	408.7	409.1	409.4	409.7	409.9	410.2	410.4
132.5°	427.9	428.3	428.7	429.2	429.6	430.1	430.6	431.3	431.9	432.4	432.4
135°	461.0	461.4	461.8	462.2	462.6	462.9	463.0	463.2	463.3	463.4	463.2
137.5°	491.0	491.5	492.1	492.6	493.2	493.5	493.6	493.7	493.8	493.9	493.6
140°	511.8	512.3	512.9	513.5	514.0	514.2	514.2	514.2	514.2	514.2	513.6
142.5°	530.7	531.2	531.7	532.3	532.9	533.0	533.0	532.9	532.7	532.6	532.1
145°	559.1	559.5	560.1	560.6	561.2	561.3	561.3	561.1	560.9	560.8	560.0
147.5°	584.3	584.8	585.3	585.9	586.4	586.4	586.1	585.9	585.5	585.3	584.7
150°	600.8	601.2	601.5	601.9	602.3	602.3	601.9	601.5	601.2	600.8	600.2
152.5°	616.3	616.8	617.3	617.8	618.3	618.3	617.8	617.3	616.8	616.3	615.6
155°	637.1	637.5	637.9	638.3	638.7	638.5	637.9	637.2	636.5	635.9	635.4
157.5°	654.9	655.6	656.2	656.9	657.5	657.4	656.5	655.6	654.7	653.8	653.5
160°	666.1	666.7	667.2	667.7	668.2	668.1	667.3	666.5	665.7	664.9	664.7
162.5°	675.8	676.5	677.1	677.7	678.3	678.2	677.4	676.4	675.5	674.6	674.4
165°	688.5	689.2	689.8	690.5	691.2	691.0	690.1	689.2	688.2	687.3	687.3
167.5°	698.9	699.6	700.3	701.0	701.6	701.6	700.6	699.7	698.7	697.8	697.8
170°	704.2	705.0	705.8	706.6	707.4	707.4	706.5	705.5	704.6	703.6	703.8
172.5°	708.6	709.4	710.2	711.0	711.8	711.8	710.8	709.9	708.9	707.9	708.1
175°	713.3	714.1	714.9	715.7	716.5	716.5	715.5	714.5	713.6	712.7	713.0
177.5°	715.4	716.1	716.7	717.4	718.0	718.0	717.4	716.7	716.1	715.4	715.7
180°	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9



TEST NUMBER: P331592-930

CATALOG NUMBER: S122DIW-S1005D710U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1668.3	1664.3	1661.7	1652.8	1644.7	1636.7	1634.3	1635.2	1624.2	1613.7	1609.2
5°	1733.2	1720.7	1708.9	1692.0	1672.0	1650.1	1638.8	1630.1	1608.3	1584.5	1570.8
7.5°	1791.5	1773.6	1750.7	1719.0	1689.9	1655.5	1633.6	1614.2	1582.3	1548.7	1528.3
10°	1826.9	1802.5	1773.2	1734.5	1698.8	1657.0	1627.6	1598.2	1560.7	1520.8	1495.7
12.5°	1857.4	1824.6	1795.7	1746.0	1703.8	1651.5	1616.7	1575.2	1535.8	1488.2	1463.8
15°	1930.1	1869.4	1814.4	1758.2	1706.3	1633.2	1594.5	1538.9	1487.0	1428.3	1400.2
17.5°	1986.2	1918.0	1831.4	1760.0	1699.5	1618.5	1561.6	1495.0	1433.7	1366.6	1328.4
20°	2018.1	1940.0	1846.9	1761.9	1689.5	1597.0	1535.1	1467.0	1395.2	1319.6	1278.4
22.5°	2037.1	1955.0	1863.0	1754.4	1669.5	1579.5	1501.6	1427.0	1354.2	1272.6	1229.4
25°	2043.1	1968.1	1870.7	1748.2	1644.5	1542.6	1448.9	1376.5	1288.3	1212.1	1149.0
27.5°	2013.4	1959.7	1865.9	1736.4	1615.6	1496.6	1392.0	1309.9	1217.0	1134.2	1070.8
30°	1976.9	1945.6	1854.4	1724.4	1592.6	1464.5	1349.6	1256.5	1164.0	1080.3	1015.3
32.5°	1920.4	1913.7	1833.4	1707.5	1568.1	1424.1	1305.1	1211.0	1108.6	1026.3	964.3
35°	1809.5	1839.4	1788.8	1669.5	1522.0	1366.4	1237.7	1130.2	1024.1	945.3	887.2
37.5°	1660.8	1735.2	1722.0	1613.9	1459.8	1303.7	1161.6	1049.3	948.1	868.6	811.6
40°	1558.3	1653.3	1667.0	1571.4	1415.8	1255.2	1104.6	992.8	894.1	821.7	764.1
42.5°	1448.3	1559.3	1597.0	1520.4	1367.8	1204.3	1053.7	937.8	840.1	769.6	718.7
45°	1264.0	1410.8	1479.0	1435.2	1287.8	1120.3	965.3	847.8	759.1	692.9	653.5
47.5°	1091.7	1252.1	1343.7	1328.2	1198.7	1032.8	879.6	766.9	680.5	627.7	592.5
50°	969.7	1134.7	1245.2	1250.3	1134.7	970.3	816.6	710.4	631.0	581.7	552.9
52.5°	863.7	1021.2	1141.7	1168.2	1063.2	905.3	760.1	654.4	584.6	539.2	513.5
55°	725.4	858.5	992.2	1040.9	956.6	806.7	672.3	579.2	513.6	482.3	459.8
57.5°	603.1	714.0	837.5	891.4	839.4	711.0	585.1	504.2	451.0	423.6	406.3
60°	538.6	626.1	736.1	800.4	755.4	641.1	531.1	454.2	410.5	386.1	369.9
62.5°	478.6	556.1	649.1	707.9	683.4	575.6	477.1	409.3	371.5	348.6	336.9
65°	394.8	456.1	528.0	582.3	566.1	484.2	403.7	345.5	315.5	297.4	288.0
67.5°	325.1	369.4	419.2	466.8	453.7	395.7	331.0	285.8	263.4	247.8	242.1
70°	281.2	314.9	359.3	397.4	386.8	339.2	288.0	249.3	229.9	216.8	211.2
72.5°	239.2	266.9	300.8	331.9	324.7	285.3	242.6	213.3	198.4	186.3	181.7
75°	180.6	201.8	222.4	243.0	241.2	210.6	185.6	163.1	151.2	141.9	140.0
77.5°	133.3	145.2	159.2	171.5	168.0	150.6	130.9	118.1	109.3	103.1	102.1
80°	101.8	108.7	118.7	127.4	123.1	115.6	100.0	90.6	84.4	78.1	75.6
82.5°	73.9	80.7	86.7	91.5	88.1	81.1	71.5	65.1	61.4	57.1	56.1
85°	38.7	42.5	45.0	46.2	45.0	40.6	36.2	33.8	30.7	28.8	28.1
87.5°	18.0	17.4	16.9	17.4	15.6	15.2	13.0	11.1	10.9	10.8	10.1
90°	15.2	12.3	9.4	7.1	5.5	3.8	2.2	0.6	2.2	3.8	5.5
92.5°	17.9	17.1	16.5	15.5	14.3	13.1	12.0	10.8	12.0	13.1	14.3
95°	38.2	37.9	37.7	36.9	35.5	34.2	32.8	31.5	32.8	34.2	35.5
97.5°	64.1	63.6	63.0	62.2	61.0	59.8	58.6	57.5	58.6	59.8	61.0
100°	82.7	82.3	81.9	81.1	80.1	79.0	77.9	76.8	77.9	79.0	80.1
102.5°	102.3	101.8	101.3	100.6	99.7	98.9	98.0	97.2	98.0	98.9	99.7
105°	132.6	132.3	132.0	131.7	131.3	130.9	130.4	130.0	130.4	130.9	131.3
107.5°	165.9	165.9	165.9	165.6	165.0	164.4	163.8	163.2	163.8	164.4	165.0
110°	188.2	188.2	188.2	187.8	186.9	186.1	185.3	184.5	185.3	186.1	186.9





TEST NUMBER: P331592-930

CATALOG NUMBER: S122DIW-S1005D710U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	211.1	211.2	211.3	211.0	210.2	209.4	208.6	207.7	208.6	209.4	210.2
115°	244.9	245.2	245.5	245.2	244.4	243.6	242.8	242.0	242.8	243.6	244.4
117.5°	279.1	279.8	280.5	280.4	279.3	278.3	277.2	276.1	277.2	278.3	279.3
120°	301.0	302.1	303.1	303.1	302.1	301.0	299.9	298.9	299.9	301.0	302.1
122.5°	323.6	324.3	325.1	324.8	323.5	322.3	321.0	319.7	321.0	322.3	323.5
125°	356.5	356.9	357.3	356.9	355.7	354.5	353.4	352.1	353.4	354.5	355.7
127.5°	389.4	389.9	390.4	389.8	388.2	386.8	385.2	383.7	385.2	386.8	388.2
130°	410.7	411.0	411.2	410.5	408.8	407.0	405.3	403.5	405.3	407.0	408.8
132.5°	432.4	432.3	432.3	431.5	430.1	428.7	427.2	425.8	427.2	428.7	430.1
135°	462.9	462.6	462.4	461.5	460.0	458.5	457.1	455.6	457.1	458.5	460.0
137.5°	493.3	492.8	492.5	491.7	490.6	489.3	488.1	486.9	488.1	489.3	490.6
140°	512.9	512.3	511.5	510.6	509.4	508.2	507.0	505.8	507.0	508.2	509.4
142.5°	531.7	531.2	530.8	529.9	528.8	527.6	526.4	525.1	526.4	527.6	528.8
145°	559.2	558.4	557.6	556.8	555.8	554.8	553.9	552.9	553.9	554.8	555.8
147.5°	584.2	583.7	583.1	582.3	581.1	580.0	578.9	577.8	578.9	580.0	581.1
150°	599.7	599.2	598.6	597.9	597.1	596.3	595.5	594.7	595.5	596.3	597.1
152.5°	615.0	614.3	613.7	612.9	612.1	611.3	610.5	609.7	610.5	611.3	612.1
155°	635.0	634.6	634.2	633.8	633.4	633.0	632.6	632.2	632.6	633.0	633.4
157.5°	653.3	653.1	652.8	652.6	652.2	652.0	651.8	651.4	651.8	652.0	652.2
160°	664.6	664.5	664.4	664.1	663.9	663.6	663.3	663.1	663.3	663.6	663.9
162.5°	674.3	674.2	674.0	673.9	673.8	673.8	673.8	673.7	673.8	673.8	673.8
165°	687.3	687.3	687.3	687.4	687.5	687.6	687.7	687.9	687.7	687.6	687.5
167.5°	697.8	697.9	697.9	698.1	698.5	699.0	699.4	699.8	699.4	699.0	698.5
170°	703.8	704.0	704.2	704.4	704.8	705.2	705.6	706.0	705.6	705.2	704.8
172.5°	708.3	708.3	708.5	708.7	709.1	709.6	710.0	710.4	710.0	709.6	709.1
175°	713.2	713.5	713.8	714.1	714.5	714.9	715.3	715.7	715.3	714.9	714.5
177.5°	715.9	716.1	716.3	716.6	716.9	717.2	717.5	717.9	717.5	717.2	716.9
180°	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9



TEST NUMBER: P331592-930

CATALOG NUMBER: S122DIW-S1005D710U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1604.3	1601.2	1590.7	1585.3	1576.3	1567.7	1562.3	1564.8	1566.8	1565.8	1564.2
5°	1558.3	1546.4	1528.3	1512.6	1501.4	1480.8	1472.0	1467.7	1464.0	1459.5	1455.1
7.5°	1503.5	1484.8	1458.8	1436.6	1415.5	1389.9	1375.3	1366.6	1357.6	1347.7	1339.0
10°	1464.5	1438.3	1410.8	1379.6	1354.6	1331.5	1310.8	1297.1	1284.6	1272.8	1264.0
12.5°	1423.6	1393.3	1359.3	1316.6	1289.1	1256.0	1252.9	1228.7	1209.1	1201.8	1191.5
15°	1358.3	1315.8	1272.8	1222.1	1200.3	1170.3	1151.5	1132.8	1115.9	1104.0	1100.9
17.5°	1284.3	1229.2	1186.3	1150.0	1114.2	1083.5	1066.2	1051.2	1037.3	1021.4	1019.3
20°	1227.8	1180.2	1133.4	1101.6	1064.7	1033.4	1012.2	997.2	985.3	975.9	967.8
22.5°	1174.3	1122.3	1079.4	1044.6	1008.2	982.9	966.2	951.7	941.8	931.5	923.8
25°	1088.4	1047.8	1000.9	961.6	931.6	915.3	901.6	889.1	882.9	876.0	867.2
27.5°	1013.3	968.2	924.3	893.8	867.5	853.1	843.3	834.9	829.0	825.0	820.0
30°	960.3	914.7	880.4	850.4	828.5	814.2	807.9	802.9	796.0	793.5	791.0
32.5°	909.3	868.2	838.9	812.9	792.0	782.6	776.9	772.4	767.0	764.5	759.5
35°	837.2	802.9	774.1	759.8	742.9	734.7	730.4	724.1	719.2	716.6	716.0
37.5°	769.4	739.6	720.6	702.1	695.0	690.1	684.0	679.8	678.3	677.9	677.3
40°	725.4	701.0	684.2	669.2	666.0	658.5	653.5	649.8	649.8	650.4	649.8
42.5°	685.4	663.6	648.7	635.7	632.0	627.5	622.6	622.3	623.3	625.4	623.3
45°	624.8	609.2	598.6	592.3	585.5	581.1	580.4	582.3	582.9	583.6	585.5
47.5°	569.1	558.7	549.1	542.2	539.2	538.4	537.7	541.0	544.0	545.1	548.0
50°	536.1	524.2	516.1	511.7	509.2	507.9	509.2	513.0	515.4	518.6	520.5
52.5°	499.1	490.7	485.1	481.8	480.7	481.5	481.8	486.0	490.0	491.1	492.0
55°	448.0	441.7	440.5	434.9	437.3	436.8	439.9	442.4	446.1	449.9	450.5
57.5°	397.0	392.0	388.7	389.1	389.9	392.6	395.3	399.7	403.7	407.6	408.0
60°	363.1	360.5	358.7	358.7	359.9	363.6	366.7	371.1	373.7	376.1	378.0
62.5°	332.0	329.5	327.7	328.6	331.9	334.1	337.8	340.1	342.7	345.1	346.0
65°	283.1	281.8	283.6	284.9	285.5	288.7	293.0	294.9	297.4	298.6	303.0
67.5°	237.9	238.1	237.9	239.7	243.3	244.0	248.2	252.6	253.1	255.4	258.3
70°	207.4	208.7	209.9	211.2	214.3	215.6	218.7	220.5	223.1	224.9	226.8
72.5°	179.4	179.7	180.9	180.7	183.3	186.1	188.7	190.5	193.1	195.4	197.3
75°	138.1	138.1	139.3	140.0	143.1	146.2	145.6	146.8	149.4	151.8	153.1
77.5°	100.9	99.5	100.9	101.5	102.5	105.1	105.6	107.4	110.2	109.3	110.7
80°	76.9	75.0	76.9	77.5	77.5	80.6	80.6	81.9	83.7	81.9	83.7
82.5°	54.9	54.0	55.4	55.5	56.5	56.6	57.6	57.9	59.8	58.9	59.8
85°	27.5	26.9	27.5	26.9	27.5	28.1	28.1	27.5	27.5	28.8	26.9
87.5°	9.9	9.9	9.9	10.5	10.7	10.8	10.2	10.1	10.1	9.0	9.0
90°	7.1	9.4	12.3	15.2	18.2	21.2	20.9	20.6	20.4	20.1	20.1
92.5°	15.5	16.5	17.1	17.9	18.5	19.2	19.3	19.3	19.4	19.5	19.5
95°	36.9	37.7	37.9	38.2	38.5	38.7	38.7	38.7	38.7	38.7	38.6
97.5°	62.2	63.0	63.6	64.1	64.6	65.1	65.1	65.1	65.1	65.1	65.1
100°	81.1	81.9	82.3	82.7	83.1	83.5	83.5	83.5	83.5	83.5	83.4
102.5°	100.6	101.3	101.8	102.3	102.8	103.3	103.5	103.5	103.6	103.8	103.8
105°	131.7	132.0	132.3	132.6	132.8	133.1	133.4	133.6	133.9	134.2	134.3
107.5°	165.6	165.9	165.9	165.9	165.9	165.9	166.0	166.1	166.2	166.3	166.1
110°	187.8	188.2	188.2	188.2	188.2	188.2	188.2	188.2	188.2	188.2	187.9



TEST NUMBER: P331592-930

CATALOG NUMBER: S122DIW-S1005D710U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	211.0	211.3	211.2	211.1	211.0	210.9	210.6	210.3	209.9	209.6	209.3
115°	245.2	245.5	245.2	244.9	244.7	244.4	244.3	244.2	244.0	243.9	243.6
117.5°	280.4	280.5	279.8	279.1	278.3	277.6	277.3	277.0	276.6	276.3	275.9
120°	303.1	303.1	302.1	301.0	299.9	298.9	298.9	298.9	298.9	298.9	298.6
122.5°	324.8	325.1	324.3	323.6	322.9	322.1	321.8	321.5	321.1	320.8	320.5
125°	356.9	357.3	356.9	356.5	356.1	355.7	355.3	354.9	354.5	354.1	353.8
127.5°	389.8	390.4	389.9	389.4	388.9	388.4	387.9	387.4	386.9	386.5	386.0
130°	410.5	411.2	411.0	410.7	410.4	410.2	409.9	409.7	409.4	409.1	408.7
132.5°	431.5	432.3	432.3	432.4	432.4	432.4	431.9	431.3	430.6	430.1	429.6
135°	461.5	462.4	462.6	462.9	463.2	463.4	463.3	463.2	463.0	462.9	462.6
137.5°	491.7	492.5	492.8	493.3	493.6	493.9	493.8	493.7	493.6	493.5	493.2
140°	510.6	511.5	512.3	512.9	513.6	514.2	514.2	514.2	514.2	514.2	514.0
142.5°	529.9	530.8	531.2	531.7	532.1	532.6	532.7	532.9	533.0	533.0	532.9
145°	556.8	557.6	558.4	559.2	560.0	560.8	560.9	561.1	561.3	561.3	561.2
147.5°	582.3	583.1	583.7	584.2	584.7	585.3	585.5	585.9	586.1	586.4	586.4
150°	597.9	598.6	599.2	599.7	600.2	600.8	601.2	601.5	601.9	602.3	602.3
152.5°	612.9	613.7	614.3	615.0	615.6	616.3	616.8	617.3	617.8	618.3	618.3
155°	633.8	634.2	634.6	635.0	635.4	635.9	636.5	637.2	637.9	638.5	638.7
157.5°	652.6	652.8	653.1	653.3	653.5	653.8	654.7	655.6	656.5	657.4	657.5
160°	664.1	664.4	664.5	664.6	664.7	664.9	665.7	666.5	667.3	668.1	668.2
162.5°	673.9	674.0	674.2	674.3	674.4	674.6	675.5	676.4	677.4	678.2	678.3
165°	687.4	687.3	687.3	687.3	687.3	687.3	688.2	689.2	690.1	691.0	691.2
167.5°	698.1	697.9	697.9	697.8	697.8	697.8	698.7	699.7	700.6	701.6	701.6
170°	704.4	704.2	704.0	703.8	703.8	703.6	704.6	705.5	706.5	707.4	707.4
172.5°	708.7	708.5	708.3	708.3	708.1	707.9	708.9	709.9	710.8	711.8	711.8
175°	714.1	713.8	713.5	713.2	713.0	712.7	713.6	714.5	715.5	716.5	716.5
177.5°	716.6	716.3	716.1	715.9	715.7	715.4	716.1	716.7	717.4	718.0	718.0
180°	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9



TEST NUMBER: P331592-930

CATALOG NUMBER: S122DIW-S1005D710U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1559.3	1558.3	1558.3	1553.8	1558.3	1558.3	1559.3	1564.2	1565.8	1566.8	1564.8
5°	1446.4	1444.5	1441.4	1444.5	1441.4	1444.5	1446.4	1455.1	1459.5	1464.0	1467.7
7.5°	1334.8	1327.3	1326.2	1318.8	1326.2	1327.3	1334.8	1339.0	1347.7	1357.6	1366.6
10°	1253.4	1248.4	1247.7	1235.8	1247.7	1248.4	1253.4	1264.0	1272.8	1284.6	1297.1
12.5°	1191.4	1179.4	1181.8	1174.8	1181.8	1179.4	1191.4	1191.5	1201.8	1209.1	1228.7
15°	1084.0	1084.0	1081.6	1070.9	1081.6	1084.0	1084.0	1100.9	1104.0	1115.9	1132.8
17.5°	1007.0	1005.7	999.7	1002.7	999.7	1005.7	1007.0	1019.3	1021.4	1037.3	1051.2
20°	960.9	957.2	949.7	949.7	949.7	957.2	960.9	967.8	975.9	985.3	997.2
22.5°	917.5	917.2	909.2	911.7	909.2	917.2	917.5	923.8	931.5	941.8	951.7
25°	866.6	861.6	857.9	859.7	857.9	861.6	866.6	867.2	876.0	882.9	889.1
27.5°	818.4	815.6	815.4	810.2	815.4	815.6	818.4	820.0	825.0	829.0	834.9
30°	790.4	784.2	785.4	782.3	785.4	784.2	790.4	791.0	793.5	796.0	802.9
32.5°	758.4	756.1	754.9	752.3	754.9	756.1	758.4	759.5	764.5	767.0	772.4
35°	714.8	715.4	712.2	713.5	712.2	715.4	714.8	716.0	716.6	719.2	724.1
37.5°	676.7	678.7	677.2	677.5	677.2	678.7	676.7	677.3	677.9	678.3	679.8
40°	651.7	651.7	651.7	653.5	651.7	651.7	651.7	649.8	650.4	649.8	649.8
42.5°	627.7	626.7	625.7	625.6	625.7	626.7	627.7	623.3	625.4	623.3	622.3
45°	586.7	588.6	589.2	586.0	589.2	588.6	586.7	585.5	583.6	582.9	582.3
47.5°	549.6	549.8	549.6	552.4	549.6	549.8	549.6	548.0	545.1	544.0	541.0
50°	523.6	522.4	523.6	522.4	523.6	522.4	523.6	520.5	518.6	515.4	513.0
52.5°	496.1	496.4	495.6	495.4	495.6	496.4	496.1	492.0	491.1	490.0	486.0
55°	453.0	454.2	453.6	453.6	453.6	454.2	453.0	450.5	449.9	446.1	442.4
57.5°	408.4	409.5	410.3	407.6	410.3	409.5	408.4	408.0	407.6	403.7	399.7
60°	377.4	380.5	379.8	378.6	379.8	380.5	377.4	378.0	376.1	373.7	371.1
62.5°	348.9	350.0	349.9	349.7	349.9	350.0	348.9	346.0	345.1	342.7	340.1
65°	304.9	306.1	304.3	306.1	304.3	306.1	304.9	303.0	298.6	297.4	294.9
67.5°	257.6	258.0	259.3	260.2	259.3	258.0	257.6	258.3	255.4	253.1	252.6
70°	228.0	227.5	229.3	231.2	229.3	227.5	228.0	226.8	224.9	223.1	220.5
72.5°	197.1	198.4	197.8	199.2	197.8	198.4	197.1	197.3	195.4	193.1	190.5
75°	151.8	153.7	153.1	155.0	153.1	153.7	151.8	153.1	151.8	149.4	146.8
77.5°	109.7	110.0	109.7	110.7	109.7	110.0	109.7	110.7	109.3	110.2	107.4
80°	83.7	82.5	81.2	83.7	81.2	82.5	83.7	83.7	81.9	83.7	81.9
82.5°	58.2	58.9	57.7	57.7	57.7	58.9	58.2	59.8	58.9	59.8	57.9
85°	26.9	26.3	25.0	25.0	25.0	26.3	26.9	26.9	28.8	27.5	27.5
87.5°	9.0	8.6	8.6	8.2	8.6	8.6	9.0	9.0	9.0	10.1	10.1
90°	20.1	20.3	20.5	20.5	20.5	20.3	20.1	20.1	20.1	20.4	20.6
92.5°	19.5	19.6	19.6	19.6	19.6	19.6	19.5	19.5	19.5	19.4	19.3
95°	38.3	38.1	37.7	37.5	37.7	38.1	38.3	38.6	38.7	38.7	38.7
97.5°	65.1	65.1	65.0	65.0	65.0	65.1	65.1	65.1	65.1	65.1	65.1
100°	83.3	83.2	83.0	82.9	83.0	83.2	83.3	83.4	83.5	83.5	83.5
102.5°	103.6	103.5	103.4	103.2	103.4	103.5	103.6	103.8	103.8	103.6	103.5
105°	134.3	134.3	134.3	134.3	134.3	134.3	134.3	134.3	134.2	133.9	133.6
107.5°	165.4	164.9	164.2	163.6	164.2	164.9	165.4	166.1	166.3	166.2	166.1
110°	187.5	187.1	186.7	186.4	186.7	187.1	187.5	187.9	188.2	188.2	188.2



TEST NUMBER: P331592-930

CATALOG NUMBER: S122DIW-S1005D710U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	209.0	208.7	208.4	208.1	208.4	208.7	209.0	209.3	209.6	209.9	210.3
115°	243.2	242.8	242.4	242.0	242.4	242.8	243.2	243.6	243.9	244.0	244.2
117.5°	275.5	275.1	274.7	274.3	274.7	275.1	275.5	275.9	276.3	276.6	277.0
120°	298.2	297.8	297.4	297.0	297.4	297.8	298.2	298.6	298.9	298.9	298.9
122.5°	320.2	319.9	319.6	319.4	319.6	319.9	320.2	320.5	320.8	321.1	321.5
125°	353.8	353.6	353.4	353.4	353.4	353.6	353.8	353.8	354.1	354.5	354.9
127.5°	385.6	385.1	384.7	384.3	384.7	385.1	385.6	386.0	386.5	386.9	387.4
130°	408.1	407.6	407.1	406.6	407.1	407.6	408.1	408.7	409.1	409.4	409.7
132.5°	429.2	428.7	428.3	427.9	428.3	428.7	429.2	429.6	430.1	430.6	431.3
135°	462.2	461.8	461.4	461.0	461.4	461.8	462.2	462.6	462.9	463.0	463.2
137.5°	492.6	492.1	491.5	491.0	491.5	492.1	492.6	493.2	493.5	493.6	493.7
140°	513.5	512.9	512.3	511.8	512.3	512.9	513.5	514.0	514.2	514.2	514.2
142.5°	532.3	531.7	531.2	530.7	531.2	531.7	532.3	532.9	533.0	533.0	532.9
145°	560.6	560.1	559.5	559.1	559.5	560.1	560.6	561.2	561.3	561.3	561.1
147.5°	585.9	585.3	584.8	584.3	584.8	585.3	585.9	586.4	586.4	586.1	585.9
150°	601.9	601.5	601.2	600.8	601.2	601.5	601.9	602.3	602.3	601.9	601.5
152.5°	617.8	617.3	616.8	616.3	616.8	617.3	617.8	618.3	618.3	617.8	617.3
155°	638.3	637.9	637.5	637.1	637.5	637.9	638.3	638.7	638.5	637.9	637.2
157.5°	656.9	656.2	655.6	654.9	655.6	656.2	656.9	657.5	657.4	656.5	655.6
160°	667.7	667.2	666.7	666.1	666.7	667.2	667.7	668.2	668.1	667.3	666.5
162.5°	677.7	677.1	676.5	675.8	676.5	677.1	677.7	678.3	678.2	677.4	676.4
165°	690.5	689.8	689.2	688.5	689.2	689.8	690.5	691.2	691.0	690.1	689.2
167.5°	701.0	700.3	699.6	698.9	699.6	700.3	701.0	701.6	701.6	700.6	699.7
170°	706.6	705.8	705.0	704.2	705.0	705.8	706.6	707.4	707.4	706.5	705.5
172.5°	711.0	710.2	709.4	708.6	709.4	710.2	711.0	711.8	711.8	710.8	709.9
175°	715.7	714.9	714.1	713.3	714.1	714.9	715.7	716.5	716.5	715.5	714.5
177.5°	717.4	716.7	716.1	715.4	716.1	716.7	717.4	718.0	718.0	717.4	716.7
180°	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9



TEST NUMBER: P331592-930

CATALOG NUMBER: S122DIW-S1005D710U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1562.3	1567.7	1576.3	1585.3	1590.7	1601.2	1604.3	1609.2	1613.7	1624.2	1635.2
5°	1472.0	1480.8	1501.4	1512.6	1528.3	1546.4	1558.3	1570.8	1584.5	1608.3	1630.1
7.5°	1375.3	1389.9	1415.5	1436.6	1458.8	1484.8	1503.5	1528.3	1548.7	1582.3	1614.2
10°	1310.8	1331.5	1354.6	1379.6	1410.8	1438.3	1464.5	1495.7	1520.8	1560.7	1598.2
12.5°	1252.9	1256.0	1289.1	1316.6	1359.3	1393.3	1423.6	1463.8	1488.2	1535.8	1575.2
15°	1151.5	1170.3	1200.3	1222.1	1272.8	1315.8	1358.3	1400.2	1428.3	1487.0	1538.9
17.5°	1066.2	1083.5	1114.2	1150.0	1186.3	1229.2	1284.3	1328.4	1366.6	1433.7	1495.0
20°	1012.2	1033.4	1064.7	1101.6	1133.4	1180.2	1227.8	1278.4	1319.6	1395.2	1467.0
22.5°	966.2	982.9	1008.2	1044.6	1079.4	1122.3	1174.3	1229.4	1272.6	1354.2	1427.0
25°	901.6	915.3	931.6	961.6	1000.9	1047.8	1088.4	1149.0	1212.1	1288.3	1376.5
27.5°	843.3	853.1	867.5	893.8	924.3	968.2	1013.3	1070.8	1134.2	1217.0	1309.9
30°	807.9	814.2	828.5	850.4	880.4	914.7	960.3	1015.3	1080.3	1164.0	1256.5
32.5°	776.9	782.6	792.0	812.9	838.9	868.2	909.3	964.3	1026.3	1108.6	1211.0
35°	730.4	734.7	742.9	759.8	774.1	802.9	837.2	887.2	945.3	1024.1	1130.2
37.5°	684.0	690.1	695.0	702.1	720.6	739.6	769.4	811.6	868.6	948.1	1049.3
40°	653.5	658.5	666.0	669.2	684.2	701.0	725.4	764.1	821.7	894.1	992.8
42.5°	622.6	627.5	632.0	635.7	648.7	663.6	685.4	718.7	769.6	840.1	937.8
45°	580.4	581.1	585.5	592.3	598.6	609.2	624.8	653.5	692.9	759.1	847.8
47.5°	537.7	538.4	539.2	542.2	549.1	558.7	569.1	592.5	627.7	680.5	766.9
50°	509.2	507.9	509.2	511.7	516.1	524.2	536.1	552.9	581.7	631.0	710.4
52.5°	481.8	481.5	480.7	481.8	485.1	490.7	499.1	513.5	539.2	584.6	654.4
55°	439.9	436.8	437.3	434.9	440.5	441.7	448.0	459.8	482.3	513.6	579.2
57.5°	395.3	392.6	389.9	389.1	388.7	392.0	397.0	406.3	423.6	451.0	504.2
60°	366.7	363.6	359.9	358.7	358.7	360.5	363.1	369.9	386.1	410.5	454.2
62.5°	337.8	334.1	331.9	328.6	327.7	329.5	332.0	336.9	348.6	371.5	409.3
65°	293.0	288.7	285.5	284.9	283.6	281.8	283.1	288.0	297.4	315.5	345.5
67.5°	248.2	244.0	243.3	239.7	237.9	238.1	237.9	242.1	247.8	263.4	285.8
70°	218.7	215.6	214.3	211.2	209.9	208.7	207.4	211.2	216.8	229.9	249.3
72.5°	188.7	186.1	183.3	180.7	180.9	179.7	179.4	181.7	186.3	198.4	213.3
75°	145.6	146.2	143.1	140.0	139.3	138.1	138.1	140.0	141.9	151.2	163.1
77.5°	105.6	105.1	102.5	101.5	100.9	99.5	100.9	102.1	103.1	109.3	118.1
80°	80.6	80.6	77.5	77.5	76.9	75.0	76.9	75.6	78.1	84.4	90.6
82.5°	57.6	56.6	56.5	55.5	55.4	54.0	54.9	56.1	57.1	61.4	65.1
85°	28.1	28.1	27.5	26.9	27.5	26.9	27.5	28.1	28.8	30.7	33.8
87.5°	10.2	10.8	10.7	10.5	9.9	9.9	9.9	10.1	10.8	10.9	11.1
90°	20.9	21.2	18.2	15.2	12.3	9.4	7.1	5.5	3.8	2.2	0.6
92.5°	19.3	19.2	18.5	17.9	17.1	16.5	15.5	14.3	13.1	12.0	10.8
95°	38.7	38.7	38.5	38.2	37.9	37.7	36.9	35.5	34.2	32.8	31.5
97.5°	65.1	65.1	64.6	64.1	63.6	63.0	62.2	61.0	59.8	58.6	57.5
100°	83.5	83.5	83.1	82.7	82.3	81.9	81.1	80.1	79.0	77.9	76.8
102.5°	103.5	103.3	102.8	102.3	101.8	101.3	100.6	99.7	98.9	98.0	97.2
105°	133.4	133.1	132.8	132.6	132.3	132.0	131.7	131.3	130.9	130.4	130.0
107.5°	166.0	165.9	165.9	165.9	165.9	165.9	165.6	165.0	164.4	163.8	163.2
110°	188.2	188.2	188.2	188.2	188.2	188.2	187.8	186.9	186.1	185.3	184.5



TEST NUMBER: P331592-930

CATALOG NUMBER: S122DIW-S1005D710U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	210.6	210.9	211.0	211.1	211.2	211.3	211.0	210.2	209.4	208.6	207.7
115°	244.3	244.4	244.7	244.9	245.2	245.5	245.2	244.4	243.6	242.8	242.0
117.5°	277.3	277.6	278.3	279.1	279.8	280.5	280.4	279.3	278.3	277.2	276.1
120°	298.9	298.9	299.9	301.0	302.1	303.1	303.1	302.1	301.0	299.9	298.9
122.5°	321.8	322.1	322.9	323.6	324.3	325.1	324.8	323.5	322.3	321.0	319.7
125°	355.3	355.7	356.1	356.5	356.9	357.3	356.9	355.7	354.5	353.4	352.1
127.5°	387.9	388.4	388.9	389.4	389.9	390.4	389.8	388.2	386.8	385.2	383.7
130°	409.9	410.2	410.4	410.7	411.0	411.2	410.5	408.8	407.0	405.3	403.5
132.5°	431.9	432.4	432.4	432.4	432.3	432.3	431.5	430.1	428.7	427.2	425.8
135°	463.3	463.4	463.2	462.9	462.6	462.4	461.5	460.0	458.5	457.1	455.6
137.5°	493.8	493.9	493.6	493.3	492.8	492.5	491.7	490.6	489.3	488.1	486.9
140°	514.2	514.2	513.6	512.9	512.3	511.5	510.6	509.4	508.2	507.0	505.8
142.5°	532.7	532.6	532.1	531.7	531.2	530.8	529.9	528.8	527.6	526.4	525.1
145°	560.9	560.8	560.0	559.2	558.4	557.6	556.8	555.8	554.8	553.9	552.9
147.5°	585.5	585.3	584.7	584.2	583.7	583.1	582.3	581.1	580.0	578.9	577.8
150°	601.2	600.8	600.2	599.7	599.2	598.6	597.9	597.1	596.3	595.5	594.7
152.5°	616.8	616.3	615.6	615.0	614.3	613.7	612.9	612.1	611.3	610.5	609.7
155°	636.5	635.9	635.4	635.0	634.6	634.2	633.8	633.4	633.0	632.6	632.2
157.5°	654.7	653.8	653.5	653.3	653.1	652.8	652.6	652.2	652.0	651.8	651.4
160°	665.7	664.9	664.7	664.6	664.5	664.4	664.1	663.9	663.6	663.3	663.1
162.5°	675.5	674.6	674.4	674.3	674.2	674.0	673.9	673.8	673.8	673.8	673.7
165°	688.2	687.3	687.3	687.3	687.3	687.3	687.3	687.4	687.5	687.6	687.9
167.5°	698.7	697.8	697.8	697.8	697.9	697.9	698.1	698.5	699.0	699.4	699.8
170°	704.6	703.6	703.8	703.8	704.0	704.2	704.4	704.8	705.2	705.6	706.0
172.5°	708.9	707.9	708.1	708.3	708.3	708.5	708.7	709.1	709.6	710.0	710.4
175°	713.6	712.7	713.0	713.2	713.5	713.8	714.1	714.5	714.9	715.3	715.7
177.5°	716.1	715.4	715.7	715.9	716.1	716.3	716.6	716.9	717.2	717.5	717.9
180°	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9



TEST NUMBER: P331592-930

CATALOG NUMBER: S122DIW-S1005D710U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1634.3	1636.7	1644.7	1652.8	1661.7	1664.3	1668.3	1664.8	1663.7	1673.2	1680.3
5°	1638.8	1650.1	1672.0	1692.0	1708.9	1720.7	1733.2	1738.2	1747.6	1760.7	1776.9
7.5°	1633.6	1655.5	1689.9	1719.0	1750.7	1773.6	1791.5	1806.7	1825.2	1850.1	1877.1
10°	1627.6	1657.0	1698.8	1734.5	1773.2	1802.5	1826.9	1850.6	1878.2	1912.5	1948.2
12.5°	1616.7	1651.5	1703.8	1746.0	1795.7	1824.6	1857.4	1908.7	1938.1	1986.0	2036.1
15°	1594.5	1633.2	1706.3	1758.2	1814.4	1869.4	1930.1	1978.7	2027.5	2055.6	2126.2
17.5°	1561.6	1618.5	1699.5	1760.0	1831.4	1918.0	1986.2	2041.3	2097.6	2143.2	2178.6
20°	1535.1	1597.0	1689.5	1761.9	1846.9	1940.0	2018.1	2074.4	2123.1	2161.2	2183.0
22.5°	1501.6	1579.5	1669.5	1754.4	1863.0	1955.0	2037.1	2081.4	2122.1	2140.7	2149.0
25°	1448.9	1542.6	1644.5	1748.2	1870.7	1968.1	2043.1	2070.0	2081.9	2063.8	2033.8
27.5°	1392.0	1496.6	1615.6	1736.4	1865.9	1959.7	2013.4	2009.1	1989.0	1930.4	1883.5
30°	1349.6	1464.5	1592.6	1724.4	1854.4	1945.6	1976.9	1945.6	1900.1	1834.4	1767.6
32.5°	1305.1	1424.1	1568.1	1707.5	1833.4	1913.7	1920.4	1866.7	1796.1	1721.5	1638.1
35°	1237.7	1366.4	1522.0	1669.5	1788.8	1839.4	1809.5	1714.5	1630.8	1528.9	1415.2
37.5°	1161.6	1303.7	1459.8	1613.9	1722.0	1735.2	1660.8	1560.7	1442.7	1323.0	1189.1
40°	1104.6	1255.2	1415.8	1571.4	1667.0	1653.3	1558.3	1448.3	1307.7	1161.5	1037.1
42.5°	1053.7	1204.3	1367.8	1520.4	1597.0	1559.3	1448.3	1313.4	1162.3	1024.6	910.7
45°	965.3	1120.3	1287.8	1435.2	1479.0	1410.8	1264.0	1114.0	965.3	850.4	760.4
47.5°	879.6	1032.8	1198.7	1328.2	1343.7	1252.1	1091.7	937.3	809.5	715.9	652.4
50°	816.6	970.3	1134.7	1250.3	1245.2	1134.7	969.7	822.9	716.0	640.4	597.9
52.5°	760.1	905.3	1063.2	1168.2	1141.7	1021.2	863.7	733.4	645.6	586.4	548.0
55°	672.3	806.7	956.6	1040.9	992.2	858.5	725.4	620.4	555.5	511.1	481.1
57.5°	585.1	711.0	839.4	891.4	837.5	714.0	603.1	526.9	478.1	445.2	425.7
60°	531.1	641.1	755.4	800.4	736.1	626.1	538.6	470.5	431.1	404.2	386.8
62.5°	477.1	575.6	683.4	707.9	649.1	556.1	478.6	422.0	389.6	365.7	349.3
65°	403.7	484.2	566.1	582.3	528.0	456.1	394.8	358.0	329.3	311.8	298.6
67.5°	331.0	395.7	453.7	466.8	419.2	369.4	325.1	293.0	273.5	259.0	247.9
70°	288.0	339.2	386.8	397.4	359.3	314.9	281.2	255.5	238.1	225.6	214.9
72.5°	242.6	285.3	324.7	331.9	300.8	266.9	239.2	219.1	203.6	195.6	185.5
75°	185.6	210.6	241.2	243.0	222.4	201.8	180.6	167.5	159.3	149.4	144.3
77.5°	130.9	150.6	168.0	171.5	159.2	145.2	133.3	122.9	116.1	111.5	106.8
80°	100.0	115.6	123.1	127.4	118.7	108.7	101.8	95.0	90.6	87.5	84.4
82.5°	71.5	81.1	88.1	91.5	86.7	80.7	73.9	70.0	66.6	64.0	62.9
85°	36.2	40.6	45.0	46.2	45.0	42.5	38.7	38.7	36.9	36.2	36.2
87.5°	13.0	15.2	15.6	17.4	16.9	17.4	18.0	18.1	18.3	17.7	17.1
90°	2.2	3.8	5.5	7.1	9.4	12.3	15.2	18.2	21.2	20.9	20.6
92.5°	12.0	13.1	14.3	15.5	16.5	17.1	17.9	18.5	19.2	19.3	19.3
95°	32.8	34.2	35.5	36.9	37.7	37.9	38.2	38.5	38.7	38.7	38.7
97.5°	58.6	59.8	61.0	62.2	63.0	63.6	64.1	64.6	65.1	65.1	65.1
100°	77.9	79.0	80.1	81.1	81.9	82.3	82.7	83.1	83.5	83.5	83.5
102.5°	98.0	98.9	99.7	100.6	101.3	101.8	102.3	102.8	103.3	103.5	103.5
105°	130.4	130.9	131.3	131.7	132.0	132.3	132.6	132.8	133.1	133.4	133.6
107.5°	163.8	164.4	165.0	165.6	165.9	165.9	165.9	165.9	165.9	166.0	166.1
110°	185.3	186.1	186.9	187.8	188.2	188.2	188.2	188.2	188.2	188.2	188.2





TEST NUMBER: P331592-930

CATALOG NUMBER: S122DIW-S1005D710U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	208.6	209.4	210.2	211.0	211.3	211.2	211.1	211.0	210.9	210.6	210.3
115°	242.8	243.6	244.4	245.2	245.5	245.2	244.9	244.7	244.4	244.3	244.2
117.5°	277.2	278.3	279.3	280.4	280.5	279.8	279.1	278.3	277.6	277.3	277.0
120°	299.9	301.0	302.1	303.1	303.1	302.1	301.0	299.9	298.9	298.9	298.9
122.5°	321.0	322.3	323.5	324.8	325.1	324.3	323.6	322.9	322.1	321.8	321.5
125°	353.4	354.5	355.7	356.9	357.3	356.9	356.5	356.1	355.7	355.3	354.9
127.5°	385.2	386.8	388.2	389.8	390.4	389.9	389.4	388.9	388.4	387.9	387.4
130°	405.3	407.0	408.8	410.5	411.2	411.0	410.7	410.4	410.2	409.9	409.7
132.5°	427.2	428.7	430.1	431.5	432.3	432.3	432.4	432.4	432.4	431.9	431.3
135°	457.1	458.5	460.0	461.5	462.4	462.6	462.9	463.2	463.4	463.3	463.2
137.5°	488.1	489.3	490.6	491.7	492.5	492.8	493.3	493.6	493.9	493.8	493.7
140°	507.0	508.2	509.4	510.6	511.5	512.3	512.9	513.6	514.2	514.2	514.2
142.5°	526.4	527.6	528.8	529.9	530.8	531.2	531.7	532.1	532.6	532.7	532.9
145°	553.9	554.8	555.8	556.8	557.6	558.4	559.2	560.0	560.8	560.9	561.1
147.5°	578.9	580.0	581.1	582.3	583.1	583.7	584.2	584.7	585.3	585.5	585.9
150°	595.5	596.3	597.1	597.9	598.6	599.2	599.7	600.2	600.8	601.2	601.5
152.5°	610.5	611.3	612.1	612.9	613.7	614.3	615.0	615.6	616.3	616.8	617.3
155°	632.6	633.0	633.4	633.8	634.2	634.6	635.0	635.4	635.9	636.5	637.2
157.5°	651.8	652.0	652.2	652.6	652.8	653.1	653.3	653.5	653.8	654.7	655.6
160°	663.3	663.6	663.9	664.1	664.4	664.5	664.6	664.7	664.9	665.7	666.5
162.5°	673.8	673.8	673.8	673.9	674.0	674.2	674.3	674.4	674.6	675.5	676.4
165°	687.7	687.6	687.5	687.4	687.3	687.3	687.3	687.3	687.3	688.2	689.2
167.5°	699.4	699.0	698.5	698.1	697.9	697.9	697.8	697.8	697.8	698.7	699.7
170°	705.6	705.2	704.8	704.4	704.2	704.0	703.8	703.8	703.6	704.6	705.5
172.5°	710.0	709.6	709.1	708.7	708.5	708.3	708.3	708.1	707.9	708.9	709.9
175°	715.3	714.9	714.5	714.1	713.8	713.5	713.2	713.0	712.7	713.6	714.5
177.5°	717.5	717.2	716.9	716.6	716.3	716.1	715.9	715.7	715.4	716.1	716.7
180°	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9	716.9



TEST NUMBER: P331592-930

CATALOG NUMBER: S122DIW-S1005D710U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7	1625.7
2.5°	1686.2	1693.2	1693.2	1694.2	1702.2	1701.2	1700.7
5°	1794.5	1805.1	1806.3	1817.5	1825.0	1822.5	1815.7
7.5°	1896.5	1916.3	1931.3	1939.7	1949.5	1955.7	1952.9
10°	1977.5	2006.3	2023.7	2035.6	2050.0	2060.6	2056.8
12.5°	2051.0	2085.2	2109.3	2129.6	2131.4	2145.1	2135.8
15°	2165.6	2201.8	2205.5	2220.5	2232.5	2231.1	2231.8
17.5°	2203.4	2215.1	2217.5	2217.8	2217.9	2213.5	2204.1
20°	2190.0	2185.6	2175.0	2166.8	2152.5	2150.6	2138.1
22.5°	2126.0	2112.1	2085.5	2067.8	2045.5	2039.6	2036.1
25°	2000.0	1969.4	1926.9	1886.3	1875.0	1853.2	1859.5
27.5°	1827.2	1779.5	1733.5	1700.5	1670.6	1637.9	1647.2
30°	1705.7	1652.0	1587.0	1537.0	1505.1	1473.9	1468.3
32.5°	1560.7	1482.1	1409.6	1365.5	1316.7	1297.0	1275.4
35°	1310.8	1234.0	1162.1	1100.2	1064.7	1037.1	1012.2
37.5°	1086.1	997.6	939.6	889.5	863.7	848.0	852.0
40°	946.6	869.1	826.6	788.5	764.8	753.5	756.0
42.5°	833.6	775.6	740.6	714.5	697.8	691.5	690.1
45°	705.4	672.9	644.2	629.2	621.1	614.2	609.8
47.5°	617.9	591.4	575.2	566.3	559.2	552.2	552.0
50°	565.4	548.0	536.7	527.3	521.7	516.7	521.1
52.5°	525.5	509.5	498.2	489.8	487.7	483.2	483.1
55°	466.1	453.6	445.5	438.0	434.2	431.7	428.6
57.5°	412.1	400.2	392.7	388.0	380.9	378.4	377.4
60°	373.7	364.3	356.8	350.5	347.4	342.4	342.4
62.5°	338.1	328.8	321.8	317.0	311.9	309.9	310.4
65°	286.8	279.3	272.4	267.4	266.2	262.4	263.7
67.5°	239.5	234.6	227.3	224.5	222.2	220.2	218.7
70°	208.1	203.1	199.3	195.6	193.7	193.7	193.7
72.5°	181.6	175.5	173.3	168.6	169.7	167.7	165.7
75°	140.6	136.8	134.9	133.1	130.0	130.0	130.0
77.5°	103.5	102.3	100.1	98.1	97.3	96.7	96.9
80°	80.0	79.3	78.1	78.1	76.9	76.2	75.0
82.5°	61.5	59.8	59.1	58.6	58.4	58.2	58.0
85°	35.0	33.8	33.8	34.3	33.1	33.1	33.8
87.5°	17.5	17.5	17.0	17.0	17.5	17.1	17.1
90°	20.4	20.1	20.1	20.1	20.3	20.5	20.5
92.5°	19.4	19.5	19.5	19.5	19.6	19.6	19.6
95°	38.7	38.7	38.6	38.3	38.1	37.7	37.5
97.5°	65.1	65.1	65.1	65.1	65.1	65.0	65.0
100°	83.5	83.5	83.4	83.3	83.2	83.0	82.9
102.5°	103.6	103.8	103.8	103.6	103.5	103.4	103.2
105°	133.9	134.2	134.3	134.3	134.3	134.3	134.3
107.5°	166.2	166.3	166.1	165.4	164.9	164.2	163.6
110°	188.2	188.2	187.9	187.5	187.1	186.7	186.4



TEST NUMBER: P331592-930

CATALOG NUMBER: S122DIW-S1005D710U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	209.9	209.6	209.3	209.0	208.7	208.4	208.1
115°	244.0	243.9	243.6	243.2	242.8	242.4	242.0
117.5°	276.6	276.3	275.9	275.5	275.1	274.7	274.3
120°	298.9	298.9	298.6	298.2	297.8	297.4	297.0
122.5°	321.1	320.8	320.5	320.2	319.9	319.6	319.4
125°	354.5	354.1	353.8	353.8	353.6	353.4	353.4
127.5°	386.9	386.5	386.0	385.6	385.1	384.7	384.3
130°	409.4	409.1	408.7	408.1	407.6	407.1	406.6
132.5°	430.6	430.1	429.6	429.2	428.7	428.3	427.9
135°	463.0	462.9	462.6	462.2	461.8	461.4	461.0
137.5°	493.6	493.5	493.2	492.6	492.1	491.5	491.0
140°	514.2	514.2	514.0	513.5	512.9	512.3	511.8
142.5°	533.0	533.0	532.9	532.3	531.7	531.2	530.7
145°	561.3	561.3	561.2	560.6	560.1	559.5	559.1
147.5°	586.1	586.4	586.4	585.9	585.3	584.8	584.3
150°	601.9	602.3	602.3	601.9	601.5	601.2	600.8
152.5°	617.8	618.3	618.3	617.8	617.3	616.8	616.3
155°	637.9	638.5	638.7	638.3	637.9	637.5	637.1
157.5°	656.5	657.4	657.5	656.9	656.2	655.6	654.9
160°	667.3	668.1	668.2	667.7	667.2	666.7	666.1
162.5°	677.4	678.2	678.3	677.7	677.1	676.5	675.8
165°	690.1	691.0	691.2	690.5	689.8	689.2	688.5
167.5°	700.6	701.6	701.6	701.0	700.3	699.6	698.9
170°	706.5	707.4	707.4	706.6	705.8	705.0	704.2
172.5°	710.8	711.8	711.8	711.0	710.2	709.4	708.6
175°	715.5	716.5	716.5	715.7	714.9	714.1	713.3
177.5°	717.4	718.0	718.0	717.4	716.7	716.1	715.4
180°	716.9	716.9	716.9	716.9	716.9	716.9	716.9

(END OF REPORT)