

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331601-930

Luminaire Tested: **S122DIW-S1005D970U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331601-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S1005D970U930-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 970 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6463.8 lumens
Efficiency: N/A
Efficacy: 95.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 67.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331601-930

CATALOG NUMBER: S122DIW-S1005D970U930-4F0-1E-UDD-F

Luminous Intensity Polar Plot

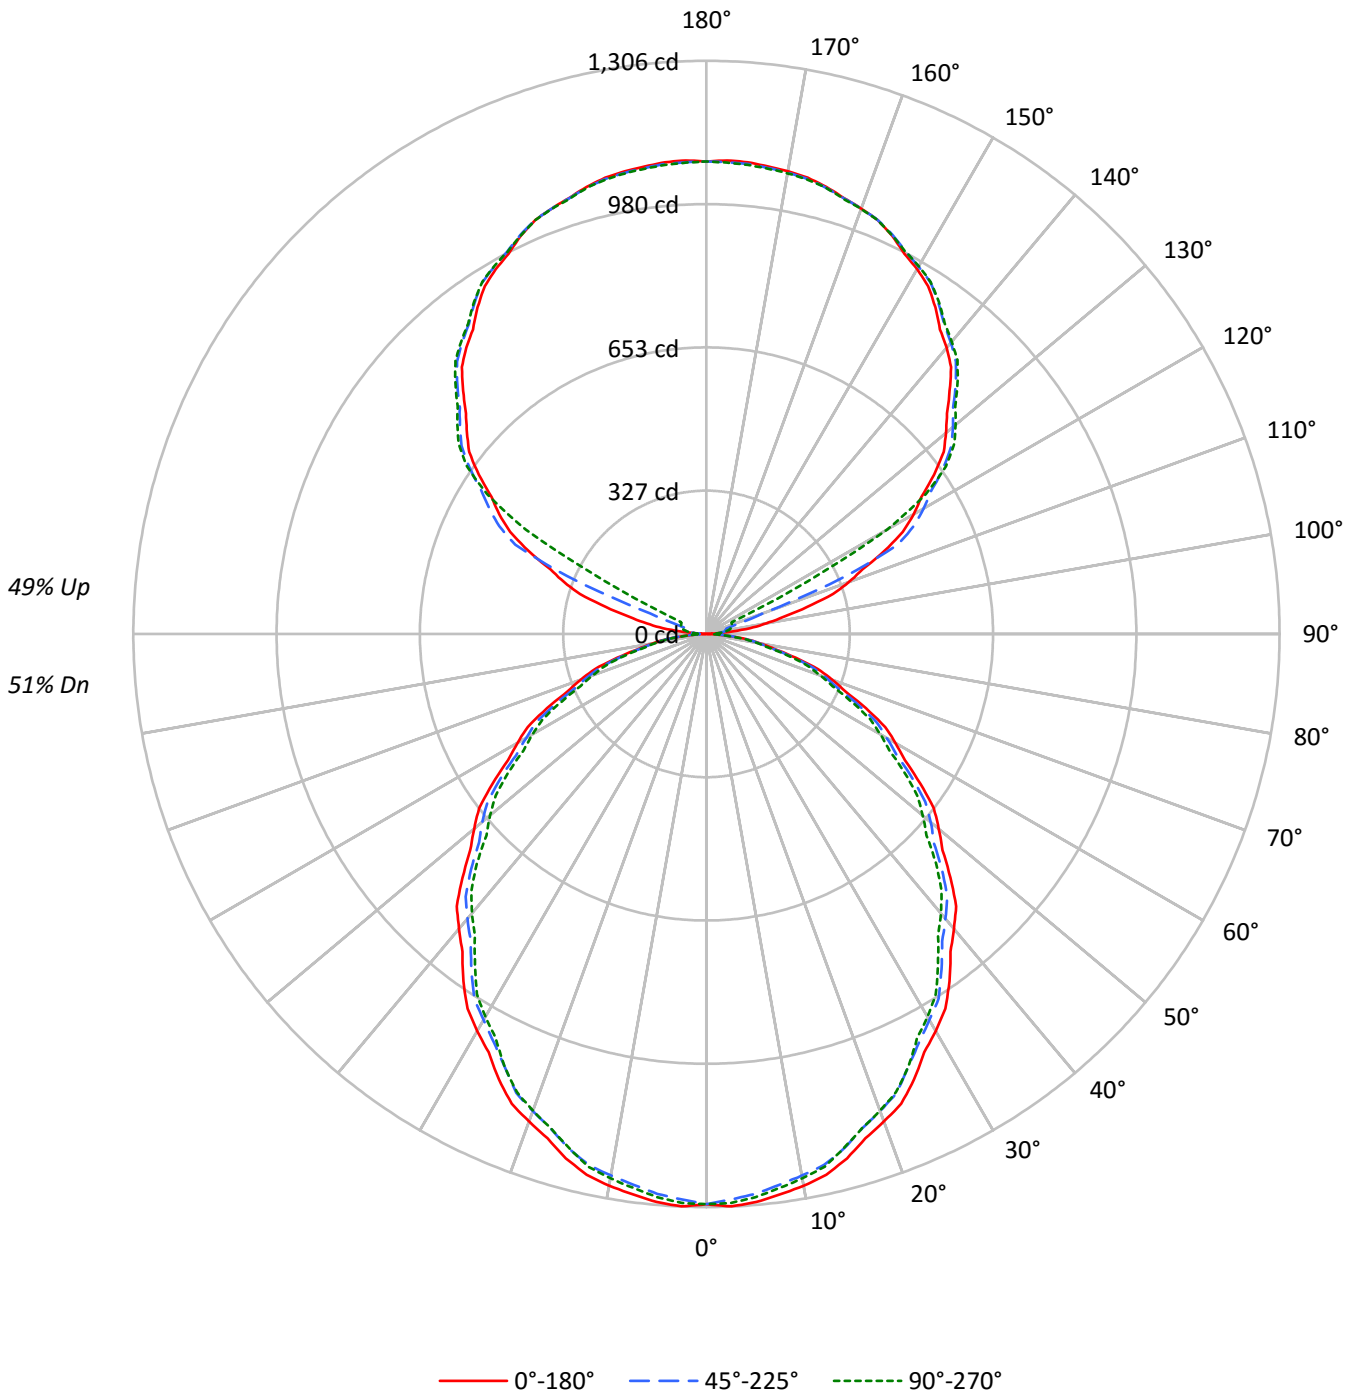



TEST NUMBER: P331601-930

CATALOG NUMBER: S122DIW-S1005D970U930-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51
1	98	94	90	86	90	87	83	80	74	71	69	62	60	58	51	49	48	43
2	89	82	76	70	82	76	70	66	65	61	57	54	51	49	44	42	41	36
3	81	72	65	59	75	67	60	55	57	52	48	48	44	41	39	37	35	31
4	75	64	56	50	69	59	52	47	51	45	41	43	39	35	35	32	30	26
5	68	57	49	43	63	53	46	40	45	40	35	38	34	31	32	29	26	23
6	63	51	43	37	58	47	40	35	41	35	31	35	30	27	29	26	23	20
7	58	46	38	32	54	43	36	31	37	31	27	31	27	24	26	23	20	18
8	54	42	34	29	50	39	32	27	34	28	24	29	24	21	24	21	18	16
9	50	38	31	26	47	36	29	24	31	25	22	27	22	19	22	19	17	14
10	47	35	28	23	44	33	26	22	29	23	19	25	20	17	21	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	20980	20980	20980
5°	21060	20757	20879
10°	20935	20546	20649
15°	20677	20279	20259
20°	20309	19880	19859
25°	19946	19388	19388
30°	19475	18938	18776
35°	19036	18398	18126
40°	18487	17856	17513
45°	17945	17317	16890
50°	17357	16759	16164
55°	16743	16110	15510
60°	16059	15332	14767
65°	15320	14560	13891
70°	14389	13624	12977
75°	13094	12545	12239
80°	11623	11269	10693
85°	9485	9040	8096



TEST NUMBER: P331601-930

CATALOG NUMBER: S122DIW-S1005D970U930-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.2	1.9
10°-20°	343.8	5.3
20°-30°	505.4	7.8
30°-40°	587.0	9.1
40°-50°	586.4	9.1
50°-60°	511.4	7.9
60°-70°	378.1	5.8
70°-80°	214.2	3.3
80°-90°	60.2	0.9
90°-100°	35.9	0.6
100°-110°	131.7	2.0
110°-120°	352.0	5.4
120°-130°	581.1	9.0
130°-140°	618.0	9.6
140°-150°	574.4	8.9
150°-160°	461.8	7.1
160°-170°	297.6	4.6
170°-180°	102.4	1.6
0°-30°	971.4	15.0
0°-40°	1558.4	24.1
0°-60°	2656.1	41.1
0°-90°	3308.6	51.2
90°-120°	519.7	8.0
90°-150°	2293.2	35.5
90°-180°	3155.0	48.8
0°-180°	6463.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1299	1299	1299	1299	1299	
5°	1299	1294	1281	1290	1288	123
15°	1237	1229	1213	1218	1212	348
25°	1120	1109	1088	1090	1088	515
35°	966	953	933	926	920	603
45°	786	777	758	745	740	606
55°	595	587	572	558	551	532
65°	401	393	381	370	364	397
75°	210	207	201	194	196	224
85°	51	50	49	45	44	59
90°	1	9	16	19	21	5
95°	51	27	30	34	34	62
105°	237	247	48	56	59	253
115°	448	462	481	137	64	441
125°	633	644	658	664	666	565
135°	784	796	803	810	809	605
145°	909	909	922	927	923	568
155°	1001	995	1003	1007	1002	461
165°	1055	1051	1052	1057	1052	298
175°	1079	1074	1075	1080	1073	103
180°	1077	1077	1077	1077	1077	



TEST NUMBER: P331601-930

CATALOG NUMBER: S122DIW-S1005D970U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4
2.5°	1305.5	1304.3	1303.3	1302.1	1301.0	1299.3	1296.8	1294.4	1291.9	1289.5	1291.7
5°	1299.4	1298.4	1297.2	1296.1	1295.0	1292.9	1289.9	1286.8	1283.8	1280.7	1283.0
7.5°	1287.9	1286.2	1284.5	1282.8	1281.1	1278.6	1275.5	1272.4	1269.3	1266.2	1268.4
10°	1276.9	1275.0	1273.1	1271.1	1269.2	1266.6	1263.2	1259.9	1256.5	1253.2	1255.5
12.5°	1262.0	1260.2	1258.5	1256.8	1255.1	1252.5	1249.2	1245.9	1242.6	1239.3	1240.8
15°	1237.0	1235.3	1233.6	1232.0	1230.3	1227.7	1224.1	1220.4	1216.8	1213.2	1214.4
17.5°	1205.0	1203.3	1201.7	1200.0	1198.3	1195.6	1192.0	1188.3	1184.6	1181.0	1182.3
20°	1182.0	1180.3	1178.7	1177.0	1175.3	1172.6	1168.7	1164.8	1160.9	1157.0	1157.8
22.5°	1159.0	1156.7	1154.4	1152.0	1149.7	1146.7	1143.0	1139.4	1135.7	1132.0	1132.2
25°	1119.6	1117.3	1115.1	1112.9	1110.7	1107.2	1102.4	1097.7	1093.0	1088.3	1088.8
27.5°	1074.6	1072.5	1070.6	1068.5	1066.6	1063.7	1060.0	1056.2	1052.6	1048.8	1048.0
30°	1044.6	1042.4	1040.1	1037.9	1035.7	1032.5	1028.3	1024.2	1020.0	1015.8	1015.0
32.5°	1012.6	1010.8	1009.0	1007.2	1005.4	1002.4	998.0	993.6	989.2	984.8	983.3
35°	965.8	963.0	960.3	957.5	954.7	951.1	946.6	942.2	937.8	933.4	931.7
37.5°	913.1	910.7	908.2	905.8	903.4	899.9	895.4	891.0	886.6	882.2	880.0
40°	877.1	874.9	872.7	870.5	868.2	865.0	860.5	856.1	851.6	847.2	844.7
42.5°	842.1	839.9	837.7	835.5	833.2	829.9	825.5	821.0	816.6	812.1	809.4
45°	785.9	784.0	782.0	780.1	778.1	775.1	770.9	766.8	762.6	758.4	755.4
47.5°	729.9	728.1	726.3	724.5	722.6	719.5	715.2	710.9	706.5	702.2	699.0
50°	691.0	689.6	688.2	686.8	685.4	682.7	678.9	675.0	671.1	667.2	663.3
52.5°	653.0	651.2	649.3	647.5	645.6	642.9	639.2	635.5	631.9	628.3	625.0
55°	594.8	593.0	591.4	589.8	588.1	585.5	582.3	578.9	575.6	572.3	568.9
57.5°	536.3	534.9	533.6	532.3	530.9	528.5	524.8	521.1	517.5	513.8	510.5
60°	497.3	496.2	495.0	494.0	492.8	490.3	486.5	482.6	478.7	474.8	471.7
62.5°	459.3	457.5	455.8	454.0	452.2	449.8	446.8	443.8	440.8	437.8	435.0
65°	401.0	399.4	397.8	396.1	394.4	392.2	389.4	386.6	383.8	381.1	378.6
67.5°	341.9	340.6	339.2	337.9	336.6	334.6	332.1	329.6	327.1	324.7	322.7
70°	304.8	303.8	302.6	301.6	300.4	298.6	296.1	293.6	291.1	288.6	286.7
72.5°	266.8	265.8	264.6	263.6	262.4	261.1	259.5	257.9	256.2	254.6	252.7
75°	209.9	209.4	208.8	208.2	207.7	206.7	205.3	203.9	202.5	201.1	199.5
77.5°	158.9	158.0	157.0	156.1	155.2	154.4	153.8	153.3	152.7	152.2	151.3
80°	125.0	124.7	124.4	124.1	123.8	123.4	122.9	122.3	121.7	121.2	120.3
82.5°	92.9	92.9	92.9	92.8	92.7	92.5	92.2	91.9	91.6	91.2	90.2
85°	51.2	51.0	50.7	50.4	50.1	49.8	49.6	49.2	49.0	48.8	47.9
87.5°	18.2	18.1	18.0	17.9	17.9	17.8	17.6	17.4	17.3	17.1	16.6
90°	0.8	2.7	4.6	6.5	8.4	10.0	11.4	12.8	14.2	15.6	16.5
92.5°	15.7	15.6	15.4	15.2	15.1	15.3	16.0	16.7	17.4	18.1	18.5
95°	50.6	44.9	39.2	33.5	27.8	25.5	26.7	28.0	29.2	30.4	31.2
97.5°	100.5	84.4	68.3	52.2	36.1	29.4	32.3	35.1	37.8	40.7	41.3
100°	137.9	114.1	90.4	66.8	43.0	32.6	35.5	38.5	41.5	44.4	45.8
102.5°	179.0	174.0	169.0	164.0	158.9	144.1	119.5	94.9	70.3	45.7	47.5
105°	236.8	242.1	247.2	252.4	257.6	236.6	189.3	142.0	94.8	47.5	49.4
107.5°	302.7	307.0	311.1	315.3	319.5	293.3	236.6	179.9	123.2	66.5	64.6
110°	345.1	348.8	352.4	356.0	359.6	336.5	286.4	236.4	186.4	136.3	119.0



TEST NUMBER: P331601-930

CATALOG NUMBER: S122DIW-S1005D970U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	385.0	388.2	391.4	394.7	397.9	393.3	381.0	368.6	356.2	343.9	280.7
115°	447.9	450.9	453.9	456.8	459.7	463.3	467.7	472.0	476.4	480.7	400.5
117.5°	504.2	507.5	510.8	514.0	517.4	520.5	523.5	526.4	529.5	532.4	513.0
120°	545.4	548.0	550.5	553.1	555.7	558.6	561.7	564.8	567.9	571.0	573.2
122.5°	580.2	582.9	585.7	588.4	591.2	594.3	597.6	601.0	604.4	607.8	609.0
125°	633.3	635.6	637.9	640.1	642.4	645.1	648.4	651.8	655.0	658.3	659.5
127.5°	681.5	684.0	686.5	689.0	691.5	694.0	696.4	698.9	701.3	703.8	705.6
130°	712.1	714.9	717.6	720.3	723.1	725.5	727.3	729.3	731.2	733.1	735.0
132.5°	743.2	745.6	748.0	750.2	752.6	754.7	756.7	758.6	760.4	762.4	764.0
135°	783.7	786.5	789.3	792.1	794.8	797.0	798.5	800.1	801.6	803.2	804.9
137.5°	824.7	826.6	828.6	830.5	832.4	834.3	836.1	837.8	839.6	841.4	843.1
140°	851.5	852.9	854.3	855.7	857.0	858.7	860.5	862.5	864.4	866.3	867.9
142.5°	873.9	875.1	876.4	877.7	878.9	880.6	882.8	885.0	887.2	889.3	890.8
145°	909.1	909.0	908.8	908.7	908.5	909.9	912.8	915.7	918.7	921.6	922.8
147.5°	939.9	939.1	938.5	937.8	937.2	938.3	941.3	944.1	947.1	950.0	950.9
150°	959.8	958.5	957.3	956.2	955.0	955.7	958.5	961.2	964.0	966.8	967.8
152.5°	976.6	975.3	973.9	972.6	971.2	971.8	974.4	977.1	979.7	982.4	983.4
155°	1001.1	999.5	997.9	996.4	994.8	995.1	997.2	999.2	1001.4	1003.4	1004.4
157.5°	1020.3	1019.0	1017.6	1016.3	1015.0	1015.0	1016.5	1018.0	1019.4	1020.8	1022.1
160°	1031.4	1030.5	1029.4	1028.3	1027.3	1027.3	1028.3	1029.4	1030.5	1031.4	1032.5
162.5°	1041.5	1040.4	1039.3	1038.3	1037.3	1037.2	1038.1	1039.0	1039.9	1040.8	1042.0
165°	1054.8	1053.8	1052.7	1051.7	1050.7	1050.4	1050.9	1051.4	1052.0	1052.5	1053.7
167.5°	1064.8	1063.7	1062.7	1061.7	1060.6	1060.4	1060.9	1061.4	1061.8	1062.3	1063.5
170°	1070.4	1069.3	1068.4	1067.3	1066.2	1065.9	1066.2	1066.6	1067.0	1067.3	1068.5
172.5°	1074.2	1073.1	1072.0	1071.1	1070.0	1069.7	1070.0	1070.3	1070.7	1071.1	1072.3
175°	1079.0	1077.7	1076.5	1075.4	1074.2	1073.7	1074.1	1074.4	1074.7	1075.1	1076.3
177.5°	1079.8	1078.8	1077.8	1076.8	1075.9	1075.5	1075.6	1075.7	1075.9	1076.0	1077.0
180°	1076.6	1076.6	1076.6	1076.6	1076.6	1076.6	1076.6	1076.6	1076.6	1076.6	1076.6



TEST NUMBER: P331601-930

CATALOG NUMBER: S122DIW-S1005D970U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4	1299.4
2.5°	1293.9	1296.1	1298.4	1299.3	1298.8	1298.4	1297.9	1297.5
5°	1285.2	1287.4	1289.6	1290.5	1289.9	1289.3	1288.7	1288.2
7.5°	1270.6	1272.8	1275.1	1275.9	1275.3	1274.7	1274.1	1273.5
10°	1257.7	1259.9	1262.1	1262.8	1262.0	1261.1	1260.3	1259.5
12.5°	1242.4	1243.9	1245.5	1245.9	1245.3	1244.7	1244.1	1243.5
15°	1215.4	1216.6	1217.6	1217.6	1216.2	1214.8	1213.4	1212.0
17.5°	1183.6	1184.9	1186.1	1186.1	1184.7	1183.4	1182.1	1180.7
20°	1158.7	1159.5	1160.3	1160.2	1159.1	1158.0	1156.9	1155.8
22.5°	1132.4	1132.5	1132.7	1132.5	1131.8	1131.1	1130.4	1129.8
25°	1089.4	1090.0	1090.5	1090.5	1090.0	1089.4	1088.8	1088.3
27.5°	1047.2	1046.3	1045.5	1044.4	1043.1	1041.7	1040.4	1039.1
30°	1014.2	1013.3	1012.5	1011.5	1010.4	1009.3	1008.2	1007.1
32.5°	981.9	980.3	978.8	977.5	976.4	975.3	974.2	973.1
35°	930.0	928.4	926.7	925.2	923.8	922.4	921.0	919.6
37.5°	878.0	876.0	873.9	872.2	870.9	869.5	868.2	866.9
40°	842.1	839.7	837.1	835.4	834.2	833.2	832.0	830.9
42.5°	806.7	804.0	801.3	799.2	797.6	796.1	794.5	792.9
45°	752.4	749.3	746.2	744.1	743.0	741.9	740.8	739.7
47.5°	695.8	692.5	689.3	686.9	685.3	683.7	682.1	680.4
50°	659.4	655.6	651.7	649.1	647.7	646.3	644.9	643.5
52.5°	621.8	618.6	615.4	612.9	611.0	609.2	607.3	605.5
55°	565.6	562.2	559.0	556.6	555.2	553.8	552.4	551.0
57.5°	507.2	503.9	500.7	498.5	497.5	496.4	495.4	494.3
60°	468.7	465.6	462.6	460.6	459.8	459.0	458.1	457.3
62.5°	432.2	429.3	426.5	424.5	423.5	422.4	421.3	420.3
65°	376.1	373.6	371.1	369.2	367.8	366.4	365.0	363.6
67.5°	320.7	318.8	316.8	315.3	314.2	313.1	312.0	310.9
70°	284.7	282.8	280.9	279.3	278.2	277.1	276.0	274.9
72.5°	250.8	248.8	246.9	245.5	244.6	243.7	242.8	241.9
75°	197.9	196.2	194.5	194.0	194.5	195.0	195.6	196.2
77.5°	150.5	149.7	148.9	148.1	147.2	146.5	145.7	145.0
80°	119.5	118.7	117.9	117.2	116.6	116.1	115.5	115.0
82.5°	89.1	88.1	87.0	86.4	86.3	86.2	86.1	85.9
85°	47.0	46.2	45.4	44.8	44.6	44.3	44.0	43.7
87.5°	16.1	15.7	15.2	14.8	14.7	14.5	14.3	14.2
90°	17.3	18.2	19.1	19.6	20.0	20.3	20.7	21.0
92.5°	19.0	19.4	19.9	20.2	20.4	20.6	20.8	21.0
95°	32.1	33.0	33.8	34.2	34.0	33.8	33.7	33.5
97.5°	42.1	42.7	43.5	43.9	44.1	44.3	44.5	44.7
100°	47.2	48.6	50.0	50.8	51.1	51.5	51.9	52.2
102.5°	49.2	51.0	52.8	54.0	54.5	55.0	55.4	55.9
105°	51.4	53.2	55.1	56.4	57.2	57.8	58.5	59.2
107.5°	62.6	60.7	58.8	58.1	58.9	59.5	60.3	60.9
110°	101.7	84.4	67.1	58.8	59.4	60.2	60.8	61.6



TEST NUMBER: P331601-930

CATALOG NUMBER: S122DIW-S1005D970U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	217.5	154.4	91.2	59.9	60.5	61.1	61.6	62.2
115°	320.3	240.2	160.0	113.7	101.3	88.8	76.3	63.9
117.5°	493.6	474.3	454.9	424.7	383.7	342.8	301.8	260.8
120°	575.2	577.2	579.4	568.7	545.4	522.0	498.6	475.2
122.5°	610.3	611.6	612.8	611.1	606.6	602.1	597.5	593.0
125°	660.7	661.9	663.2	664.0	664.6	665.0	665.5	666.1
127.5°	707.4	709.1	710.9	711.8	711.9	712.0	712.1	712.2
130°	736.9	738.8	740.7	741.6	741.4	741.2	741.0	740.9
132.5°	765.6	767.3	768.9	769.6	769.4	769.2	769.1	768.9
135°	806.7	808.4	810.1	810.8	810.5	810.1	809.8	809.4
137.5°	844.7	846.4	848.2	848.7	848.2	847.5	846.9	846.4
140°	869.4	871.0	872.5	872.9	872.0	871.1	870.3	869.4
142.5°	892.2	893.6	895.0	895.3	894.5	893.6	892.8	891.9
145°	924.1	925.3	926.4	926.7	925.8	924.9	924.1	923.2
147.5°	951.8	952.7	953.6	953.7	952.9	952.2	951.5	950.7
150°	968.9	969.9	970.9	971.0	970.2	969.3	968.4	967.6
152.5°	984.5	985.5	986.5	986.5	985.4	984.2	983.1	981.9
155°	1005.5	1006.5	1007.5	1007.4	1006.0	1004.6	1003.2	1001.8
157.5°	1023.2	1024.4	1025.6	1025.5	1024.1	1022.8	1021.4	1020.1
160°	1033.6	1034.5	1035.6	1035.5	1034.3	1033.1	1031.9	1030.7
162.5°	1043.2	1044.3	1045.5	1045.4	1043.8	1042.4	1040.9	1039.4
165°	1054.9	1056.1	1057.4	1057.4	1056.1	1054.9	1053.7	1052.5
167.5°	1064.7	1065.9	1067.1	1067.0	1065.4	1063.9	1062.3	1060.8
170°	1069.8	1070.9	1072.1	1072.0	1070.4	1068.9	1067.3	1065.8
172.5°	1073.4	1074.6	1075.9	1075.7	1074.2	1072.6	1071.1	1069.5
175°	1077.5	1078.7	1079.9	1079.7	1077.9	1076.2	1074.5	1072.8
177.5°	1078.0	1078.9	1079.9	1079.8	1078.5	1077.3	1076.0	1074.8
180°	1076.6	1076.6	1076.6	1076.6	1076.6	1076.6	1076.6	1076.6

(END OF REPORT)