

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331488-930

Luminaire Tested: **S122DIW-S290D1240U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331488-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIW-S290D1240U930-4F0-1E-UDD-F1  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1240 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4487.8 lumens  
Efficiency: N/A  
Efficacy: 96.3 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 46.6  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331488-930

CATALOG NUMBER: S122DIW-S290D1240U930-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

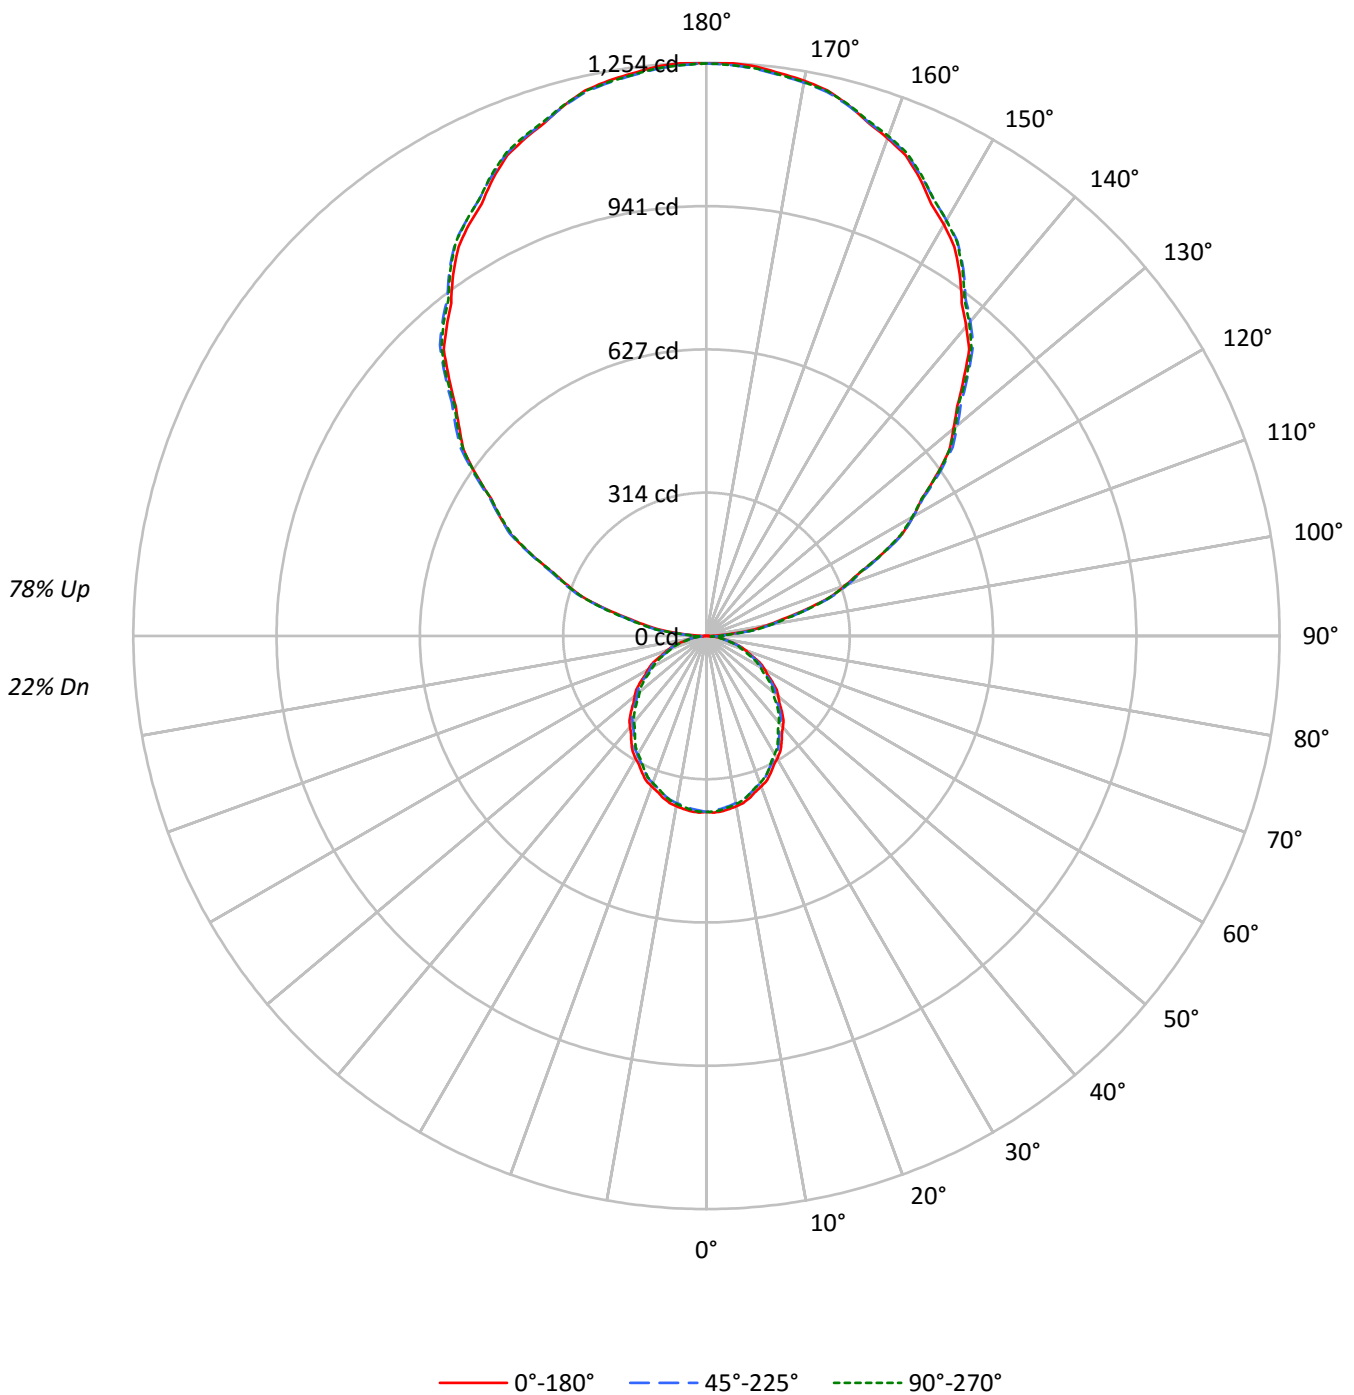



TEST NUMBER: P331488-930

CATALOG NUMBER: S122DIW-S290D1240U930-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	100	100	100	100	89	89	89	89	68	68	68	48	48	48	30	30	30	22				
1	91	87	84	80	81	78	74	72	59	57	55	42	41	40	27	26	25	18				
2	83	76	70	65	74	68	63	59	52	49	46	37	35	33	23	22	21	15				
3	76	67	60	54	67	59	54	49	46	42	38	33	30	28	21	19	18	13				
4	69	59	52	46	61	53	46	41	40	36	33	29	26	24	19	17	16	11				
5	63	52	45	39	56	47	40	35	36	31	28	26	23	21	17	15	14	10				
6	58	47	39	34	51	42	35	30	32	28	24	23	20	18	15	13	12	9				
7	54	42	35	29	47	38	31	26	29	24	21	21	18	16	14	12	11	8				
8	50	38	31	26	44	34	28	23	26	22	19	19	16	14	13	11	9	7				
9	46	35	27	23	41	31	25	21	24	20	16	18	15	12	12	10	8	6				
10	43	32	25	20	38	28	22	18	22	18	15	16	13	11	11	9	8	6				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6218	6218	6218
5°	6242	6152	6190
10°	6205	6091	6120
15°	6128	6011	6006
20°	6019	5893	5887
25°	5911	5747	5747
30°	5774	5614	5565
35°	5643	5452	5373
40°	5480	5292	5191
45°	5318	5133	5005
50°	5144	4968	4793
55°	4963	4777	4597
60°	4760	4543	4379
65°	4542	4317	4118
70°	4263	4036	3843
75°	3880	3718	3624
80°	3440	3347	3171
85°	2816	2668	2408



TEST NUMBER: P331488-930

CATALOG NUMBER: S122DIW-S290D1240U930-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	36.2	0.8
10°-20°	101.9	2.3
20°-30°	149.8	3.3
30°-40°	174.0	3.9
40°-50°	173.8	3.9
50°-60°	151.6	3.4
60°-70°	112.1	2.5
70°-80°	63.5	1.4
80°-90°	22.1	0.5
90°-100°	79.4	1.8
100°-110°	246.5	5.5
110°-120°	421.4	9.4
120°-130°	554.2	12.3
130°-140°	622.0	13.9
140°-150°	609.9	13.6
150°-160°	511.5	11.4
160°-170°	339.3	7.6
170°-180°	118.6	2.6
0°-30°	287.9	6.4
0°-40°	461.9	10.3
0°-60°	787.3	17.5
0°-90°	985.0	21.9
90°-120°	747.3	16.7
90°-150°	2533.4	56.5
90°-180°	3503.0	78.1
0°-180°	4487.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	385	385	385	385	385	
5°	385	384	380	382	382	37
15°	367	364	360	361	359	103
25°	332	329	323	323	323	153
35°	286	282	277	274	273	179
45°	233	230	225	221	219	180
55°	176	174	170	165	163	158
65°	119	117	113	110	108	118
75°	62	61	60	58	58	66
85°	15	15	14	13	13	17
90°	1	14	37	35	36	4
95°	55	65	68	68	66	63
105°	227	230	233	235	235	240
115°	423	429	427	426	423	418
125°	615	624	622	619	617	550
135°	796	807	810	809	806	615
145°	966	974	980	981	977	603
155°	1105	1108	1111	1116	1113	508
165°	1202	1201	1201	1208	1203	339
175°	1251	1248	1245	1252	1246	119
180°	1253	1253	1253	1253	1253	



TEST NUMBER: P331488-930

CATALOG NUMBER: S122DIW-S290D1240U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	385.1	385.1	385.1	385.1	385.1	385.1	385.1	385.1	385.1	385.1	385.1
2.5°	386.9	386.6	386.3	386.0	385.6	385.1	384.4	383.7	382.9	382.2	382.9
5°	385.1	384.8	384.5	384.2	383.8	383.3	382.4	381.5	380.5	379.6	380.3
7.5°	381.8	381.2	380.7	380.3	379.8	379.0	378.1	377.2	376.3	375.4	376.0
10°	378.5	378.0	377.4	376.8	376.2	375.4	374.5	373.5	372.5	371.5	372.1
12.5°	374.1	373.6	373.1	372.5	372.0	371.3	370.3	369.3	368.4	367.4	367.8
15°	366.6	366.2	365.7	365.2	364.7	363.9	362.8	361.7	360.7	359.6	360.0
17.5°	357.2	356.7	356.2	355.7	355.2	354.4	353.4	352.2	351.1	350.1	350.4
20°	350.3	349.8	349.4	348.9	348.4	347.6	346.4	345.3	344.1	343.0	343.2
22.5°	343.6	342.8	342.2	341.4	340.8	339.9	338.8	337.7	336.6	335.6	335.6
25°	331.8	331.2	330.5	329.9	329.2	328.2	326.8	325.4	324.0	322.6	322.8
27.5°	318.5	318.0	317.3	316.7	316.2	315.3	314.2	313.1	312.0	310.9	310.6
30°	309.7	309.0	308.3	307.7	307.0	306.1	304.8	303.6	302.3	301.1	300.8
32.5°	300.1	299.6	299.1	298.6	298.1	297.1	295.8	294.6	293.3	292.0	291.5
35°	286.3	285.4	284.6	283.8	283.0	281.9	280.6	279.3	278.0	276.6	276.1
37.5°	270.7	269.9	269.2	268.5	267.7	266.8	265.5	264.2	262.8	261.5	260.9
40°	260.0	259.3	258.7	258.0	257.4	256.4	255.0	253.7	252.4	251.1	250.4
42.5°	249.6	249.0	248.3	247.7	247.0	246.0	244.7	243.4	242.1	240.8	239.9
45°	232.9	232.4	231.8	231.2	230.6	229.8	228.5	227.3	226.1	224.8	223.9
47.5°	216.4	215.8	215.3	214.7	214.2	213.3	212.0	210.8	209.5	208.1	207.2
50°	204.8	204.4	204.0	203.6	203.2	202.4	201.2	200.1	198.9	197.8	196.7
52.5°	193.6	193.0	192.5	191.9	191.4	190.5	189.5	188.4	187.3	186.2	185.2
55°	176.3	175.8	175.3	174.8	174.3	173.6	172.6	171.6	170.6	169.7	168.6
57.5°	159.0	158.6	158.2	157.8	157.4	156.6	155.6	154.5	153.4	152.3	151.3
60°	147.4	147.1	146.8	146.4	146.1	145.4	144.2	143.1	141.9	140.7	139.8
62.5°	136.2	135.6	135.1	134.6	134.0	133.3	132.4	131.6	130.7	129.8	128.9
65°	118.9	118.4	117.9	117.4	116.9	116.3	115.4	114.6	113.8	113.0	112.2
67.5°	101.3	100.9	100.5	100.1	99.8	99.2	98.4	97.7	96.9	96.2	95.6
70°	90.3	90.0	89.7	89.4	89.0	88.5	87.8	87.1	86.3	85.5	85.0
72.5°	79.1	78.8	78.4	78.1	77.8	77.4	76.9	76.5	76.0	75.5	74.9
75°	62.2	62.0	61.9	61.7	61.6	61.3	60.9	60.4	60.0	59.6	59.1
77.5°	47.1	46.8	46.6	46.3	46.0	45.7	45.6	45.4	45.2	45.1	44.8
80°	37.0	36.9	36.9	36.8	36.7	36.6	36.4	36.3	36.1	36.0	35.7
82.5°	27.6	27.6	27.6	27.5	27.5	27.4	27.3	27.2	27.1	27.1	26.7
85°	15.2	15.1	15.0	14.9	14.8	14.8	14.7	14.6	14.5	14.4	14.2
87.5°	5.5	6.0	6.4	6.8	7.3	7.9	8.8	9.8	10.7	11.6	11.3
90°	1.1	3.9	6.7	9.5	12.3	16.3	21.5	26.7	31.8	37.0	36.5
92.5°	18.8	20.9	23.0	25.0	27.1	28.7	29.9	31.1	32.4	33.6	33.7
95°	55.0	57.3	59.7	62.0	64.4	65.8	66.3	66.7	67.2	67.7	67.7
97.5°	100.4	102.5	104.6	106.6	108.7	110.1	111.0	111.9	112.8	113.7	113.7
100°	134.3	136.2	138.0	139.9	141.8	143.1	143.7	144.5	145.2	145.9	145.9
102.5°	169.7	171.3	172.8	174.3	175.8	177.0	177.9	178.8	179.7	180.6	180.8
105°	227.3	228.0	228.7	229.4	230.1	230.7	231.1	231.6	232.1	232.6	233.0
107.5°	285.2	286.3	287.3	288.3	289.3	289.8	289.8	289.8	289.8	289.8	290.1
110°	322.5	323.8	325.2	326.7	328.1	328.8	328.8	328.8	328.8	328.8	328.8



TEST NUMBER: P331488-930

CATALOG NUMBER: S122DIW-S290D1240U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	363.1	364.4	365.8	367.3	368.7	369.2	369.1	368.9	368.7	368.5	367.9
115°	422.9	424.3	425.7	427.1	428.5	428.9	428.5	428.0	427.5	427.1	426.9
117.5°	482.5	484.4	486.2	488.1	490.0	490.3	488.9	487.6	486.3	485.0	484.5
120°	522.2	524.1	526.0	527.9	529.8	529.8	527.9	526.0	524.1	522.2	522.2
122.5°	558.6	560.8	563.1	565.3	567.6	568.1	566.8	565.5	564.1	562.8	562.2
125°	615.2	617.3	619.5	621.6	623.7	624.4	623.7	623.1	622.3	621.6	620.9
127.5°	670.4	673.1	675.8	678.5	681.2	682.1	681.3	680.4	679.6	678.7	677.8
130°	705.2	708.2	711.3	714.3	717.3	718.6	718.2	717.7	717.2	716.7	716.2
132.5°	744.0	746.5	749.0	751.5	754.0	755.3	755.4	755.5	755.5	755.6	754.6
135°	796.1	798.6	801.2	803.8	806.4	807.9	808.4	808.9	809.3	809.8	809.5
137.5°	850.8	852.9	855.0	857.1	859.2	860.6	861.2	861.9	862.4	863.1	862.9
140°	883.8	885.9	888.0	890.1	892.3	893.9	895.0	896.3	897.4	898.5	898.5
142.5°	917.6	919.7	921.9	924.0	926.1	927.5	928.3	929.1	929.9	930.7	930.9
145°	966.2	967.9	969.6	971.2	972.8	974.4	975.8	977.1	978.6	980.0	980.2
147.5°	1009.6	1011.5	1013.5	1015.5	1017.5	1019.0	1019.9	1020.8	1021.7	1022.7	1023.2
150°	1039.2	1040.6	1042.0	1043.4	1044.8	1046.0	1046.9	1047.9	1048.8	1049.8	1050.4
152.5°	1065.4	1066.8	1068.2	1069.6	1071.1	1072.3	1073.4	1074.6	1075.7	1076.8	1077.7
155°	1104.7	1105.5	1106.1	1106.9	1107.6	1108.2	1109.0	1109.6	1110.4	1111.1	1112.2
157.5°	1138.3	1138.8	1139.3	1139.8	1140.2	1140.7	1141.1	1141.5	1141.9	1142.4	1143.9
160°	1158.6	1159.1	1159.6	1160.1	1160.5	1160.9	1161.1	1161.3	1161.6	1161.8	1163.2
162.5°	1177.2	1177.4	1177.5	1177.5	1177.6	1177.8	1178.0	1178.3	1178.5	1178.8	1180.3
165°	1202.0	1201.8	1201.5	1201.3	1201.0	1200.9	1200.9	1200.9	1200.9	1200.9	1202.6
167.5°	1222.7	1222.0	1221.3	1220.6	1219.9	1219.5	1219.4	1219.4	1219.4	1219.3	1221.0
170°	1233.7	1233.0	1232.3	1231.6	1230.9	1230.4	1230.2	1230.0	1229.7	1229.5	1231.1
172.5°	1241.3	1240.6	1239.9	1239.2	1238.5	1238.0	1237.8	1237.5	1237.3	1237.1	1238.8
175°	1250.6	1249.9	1249.2	1248.5	1247.8	1247.2	1246.8	1246.3	1245.8	1245.3	1247.0
177.5°	1254.4	1253.8	1253.3	1252.7	1252.1	1251.7	1251.3	1250.9	1250.6	1250.2	1251.3
180°	1252.7	1252.7	1252.7	1252.7	1252.7	1252.7	1252.7	1252.7	1252.7	1252.7	1252.7



TEST NUMBER: P331488-930

CATALOG NUMBER: S122DIW-S290D1240U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	385.1	385.1	385.1	385.1	385.1	385.1	385.1	385.1
2.5°	383.5	384.2	384.8	385.1	385.0	384.8	384.7	384.6
5°	381.0	381.6	382.3	382.5	382.4	382.2	382.0	381.9
7.5°	376.7	377.3	378.0	378.2	378.1	377.8	377.6	377.5
10°	372.8	373.5	374.1	374.3	374.1	373.8	373.6	373.3
12.5°	368.3	368.7	369.2	369.3	369.2	368.9	368.8	368.6
15°	360.3	360.6	360.9	360.9	360.5	360.1	359.7	359.3
17.5°	350.8	351.2	351.6	351.6	351.1	350.8	350.4	350.0
20°	343.5	343.7	344.0	343.9	343.6	343.2	342.9	342.6
22.5°	335.7	335.7	335.7	335.7	335.5	335.3	335.1	334.9
25°	322.9	323.1	323.3	323.3	323.1	322.9	322.8	322.6
27.5°	310.4	310.1	309.9	309.6	309.2	308.8	308.4	308.0
30°	300.6	300.4	300.1	299.9	299.5	299.2	298.9	298.5
32.5°	291.1	290.6	290.2	289.8	289.4	289.1	288.8	288.5
35°	275.7	275.2	274.7	274.3	273.9	273.5	273.0	272.6
37.5°	260.2	259.7	259.0	258.5	258.1	257.7	257.4	257.0
40°	249.6	248.9	248.2	247.6	247.3	247.0	246.6	246.3
42.5°	239.1	238.3	237.5	236.8	236.4	235.9	235.5	235.1
45°	223.0	222.1	221.2	220.5	220.2	219.9	219.6	219.2
47.5°	206.3	205.3	204.3	203.6	203.2	202.7	202.2	201.7
50°	195.5	194.3	193.1	192.4	192.0	191.6	191.2	190.8
52.5°	184.3	183.4	182.4	181.6	181.1	180.6	180.0	179.4
55°	167.6	166.6	165.7	165.0	164.6	164.1	163.7	163.3
57.5°	150.3	149.4	148.4	147.7	147.5	147.2	146.8	146.5
60°	138.9	138.0	137.1	136.6	136.3	136.1	135.8	135.6
62.5°	128.1	127.3	126.5	125.9	125.6	125.2	124.9	124.6
65°	111.5	110.7	110.0	109.4	109.0	108.6	108.2	107.8
67.5°	95.1	94.5	93.9	93.4	93.1	92.8	92.5	92.1
70°	84.4	83.8	83.2	82.8	82.5	82.1	81.8	81.4
72.5°	74.4	73.8	73.2	72.7	72.5	72.2	72.0	71.7
75°	58.6	58.1	57.6	57.5	57.6	57.8	58.0	58.1
77.5°	44.6	44.4	44.1	43.9	43.6	43.5	43.2	43.0
80°	35.5	35.2	35.0	34.7	34.6	34.4	34.2	34.1
82.5°	26.4	26.1	25.8	25.6	25.6	25.5	25.5	25.5
85°	13.9	13.7	13.5	13.3	13.2	13.1	13.0	13.0
87.5°	10.9	10.7	10.4	10.2	10.2	10.2	10.2	10.2
90°	36.0	35.6	35.1	35.0	35.2	35.5	35.7	36.0
92.5°	33.8	33.9	34.0	34.1	34.1	34.2	34.2	34.2
95°	67.7	67.7	67.7	67.4	66.9	66.4	66.0	65.6
97.5°	113.7	113.7	113.7	113.7	113.7	113.7	113.6	113.6
100°	145.9	145.9	145.9	145.8	145.5	145.3	145.0	144.8
102.5°	180.9	181.2	181.3	181.3	181.1	180.8	180.6	180.3
105°	233.5	234.0	234.5	234.7	234.7	234.7	234.7	234.7
107.5°	290.2	290.4	290.7	290.2	289.1	288.0	286.9	285.8
110°	328.8	328.8	328.8	328.4	327.8	327.0	326.3	325.6





TEST NUMBER: P331488-930

CATALOG NUMBER: S122DIW-S290D1240U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	367.4	366.8	366.2	365.7	365.2	364.7	364.2	363.6
115°	426.6	426.4	426.2	425.7	425.0	424.3	423.5	422.9
117.5°	483.9	483.3	482.7	482.2	481.4	480.7	480.0	479.3
120°	522.2	522.2	522.2	521.9	521.1	520.5	519.8	519.1
122.5°	561.7	561.2	560.6	560.0	559.5	559.0	558.5	558.0
125°	620.2	619.5	618.8	618.3	618.1	617.8	617.6	617.3
127.5°	677.0	676.1	675.3	674.5	673.8	673.0	672.3	671.5
130°	715.8	715.3	714.9	714.2	713.2	712.3	711.3	710.4
132.5°	753.6	752.5	751.5	750.6	749.9	749.1	748.4	747.6
135°	809.3	809.1	808.9	808.4	807.6	807.0	806.2	805.5
137.5°	862.7	862.5	862.3	861.8	860.8	859.9	858.9	858.0
140°	898.5	898.5	898.5	898.1	897.2	896.3	895.3	894.4
142.5°	931.1	931.3	931.5	931.1	930.2	929.2	928.3	927.3
145°	980.5	980.7	980.9	980.6	979.7	978.7	977.8	976.8
147.5°	1023.7	1024.3	1024.7	1024.6	1023.7	1022.8	1021.9	1021.0
150°	1051.2	1051.9	1052.6	1052.6	1051.9	1051.2	1050.4	1049.8
152.5°	1078.6	1079.5	1080.4	1080.4	1079.5	1078.6	1077.7	1076.8
155°	1113.5	1114.6	1115.7	1116.0	1115.3	1114.6	1113.9	1113.2
157.5°	1145.6	1147.1	1148.8	1149.0	1147.9	1146.7	1145.6	1144.4
160°	1164.7	1166.0	1167.4	1167.7	1166.8	1165.8	1164.9	1163.9
162.5°	1181.9	1183.5	1185.1	1185.4	1184.2	1183.1	1181.9	1180.9
165°	1204.2	1205.8	1207.5	1207.7	1206.6	1205.4	1204.2	1203.1
167.5°	1222.6	1224.3	1225.9	1226.1	1224.9	1223.7	1222.5	1221.2
170°	1232.7	1234.4	1236.1	1236.2	1234.8	1233.4	1231.9	1230.5
172.5°	1240.4	1242.0	1243.7	1243.7	1242.4	1241.0	1239.6	1238.1
175°	1248.6	1250.3	1251.9	1252.1	1250.6	1249.2	1247.8	1246.3
177.5°	1252.5	1253.6	1254.7	1254.7	1253.6	1252.5	1251.3	1250.2
180°	1252.7	1252.7	1252.7	1252.7	1252.7	1252.7	1252.7	1252.7

(END OF REPORT)