

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331524-930

Luminaire Tested: **S122DIW-S485D1440U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331524-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S485D1440U930-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1440 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5689.5 lumens
Efficiency: N/A
Efficacy: 93.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 60.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331524-930

CATALOG NUMBER: S122DIW-S485D1440U930-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

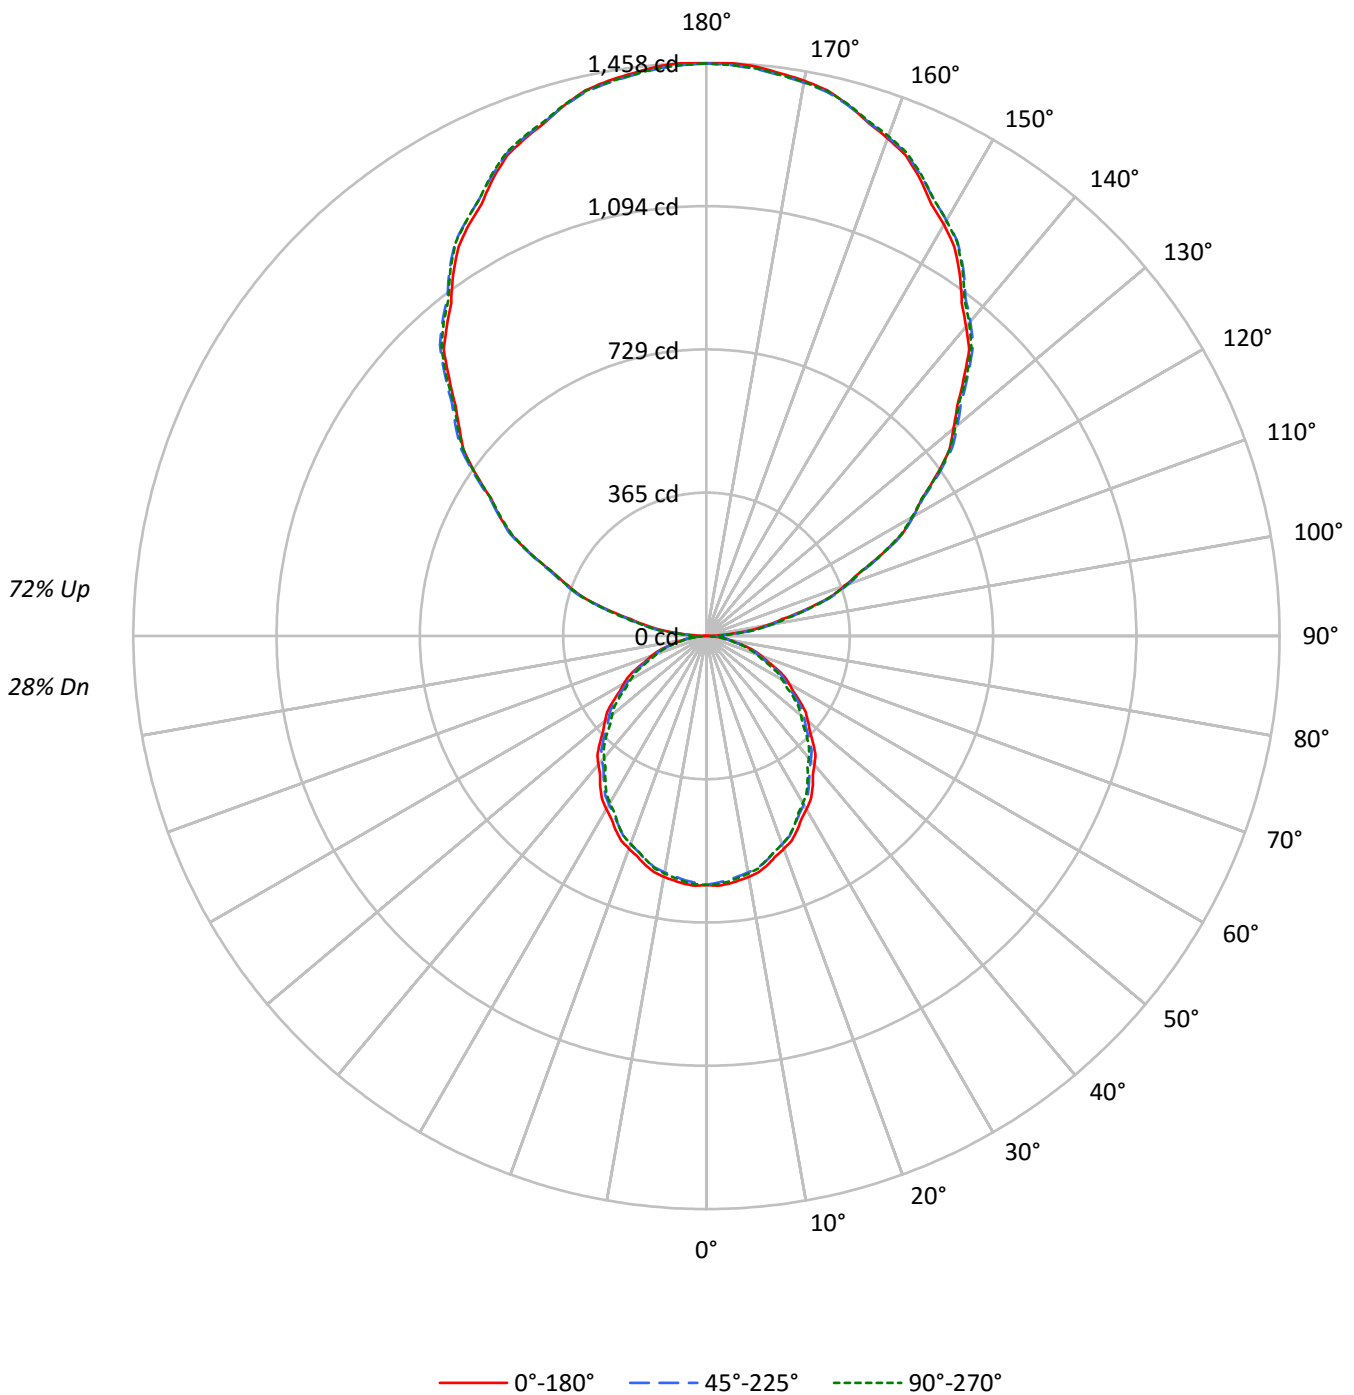



TEST NUMBER: P331524-930

CATALOG NUMBER: S122DIW-S485D1440U930-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36
1	93	89	85	82	83	80	76	74	62	60	58	47	45	44	32	31	31
2	85	77	72	67	75	69	65	60	55	51	48	41	39	37	28	27	26
3	77	68	61	55	69	61	55	50	48	44	40	36	33	31	25	23	22
4	70	60	52	47	63	54	48	43	43	38	34	32	29	26	22	20	19
5	65	53	46	40	58	48	41	36	38	33	30	29	25	23	20	18	16
6	59	48	40	34	53	43	36	31	34	29	26	26	23	20	18	16	14
7	55	43	35	30	49	39	32	27	31	26	22	23	20	18	17	14	13
8	51	39	31	26	45	35	29	24	28	23	20	21	18	16	15	13	11
9	47	35	28	23	42	32	26	21	26	21	18	20	16	14	14	12	10
10	44	32	25	21	39	29	23	19	24	19	16	18	15	13	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10224	10224	10224
5°	10263	10115	10175
10°	10203	10012	10063
15°	10076	9884	9872
20°	9897	9689	9677
25°	9720	9449	9449
30°	9491	9229	9148
35°	9278	8966	8834
40°	9010	8703	8534
45°	8745	8439	8229
50°	8457	8166	7877
55°	8158	7848	7561
60°	7824	7472	7195
65°	7465	7095	6770
70°	7010	6637	6326
75°	6382	6114	5964
80°	5662	5486	5207
85°	4613	4390	3946



TEST NUMBER: P331524-930

CATALOG NUMBER: S122DIW-S485D1440U930-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	59.5	1.0
10°-20°	167.6	2.9
20°-30°	246.3	4.3
30°-40°	286.1	5.0
40°-50°	285.8	5.0
50°-60°	249.2	4.4
60°-70°	184.3	3.2
70°-80°	104.4	1.8
80°-90°	33.9	0.6
90°-100°	92.3	1.6
100°-110°	286.6	5.0
110°-120°	490.0	8.6
120°-130°	644.3	11.3
130°-140°	723.2	12.7
140°-150°	709.1	12.5
150°-160°	594.8	10.5
160°-170°	394.5	6.9
170°-180°	137.9	2.4
0°-30°	473.4	8.3
0°-40°	759.4	13.3
0°-60°	1294.4	22.8
0°-90°	1616.9	28.4
90°-120°	868.9	15.3
90°-150°	2945.5	51.8
90°-180°	4073.0	71.6
0°-180°	5689.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	633	633	633	633	633	
5°	633	631	624	629	628	60
15°	603	599	591	593	591	170
25°	546	540	530	531	530	251
35°	471	464	455	451	448	294
45°	383	378	370	363	360	295
55°	290	286	279	272	269	259
65°	195	192	186	180	177	193
75°	102	101	98	95	96	109
85°	25	24	24	22	21	29
90°	1	17	43	41	42	5
95°	64	76	79	79	76	73
105°	264	268	270	273	273	279
115°	492	498	497	495	492	486
125°	715	726	723	719	718	639
135°	926	938	942	940	937	715
145°	1123	1132	1139	1140	1136	702
155°	1284	1288	1292	1297	1294	591
165°	1398	1396	1396	1404	1399	394
175°	1454	1450	1448	1456	1449	138
180°	1456	1456	1456	1456	1456	



TEST NUMBER: P331524-930

CATALOG NUMBER: S122DIW-S485D1440U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	633.2	633.2	633.2	633.2	633.2	633.2	633.2	633.2	633.2	633.2	633.2
2.5°	636.2	635.6	635.1	634.5	634.0	633.2	631.9	630.8	629.6	628.4	629.5
5°	633.2	632.7	632.2	631.6	631.1	630.1	628.6	627.1	625.6	624.1	625.2
7.5°	627.6	626.8	626.0	625.1	624.3	623.1	621.6	620.1	618.6	617.0	618.2
10°	622.3	621.3	620.4	619.5	618.5	617.2	615.6	614.0	612.4	610.7	611.8
12.5°	615.0	614.2	613.3	612.5	611.6	610.4	608.8	607.2	605.5	603.9	604.6
15°	602.8	602.0	601.2	600.4	599.6	598.3	596.5	594.8	593.0	591.3	591.7
17.5°	587.2	586.4	585.6	584.8	584.0	582.7	580.9	579.1	577.3	575.5	576.2
20°	576.0	575.2	574.4	573.6	572.7	571.4	569.5	567.6	565.7	563.9	564.3
22.5°	564.8	563.7	562.6	561.4	560.3	558.8	557.0	555.2	553.4	551.6	551.7
25°	545.6	544.5	543.4	542.3	541.3	539.6	537.3	534.9	532.6	530.4	530.6
27.5°	523.7	522.7	521.7	520.7	519.8	518.4	516.6	514.7	512.9	511.1	510.7
30°	509.1	507.9	506.9	505.8	504.7	503.1	501.1	499.1	497.1	495.0	494.6
32.5°	493.4	492.6	491.7	490.8	490.0	488.4	486.3	484.2	482.1	480.0	479.2
35°	470.7	469.3	468.0	466.6	465.3	463.5	461.4	459.2	457.0	454.9	454.0
37.5°	445.0	443.8	442.6	441.4	440.2	438.5	436.3	434.2	432.0	429.9	428.8
40°	427.5	426.3	425.3	424.2	423.1	421.5	419.3	417.2	415.0	412.9	411.6
42.5°	410.4	409.3	408.2	407.2	406.1	404.5	402.3	400.1	397.9	395.7	394.4
45°	383.0	382.0	381.1	380.2	379.2	377.7	375.7	373.7	371.6	369.6	368.1
47.5°	355.7	354.8	353.9	353.0	352.1	350.7	348.5	346.4	344.3	342.2	340.6
50°	336.7	336.1	335.3	334.7	334.0	332.7	330.8	329.0	327.0	325.1	323.3
52.5°	318.2	317.3	316.4	315.5	314.6	313.3	311.5	309.7	307.9	306.1	304.6
55°	289.8	289.0	288.2	287.4	286.6	285.4	283.7	282.1	280.5	278.8	277.3
57.5°	261.3	260.7	260.0	259.4	258.8	257.6	255.8	254.0	252.2	250.4	248.7
60°	242.3	241.8	241.2	240.7	240.2	239.0	237.1	235.1	233.3	231.4	229.9
62.5°	223.8	223.0	222.1	221.2	220.4	219.2	217.8	216.3	214.8	213.4	212.0
65°	195.4	194.6	193.8	193.0	192.2	191.1	189.8	188.4	187.0	185.7	184.5
67.5°	166.6	165.9	165.3	164.6	164.0	163.1	161.8	160.6	159.4	158.2	157.3
70°	148.5	148.1	147.5	146.9	146.4	145.5	144.3	143.1	141.9	140.6	139.7
72.5°	130.0	129.6	129.0	128.4	127.9	127.3	126.5	125.6	124.9	124.1	123.1
75°	102.3	102.0	101.7	101.5	101.2	100.8	100.0	99.4	98.7	98.0	97.2
77.5°	77.5	77.0	76.6	76.1	75.6	75.3	75.0	74.7	74.4	74.2	73.8
80°	60.9	60.7	60.7	60.5	60.3	60.2	59.8	59.6	59.4	59.0	58.6
82.5°	45.3	45.2	45.2	45.2	45.2	45.1	44.9	44.8	44.6	44.4	43.9
85°	24.9	24.9	24.7	24.5	24.5	24.3	24.1	24.1	23.9	23.7	23.3
87.5°	9.0	9.5	9.9	10.4	10.8	11.5	12.5	13.5	14.4	15.4	15.0
90°	1.2	4.5	7.7	11.1	14.3	19.0	25.0	31.0	37.0	43.0	42.5
92.5°	21.9	24.3	26.7	29.1	31.5	33.4	34.8	36.3	37.7	39.1	39.2
95°	63.9	66.6	69.4	72.1	74.8	76.5	77.0	77.5	78.1	78.7	78.7
97.5°	116.8	119.2	121.6	124.0	126.4	128.1	129.1	130.2	131.2	132.2	132.2
100°	156.1	158.2	160.5	162.7	164.9	166.3	167.1	168.0	168.8	169.6	169.6
102.5°	197.4	199.2	200.9	202.6	204.4	205.8	206.8	207.8	208.9	209.9	210.2
105°	264.2	265.1	265.9	266.7	267.5	268.2	268.8	269.3	269.9	270.4	270.9
107.5°	331.6	332.8	334.0	335.3	336.4	337.0	337.0	337.0	337.0	337.0	337.2
110°	374.9	376.5	378.1	379.8	381.4	382.3	382.3	382.3	382.3	382.3	382.3



TEST NUMBER: P331524-930

CATALOG NUMBER: S122DIW-S485D1440U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	422.1	423.7	425.3	427.0	428.6	429.3	429.1	428.9	428.7	428.4	427.8
115°	491.6	493.3	494.9	496.6	498.2	498.7	498.2	497.7	497.1	496.6	496.3
117.5°	561.0	563.1	565.3	567.5	569.7	570.1	568.5	567.0	565.4	563.9	563.3
120°	607.2	609.4	611.6	613.8	616.0	616.0	613.8	611.6	609.4	607.2	607.2
122.5°	649.5	652.1	654.7	657.3	660.0	660.5	659.0	657.5	655.9	654.4	653.7
125°	715.3	717.8	720.2	722.7	725.2	726.0	725.2	724.4	723.6	722.7	721.9
127.5°	779.5	782.6	785.7	788.9	792.0	793.0	792.1	791.1	790.1	789.1	788.1
130°	819.8	823.4	827.0	830.5	834.1	835.5	834.9	834.5	833.9	833.3	832.8
132.5°	865.0	868.0	870.8	873.8	876.6	878.2	878.2	878.3	878.5	878.6	877.3
135°	925.5	928.5	931.6	934.5	937.5	939.3	939.9	940.4	940.9	941.5	941.3
137.5°	989.2	991.6	994.1	996.5	999.0	1000.6	1001.4	1002.0	1002.7	1003.5	1003.2
140°	1027.5	1030.0	1032.5	1034.9	1037.4	1039.3	1040.6	1042.0	1043.4	1044.7	1044.7
142.5°	1066.9	1069.3	1071.8	1074.2	1076.7	1078.4	1079.3	1080.3	1081.2	1082.1	1082.3
145°	1123.4	1125.4	1127.2	1129.1	1131.1	1132.9	1134.5	1136.1	1137.8	1139.4	1139.6
147.5°	1173.8	1176.1	1178.4	1180.7	1183.0	1184.7	1185.8	1186.8	1188.0	1189.0	1189.7
150°	1208.2	1209.8	1211.5	1213.2	1214.8	1216.1	1217.2	1218.3	1219.4	1220.5	1221.3
152.5°	1238.7	1240.3	1241.9	1243.6	1245.3	1246.8	1248.1	1249.4	1250.7	1252.0	1253.0
155°	1284.4	1285.2	1286.1	1286.9	1287.7	1288.5	1289.3	1290.1	1290.9	1291.8	1293.1
157.5°	1323.5	1324.0	1324.6	1325.2	1325.7	1326.2	1326.7	1327.2	1327.7	1328.2	1330.0
160°	1347.1	1347.7	1348.2	1348.7	1349.3	1349.7	1350.0	1350.2	1350.5	1350.8	1352.4
162.5°	1368.7	1368.9	1369.0	1369.1	1369.2	1369.4	1369.6	1369.9	1370.2	1370.4	1372.3
165°	1397.5	1397.3	1396.9	1396.7	1396.4	1396.3	1396.3	1396.3	1396.3	1396.3	1398.2
167.5°	1421.6	1420.7	1419.9	1419.1	1418.3	1417.9	1417.8	1417.8	1417.7	1417.6	1419.6
170°	1434.4	1433.5	1432.7	1431.9	1431.1	1430.5	1430.3	1430.0	1429.7	1429.5	1431.3
172.5°	1443.2	1442.4	1441.6	1440.8	1440.0	1439.4	1439.2	1438.8	1438.6	1438.3	1440.2
175°	1454.0	1453.2	1452.4	1451.6	1450.7	1450.1	1449.5	1448.9	1448.5	1447.9	1449.8
177.5°	1458.5	1457.8	1457.2	1456.5	1455.9	1455.3	1454.8	1454.4	1454.0	1453.5	1454.8
180°	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5



TEST NUMBER: P331524-930

CATALOG NUMBER: S122DIW-S485D1440U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	633.2	633.2	633.2	633.2	633.2	633.2	633.2	633.2
2.5°	630.6	631.6	632.7	633.2	632.9	632.7	632.5	632.3
5°	626.3	627.4	628.4	628.8	628.6	628.3	628.0	627.8
7.5°	619.2	620.3	621.4	621.7	621.5	621.2	620.9	620.6
10°	612.9	614.0	615.1	615.4	615.0	614.6	614.2	613.8
12.5°	605.4	606.2	606.9	607.2	606.8	606.6	606.3	605.9
15°	592.3	592.9	593.4	593.3	592.6	592.0	591.3	590.6
17.5°	576.7	577.4	578.0	578.0	577.3	576.7	576.1	575.4
20°	564.7	565.1	565.5	565.4	564.8	564.3	563.8	563.2
22.5°	551.8	551.9	552.0	551.9	551.5	551.2	550.9	550.6
25°	530.9	531.2	531.4	531.4	531.2	530.9	530.6	530.4
27.5°	510.3	509.9	509.5	509.0	508.3	507.7	507.0	506.4
30°	494.2	493.8	493.4	492.9	492.4	491.9	491.3	490.7
32.5°	478.5	477.8	477.0	476.4	475.8	475.3	474.7	474.2
35°	453.2	452.4	451.6	450.9	450.2	449.5	448.8	448.2
37.5°	427.9	426.9	425.9	425.0	424.4	423.7	423.1	422.5
40°	410.4	409.2	408.0	407.1	406.5	406.0	405.4	404.9
42.5°	393.1	391.8	390.4	389.5	388.7	387.9	387.2	386.4
45°	366.6	365.2	363.6	362.6	362.1	361.6	361.0	360.4
47.5°	339.1	337.5	335.9	334.8	333.9	333.2	332.4	331.6
50°	321.4	319.4	317.6	316.3	315.6	315.0	314.2	313.6
52.5°	303.0	301.4	299.9	298.6	297.7	296.9	296.0	295.1
55°	275.7	274.0	272.4	271.3	270.5	269.9	269.2	268.6
57.5°	247.2	245.6	244.0	243.0	242.4	241.9	241.4	240.8
60°	228.4	226.9	225.4	224.5	224.0	223.6	223.2	222.8
62.5°	210.6	209.2	207.8	206.9	206.4	205.9	205.4	204.8
65°	183.3	182.1	180.8	179.9	179.2	178.6	177.9	177.2
67.5°	156.3	155.3	154.4	153.7	153.1	152.5	152.1	151.5
70°	138.8	137.8	136.9	136.2	135.6	135.0	134.5	134.0
72.5°	122.2	121.2	120.3	119.6	119.2	118.7	118.3	117.9
75°	96.4	95.6	94.8	94.5	94.8	95.1	95.3	95.6
77.5°	73.4	73.0	72.6	72.2	71.7	71.4	71.0	70.6
80°	58.2	57.8	57.5	57.1	56.8	56.6	56.3	56.0
82.5°	43.5	42.9	42.4	42.1	42.1	42.0	41.9	41.9
85°	22.9	22.5	22.1	21.9	21.7	21.6	21.4	21.3
87.5°	14.6	14.1	13.7	13.5	13.4	13.4	13.3	13.2
90°	41.9	41.4	40.8	40.7	41.0	41.3	41.5	41.8
92.5°	39.3	39.4	39.5	39.6	39.6	39.7	39.8	39.8
95°	78.7	78.7	78.7	78.4	77.9	77.3	76.7	76.2
97.5°	132.2	132.2	132.2	132.2	132.2	132.1	132.1	132.0
100°	169.6	169.6	169.6	169.5	169.2	168.9	168.7	168.4
102.5°	210.3	210.6	210.8	210.8	210.5	210.3	209.9	209.7
105°	271.5	272.1	272.6	272.9	272.9	272.9	272.9	272.9
107.5°	337.5	337.7	337.9	337.4	336.1	334.8	333.6	332.3
110°	382.3	382.3	382.3	381.8	381.0	380.2	379.4	378.5



TEST NUMBER: P331524-930

CATALOG NUMBER: S122DIW-S485D1440U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	427.1	426.5	425.8	425.2	424.6	424.0	423.4	422.8
115°	496.0	495.7	495.5	494.9	494.1	493.3	492.4	491.6
117.5°	562.6	562.0	561.3	560.5	559.7	558.9	558.1	557.3
120°	607.2	607.2	607.2	606.7	605.9	605.1	604.3	603.5
122.5°	653.1	652.4	651.8	651.1	650.5	650.0	649.3	648.7
125°	721.1	720.2	719.4	718.9	718.6	718.4	718.1	717.8
127.5°	787.1	786.1	785.1	784.2	783.3	782.4	781.6	780.7
130°	832.3	831.7	831.1	830.3	829.2	828.2	827.0	826.0
132.5°	876.2	875.0	873.8	872.7	871.9	871.0	870.1	869.2
135°	940.9	940.7	940.4	939.9	939.1	938.2	937.4	936.6
137.5°	1003.0	1002.8	1002.6	1001.9	1000.9	999.7	998.7	997.5
140°	1044.7	1044.7	1044.7	1044.2	1043.1	1042.0	1040.9	1039.8
142.5°	1082.6	1082.8	1083.0	1082.6	1081.5	1080.4	1079.3	1078.2
145°	1140.0	1140.2	1140.4	1140.0	1139.0	1137.9	1136.8	1135.7
147.5°	1190.3	1190.8	1191.5	1191.2	1190.2	1189.1	1188.1	1187.1
150°	1222.1	1222.9	1223.8	1223.8	1222.9	1222.1	1221.3	1220.5
152.5°	1254.0	1255.1	1256.1	1256.1	1255.1	1254.0	1253.0	1252.0
155°	1294.5	1295.9	1297.2	1297.5	1296.7	1295.9	1295.1	1294.3
157.5°	1331.9	1333.7	1335.6	1335.9	1334.6	1333.3	1332.0	1330.6
160°	1354.0	1355.7	1357.3	1357.6	1356.5	1355.4	1354.4	1353.2
162.5°	1374.2	1376.1	1377.9	1378.2	1376.9	1375.6	1374.3	1372.9
165°	1400.1	1402.0	1403.9	1404.2	1402.8	1401.5	1400.1	1398.7
167.5°	1421.5	1423.4	1425.3	1425.6	1424.2	1422.7	1421.3	1419.8
170°	1433.3	1435.2	1437.1	1437.2	1435.6	1433.9	1432.3	1430.7
172.5°	1442.1	1444.1	1445.9	1446.1	1444.5	1442.8	1441.2	1439.6
175°	1451.7	1453.6	1455.6	1455.7	1454.0	1452.4	1450.7	1449.1
177.5°	1456.2	1457.5	1458.8	1458.8	1457.5	1456.2	1454.8	1453.5
180°	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5

(END OF REPORT)