

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331554-930

Luminaire Tested: **S122DIW-S675D1440U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331554-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S675D1440U930-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1440 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6280.6 lumens
Efficiency: N/A
Efficacy: 92.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 68.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331554-930

CATALOG NUMBER: S122DIW-S675D1440U930-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

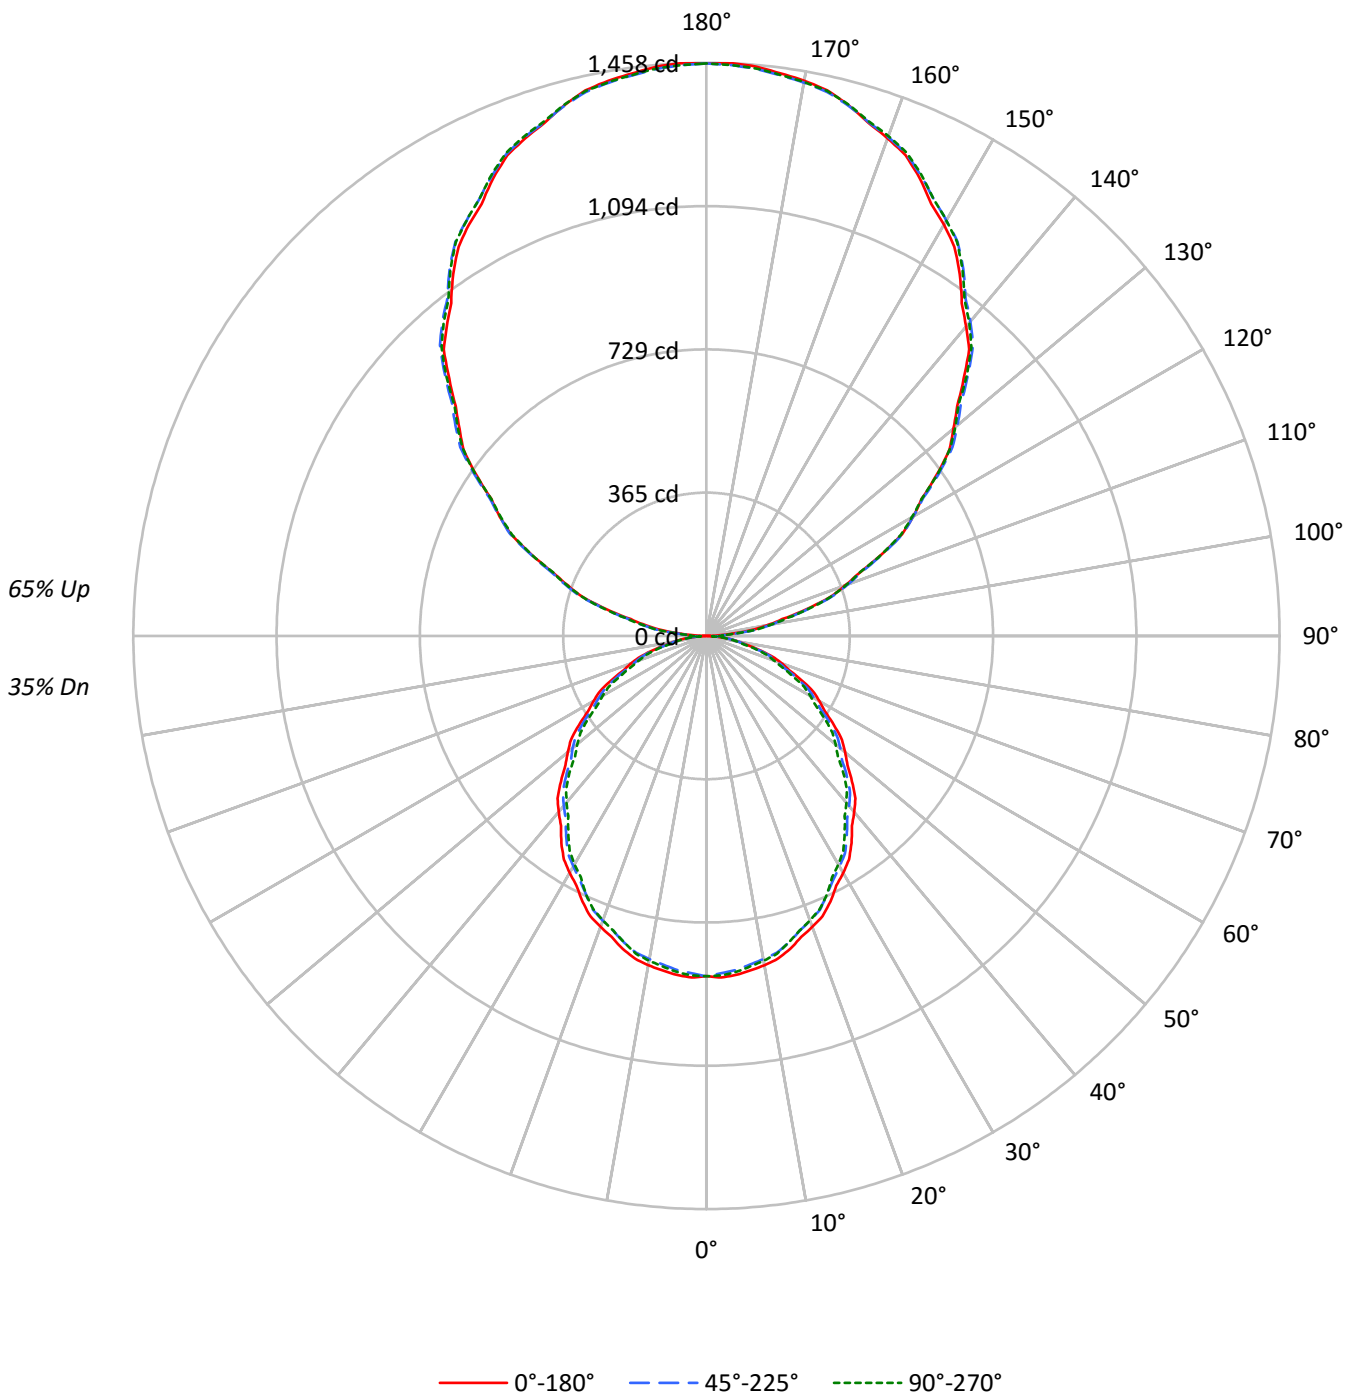



TEST NUMBER: P331554-930

CATALOG NUMBER: S122DIW-S675D1440U930-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	42	42	42	35
1	94	90	86	83	85	82	78	76	66	63	61	51	50	48	37	37	36	30
2	86	79	73	68	77	71	66	62	58	54	51	45	42	40	33	31	30	25
3	78	69	62	56	71	63	57	52	51	46	43	40	37	34	29	27	26	21
4	72	61	53	48	64	56	49	44	45	40	36	35	32	29	26	24	22	18
5	66	54	46	41	59	49	43	37	40	35	31	32	28	25	23	21	19	16
6	60	49	41	35	54	44	37	32	36	31	27	28	25	22	21	19	17	14
7	56	44	36	31	50	40	33	28	33	28	24	26	22	19	19	17	15	12
8	52	40	32	27	47	36	30	25	30	25	21	24	20	17	18	15	13	11
9	48	36	29	24	43	33	27	22	27	22	19	22	18	15	16	14	12	10
10	45	33	26	21	41	30	24	20	25	20	17	20	16	14	15	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13976	13976	13976
5°	14029	13827	13908
10°	13946	13686	13754
15°	13772	13508	13494
20°	13527	13242	13228
25°	13286	12916	12916
30°	12972	12616	12506
35°	12682	12254	12073
40°	12313	11894	11666
45°	11953	11536	11250
50°	11560	11163	10766
55°	11153	10731	10331
60°	10698	10214	9836
65°	10208	9700	9253
70°	9588	9073	8644
75°	8721	8359	8153
80°	7736	7504	7122
85°	6336	6002	5391



TEST NUMBER: P331554-930

CATALOG NUMBER: S122DIW-S675D1440U930-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.4	1.3
10°-20°	229.0	3.6
20°-30°	336.6	5.4
30°-40°	391.0	6.2
40°-50°	390.6	6.2
50°-60°	340.6	5.4
60°-70°	251.9	4.0
70°-80°	142.7	2.3
80°-90°	44.2	0.7
90°-100°	92.3	1.5
100°-110°	286.6	4.6
110°-120°	490.0	7.8
120°-130°	644.3	10.3
130°-140°	723.2	11.5
140°-150°	709.1	11.3
150°-160°	594.8	9.5
160°-170°	394.5	6.3
170°-180°	137.9	2.2
0°-30°	647.0	10.3
0°-40°	1038.1	16.5
0°-60°	1769.3	28.2
0°-90°	2208.0	35.2
90°-120°	868.9	13.8
90°-150°	2945.5	46.9
90°-180°	4073.0	64.9
0°-180°	6280.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	866	866	866	866	866	
5°	866	862	853	859	858	82
15°	824	819	808	811	807	232
25°	746	739	725	726	725	343
35°	643	635	622	617	612	402
45°	524	517	505	496	493	404
55°	396	391	381	372	367	354
65°	267	262	254	247	242	264
75°	140	138	134	129	131	149
85°	34	33	32	30	29	39
90°	1	17	43	41	42	5
95°	64	76	79	79	76	73
105°	264	268	270	273	273	279
115°	492	498	497	495	492	486
125°	715	726	723	719	718	639
135°	926	938	942	940	937	715
145°	1123	1132	1139	1140	1136	702
155°	1284	1288	1292	1297	1294	591
165°	1398	1396	1396	1404	1399	394
175°	1454	1450	1448	1456	1449	138
180°	1456	1456	1456	1456	1456	



TEST NUMBER: P331554-930

CATALOG NUMBER: S122DIW-S675D1440U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	865.6	865.6	865.6	865.6	865.6	865.6	865.6	865.6	865.6	865.6	865.6
2.5°	869.6	868.9	868.1	867.4	866.7	865.4	863.8	862.2	860.5	858.9	860.4
5°	865.6	864.9	864.1	863.4	862.7	861.3	859.2	857.2	855.2	853.1	854.6
7.5°	857.9	856.8	855.7	854.5	853.4	851.7	849.7	847.6	845.5	843.4	844.9
10°	850.6	849.3	848.0	846.7	845.5	843.7	841.5	839.3	837.0	834.8	836.3
12.5°	840.7	839.5	838.3	837.1	836.0	834.4	832.1	829.9	827.7	825.5	826.6
15°	823.9	822.9	821.7	820.7	819.5	817.7	815.4	812.9	810.6	808.1	808.9
17.5°	802.7	801.5	800.5	799.3	798.3	796.5	794.0	791.6	789.1	786.7	787.6
20°	787.3	786.3	785.1	784.0	782.9	781.1	778.4	775.9	773.3	770.7	771.3
22.5°	772.0	770.5	768.9	767.4	765.8	763.9	761.4	759.0	756.5	754.1	754.2
25°	745.8	744.3	742.8	741.3	739.8	737.5	734.3	731.2	728.1	725.0	725.3
27.5°	715.8	714.4	713.1	711.8	710.5	708.6	706.0	703.6	701.1	698.6	698.1
30°	695.8	694.3	692.8	691.4	689.9	687.8	685.0	682.2	679.5	676.7	676.1
32.5°	674.5	673.3	672.1	670.9	669.8	667.7	664.8	661.9	658.9	656.0	655.0
35°	643.4	641.6	639.7	637.8	635.9	633.6	630.6	627.6	624.7	621.7	620.6
37.5°	608.2	606.6	605.0	603.3	601.8	599.4	596.5	593.5	590.6	587.6	586.2
40°	584.2	582.8	581.3	579.8	578.4	576.2	573.2	570.2	567.3	564.3	562.6
42.5°	561.0	559.5	558.0	556.5	555.1	552.9	549.8	546.9	544.0	541.0	539.2
45°	523.5	522.2	520.9	519.7	518.4	516.3	513.6	510.8	508.0	505.2	503.2
47.5°	486.2	485.0	483.8	482.6	481.4	479.3	476.4	473.5	470.7	467.7	465.6
50°	460.2	459.3	458.4	457.5	456.6	454.8	452.2	449.6	447.0	444.4	441.9
52.5°	435.0	433.7	432.5	431.3	430.1	428.3	425.8	423.4	420.9	418.5	416.4
55°	396.2	395.1	394.0	392.8	391.8	390.0	387.8	385.6	383.4	381.2	379.0
57.5°	357.2	356.4	355.5	354.6	353.7	352.0	349.6	347.2	344.7	342.3	340.1
60°	331.3	330.5	329.8	329.1	328.3	326.6	324.1	321.5	318.9	316.3	314.2
62.5°	306.0	304.8	303.6	302.4	301.3	299.6	297.7	295.6	293.7	291.6	289.8
65°	267.2	266.0	265.0	263.8	262.7	261.2	259.4	257.6	255.7	253.9	252.2
67.5°	227.7	226.8	225.9	225.0	224.1	222.9	221.2	219.6	217.9	216.2	214.9
70°	203.1	202.4	201.6	200.9	200.2	198.9	197.2	195.6	194.0	192.2	190.9
72.5°	177.8	177.0	176.3	175.5	174.8	173.9	172.8	171.8	170.7	169.6	168.4
75°	139.8	139.4	139.1	138.7	138.4	137.7	136.8	135.8	134.9	134.0	132.9
77.5°	105.9	105.3	104.6	104.0	103.4	102.9	102.5	102.1	101.7	101.3	100.9
80°	83.2	83.1	82.8	82.7	82.5	82.2	81.9	81.4	81.1	80.7	80.1
82.5°	62.0	61.9	61.9	61.8	61.8	61.6	61.4	61.2	61.0	60.7	60.1
85°	34.2	33.9	33.8	33.6	33.3	33.2	33.0	32.9	32.6	32.4	31.9
87.5°	12.2	12.6	13.0	13.3	13.7	14.3	15.2	16.1	17.0	17.9	17.4
90°	1.2	4.5	7.7	11.1	14.3	19.0	25.0	31.0	37.0	43.0	42.5
92.5°	21.9	24.3	26.7	29.1	31.5	33.4	34.8	36.3	37.7	39.1	39.2
95°	63.9	66.6	69.4	72.1	74.8	76.5	77.0	77.5	78.1	78.7	78.7
97.5°	116.8	119.2	121.6	124.0	126.4	128.1	129.1	130.2	131.2	132.2	132.2
100°	156.1	158.2	160.5	162.7	164.9	166.3	167.1	168.0	168.8	169.6	169.6
102.5°	197.4	199.2	200.9	202.6	204.4	205.8	206.8	207.8	208.9	209.9	210.2
105°	264.2	265.1	265.9	266.7	267.5	268.2	268.8	269.3	269.9	270.4	270.9
107.5°	331.6	332.8	334.0	335.3	336.4	337.0	337.0	337.0	337.0	337.0	337.2
110°	374.9	376.5	378.1	379.8	381.4	382.3	382.3	382.3	382.3	382.3	382.3



TEST NUMBER: P331554-930

CATALOG NUMBER: S122DIW-S675D1440U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	422.1	423.7	425.3	427.0	428.6	429.3	429.1	428.9	428.7	428.4	427.8
115°	491.6	493.3	494.9	496.6	498.2	498.7	498.2	497.7	497.1	496.6	496.3
117.5°	561.0	563.1	565.3	567.5	569.7	570.1	568.5	567.0	565.4	563.9	563.3
120°	607.2	609.4	611.6	613.8	616.0	616.0	613.8	611.6	609.4	607.2	607.2
122.5°	649.5	652.1	654.7	657.3	660.0	660.5	659.0	657.5	655.9	654.4	653.7
125°	715.3	717.8	720.2	722.7	725.2	726.0	725.2	724.4	723.6	722.7	721.9
127.5°	779.5	782.6	785.7	788.9	792.0	793.0	792.1	791.1	790.1	789.1	788.1
130°	819.8	823.4	827.0	830.5	834.1	835.5	834.9	834.5	833.9	833.3	832.8
132.5°	865.0	868.0	870.8	873.8	876.6	878.2	878.2	878.3	878.5	878.6	877.3
135°	925.5	928.5	931.6	934.5	937.5	939.3	939.9	940.4	940.9	941.5	941.3
137.5°	989.2	991.6	994.1	996.5	999.0	1000.6	1001.4	1002.0	1002.7	1003.5	1003.2
140°	1027.5	1030.0	1032.5	1034.9	1037.4	1039.3	1040.6	1042.0	1043.4	1044.7	1044.7
142.5°	1066.9	1069.3	1071.8	1074.2	1076.7	1078.4	1079.3	1080.3	1081.2	1082.1	1082.3
145°	1123.4	1125.4	1127.2	1129.1	1131.1	1132.9	1134.5	1136.1	1137.8	1139.4	1139.6
147.5°	1173.8	1176.1	1178.4	1180.7	1183.0	1184.7	1185.8	1186.8	1188.0	1189.0	1189.7
150°	1208.2	1209.8	1211.5	1213.2	1214.8	1216.1	1217.2	1218.3	1219.4	1220.5	1221.3
152.5°	1238.7	1240.3	1241.9	1243.6	1245.3	1246.8	1248.1	1249.4	1250.7	1252.0	1253.0
155°	1284.4	1285.2	1286.1	1286.9	1287.7	1288.5	1289.3	1290.1	1290.9	1291.8	1293.1
157.5°	1323.5	1324.0	1324.6	1325.2	1325.7	1326.2	1326.7	1327.2	1327.7	1328.2	1330.0
160°	1347.1	1347.7	1348.2	1348.7	1349.3	1349.7	1350.0	1350.2	1350.5	1350.8	1352.4
162.5°	1368.7	1368.9	1369.0	1369.1	1369.2	1369.4	1369.6	1369.9	1370.2	1370.4	1372.3
165°	1397.5	1397.3	1396.9	1396.7	1396.4	1396.3	1396.3	1396.3	1396.3	1396.3	1398.2
167.5°	1421.6	1420.7	1419.9	1419.1	1418.3	1417.9	1417.8	1417.8	1417.7	1417.6	1419.6
170°	1434.4	1433.5	1432.7	1431.9	1431.1	1430.5	1430.3	1430.0	1429.7	1429.5	1431.3
172.5°	1443.2	1442.4	1441.6	1440.8	1440.0	1439.4	1439.2	1438.8	1438.6	1438.3	1440.2
175°	1454.0	1453.2	1452.4	1451.6	1450.7	1450.1	1449.5	1448.9	1448.5	1447.9	1449.8
177.5°	1458.5	1457.8	1457.2	1456.5	1455.9	1455.3	1454.8	1454.4	1454.0	1453.5	1454.8
180°	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5



TEST NUMBER: P331554-930

CATALOG NUMBER: S122DIW-S675D1440U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	865.6	865.6	865.6	865.6	865.6	865.6	865.6	865.6
2.5°	861.9	863.4	864.9	865.4	865.1	864.9	864.5	864.3
5°	856.1	857.5	859.0	859.6	859.2	858.8	858.5	858.1
7.5°	846.4	847.9	849.4	849.9	849.5	849.1	848.7	848.3
10°	837.7	839.3	840.7	841.1	840.7	840.1	839.5	838.9
12.5°	827.5	828.6	829.6	829.9	829.5	829.2	828.8	828.3
15°	809.7	810.4	811.1	811.1	810.1	809.2	808.3	807.3
17.5°	788.4	789.2	790.1	790.1	789.2	788.3	787.4	786.5
20°	771.8	772.4	772.9	772.8	772.1	771.4	770.6	769.9
22.5°	754.3	754.4	754.5	754.3	753.9	753.4	753.0	752.6
25°	725.7	726.0	726.4	726.4	726.0	725.7	725.3	725.0
27.5°	697.5	697.0	696.4	695.7	694.8	693.9	693.0	692.1
30°	675.6	675.0	674.4	673.8	673.0	672.3	671.6	670.8
32.5°	654.0	653.1	652.0	651.2	650.4	649.7	648.9	648.2
35°	619.5	618.4	617.3	616.3	615.4	614.4	613.5	612.5
37.5°	584.9	583.5	582.1	581.0	580.1	579.2	578.4	577.5
40°	561.0	559.3	557.7	556.4	555.7	555.0	554.2	553.5
42.5°	537.4	535.6	533.8	532.3	531.2	530.3	529.2	528.2
45°	501.2	499.1	497.1	495.7	495.0	494.2	493.5	492.7
47.5°	463.5	461.3	459.2	457.5	456.5	455.4	454.4	453.3
50°	439.3	436.7	434.1	432.4	431.4	430.5	429.6	428.6
52.5°	414.2	412.1	409.9	408.2	407.0	405.8	404.6	403.3
55°	376.7	374.5	372.3	370.7	369.8	368.9	367.9	367.0
57.5°	337.9	335.7	333.5	332.1	331.3	330.7	330.0	329.2
60°	312.2	310.1	308.1	306.9	306.3	305.7	305.2	304.6
62.5°	287.9	286.0	284.1	282.8	282.1	281.4	280.7	280.0
65°	250.5	248.8	247.2	245.9	245.0	244.0	243.1	242.2
67.5°	213.6	212.4	211.1	210.0	209.3	208.6	207.8	207.1
70°	189.6	188.4	187.1	186.1	185.3	184.6	183.8	183.1
72.5°	167.1	165.8	164.4	163.5	162.9	162.3	161.8	161.1
75°	131.8	130.7	129.6	129.2	129.6	130.0	130.3	130.7
77.5°	100.3	99.7	99.1	98.7	98.1	97.6	97.1	96.5
80°	79.7	79.1	78.5	78.0	77.7	77.3	77.0	76.6
82.5°	59.4	58.6	58.0	57.6	57.5	57.4	57.3	57.2
85°	31.4	30.8	30.2	29.8	29.7	29.5	29.4	29.1
87.5°	16.8	16.3	15.7	15.4	15.3	15.2	15.1	15.0
90°	41.9	41.4	40.8	40.7	41.0	41.3	41.5	41.8
92.5°	39.3	39.4	39.5	39.6	39.6	39.7	39.8	39.8
95°	78.7	78.7	78.7	78.4	77.9	77.3	76.7	76.2
97.5°	132.2	132.2	132.2	132.2	132.2	132.1	132.1	132.0
100°	169.6	169.6	169.6	169.5	169.2	168.9	168.7	168.4
102.5°	210.3	210.6	210.8	210.8	210.5	210.3	209.9	209.7
105°	271.5	272.1	272.6	272.9	272.9	272.9	272.9	272.9
107.5°	337.5	337.7	337.9	337.4	336.1	334.8	333.6	332.3
110°	382.3	382.3	382.3	381.8	381.0	380.2	379.4	378.5



TEST NUMBER: P331554-930

CATALOG NUMBER: S122DIW-S675D1440U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	427.1	426.5	425.8	425.2	424.6	424.0	423.4	422.8
115°	496.0	495.7	495.5	494.9	494.1	493.3	492.4	491.6
117.5°	562.6	562.0	561.3	560.5	559.7	558.9	558.1	557.3
120°	607.2	607.2	607.2	606.7	605.9	605.1	604.3	603.5
122.5°	653.1	652.4	651.8	651.1	650.5	650.0	649.3	648.7
125°	721.1	720.2	719.4	718.9	718.6	718.4	718.1	717.8
127.5°	787.1	786.1	785.1	784.2	783.3	782.4	781.6	780.7
130°	832.3	831.7	831.1	830.3	829.2	828.2	827.0	826.0
132.5°	876.2	875.0	873.8	872.7	871.9	871.0	870.1	869.2
135°	940.9	940.7	940.4	939.9	939.1	938.2	937.4	936.6
137.5°	1003.0	1002.8	1002.6	1001.9	1000.9	999.7	998.7	997.5
140°	1044.7	1044.7	1044.7	1044.2	1043.1	1042.0	1040.9	1039.8
142.5°	1082.6	1082.8	1083.0	1082.6	1081.5	1080.4	1079.3	1078.2
145°	1140.0	1140.2	1140.4	1140.0	1139.0	1137.9	1136.8	1135.7
147.5°	1190.3	1190.8	1191.5	1191.2	1190.2	1189.1	1188.1	1187.1
150°	1222.1	1222.9	1223.8	1223.8	1222.9	1222.1	1221.3	1220.5
152.5°	1254.0	1255.1	1256.1	1256.1	1255.1	1254.0	1253.0	1252.0
155°	1294.5	1295.9	1297.2	1297.5	1296.7	1295.9	1295.1	1294.3
157.5°	1331.9	1333.7	1335.6	1335.9	1334.6	1333.3	1332.0	1330.6
160°	1354.0	1355.7	1357.3	1357.6	1356.5	1355.4	1354.4	1353.2
162.5°	1374.2	1376.1	1377.9	1378.2	1376.9	1375.6	1374.3	1372.9
165°	1400.1	1402.0	1403.9	1404.2	1402.8	1401.5	1400.1	1398.7
167.5°	1421.5	1423.4	1425.3	1425.6	1424.2	1422.7	1421.3	1419.8
170°	1433.3	1435.2	1437.1	1437.2	1435.6	1433.9	1432.3	1430.7
172.5°	1442.1	1444.1	1445.9	1446.1	1444.5	1442.8	1441.2	1439.6
175°	1451.7	1453.6	1455.6	1455.7	1454.0	1452.4	1450.7	1449.1
177.5°	1456.2	1457.5	1458.8	1458.8	1457.5	1456.2	1454.8	1453.5
180°	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5

(END OF REPORT)