

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331576-930

Luminaire Tested: **S122DIW-S865D1240U930-4F0-1E-UDD-D1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331576-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIW-S865D1240U930-4F0-1E-UDD-D1  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 865 LUMENS PER FOOT, DROP SATIN WHITE DIFFUSER  
UPLIGHT 1240 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6355.7 lumens  
Efficiency: N/A  
Efficacy: 91.1 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.32 / 1.42  
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.08')  
CIE Type: Semi-Indirect


Input Watts (W): 69.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331576-930

CATALOG NUMBER: S122DIW-S865D1240U930-4F0-1E-UDD-D1

### Luminous Intensity Polar Plot

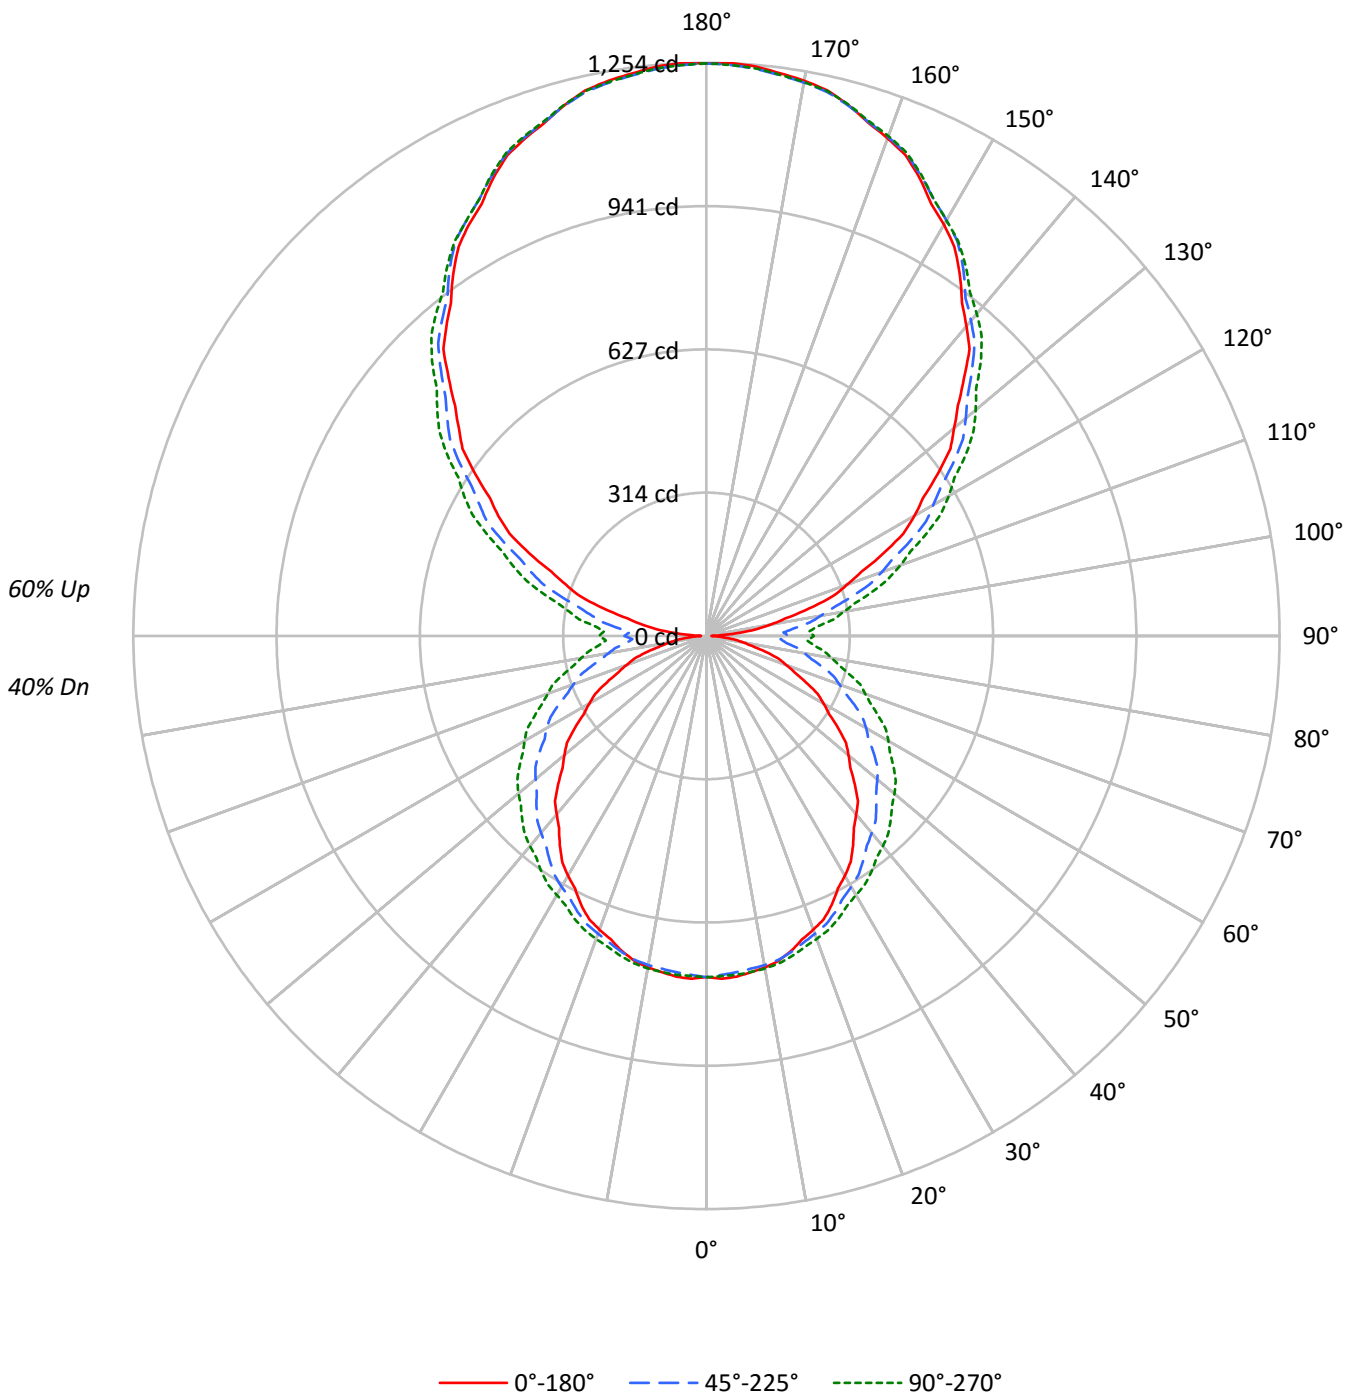



TEST NUMBER: P331576-930

CATALOG NUMBER: S122DIW-S865D1240U930-4F0-1E-UDD-D1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47	40
1	94	90	85	81	85	81	78	74	66	64	61	52	50	49	39	38	37	31
2	85	77	71	65	77	70	65	60	57	53	50	45	42	40	34	32	30	25
3	78	68	60	54	70	62	55	50	50	45	41	40	36	33	30	27	25	21
4	71	60	51	45	64	54	47	42	44	39	35	35	31	28	26	24	21	17
5	65	53	45	38	58	48	41	35	39	34	30	31	27	24	24	21	18	15
6	59	47	39	33	54	43	36	31	35	30	26	28	24	21	21	18	16	13
7	55	42	34	29	50	39	32	27	32	26	22	25	21	18	19	16	14	11
8	51	38	31	25	46	35	28	23	29	24	20	23	19	16	18	15	13	10
9	47	35	27	22	43	32	25	21	26	21	18	21	17	14	16	13	11	9
10	44	32	25	20	40	29	23	18	24	19	16	20	16	13	15	12	10	8

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	12053	12053	12053
5°	12111	11602	11558
10°	12036	11258	11133
15°	11869	10896	10685
20°	11659	10507	10254
25°	11452	10132	9863
30°	11160	9747	9469
35°	10866	9375	9193
40°	10556	9059	8916
45°	10260	8774	8678
50°	9944	8519	8446
55°	9611	8242	8208
60°	9207	7957	7957
65°	8784	7620	7658
70°	8310	7260	7336
75°	7704	6907	7041
80°	6744	6545	6739
85°	5835	6234	6508



TEST NUMBER: P331576-930

CATALOG NUMBER: S122DIW-S865D1240U930-4F0-1E-UDD-D1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	70.7	1.1
10°-20°	202.8	3.2
20°-30°	307.4	4.8
30°-40°	374.4	5.9
40°-50°	402.8	6.3
50°-60°	391.1	6.2
60°-70°	341.5	5.4
70°-80°	262.9	4.1
80°-90°	181.5	2.9
90°-100°	200.9	3.2
100°-110°	335.3	5.3
110°-120°	480.0	7.6
120°-130°	586.9	9.2
130°-140°	635.7	10.0
140°-150°	612.3	9.6
150°-160°	511.5	8.0
160°-170°	339.3	5.3
170°-180°	118.6	1.9
0°-30°	580.9	9.1
0°-40°	955.3	15.0
0°-60°	1749.2	27.5
0°-90°	2535.1	39.9
90°-120°	1016.3	16.0
90°-150°	2851.2	44.9
90°-180°	3821.0	60.1
0°-180°	6355.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	746	746	746	746	746	
5°	749	745	739	745	744	71
15°	714	716	716	725	725	201
25°	649	657	666	679	683	298
35°	559	578	598	621	630	349
45°	459	488	526	558	570	354
55°	352	392	447	484	500	314
65°	240	294	357	400	415	239
75°	133	194	263	308	324	141
85°	39	106	175	219	236	42
90°	12	88	180	219	235	10
95°	64	125	192	232	244	70
105°	233	269	326	364	378	246
115°	427	447	492	522	532	422
125°	617	628	658	683	693	552
135°	797	809	822	842	849	616
145°	966	974	980	987	989	604
155°	1105	1108	1111	1116	1113	508
165°	1202	1201	1201	1208	1203	339
175°	1251	1248	1245	1252	1246	119
180°	1253	1253	1253	1253	1253	



TEST NUMBER: P331576-930

CATALOG NUMBER: S122DIW-S865D1240U930-4F0-1E-UDD-D1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	746.5	746.5	746.5	746.5	746.5	746.5	746.5	746.5	746.5	746.5	746.5
2.5°	750.8	750.2	749.7	749.1	748.5	747.5	746.2	744.9	743.5	742.2	743.1
5°	748.6	748.0	747.2	746.5	745.8	744.7	743.2	741.8	740.4	738.9	740.4
7.5°	741.9	741.4	740.9	740.5	740.0	739.2	738.1	737.0	735.9	734.8	736.5
10°	736.8	736.3	735.8	735.3	734.8	734.3	733.5	732.8	732.1	731.3	733.3
12.5°	728.1	728.2	728.3	728.4	728.5	728.2	727.7	727.2	726.7	726.1	728.1
15°	714.0	714.5	715.0	715.5	715.9	716.2	716.2	716.2	716.2	716.2	718.4
17.5°	695.9	696.8	697.9	698.9	699.9	700.7	701.6	702.3	703.1	703.8	706.1
20°	683.7	684.9	686.2	687.4	688.5	689.7	690.6	691.5	692.5	693.5	696.1
22.5°	670.7	672.1	673.5	674.9	676.3	677.7	679.1	680.4	681.8	683.1	685.7
25°	649.1	650.8	652.5	654.2	655.8	657.8	659.9	662.1	664.2	666.4	669.3
27.5°	623.1	625.9	628.6	631.4	634.1	636.7	639.3	641.9	644.4	646.9	650.6
30°	605.8	608.9	612.1	615.2	618.3	621.5	624.6	627.7	630.9	634.0	637.8
32.5°	586.8	590.3	593.8	597.4	600.9	604.5	608.1	611.9	615.6	619.2	623.7
35°	559.3	563.4	567.5	571.6	575.7	580.0	584.6	589.1	593.7	598.3	603.6
37.5°	529.5	534.2	538.9	543.6	548.3	553.6	559.5	565.5	571.4	577.3	583.2
40°	509.6	514.9	520.2	525.5	530.7	536.6	543.1	549.6	556.1	562.6	568.8
42.5°	490.5	495.8	501.1	506.4	511.7	518.0	525.5	533.0	540.4	547.9	554.6
45°	458.7	465.2	471.7	478.2	484.7	492.1	500.5	509.0	517.4	525.8	533.2
47.5°	427.3	434.4	441.5	448.6	455.6	464.1	473.9	483.8	493.7	503.5	511.3
50°	405.7	413.1	420.6	428.0	435.5	444.7	455.4	466.3	477.1	488.0	496.1
52.5°	384.9	392.7	400.6	408.5	416.3	425.9	437.3	448.7	460.1	471.5	479.8
55°	351.6	360.3	368.9	377.6	386.2	396.8	409.3	421.8	434.3	446.8	455.4
57.5°	318.7	328.5	338.3	348.0	357.8	369.0	381.7	394.5	407.2	420.0	429.3
60°	295.4	305.7	316.0	326.4	336.7	348.7	362.4	376.1	389.8	403.6	412.7
62.5°	274.6	285.3	296.0	306.7	317.5	329.7	343.4	357.1	370.8	384.5	394.2
65°	240.2	251.9	263.7	275.5	287.3	300.3	314.5	328.6	342.8	357.0	366.9
67.5°	208.6	220.9	233.2	245.5	257.8	271.3	285.8	300.3	314.8	329.3	339.2
70°	186.1	198.6	211.1	223.6	236.1	249.8	264.7	279.6	294.5	309.4	319.8
72.5°	165.3	178.2	191.1	204.0	216.9	230.8	246.0	261.1	276.1	291.2	301.4
75°	133.1	146.5	160.0	173.5	186.9	201.4	216.7	232.1	247.5	262.9	273.2
77.5°	101.9	116.0	130.1	144.1	158.2	173.1	188.7	204.4	220.0	235.6	245.9
80°	81.1	95.8	110.5	125.1	139.8	154.9	170.6	186.2	201.8	217.4	227.6
82.5°	63.8	78.3	92.8	107.2	121.7	136.9	152.7	168.5	184.3	200.2	210.3
85°	39.0	53.9	68.7	83.6	98.6	113.7	129.1	144.5	159.9	175.3	185.4
87.5°	21.4	36.3	51.2	66.1	81.0	96.6	113.1	129.5	145.9	162.3	172.0
90°	11.9	28.6	45.4	62.1	78.9	97.6	118.1	138.7	159.2	179.8	189.0
92.5°	28.8	43.8	58.9	73.9	88.9	104.5	120.5	136.6	152.6	168.6	178.1
95°	63.6	77.3	90.9	104.6	118.2	132.5	147.4	162.2	177.2	192.1	201.2
97.5°	108.0	120.1	132.2	144.4	156.5	169.9	184.7	199.3	214.1	228.9	237.7
100°	141.9	152.6	163.4	174.1	184.9	197.4	211.6	225.8	239.9	254.0	262.9
102.5°	176.5	186.1	195.8	205.4	215.0	226.8	240.8	254.8	268.7	282.7	291.6
105°	232.7	240.4	248.0	255.8	263.4	273.7	286.7	299.7	312.7	325.6	334.5
107.5°	290.4	297.0	303.6	310.2	316.8	326.1	338.1	350.1	362.1	374.1	382.3
110°	326.8	333.0	339.2	345.4	351.6	360.6	372.4	384.2	396.0	407.7	415.5



TEST NUMBER: P331576-930

CATALOG NUMBER: S122DIW-S865D1240U930-4F0-1E-UDD-D1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	367.4	372.8	378.2	383.7	389.1	397.4	408.4	419.4	430.4	441.4	448.6
115°	427.2	431.2	435.3	439.4	443.4	450.6	461.0	471.3	481.7	492.0	499.0
117.5°	485.8	489.3	492.9	496.6	500.2	506.3	515.0	523.7	532.4	541.0	547.6
120°	525.5	528.3	531.2	534.0	536.9	542.1	549.8	557.6	565.3	573.1	579.8
122.5°	561.8	564.5	567.1	569.7	572.4	577.6	585.3	593.0	600.8	608.5	614.5
125°	617.4	619.5	621.7	623.8	625.9	630.5	637.4	644.4	651.4	658.4	664.1
127.5°	672.6	675.1	677.5	680.0	682.3	686.2	691.6	697.0	702.3	707.7	712.8
130°	707.3	710.1	712.9	715.8	718.5	722.3	726.8	731.4	736.0	740.5	745.8
132.5°	746.2	748.4	750.7	752.9	755.2	758.3	762.3	766.3	770.3	774.3	778.8
135°	797.1	799.7	802.3	804.9	807.5	810.2	813.1	816.0	818.8	821.7	826.5
137.5°	851.9	853.9	856.0	858.1	860.1	862.0	863.6	865.4	867.0	868.7	872.9
140°	884.8	886.7	888.6	890.5	892.3	894.1	895.8	897.4	899.1	900.7	904.6
142.5°	918.7	920.6	922.4	924.3	926.2	927.6	928.5	929.4	930.3	931.2	934.4
145°	966.2	967.9	969.6	971.2	972.8	974.4	975.8	977.1	978.6	980.0	981.6
147.5°	1009.6	1011.5	1013.5	1015.5	1017.5	1019.0	1019.9	1020.8	1021.7	1022.7	1023.4
150°	1039.2	1040.6	1042.0	1043.4	1044.8	1046.0	1046.9	1047.9	1048.8	1049.8	1050.4
152.5°	1065.4	1066.8	1068.2	1069.6	1071.1	1072.3	1073.4	1074.6	1075.7	1076.8	1077.7
155°	1104.7	1105.5	1106.1	1106.9	1107.6	1108.2	1109.0	1109.6	1110.4	1111.1	1112.2
157.5°	1138.3	1138.8	1139.3	1139.8	1140.2	1140.7	1141.1	1141.5	1141.9	1142.4	1143.9
160°	1158.6	1159.1	1159.6	1160.1	1160.5	1160.9	1161.1	1161.3	1161.6	1161.8	1163.2
162.5°	1177.2	1177.4	1177.5	1177.5	1177.6	1177.8	1178.0	1178.3	1178.5	1178.8	1180.3
165°	1202.0	1201.8	1201.5	1201.3	1201.0	1200.9	1200.9	1200.9	1200.9	1200.9	1202.6
167.5°	1222.7	1222.0	1221.3	1220.6	1219.9	1219.5	1219.4	1219.4	1219.4	1219.3	1221.0
170°	1233.7	1233.0	1232.3	1231.6	1230.9	1230.4	1230.2	1230.0	1229.7	1229.5	1231.1
172.5°	1241.3	1240.6	1239.9	1239.2	1238.5	1238.0	1237.8	1237.5	1237.3	1237.1	1238.8
175°	1250.6	1249.9	1249.2	1248.5	1247.8	1247.2	1246.8	1246.3	1245.8	1245.3	1247.0
177.5°	1254.4	1253.8	1253.3	1252.7	1252.1	1251.7	1251.3	1250.9	1250.6	1250.2	1251.3
180°	1252.7	1252.7	1252.7	1252.7	1252.7	1252.7	1252.7	1252.7	1252.7	1252.7	1252.7



TEST NUMBER: P331576-930

CATALOG NUMBER: S122DIW-S865D1240U930-4F0-1E-UDD-D1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	746.5	746.5	746.5	746.5	746.5	746.5	746.5	746.5
2.5°	744.0	745.0	746.0	746.3	745.9	745.5	745.1	744.8
5°	741.8	743.2	744.7	745.3	745.0	744.8	744.5	744.3
7.5°	738.3	740.0	741.8	742.5	742.2	742.0	741.8	741.5
10°	735.2	737.1	739.1	739.9	739.6	739.4	739.2	738.9
12.5°	730.0	731.9	733.9	734.7	734.4	734.2	733.9	733.7
15°	720.5	722.7	724.9	725.8	725.5	725.3	725.0	724.9
17.5°	708.4	710.6	712.9	714.0	714.0	714.0	714.0	714.0
20°	698.8	701.4	704.0	705.4	705.4	705.4	705.4	705.4
22.5°	688.4	691.0	693.7	695.2	695.5	695.9	696.3	696.8
25°	672.2	675.1	678.0	679.8	680.4	681.2	681.9	682.7
27.5°	654.3	657.9	661.5	663.7	664.2	664.7	665.3	665.8
30°	641.6	645.5	649.4	651.7	652.3	653.1	653.8	654.5
32.5°	628.1	632.5	636.9	639.8	641.1	642.4	643.7	645.0
35°	608.9	614.2	619.5	622.9	624.6	626.3	627.9	629.7
37.5°	589.0	594.8	600.7	604.5	606.3	608.1	609.9	611.7
40°	575.0	581.3	587.6	591.7	593.9	596.1	598.3	600.5
42.5°	561.5	568.3	575.2	579.7	581.8	584.0	586.1	588.3
45°	540.7	548.1	555.6	560.5	563.0	565.3	567.8	570.1
47.5°	519.1	526.8	534.7	539.9	542.5	545.2	547.8	550.5
50°	504.3	512.4	520.7	526.0	528.6	531.3	533.9	536.6
52.5°	488.2	496.6	504.9	510.5	513.4	516.2	519.0	521.9
55°	464.1	472.8	481.4	487.3	490.4	493.6	496.7	499.8
57.5°	438.6	447.9	457.3	463.6	466.7	469.9	473.0	476.2
60°	421.8	431.0	440.1	446.3	449.7	453.1	456.4	459.8
62.5°	403.9	413.6	423.3	429.8	432.9	436.1	439.3	442.5
65°	376.7	386.6	396.5	402.9	406.0	409.2	412.3	415.4
67.5°	349.2	359.1	369.2	375.8	379.0	382.3	385.6	388.8
70°	330.1	340.4	350.7	357.3	360.3	363.1	366.1	368.9
72.5°	311.5	321.6	331.8	338.6	342.1	345.5	349.0	352.5
75°	283.6	293.9	304.3	311.0	314.1	317.2	320.3	323.5
77.5°	256.2	266.5	276.8	283.6	287.0	290.3	293.8	297.1
80°	237.7	247.8	257.9	264.6	267.9	271.3	274.7	278.0
82.5°	220.4	230.4	240.5	247.2	250.4	253.5	256.7	259.8
85°	195.4	205.5	215.6	222.4	225.8	229.1	232.4	235.9
87.5°	181.7	191.4	201.2	207.6	210.8	213.9	217.0	220.1
90°	198.1	207.2	216.4	222.5	225.7	228.8	231.9	235.0
92.5°	187.7	197.2	206.7	213.0	215.9	218.8	221.8	224.7
95°	210.3	219.5	228.6	234.4	236.8	239.2	241.7	244.0
97.5°	246.6	255.5	264.4	270.3	273.0	275.9	278.7	281.4
100°	271.9	280.8	289.7	295.3	297.7	300.1	302.6	304.9
102.5°	300.4	309.3	318.3	323.9	326.3	328.7	331.1	333.5
105°	343.4	352.3	361.2	366.9	369.6	372.2	374.9	377.5
107.5°	390.6	398.8	407.1	412.1	413.6	415.2	416.7	418.2
110°	423.1	430.8	438.5	443.4	445.3	447.2	449.1	451.1





TEST NUMBER: P331576-930

CATALOG NUMBER: S122DIW-S865D1240U930-4F0-1E-UDD-D1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	455.7	462.8	469.9	474.6	476.7	478.8	480.9	483.1
115°	506.0	512.9	519.9	524.4	526.3	528.2	530.2	532.1
117.5°	554.2	560.7	567.3	571.4	573.2	574.9	576.7	578.4
120°	586.5	593.3	600.0	604.4	606.3	608.2	610.2	612.1
122.5°	620.4	626.4	632.3	636.3	638.0	639.8	641.5	643.2
125°	669.9	675.7	681.5	685.4	687.3	689.3	691.2	693.1
127.5°	718.0	723.0	728.1	731.4	732.8	734.1	735.5	736.9
130°	751.1	756.4	761.7	764.9	765.9	766.9	767.8	768.8
132.5°	783.3	787.9	792.5	795.3	796.5	797.6	798.8	800.0
135°	831.3	836.1	840.9	843.9	845.1	846.4	847.6	848.8
137.5°	877.2	881.4	885.7	888.1	888.8	889.5	890.1	890.9
140°	908.4	912.3	916.2	918.3	918.8	919.3	919.8	920.3
142.5°	937.7	940.9	944.2	946.0	946.3	946.6	947.0	947.2
145°	983.3	985.0	986.7	987.7	987.9	988.2	988.5	988.7
147.5°	1024.1	1024.8	1025.6	1025.7	1025.4	1025.1	1024.7	1024.4
150°	1051.2	1051.9	1052.6	1052.6	1051.9	1051.2	1050.4	1049.8
152.5°	1078.6	1079.5	1080.4	1080.4	1079.5	1078.6	1077.7	1076.8
155°	1113.5	1114.6	1115.7	1116.0	1115.3	1114.6	1113.9	1113.2
157.5°	1145.6	1147.1	1148.8	1149.0	1147.9	1146.7	1145.6	1144.4
160°	1164.7	1166.0	1167.4	1167.7	1166.8	1165.8	1164.9	1163.9
162.5°	1181.9	1183.5	1185.1	1185.4	1184.2	1183.1	1181.9	1180.9
165°	1204.2	1205.8	1207.5	1207.7	1206.6	1205.4	1204.2	1203.1
167.5°	1222.6	1224.3	1225.9	1226.1	1224.9	1223.7	1222.5	1221.2
170°	1232.7	1234.4	1236.1	1236.2	1234.8	1233.4	1231.9	1230.5
172.5°	1240.4	1242.0	1243.7	1243.7	1242.4	1241.0	1239.6	1238.1
175°	1248.6	1250.3	1251.9	1252.1	1250.6	1249.2	1247.8	1246.3
177.5°	1252.5	1253.6	1254.7	1254.7	1253.6	1252.5	1251.3	1250.2
180°	1252.7	1252.7	1252.7	1252.7	1252.7	1252.7	1252.7	1252.7

(END OF REPORT)