

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331847-930

Luminaire Tested: **S122RDIW-S1005D435U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331847-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S1005D435U930-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 435 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4252.2 lumens
Efficiency: N/A
Efficacy: 81.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 52.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331847-930

CATALOG NUMBER: S122RDIW-S1005D435U930-4F0-1E-UDD-F

Luminous Intensity Polar Plot

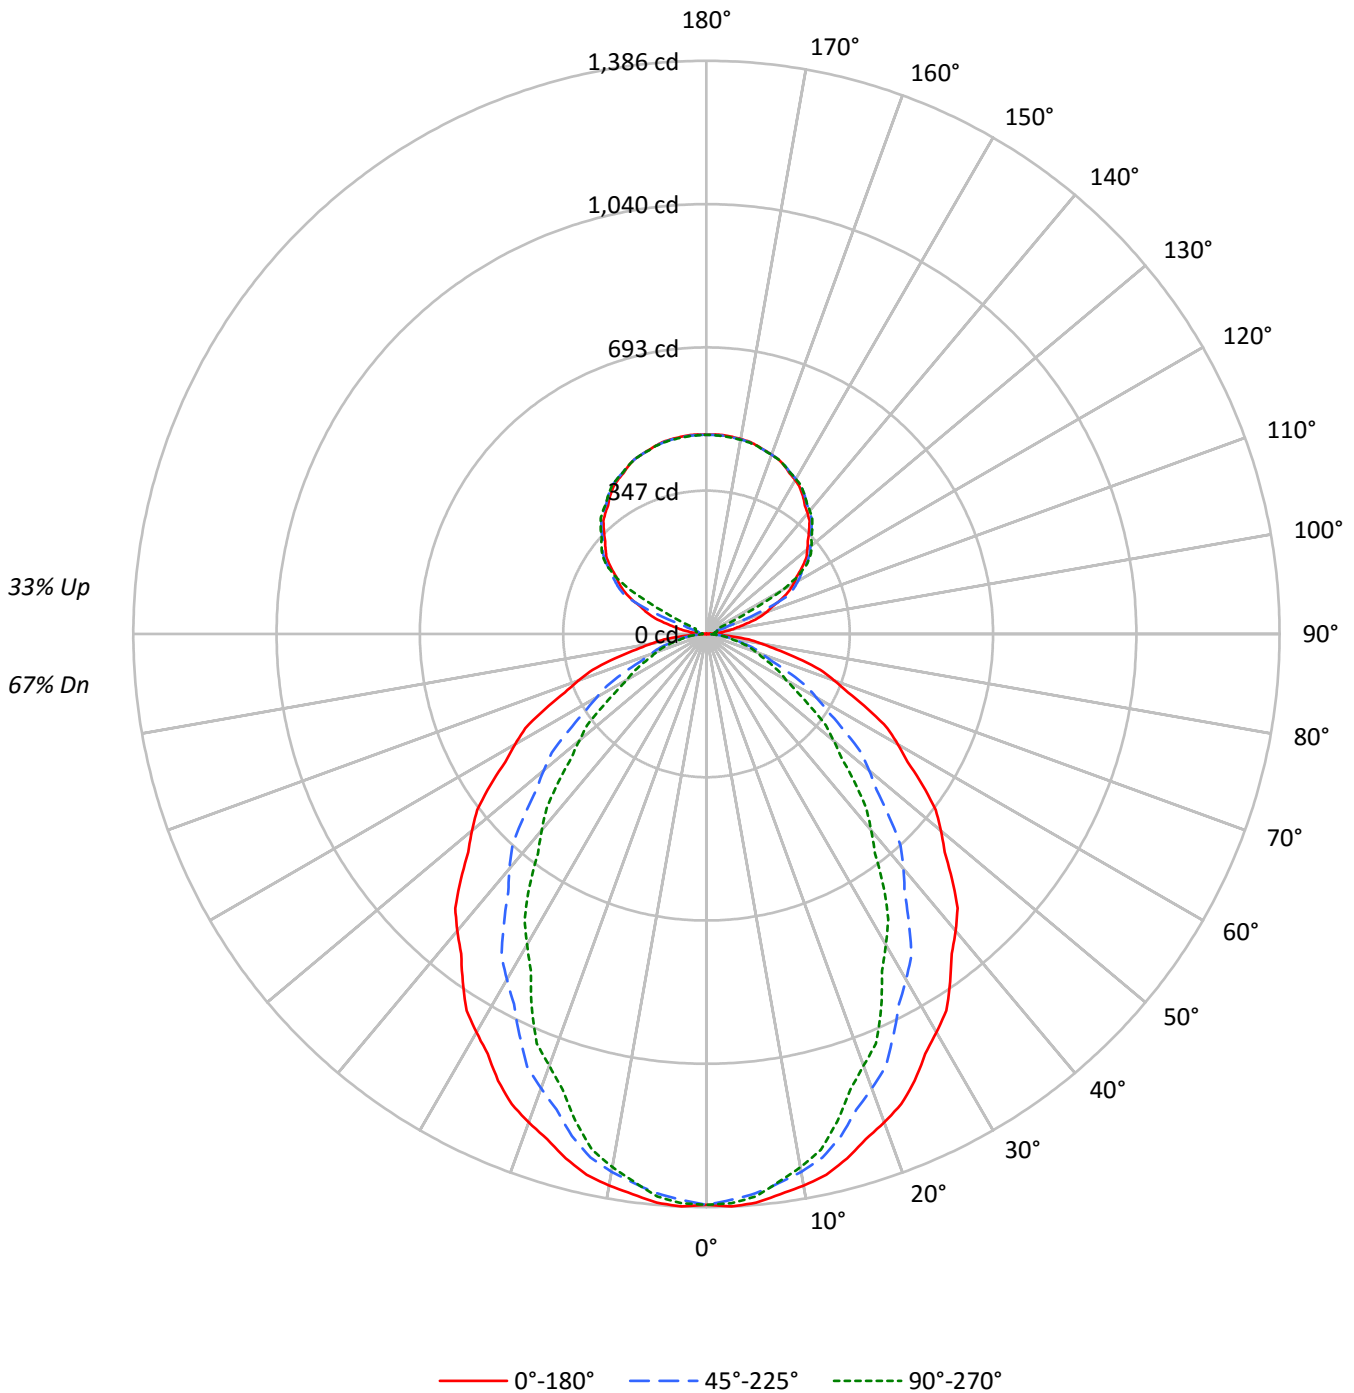



TEST NUMBER: P331847-930

CATALOG NUMBER: S122RDIW-S1005D435U930-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	72	72	72	67
1	102	98	94	91	96	93	89	86	82	80	78	73	71	69	64	63	62	58
2	94	86	80	75	88	82	76	72	73	69	65	65	62	59	57	55	53	49
3	86	77	69	64	81	72	66	61	65	60	56	58	54	51	51	48	46	42
4	79	68	60	54	74	65	58	52	58	53	48	52	48	44	46	43	40	37
5	73	61	53	47	68	58	51	45	52	47	42	47	42	39	42	38	35	33
6	67	55	47	41	63	53	45	40	48	42	37	43	38	34	38	35	31	29
7	62	50	42	37	59	48	41	36	43	37	33	39	34	31	35	31	28	26
8	58	46	38	33	55	44	37	32	40	34	30	36	31	28	33	29	26	23
9	54	42	35	30	51	40	33	29	37	31	27	33	29	25	30	26	23	21
10	51	39	32	27	48	37	31	26	34	28	24	31	26	23	28	24	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	22291	22291	22291
5°	22376	22013	22135
10°	22207	21653	21469
15°	21951	21010	20404
20°	21596	20094	19086
25°	21235	19053	17808
30°	20734	17984	16168
35°	20243	16821	14728
40°	19751	15616	13061
45°	19173	14266	11556
50°	18580	12901	10073
55°	17973	11431	8653
60°	17270	9884	7182
65°	16466	8306	6541
70°	15512	6845	6014
75°	14342	6238	5608
80°	12664	5579	5114
85°	9948	4390	4390



TEST NUMBER: P331847-930

CATALOG NUMBER: S122RDIW-S1005D435U930-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	129.2	3.0
10°-20°	354.8	8.3
20°-30°	498.3	11.7
30°-40°	543.4	12.8
40°-50°	499.6	11.7
50°-60°	392.4	9.2
60°-70°	255.8	6.0
70°-80°	131.9	3.1
80°-90°	35.4	0.8
90°-100°	16.1	0.4
100°-110°	58.9	1.4
110°-120°	157.5	3.7
120°-130°	259.9	6.1
130°-140°	276.4	6.5
140°-150°	256.9	6.0
150°-160°	206.6	4.9
160°-170°	133.1	3.1
170°-180°	45.8	1.1
0°-30°	982.4	23.1
0°-40°	1525.7	35.9
0°-60°	2417.7	56.9
0°-90°	2840.9	66.8
90°-120°	232.4	5.5
90°-150°	1025.8	24.1
90°-180°	1411.0	33.2
0°-180°	4252.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1381	1381	1381	1381	1381	
5°	1381	1374	1358	1369	1366	131
15°	1313	1298	1257	1234	1221	370
25°	1192	1150	1070	1020	1000	548
35°	1027	961	853	778	747	642
45°	840	753	625	539	506	648
55°	638	539	406	334	307	570
65°	431	329	217	177	171	427
75°	230	145	100	92	90	243
85°	54	29	24	24	24	63
90°	0	4	7	9	9	3
95°	23	12	14	15	15	28
105°	106	110	21	25	26	113
115°	200	206	215	61	28	197
125°	283	288	294	297	298	252
135°	351	356	359	362	362	271
145°	407	407	412	414	413	254
155°	448	445	449	451	448	206
165°	472	470	471	473	471	133
175°	483	480	481	483	480	46
180°	482	482	482	482	482	



TEST NUMBER: P331847-930

CATALOG NUMBER: S122RDIW-S1005D435U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6
2.5°	1385.7	1384.5	1383.4	1382.3	1381.2	1379.4	1377.0	1374.6	1372.1	1369.7	1371.9
5°	1380.6	1379.2	1377.9	1376.5	1375.1	1372.6	1369.0	1365.4	1361.8	1358.2	1360.7
7.5°	1366.4	1364.7	1363.0	1361.2	1359.5	1356.6	1352.3	1348.1	1343.9	1339.7	1340.4
10°	1354.5	1352.5	1350.5	1348.6	1346.6	1342.9	1337.3	1331.8	1326.2	1320.7	1319.9
12.5°	1339.5	1337.0	1334.6	1332.3	1329.9	1325.1	1318.0	1310.9	1303.8	1296.7	1295.2
15°	1313.2	1310.1	1307.1	1304.0	1301.0	1294.7	1285.3	1275.9	1266.4	1256.9	1251.7
17.5°	1280.9	1276.3	1271.6	1267.0	1262.3	1253.9	1241.8	1229.7	1217.6	1205.5	1199.2
20°	1256.9	1251.4	1245.9	1240.3	1234.8	1225.1	1211.1	1197.3	1183.4	1169.5	1162.5
22.5°	1230.9	1224.7	1218.5	1212.4	1206.1	1195.1	1179.5	1163.8	1148.2	1132.5	1123.6
25°	1192.0	1183.1	1174.2	1165.3	1156.4	1142.9	1124.5	1106.2	1087.9	1069.5	1058.2
27.5°	1145.0	1135.4	1125.7	1116.1	1106.4	1091.2	1070.6	1049.9	1029.2	1008.6	995.3
30°	1112.1	1101.5	1091.0	1080.4	1069.8	1053.4	1031.2	1009.0	986.8	964.6	950.4
32.5°	1080.0	1067.7	1055.4	1043.1	1030.7	1013.3	990.6	967.9	945.3	922.6	906.4
35°	1027.0	1012.9	998.7	984.6	970.5	951.1	926.7	902.3	877.8	853.4	835.9
37.5°	974.1	958.5	943.0	927.4	911.9	891.1	865.0	839.0	812.9	786.9	767.7
40°	937.1	920.5	903.8	887.1	870.5	848.6	821.7	794.8	767.8	740.9	721.2
42.5°	899.1	881.6	864.1	846.4	828.9	806.2	778.4	750.6	722.8	695.0	674.6
45°	839.7	821.0	802.4	783.8	765.2	741.4	712.2	683.1	653.9	624.8	605.0
47.5°	781.6	762.0	742.2	722.5	702.8	677.9	647.8	617.7	587.6	557.5	537.9
50°	739.7	720.0	700.3	680.5	660.8	635.7	605.2	574.6	544.0	513.6	494.4
52.5°	698.7	678.1	657.5	636.9	616.3	591.1	561.2	531.3	501.4	471.6	453.1
55°	638.5	616.9	595.2	573.5	551.9	526.0	496.0	466.0	436.1	406.1	389.4
57.5°	576.7	554.6	532.3	510.1	487.9	462.4	433.6	404.7	375.9	347.1	331.8
60°	534.8	512.6	490.3	468.1	445.9	420.5	391.9	363.3	334.7	306.1	292.0
62.5°	493.8	471.6	449.4	427.1	405.0	380.2	352.9	325.6	298.4	271.2	257.6
65°	431.0	408.5	386.1	363.6	341.1	317.4	292.4	267.4	242.4	217.4	208.0
67.5°	370.6	348.3	326.0	303.6	281.3	258.9	236.4	213.9	191.4	168.9	164.6
70°	328.6	307.0	285.3	263.7	242.0	221.6	202.4	183.3	164.1	145.0	142.2
72.5°	288.6	267.8	247.1	226.3	205.5	187.4	172.1	156.7	141.3	126.0	123.6
75°	229.9	210.4	191.0	171.6	152.1	137.7	128.2	118.9	109.4	100.0	98.0
77.5°	172.2	155.2	138.1	121.1	104.0	93.2	88.6	84.1	79.5	75.0	73.9
80°	136.2	122.1	107.9	93.7	79.6	71.1	68.3	65.6	62.8	60.0	58.9
82.5°	103.2	92.1	81.1	70.0	59.0	52.5	50.6	48.8	46.9	45.0	44.4
85°	53.7	47.9	42.1	36.2	30.4	27.1	26.3	25.4	24.5	23.7	23.7
87.5°	16.1	14.4	12.9	11.3	9.6	8.9	9.0	9.1	9.3	9.4	9.2
90°	0.3	1.2	2.0	2.9	3.8	4.5	5.1	5.7	6.4	6.9	7.3
92.5°	7.0	6.9	6.8	6.8	6.8	6.8	7.2	7.5	7.7	8.1	8.3
95°	22.7	20.1	17.5	15.0	12.4	11.4	12.0	12.5	13.0	13.6	13.9
97.5°	44.9	37.7	30.6	23.3	16.1	13.2	14.4	15.7	17.0	18.2	18.5
100°	61.7	51.0	40.4	29.8	19.2	14.6	15.9	17.2	18.5	19.9	20.5
102.5°	80.1	77.9	75.6	73.4	71.1	64.5	53.5	42.5	31.5	20.4	21.2
105°	105.9	108.3	110.6	112.9	115.2	105.8	84.7	63.5	42.4	21.3	22.1
107.5°	135.4	137.3	139.2	141.0	142.9	131.2	105.8	80.5	55.1	29.8	28.9
110°	154.3	156.0	157.6	159.2	160.9	150.5	128.1	105.7	83.3	61.0	53.2



TEST NUMBER: P331847-930

CATALOG NUMBER: S122RDIW-S1005D435U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	172.2	173.7	175.1	176.5	178.0	175.9	170.4	164.9	159.3	153.8	125.6
115°	200.4	201.7	203.0	204.3	205.6	207.2	209.2	211.2	213.0	215.0	179.1
117.5°	225.5	227.0	228.4	229.9	231.4	232.8	234.2	235.5	236.8	238.1	229.5
120°	243.9	245.1	246.2	247.4	248.6	249.9	251.3	252.7	254.0	255.4	256.3
122.5°	259.5	260.7	262.0	263.2	264.4	265.8	267.3	268.8	270.4	271.9	272.5
125°	283.3	284.3	285.4	286.3	287.3	288.5	290.1	291.6	293.0	294.5	295.0
127.5°	304.8	306.0	307.0	308.2	309.3	310.4	311.5	312.6	313.7	314.8	315.6
130°	318.5	319.8	321.0	322.2	323.4	324.5	325.4	326.2	327.1	327.9	328.7
132.5°	332.5	333.5	334.5	335.6	336.6	337.6	338.4	339.3	340.1	341.0	341.8
135°	350.6	351.8	353.0	354.2	355.6	356.4	357.2	357.9	358.6	359.3	360.0
137.5°	368.9	369.7	370.6	371.5	372.3	373.2	374.0	374.8	375.5	376.3	377.1
140°	380.9	381.5	382.1	382.7	383.4	384.1	385.0	385.8	386.6	387.5	388.2
142.5°	390.9	391.5	392.0	392.6	393.1	394.0	394.8	395.8	396.8	397.8	398.4
145°	406.7	406.6	406.5	406.4	406.3	407.0	408.3	409.6	410.9	412.2	412.8
147.5°	420.4	420.1	419.8	419.6	419.2	419.7	421.0	422.3	423.6	424.9	425.3
150°	429.3	428.8	428.2	427.7	427.1	427.5	428.8	430.0	431.2	432.4	432.9
152.5°	436.8	436.3	435.6	435.0	434.4	434.7	435.9	437.1	438.2	439.4	439.9
155°	447.8	447.1	446.4	445.7	445.0	445.2	446.1	446.9	447.9	448.8	449.3
157.5°	456.3	455.8	455.2	454.6	454.0	454.0	454.7	455.3	456.0	456.6	457.1
160°	461.4	460.9	460.5	460.0	459.5	459.5	460.0	460.5	460.9	461.4	461.9
162.5°	465.9	465.4	464.9	464.5	464.0	464.0	464.3	464.7	465.1	465.5	466.1
165°	471.8	471.4	470.9	470.4	469.9	469.9	470.1	470.3	470.6	470.8	471.3
167.5°	476.3	475.8	475.4	474.9	474.4	474.3	474.5	474.7	475.0	475.2	475.7
170°	478.8	478.3	477.8	477.4	477.0	476.8	477.0	477.1	477.3	477.4	477.9
172.5°	480.5	480.0	479.6	479.1	478.6	478.5	478.6	478.7	478.9	479.1	479.6
175°	482.7	482.1	481.5	481.0	480.5	480.3	480.5	480.6	480.7	480.9	481.4
177.5°	483.0	482.6	482.1	481.7	481.3	481.0	481.1	481.2	481.3	481.3	481.8
180°	481.6	481.6	481.6	481.6	481.6	481.6	481.6	481.6	481.6	481.6	481.6



TEST NUMBER: P331847-930

CATALOG NUMBER: S122RDIW-S1005D435U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6
2.5°	1374.1	1376.3	1378.6	1379.4	1379.0	1378.6	1378.1	1377.7
5°	1363.2	1365.7	1368.2	1369.0	1368.2	1367.3	1366.5	1365.7
7.5°	1341.1	1341.8	1342.6	1342.2	1340.8	1339.3	1337.9	1336.4
10°	1319.0	1318.2	1317.4	1316.1	1314.4	1312.8	1311.1	1309.5
12.5°	1293.7	1292.2	1290.7	1288.6	1285.8	1283.0	1280.3	1277.5
15°	1246.4	1241.1	1235.8	1231.8	1229.1	1226.3	1223.5	1220.7
17.5°	1192.9	1186.7	1180.4	1174.8	1170.1	1165.3	1160.5	1155.8
20°	1155.6	1148.7	1141.7	1135.2	1129.1	1123.0	1116.9	1110.8
22.5°	1114.7	1105.7	1096.7	1090.0	1085.5	1080.9	1076.4	1071.8
25°	1046.8	1035.4	1024.0	1016.3	1012.0	1007.9	1003.7	999.6
27.5°	982.0	968.7	955.4	945.5	938.9	932.3	925.7	919.1
30°	936.3	922.1	907.9	897.2	889.7	882.2	874.7	867.2
32.5°	890.3	874.2	857.9	846.4	839.4	832.3	825.2	818.2
35°	818.4	801.0	783.4	771.6	765.5	759.4	753.3	747.2
37.5°	748.4	729.1	709.8	696.7	689.7	682.7	675.7	668.7
40°	701.5	681.8	662.1	648.7	641.4	634.1	627.0	619.7
42.5°	654.2	633.8	613.4	599.7	592.7	585.7	578.8	571.8
45°	585.3	565.6	545.8	532.7	526.0	519.3	512.7	506.1
47.5°	518.3	498.7	479.1	466.3	460.2	454.2	448.1	442.1
50°	475.2	456.1	436.9	424.4	418.6	412.7	406.9	401.0
52.5°	434.6	416.0	397.6	385.6	380.3	374.9	369.5	364.1
55°	372.8	356.1	339.4	328.5	323.2	317.9	312.7	307.4
57.5°	316.6	301.3	286.0	276.1	271.7	267.3	262.9	258.4
60°	277.8	263.7	249.5	240.2	235.7	231.3	226.8	222.4
62.5°	244.2	230.6	217.2	209.0	206.4	203.7	201.1	198.4
65°	198.5	189.1	179.6	174.5	173.7	172.8	172.0	171.2
67.5°	160.3	156.0	151.6	149.0	148.1	147.2	146.3	145.4
70°	139.4	136.6	133.9	131.9	130.8	129.6	128.6	127.4
72.5°	121.3	119.0	116.6	115.1	114.5	113.8	113.1	112.4
75°	96.0	94.2	92.2	91.1	90.8	90.5	90.3	89.9
77.5°	72.7	71.7	70.5	69.7	69.3	68.9	68.4	68.0
80°	57.7	56.7	55.5	55.0	55.0	55.0	55.0	55.0
82.5°	43.6	43.0	42.3	42.0	42.0	42.0	42.0	42.0
85°	23.7	23.7	23.7	23.7	23.7	23.7	23.7	23.7
87.5°	9.1	9.0	8.8	8.7	8.8	8.8	8.9	8.9
90°	7.7	8.2	8.5	8.8	9.0	9.1	9.3	9.4
92.5°	8.5	8.7	8.9	9.0	9.1	9.2	9.3	9.4
95°	14.3	14.8	15.2	15.3	15.2	15.2	15.1	15.0
97.5°	18.8	19.2	19.4	19.6	19.7	19.8	19.9	20.0
100°	21.1	21.7	22.3	22.7	22.9	23.1	23.2	23.3
102.5°	22.0	22.8	23.6	24.1	24.4	24.6	24.8	25.0
105°	23.0	23.8	24.7	25.3	25.5	25.8	26.2	26.5
107.5°	28.0	27.1	26.3	26.0	26.3	26.7	26.9	27.2
110°	45.5	37.7	30.0	26.3	26.6	26.9	27.2	27.6



TEST NUMBER: P331847-930

CATALOG NUMBER: S122RDIW-S1005D435U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	97.3	69.1	40.8	26.8	27.1	27.3	27.6	27.8
115°	143.3	107.5	71.6	50.9	45.3	39.7	34.2	28.5
117.5°	220.8	212.1	203.4	190.0	171.6	153.3	135.0	116.7
120°	257.3	258.2	259.2	254.4	243.9	233.5	223.0	212.5
122.5°	273.0	273.5	274.1	273.4	271.3	269.3	267.3	265.2
125°	295.5	296.1	296.6	297.0	297.3	297.5	297.7	297.9
127.5°	316.4	317.2	318.0	318.4	318.5	318.5	318.5	318.5
130°	329.6	330.4	331.3	331.7	331.7	331.6	331.5	331.4
132.5°	342.5	343.2	343.9	344.2	344.1	344.1	344.1	344.0
135°	360.9	361.6	362.4	362.6	362.6	362.4	362.2	362.1
137.5°	377.9	378.6	379.4	379.6	379.4	379.1	378.9	378.5
140°	388.9	389.6	390.3	390.4	390.0	389.6	389.3	388.9
142.5°	399.1	399.7	400.4	400.5	400.1	399.7	399.3	398.9
145°	413.4	413.8	414.4	414.5	414.1	413.7	413.4	412.9
147.5°	425.7	426.2	426.6	426.6	426.2	425.9	425.6	425.3
150°	433.4	433.8	434.3	434.4	434.0	433.6	433.2	432.8
152.5°	440.3	440.8	441.3	441.2	440.8	440.3	439.7	439.2
155°	449.8	450.2	450.7	450.6	450.0	449.4	448.7	448.2
157.5°	457.7	458.2	458.8	458.7	458.1	457.5	456.9	456.3
160°	462.3	462.8	463.3	463.2	462.7	462.1	461.5	461.1
162.5°	466.6	467.2	467.7	467.6	466.9	466.3	465.6	465.0
165°	471.9	472.4	473.0	473.0	472.4	471.9	471.3	470.8
167.5°	476.3	476.8	477.4	477.3	476.5	475.9	475.2	474.5
170°	478.5	479.1	479.6	479.5	478.8	478.1	477.4	476.7
172.5°	480.1	480.7	481.3	481.2	480.5	479.8	479.1	478.4
175°	482.0	482.5	483.1	483.0	482.2	481.4	480.6	479.9
177.5°	482.2	482.6	483.1	483.0	482.4	481.8	481.3	480.8
180°	481.6	481.6	481.6	481.6	481.6	481.6	481.6	481.6

(END OF REPORT)