

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331854-930

Luminaire Tested: **S122RDIW-S1005D970U930-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331854-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIW-S1005D970U930-4F0-1E-UDD-A1  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 970 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5847.6 lumens  
Efficiency: N/A  
Efficacy: 86.8 lumens/watt  
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02  
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 67.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331854-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

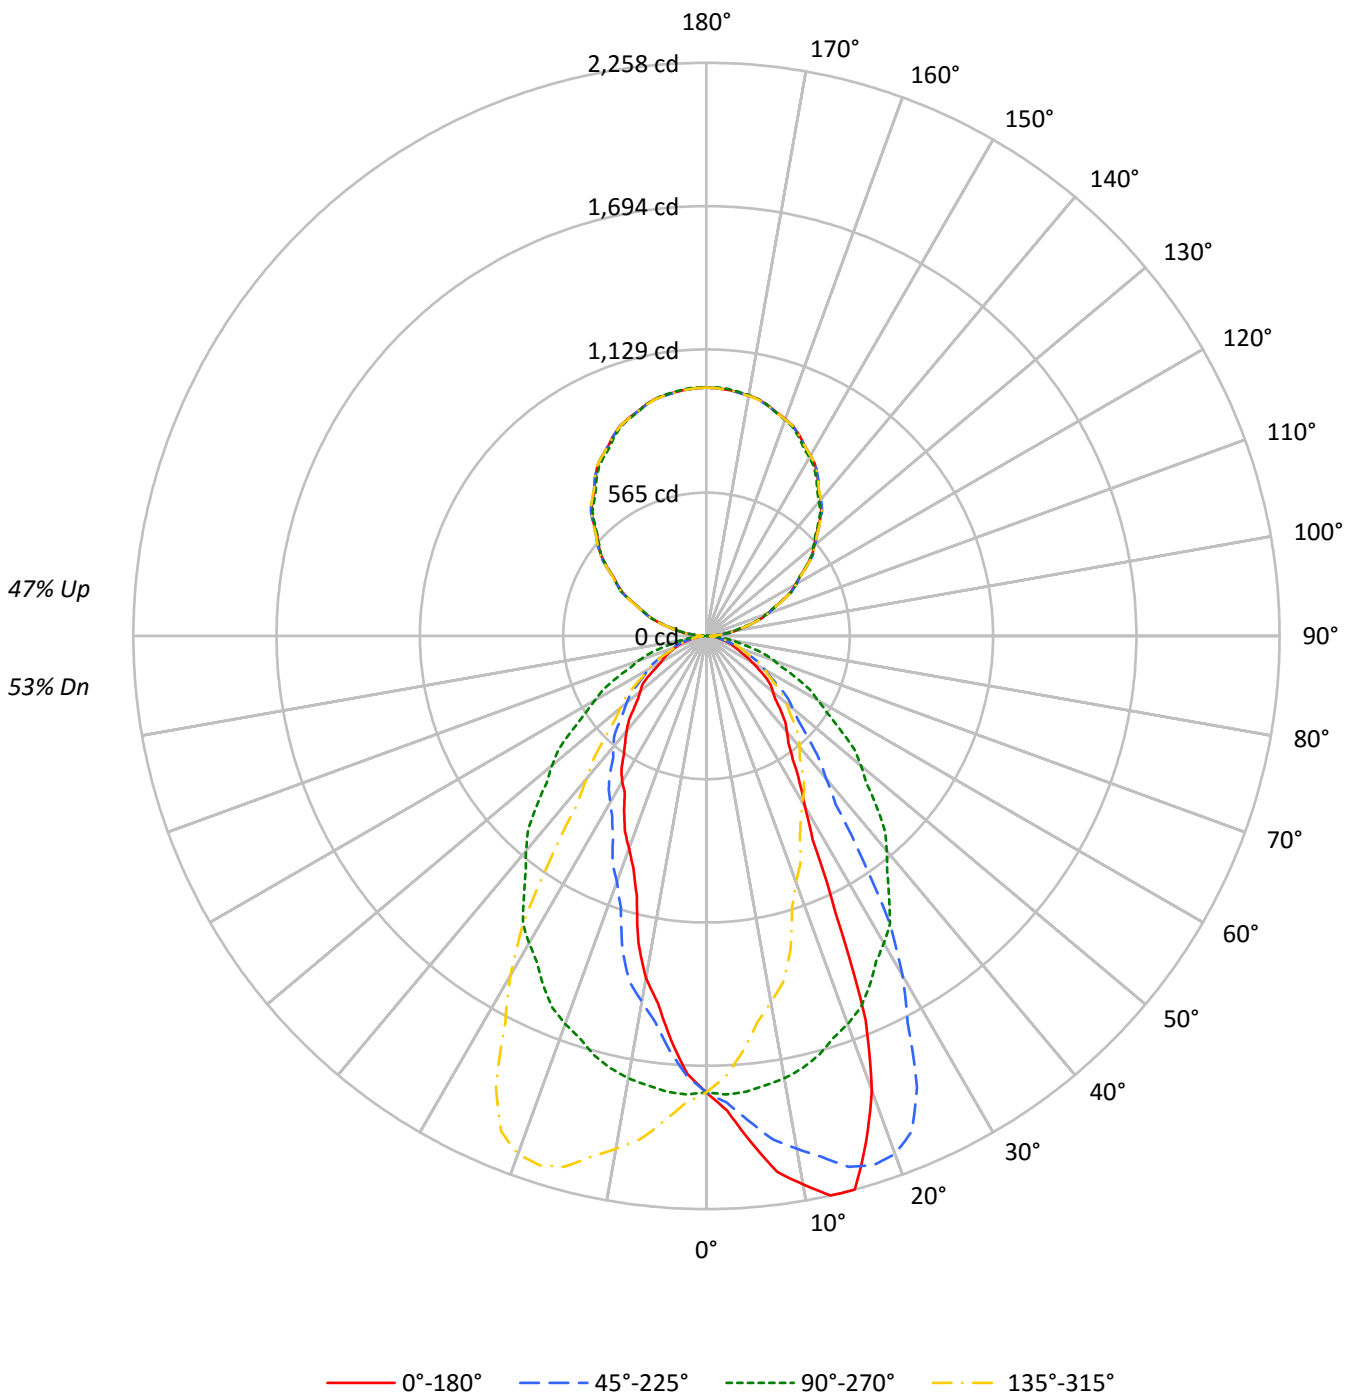



TEST NUMBER: P331854-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59	53
1	99	95	92	88	92	88	85	83	76	74	72	64	63	61	53	52	51	46
2	91	84	78	74	84	78	73	69	67	64	61	57	55	52	48	46	45	40
3	84	75	68	62	77	70	64	59	60	56	52	52	48	45	43	41	39	35
4	77	67	59	54	71	63	56	51	54	49	45	47	43	40	39	37	35	31
5	71	60	52	47	66	56	49	44	49	44	40	42	38	35	36	33	31	28
6	66	54	47	41	61	51	44	39	45	39	35	39	35	31	33	30	28	25
7	61	49	42	37	57	47	40	35	41	35	32	36	31	28	31	27	25	22
8	57	45	38	33	53	43	36	31	38	32	28	33	29	26	28	25	23	20
9	53	42	34	30	50	39	33	28	35	29	26	30	26	23	26	23	21	19
10	50	38	31	27	47	36	30	26	32	27	23	28	24	21	25	21	19	17

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	29032	29032	29032	29032
5°	32423	29214	25901	29214
10°	35974	29009	22453	29009
15°	37742	28583	17690	28583
20°	32720	27953	15309	27953
25°	21458	27091	13668	27091
30°	14443	26045	12370	26045
35°	11698	24727	11158	24727
40°	10404	23294	10323	23294
45°	9417	21614	9216	21614
50°	8568	19947	8538	19947
55°	8056	18097	7949	18097
60°	6736	16401	6659	16401
65°	5681	14896	6445	14896
70°	5249	13303	6076	13303
75°	4916	11578	5608	11578
80°	4537	9530	4993	9530
85°	4168	7521	4390	7521



TEST NUMBER: P331854-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	170.4	2.9
10°-20°	474.9	8.1
20°-30°	612.0	10.5
30°-40°	581.6	9.9
40°-50°	498.2	8.5
50°-60°	379.4	6.5
60°-70°	239.9	4.1
70°-80°	119.8	2.0
80°-90°	35.1	0.6
90°-100°	62.0	1.1
100°-110°	192.6	3.3
110°-120°	329.2	5.6
120°-130°	432.9	7.4
130°-140°	485.9	8.3
140°-150°	476.4	8.1
150°-160°	399.6	6.8
160°-170°	265.0	4.5
170°-180°	92.6	1.6
0°-30°	1257.4	21.5
0°-40°	1839.0	31.4
0°-60°	2716.7	46.5
0°-90°	3111.4	53.2
90°-120°	583.8	10.0
90°-150°	1979.0	33.8
90°-180°	2736.0	46.8
0°-180°	5847.6	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1798	1798	1798	1798	1798	
5°	2000	1802	1598	1802	2000	197
15°	2258	1710	1058	1710	2258	609
25°	1204	1521	767	1521	1204	572
35°	594	1254	566	1254	594	380
45°	412	947	404	947	412	319
55°	286	643	282	643	286	251
65°	149	390	169	390	149	151
75°	79	186	90	186	79	84
85°	22	41	24	41	22	25
90°	28	1	28	1	28	13
95°	51	43	51	43	51	57
105°	183	178	183	178	183	193
115°	330	330	330	330	330	326
125°	482	481	482	481	482	430
135°	629	622	629	622	629	484
145°	763	755	763	755	763	476
155°	870	863	870	863	870	400
165°	940	939	940	939	940	265
175°	974	977	974	977	974	92
180°	978	978	978	978	978	



TEST NUMBER: P331854-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1
2.5°	1871.0	1872.6	1874.0	1870.5	1870.5	1867.5	1861.1	1856.0	1842.1	1840.0	1840.0
5°	2000.5	1999.3	2001.7	1993.7	1982.4	1979.9	1968.1	1952.4	1936.2	1918.1	1914.3
7.5°	2129.2	2127.4	2122.3	2121.0	2112.4	2093.4	2074.4	2054.0	2027.0	2000.7	1987.4
10°	2194.2	2214.8	2202.3	2180.4	2184.8	2155.5	2139.8	2113.0	2090.5	2051.1	2042.4
12.5°	2258.1	2266.3	2262.3	2249.9	2244.3	2223.9	2202.8	2179.5	2138.0	2102.6	2071.8
15°	2257.9	2269.8	2272.9	2269.1	2272.3	2271.0	2259.8	2240.4	2204.2	2165.4	2131.7
17.5°	2091.2	2099.5	2119.9	2133.8	2151.3	2188.3	2206.5	2213.7	2208.3	2186.2	2162.4
20°	1904.3	1890.5	1948.0	1977.4	2002.4	2064.8	2118.6	2139.2	2172.3	2171.7	2165.4
22.5°	1639.4	1642.7	1697.1	1732.0	1805.0	1867.4	1928.7	2006.3	2070.4	2112.7	2137.5
25°	1204.5	1228.3	1282.6	1330.2	1411.4	1527.5	1633.1	1755.6	1871.2	1962.4	2049.3
27.5°	904.7	906.4	949.5	993.4	1041.6	1136.9	1269.7	1416.0	1580.8	1716.8	1873.2
30°	774.7	770.9	789.0	816.0	857.2	930.9	1030.9	1174.6	1338.9	1543.8	1726.2
32.5°	682.7	683.0	696.6	716.5	750.7	800.5	868.9	985.6	1140.9	1342.4	1556.3
35°	593.5	592.9	602.9	617.3	631.6	663.5	710.4	771.6	878.4	1066.5	1285.2
37.5°	529.5	532.3	537.2	546.2	562.1	579.8	607.9	649.0	725.1	836.3	1020.1
40°	493.6	494.8	501.7	509.2	518.5	532.3	555.4	588.6	644.2	732.9	867.2
42.5°	460.6	461.9	466.7	473.7	481.1	494.8	514.0	542.6	587.7	656.9	767.7
45°	412.4	412.4	416.7	419.9	428.0	440.4	456.1	479.8	511.0	562.3	636.0
47.5°	367.1	367.2	370.1	375.5	380.6	390.4	405.7	425.1	447.8	487.5	550.4
50°	341.1	341.8	343.6	348.0	351.1	359.9	371.8	388.6	412.4	443.0	495.5
52.5°	320.2	319.8	322.1	324.0	326.1	332.4	341.3	356.1	377.3	404.0	447.4
55°	286.2	283.6	287.4	290.5	292.4	294.9	299.9	309.2	327.3	349.8	382.4
57.5°	243.7	242.6	245.3	248.2	254.0	260.8	265.1	271.0	280.4	296.5	328.7
60°	208.6	208.6	214.3	216.1	223.1	231.8	240.5	245.6	254.9	265.5	289.3
62.5°	177.7	178.2	180.8	182.7	186.5	197.3	209.5	220.5	229.4	239.5	255.3
65°	148.7	149.9	149.9	151.2	153.7	156.2	161.2	169.9	185.6	199.9	211.8
67.5°	126.2	126.6	126.9	128.2	128.8	131.6	133.5	137.5	141.0	154.7	169.4
70°	111.2	113.1	112.4	113.7	114.3	115.6	118.1	119.9	125.6	128.7	137.5
72.5°	97.2	98.6	98.5	99.2	100.9	101.1	103.1	104.9	108.6	111.2	115.9
75°	78.8	78.1	78.8	80.0	80.6	81.2	81.2	83.7	85.6	88.1	91.2
77.5°	60.7	61.4	61.2	61.4	61.5	62.6	62.5	63.6	65.5	66.7	68.2
80°	48.8	49.3	48.8	49.3	50.0	50.6	50.0	50.6	52.5	53.7	53.7
82.5°	37.7	37.8	38.2	38.4	38.5	38.6	39.5	39.6	41.0	40.8	41.3
85°	22.5	21.9	21.9	21.9	22.5	23.2	22.5	22.5	23.2	23.2	23.2
87.5°	13.6	14.1	14.0	14.0	13.9	14.0	14.0	14.6	14.2	14.8	13.5
90°	28.0	27.9	27.7	27.6	27.3	27.4	27.8	28.1	28.5	28.9	24.9
92.5°	26.7	26.7	26.7	26.7	26.6	26.6	26.5	26.4	26.3	26.3	25.3
95°	51.2	51.5	51.9	52.3	52.7	52.8	52.8	52.8	52.8	52.8	52.5
97.5°	88.7	88.7	88.8	88.8	88.9	88.9	88.9	88.9	88.9	88.9	88.1
100°	113.2	113.3	113.5	113.7	113.9	114.0	114.0	114.0	114.0	114.0	113.4
102.5°	140.9	141.0	141.2	141.5	141.6	141.6	141.5	141.4	141.2	141.0	140.3
105°	183.4	183.4	183.4	183.4	183.4	183.1	182.8	182.4	182.1	181.6	181.3
107.5°	223.3	224.1	224.9	225.8	226.7	227.0	226.9	226.7	226.6	226.4	226.4
110°	254.4	254.9	255.4	256.0	256.6	256.8	256.8	256.8	256.8	256.8	256.8



TEST NUMBER: P331854-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	284.1	284.5	284.9	285.3	285.7	286.1	286.6	287.0	287.4	287.9	288.0
115°	330.3	330.8	331.4	332.0	332.5	332.9	333.0	333.2	333.5	333.6	333.9
117.5°	374.4	375.0	375.5	376.1	376.6	377.1	377.6	378.0	378.5	378.9	379.9
120°	405.4	406.0	406.6	407.1	407.6	408.0	408.0	408.0	408.0	408.0	409.4
122.5°	435.9	436.3	436.7	437.1	437.5	437.9	438.3	438.8	439.2	439.6	440.7
125°	482.2	482.4	482.7	482.8	483.0	483.4	483.9	484.5	485.0	485.6	486.1
127.5°	524.6	525.1	525.7	526.3	526.8	527.5	528.2	528.8	529.5	530.2	530.8
130°	554.9	555.6	556.4	557.1	557.8	558.4	558.8	559.1	559.5	559.9	560.3
132.5°	584.0	584.6	585.1	585.8	586.4	587.0	587.8	588.6	589.5	590.3	590.2
135°	629.2	629.8	630.3	630.9	631.4	631.8	632.0	632.2	632.3	632.5	632.2
137.5°	670.2	670.9	671.6	672.4	673.1	673.6	673.8	673.8	674.0	674.2	673.7
140°	698.6	699.4	700.1	700.8	701.6	701.9	701.9	701.9	701.9	701.9	701.0
142.5°	724.4	725.1	725.9	726.6	727.3	727.6	727.5	727.3	727.2	727.0	726.4
145°	763.0	763.8	764.5	765.2	766.0	766.2	766.1	765.9	765.6	765.5	764.4
147.5°	797.5	798.3	798.9	799.6	800.3	800.5	800.1	799.6	799.2	798.8	798.1
150°	820.0	820.5	821.1	821.7	822.2	822.2	821.7	821.1	820.5	820.0	819.3
152.5°	841.1	841.8	842.5	843.3	843.9	843.9	843.3	842.5	841.8	841.1	840.2
155°	869.5	870.1	870.7	871.2	871.7	871.6	870.7	869.8	868.8	867.9	867.3
157.5°	894.0	894.9	895.8	896.7	897.5	897.3	896.1	894.9	893.6	892.3	892.0
160°	909.2	910.0	910.7	911.4	912.2	911.9	910.9	909.7	908.7	907.5	907.3
162.5°	922.4	923.2	924.1	925.0	925.9	925.8	924.5	923.2	922.0	920.7	920.6
165°	939.7	940.7	941.6	942.5	943.4	943.2	941.9	940.7	939.4	938.1	938.1
167.5°	954.0	954.9	955.9	956.8	957.7	957.6	956.3	955.0	953.7	952.4	952.5
170°	961.2	962.3	963.4	964.5	965.6	965.6	964.3	963.0	961.6	960.4	960.6
172.5°	967.2	968.2	969.4	970.5	971.6	971.4	970.2	968.9	967.6	966.3	966.5
175°	973.6	974.7	975.8	976.9	978.0	977.9	976.6	975.3	974.0	972.7	973.1
177.5°	976.6	977.5	978.4	979.2	980.1	980.1	979.2	978.4	977.5	976.6	976.9
180°	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5



TEST NUMBER: P331854-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1
2.5°	1841.1	1837.0	1833.6	1824.6	1820.1	1810.0	1808.6	1808.1	1795.1	1782.6	1779.1
5°	1904.3	1894.3	1879.3	1861.8	1843.7	1825.0	1812.5	1802.5	1777.4	1753.7	1740.0
7.5°	1968.1	1946.5	1920.7	1887.6	1859.9	1829.0	1806.0	1785.3	1749.9	1715.9	1693.0
10°	2015.5	1980.5	1946.1	1900.5	1864.9	1829.9	1797.5	1769.4	1729.3	1684.4	1652.5
12.5°	2045.0	2006.5	1959.2	1914.6	1868.4	1824.0	1780.5	1744.3	1697.4	1650.9	1613.1
15°	2084.9	2043.6	1986.2	1922.4	1863.0	1805.0	1755.0	1710.0	1648.8	1593.2	1546.9
17.5°	2117.5	2060.8	1999.0	1925.3	1856.6	1782.7	1718.4	1660.9	1592.8	1525.7	1471.2
20°	2127.9	2071.8	2000.5	1926.8	1845.6	1758.8	1689.4	1626.9	1553.8	1480.7	1418.2
22.5°	2121.5	2077.7	1998.5	1910.3	1827.1	1736.3	1657.9	1585.4	1504.3	1429.7	1357.2
25°	2077.4	2062.4	1987.4	1891.2	1796.2	1690.6	1600.0	1520.7	1428.2	1348.3	1269.5
27.5°	1974.5	2006.9	1960.4	1857.9	1752.3	1639.2	1537.3	1447.0	1351.0	1261.0	1182.6
30°	1875.6	1949.9	1929.9	1834.9	1716.9	1605.7	1491.3	1397.0	1294.5	1202.1	1124.6
32.5°	1740.1	1863.0	1882.4	1803.0	1680.9	1558.7	1438.8	1345.0	1238.0	1140.6	1065.1
35°	1524.4	1708.1	1792.4	1741.9	1619.4	1487.6	1363.8	1254.5	1147.0	1050.8	975.9
37.5°	1267.1	1517.4	1657.9	1661.5	1549.1	1412.0	1277.2	1168.7	1058.7	964.3	883.2
40°	1100.2	1371.3	1554.4	1595.1	1500.1	1352.0	1215.8	1105.2	997.8	905.3	812.2
42.5°	950.3	1220.4	1445.4	1516.0	1440.6	1293.6	1156.8	1041.2	936.8	849.3	754.2
45°	768.5	1004.6	1252.6	1378.8	1337.0	1200.8	1056.5	946.6	848.4	772.8	681.6
47.5°	648.2	814.7	1054.8	1225.4	1224.7	1100.3	958.4	853.0	762.1	691.2	617.4
50°	579.8	724.7	927.8	1121.4	1137.7	1033.4	898.4	794.1	709.1	634.8	575.4
52.5°	518.3	637.7	820.4	1006.0	1052.2	961.9	831.0	734.6	652.2	583.8	533.0
55°	438.0	530.4	669.1	842.8	912.8	849.1	732.9	642.9	576.0	518.5	474.8
57.5°	370.5	439.9	551.1	691.0	772.5	732.4	636.5	563.5	506.2	454.2	419.7
60°	328.0	384.8	479.2	596.1	686.0	657.9	576.0	507.9	459.2	414.3	381.7
62.5°	288.0	336.9	417.8	512.6	595.0	583.4	516.6	459.4	416.7	375.8	348.2
65°	231.8	267.4	330.5	404.9	471.1	476.7	428.6	389.9	351.7	319.3	294.9
67.5°	184.6	207.8	252.3	314.9	364.5	382.2	352.9	323.3	293.0	267.9	246.8
70°	155.6	174.3	206.8	257.4	303.0	321.7	304.9	281.8	255.5	234.9	216.8
72.5°	126.0	144.3	168.3	205.5	244.5	264.8	258.9	242.3	221.0	203.9	186.8
75°	95.0	100.6	116.8	141.9	172.4	190.0	194.3	185.6	168.7	155.6	145.5
77.5°	70.2	73.6	81.4	94.5	114.5	130.0	136.5	135.4	123.8	116.2	106.8
80°	56.3	58.1	61.9	67.5	82.5	98.1	102.5	102.5	94.3	91.2	81.9
82.5°	42.7	44.1	46.4	49.5	56.5	70.1	75.0	76.0	70.8	66.7	59.4
85°	24.4	23.7	25.0	26.9	28.1	31.9	39.4	40.6	39.4	34.3	32.4
87.5°	12.6	12.4	11.6	10.4	10.5	10.5	12.6	14.7	13.1	12.1	11.5
90°	20.8	16.8	12.7	9.6	7.4	5.2	3.0	0.8	3.0	5.2	7.4
92.5°	24.4	23.4	22.4	21.2	19.6	17.9	16.3	14.7	16.3	17.9	19.6
95°	52.1	51.8	51.4	50.3	48.4	46.6	44.8	43.0	44.8	46.6	48.4
97.5°	87.5	86.7	86.1	84.9	83.3	81.7	80.1	78.4	80.1	81.7	83.3
100°	112.8	112.3	111.8	110.7	109.3	107.8	106.3	104.8	106.3	107.8	109.3
102.5°	139.7	138.9	138.3	137.3	136.2	134.9	133.8	132.6	133.8	134.9	136.2
105°	180.9	180.6	180.2	179.8	179.2	178.6	178.1	177.6	178.1	178.6	179.2
107.5°	226.4	226.4	226.4	226.0	225.2	224.4	223.6	222.8	223.6	224.4	225.2
110°	256.8	256.8	256.8	256.2	255.2	254.0	253.0	251.8	253.0	254.0	255.2





TEST NUMBER: P331854-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	288.1	288.3	288.5	288.0	286.9	285.8	284.7	283.6	284.7	285.8	286.9
115°	334.4	334.7	335.1	334.7	333.6	332.5	331.4	330.3	331.4	332.5	333.6
117.5°	380.9	382.0	382.9	382.8	381.3	379.8	378.4	376.9	378.4	379.8	381.3
120°	410.9	412.4	413.8	413.8	412.4	410.9	409.4	408.0	409.4	410.9	412.4
122.5°	441.7	442.7	443.8	443.4	441.6	439.9	438.1	436.3	438.1	439.9	441.6
125°	486.7	487.2	487.8	487.2	485.6	483.9	482.2	480.6	482.2	483.9	485.6
127.5°	531.5	532.1	532.8	532.1	530.0	527.9	525.8	523.7	525.8	527.9	530.0
130°	560.6	561.0	561.3	560.4	558.0	555.5	553.2	550.8	553.2	555.5	558.0
132.5°	590.1	590.0	590.0	589.0	587.0	585.1	583.1	581.1	583.1	585.1	587.0
135°	631.8	631.4	631.0	629.9	627.9	625.8	623.9	621.8	623.9	625.8	627.9
137.5°	673.2	672.7	672.3	671.2	669.5	667.9	666.3	664.6	666.3	667.9	669.5
140°	700.1	699.2	698.2	696.9	695.3	693.7	692.0	690.3	692.0	693.7	695.3
142.5°	725.8	725.1	724.6	723.4	721.7	720.1	718.4	716.8	718.4	720.1	721.7
145°	763.3	762.2	761.1	759.9	758.6	757.3	756.0	754.7	756.0	757.3	758.6
147.5°	797.4	796.6	795.9	794.8	793.2	791.7	790.2	788.6	790.2	791.7	793.2
150°	818.6	817.8	817.1	816.1	815.1	813.9	812.9	811.7	812.9	813.9	815.1
152.5°	839.4	838.5	837.6	836.7	835.5	834.5	833.3	832.3	833.3	834.5	835.5
155°	866.8	866.3	865.7	865.1	864.6	864.1	863.5	862.9	863.5	864.1	864.6
157.5°	891.7	891.4	891.0	890.6	890.3	889.9	889.6	889.2	889.6	889.9	890.3
160°	907.2	907.0	906.8	906.5	906.1	905.8	905.4	905.1	905.4	905.8	906.1
162.5°	920.4	920.2	920.0	919.9	919.8	919.7	919.7	919.6	919.7	919.7	919.8
165°	938.1	938.1	938.1	938.2	938.3	938.6	938.7	938.9	938.7	938.6	938.3
167.5°	952.5	952.6	952.6	952.9	953.4	954.0	954.6	955.1	954.6	954.0	953.4
170°	960.7	960.9	961.2	961.5	962.1	962.6	963.1	963.7	963.1	962.6	962.1
172.5°	966.7	966.9	967.0	967.4	968.0	968.5	969.1	969.6	969.1	968.5	968.0
175°	973.5	973.9	974.2	974.7	975.3	975.8	976.3	976.9	976.3	975.8	975.3
177.5°	977.1	977.5	977.7	978.1	978.5	979.0	979.4	979.9	979.4	979.0	978.5
180°	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5



TEST NUMBER: P331854-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1
2.5°	1772.6	1769.1	1762.6	1752.6	1746.6	1736.1	1729.1	1733.1	1734.1	1733.1	1732.1
5°	1725.0	1711.9	1693.8	1676.3	1660.0	1642.5	1632.6	1628.2	1619.4	1614.4	1611.9
7.5°	1667.4	1644.8	1619.2	1588.7	1562.8	1535.7	1521.8	1514.9	1497.1	1487.4	1478.8
10°	1624.4	1588.8	1563.2	1523.2	1498.8	1463.2	1438.8	1439.5	1415.1	1401.3	1391.4
12.5°	1577.0	1537.8	1495.2	1459.2	1425.4	1396.8	1367.3	1355.5	1329.7	1316.4	1289.4
15°	1498.2	1452.6	1407.6	1358.9	1324.5	1280.2	1237.7	1185.9	1143.9	1107.7	1097.7
17.5°	1412.3	1355.8	1310.7	1253.4	1194.6	1120.0	1070.7	1040.6	1015.4	996.3	982.0
20°	1353.2	1295.8	1247.7	1161.5	1082.1	1031.5	995.2	972.2	945.9	925.3	914.0
22.5°	1291.3	1231.3	1165.7	1069.5	1007.6	967.0	934.7	908.2	890.4	874.3	864.1
25°	1203.3	1137.7	1029.6	963.4	913.4	870.9	848.4	832.2	813.4	791.6	781.6
27.5°	1110.4	1006.0	928.4	879.1	831.4	803.8	783.6	759.4	742.6	732.7	722.4
30°	1040.9	936.5	876.0	822.2	788.5	757.8	734.1	720.4	704.1	687.2	680.4
32.5°	963.4	880.0	822.0	777.2	743.0	716.9	698.1	675.9	664.1	653.8	639.4
35°	867.2	804.0	751.0	714.8	682.2	661.0	639.1	626.0	604.8	596.1	590.4
37.5°	785.7	731.0	691.4	653.1	627.4	603.9	590.5	569.6	560.4	548.3	536.5
40°	739.7	686.0	647.9	616.6	587.9	570.4	553.5	536.7	522.9	517.3	503.0
42.5°	692.8	649.0	610.9	576.7	557.4	538.9	517.6	505.2	491.0	481.8	473.0
45°	627.9	589.1	556.7	528.6	507.3	488.0	474.2	453.6	445.5	427.4	419.9
47.5°	571.0	534.9	503.9	477.2	456.5	443.8	423.7	407.6	394.6	383.5	373.9
50°	530.4	500.4	470.4	446.7	428.0	409.9	389.2	381.1	361.1	355.5	349.8
52.5°	493.4	465.0	437.5	414.3	395.5	377.9	359.7	349.1	335.7	330.0	325.9
55°	441.7	414.3	388.0	367.4	348.6	330.5	319.3	306.1	299.9	295.5	290.5
57.5°	389.7	365.0	344.9	324.0	305.2	290.7	277.8	269.9	263.4	257.6	251.7
60°	356.8	333.0	314.9	295.5	276.1	264.2	254.3	244.9	237.4	228.7	226.2
62.5°	321.7	301.0	284.4	265.5	248.7	237.8	228.3	219.4	210.4	197.7	194.2
65°	273.6	257.4	239.9	224.3	209.3	198.7	184.9	175.0	171.2	169.9	169.3
67.5°	230.2	214.8	199.8	183.8	170.2	160.3	153.4	151.8	149.2	148.5	146.7
70°	201.2	186.8	171.8	156.8	143.7	141.9	139.3	136.8	133.7	132.5	131.2
72.5°	175.2	160.3	145.3	133.3	127.7	125.3	122.9	120.3	118.2	117.0	116.2
75°	134.4	120.6	110.6	106.2	103.1	101.2	97.4	95.6	94.3	92.5	91.8
77.5°	96.7	88.9	84.4	81.6	78.4	76.3	74.2	72.3	71.0	70.6	69.6
80°	73.7	70.0	66.9	63.1	61.9	59.4	58.7	56.8	57.5	55.6	55.6
82.5°	57.2	52.5	49.9	48.1	46.9	44.8	44.3	43.4	43.5	42.1	42.1
85°	29.4	28.1	26.9	25.6	25.6	23.7	24.4	23.7	23.7	22.5	21.9
87.5°	11.4	11.6	11.3	12.1	13.0	13.3	13.2	12.6	12.6	12.5	12.0
90°	9.6	12.7	16.8	20.8	24.9	28.9	28.5	28.1	27.8	27.4	27.3
92.5°	21.2	22.4	23.4	24.4	25.3	26.3	26.3	26.4	26.5	26.6	26.6
95°	50.3	51.4	51.8	52.1	52.5	52.8	52.8	52.8	52.8	52.8	52.7
97.5°	84.9	86.1	86.7	87.5	88.1	88.9	88.9	88.9	88.9	88.9	88.9
100°	110.7	111.8	112.3	112.8	113.4	114.0	114.0	114.0	114.0	114.0	113.9
102.5°	137.3	138.3	138.9	139.7	140.3	141.0	141.2	141.4	141.5	141.6	141.6
105°	179.8	180.2	180.6	180.9	181.3	181.6	182.1	182.4	182.8	183.1	183.4
107.5°	226.0	226.4	226.4	226.4	226.4	226.4	226.6	226.7	226.9	227.0	226.7
110°	256.2	256.8	256.8	256.8	256.8	256.8	256.8	256.8	256.8	256.8	256.6



TEST NUMBER: P331854-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	288.0	288.5	288.3	288.1	288.0	287.9	287.4	287.0	286.6	286.1	285.7
115°	334.7	335.1	334.7	334.4	333.9	333.6	333.5	333.2	333.0	332.9	332.5
117.5°	382.8	382.9	382.0	380.9	379.9	378.9	378.5	378.0	377.6	377.1	376.6
120°	413.8	413.8	412.4	410.9	409.4	408.0	408.0	408.0	408.0	408.0	407.6
122.5°	443.4	443.8	442.7	441.7	440.7	439.6	439.2	438.8	438.3	437.9	437.5
125°	487.2	487.8	487.2	486.7	486.1	485.6	485.0	484.5	483.9	483.4	483.0
127.5°	532.1	532.8	532.1	531.5	530.8	530.2	529.5	528.8	528.2	527.5	526.8
130°	560.4	561.3	561.0	560.6	560.3	559.9	559.5	559.1	558.8	558.4	557.8
132.5°	589.0	590.0	590.0	590.1	590.2	590.3	589.5	588.6	587.8	587.0	586.4
135°	629.9	631.0	631.4	631.8	632.2	632.5	632.3	632.2	632.0	631.8	631.4
137.5°	671.2	672.3	672.7	673.2	673.7	674.2	674.0	673.8	673.8	673.6	673.1
140°	696.9	698.2	699.2	700.1	701.0	701.9	701.9	701.9	701.9	701.9	701.6
142.5°	723.4	724.6	725.1	725.8	726.4	727.0	727.2	727.3	727.5	727.6	727.3
145°	759.9	761.1	762.2	763.3	764.4	765.5	765.6	765.9	766.1	766.2	766.0
147.5°	794.8	795.9	796.6	797.4	798.1	798.8	799.2	799.6	800.1	800.5	800.3
150°	816.1	817.1	817.8	818.6	819.3	820.0	820.5	821.1	821.7	822.2	822.2
152.5°	836.7	837.6	838.5	839.4	840.2	841.1	841.8	842.5	843.3	843.9	843.9
155°	865.1	865.7	866.3	866.8	867.3	867.9	868.8	869.8	870.7	871.6	871.7
157.5°	890.6	891.0	891.4	891.7	892.0	892.3	893.6	894.9	896.1	897.3	897.5
160°	906.5	906.8	907.0	907.2	907.3	907.5	908.7	909.7	910.9	911.9	912.2
162.5°	919.9	920.0	920.2	920.4	920.6	920.7	922.0	923.2	924.5	925.8	925.9
165°	938.2	938.1	938.1	938.1	938.1	938.1	939.4	940.7	941.9	943.2	943.4
167.5°	952.9	952.6	952.6	952.5	952.5	952.4	953.7	955.0	956.3	957.6	957.7
170°	961.5	961.2	960.9	960.7	960.6	960.4	961.6	963.0	964.3	965.6	965.6
172.5°	967.4	967.0	966.9	966.7	966.5	966.3	967.6	968.9	970.2	971.4	971.6
175°	974.7	974.2	973.9	973.5	973.1	972.7	974.0	975.3	976.6	977.9	978.0
177.5°	978.1	977.7	977.5	977.1	976.9	976.6	977.5	978.4	979.2	980.1	980.1
180°	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5



TEST NUMBER: P331854-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1
2.5°	1726.6	1727.6	1726.2	1727.1	1726.2	1727.6	1726.6	1732.1	1733.1	1734.1	1733.1
5°	1608.7	1601.2	1600.0	1598.1	1600.0	1601.2	1608.7	1611.9	1614.4	1619.4	1628.2
7.5°	1468.1	1467.0	1463.9	1459.5	1463.9	1467.0	1468.1	1478.8	1487.4	1497.1	1514.9
10°	1377.6	1374.5	1373.9	1369.5	1373.9	1374.5	1377.6	1391.4	1401.3	1415.1	1439.5
12.5°	1271.6	1251.6	1249.4	1238.5	1249.4	1251.6	1271.6	1289.4	1316.4	1329.7	1355.5
15°	1082.7	1079.0	1066.5	1058.3	1066.5	1079.0	1082.7	1097.7	1107.7	1143.9	1185.9
17.5°	974.8	962.5	958.6	956.9	958.6	962.5	974.8	982.0	996.3	1015.4	1040.6
20°	905.3	894.1	892.2	891.0	892.2	894.1	905.3	914.0	925.3	945.9	972.2
22.5°	857.3	845.5	840.7	836.9	840.7	845.5	857.3	864.1	874.3	890.4	908.2
25°	775.3	770.9	768.5	767.2	768.5	770.9	775.3	781.6	791.6	813.4	832.2
27.5°	711.3	701.6	699.8	696.5	699.8	701.6	711.3	722.4	732.7	742.6	759.4
30°	674.7	671.6	667.2	663.5	667.2	671.6	674.7	680.4	687.2	704.1	720.4
32.5°	631.8	629.2	625.3	623.5	625.3	629.2	631.8	639.4	653.8	664.1	675.9
35°	584.2	575.4	571.7	566.1	571.7	575.4	584.2	590.4	596.1	604.8	626.0
37.5°	533.8	529.2	523.9	525.8	523.9	529.2	533.8	536.5	548.3	560.4	569.6
40°	494.8	491.7	490.5	489.8	490.5	491.7	494.8	503.0	517.3	522.9	536.7
42.5°	463.8	455.2	451.9	451.8	451.9	455.2	463.8	473.0	481.8	491.0	505.2
45°	416.7	408.6	403.0	403.6	403.0	408.6	416.7	419.9	427.4	445.5	453.6
47.5°	368.5	368.3	364.8	365.8	364.8	368.3	368.5	373.9	383.5	394.6	407.6
50°	345.5	341.8	339.2	339.9	339.2	341.8	345.5	349.8	355.5	361.1	381.1
52.5°	323.5	320.2	318.3	320.9	318.3	320.2	323.5	325.9	330.0	335.7	349.1
55°	287.4	283.6	283.0	282.4	283.0	283.6	287.4	290.5	295.5	299.9	306.1
57.5°	247.0	244.5	240.8	239.1	240.8	244.5	247.0	251.7	257.6	263.4	269.9
60°	218.0	213.0	206.8	206.2	206.8	213.0	218.0	226.2	228.7	237.4	244.9
62.5°	191.5	190.5	189.3	189.1	189.3	190.5	191.5	194.2	197.7	210.4	219.4
65°	168.0	167.5	168.0	168.7	168.0	167.5	168.0	169.3	169.9	171.2	175.0
67.5°	146.4	145.3	144.2	144.7	144.2	145.3	146.4	146.7	148.5	149.2	151.8
70°	130.0	129.3	128.7	128.7	128.7	129.3	130.0	131.2	132.5	133.7	136.8
72.5°	114.0	113.8	113.2	112.7	113.2	113.8	114.0	116.2	117.0	118.2	120.3
75°	91.2	89.9	89.9	89.9	89.9	89.9	91.2	91.8	92.5	94.3	95.6
77.5°	69.5	68.8	68.2	67.8	68.2	68.8	69.5	69.6	70.6	71.0	72.3
80°	55.0	54.4	53.7	53.7	53.7	54.4	55.0	55.6	55.6	57.5	56.8
82.5°	42.0	41.3	41.3	40.8	41.3	41.3	42.0	42.1	42.1	43.5	43.4
85°	22.5	23.2	22.5	23.7	22.5	23.2	22.5	21.9	22.5	23.7	23.7
87.5°	12.0	11.6	12.1	11.6	12.1	11.6	12.0	12.0	12.5	12.6	12.6
90°	27.6	27.7	27.9	28.0	27.9	27.7	27.6	27.3	27.4	27.8	28.1
92.5°	26.7	26.7	26.7	26.7	26.7	26.7	26.7	26.6	26.6	26.5	26.4
95°	52.3	51.9	51.5	51.2	51.5	51.9	52.3	52.7	52.8	52.8	52.8
97.5°	88.8	88.8	88.7	88.7	88.7	88.8	88.8	88.9	88.9	88.9	88.9
100°	113.7	113.5	113.3	113.2	113.3	113.5	113.7	113.9	114.0	114.0	114.0
102.5°	141.5	141.2	141.0	140.9	141.0	141.2	141.5	141.6	141.6	141.5	141.4
105°	183.4	183.4	183.4	183.4	183.4	183.4	183.4	183.4	183.1	182.8	182.4
107.5°	225.8	224.9	224.1	223.3	224.1	224.9	225.8	226.7	227.0	226.9	226.7
110°	256.0	255.4	254.9	254.4	254.9	255.4	256.0	256.6	256.8	256.8	256.8



TEST NUMBER: P331854-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	285.3	284.9	284.5	284.1	284.5	284.9	285.3	285.7	286.1	286.6	287.0
115°	332.0	331.4	330.8	330.3	330.8	331.4	332.0	332.5	332.9	333.0	333.2
117.5°	376.1	375.5	375.0	374.4	375.0	375.5	376.1	376.6	377.1	377.6	378.0
120°	407.1	406.6	406.0	405.4	406.0	406.6	407.1	407.6	408.0	408.0	408.0
122.5°	437.1	436.7	436.3	435.9	436.3	436.7	437.1	437.5	437.9	438.3	438.8
125°	482.8	482.7	482.4	482.2	482.4	482.7	482.8	483.0	483.4	483.9	484.5
127.5°	526.3	525.7	525.1	524.6	525.1	525.7	526.3	526.8	527.5	528.2	528.8
130°	557.1	556.4	555.6	554.9	555.6	556.4	557.1	557.8	558.4	558.8	559.1
132.5°	585.8	585.1	584.6	584.0	584.6	585.1	585.8	586.4	587.0	587.8	588.6
135°	630.9	630.3	629.8	629.2	629.8	630.3	630.9	631.4	631.8	632.0	632.2
137.5°	672.4	671.6	670.9	670.2	670.9	671.6	672.4	673.1	673.6	673.8	673.8
140°	700.8	700.1	699.4	698.6	699.4	700.1	700.8	701.6	701.9	701.9	701.9
142.5°	726.6	725.9	725.1	724.4	725.1	725.9	726.6	727.3	727.6	727.5	727.3
145°	765.2	764.5	763.8	763.0	763.8	764.5	765.2	766.0	766.2	766.1	765.9
147.5°	799.6	798.9	798.3	797.5	798.3	798.9	799.6	800.3	800.5	800.1	799.6
150°	821.7	821.1	820.5	820.0	820.5	821.1	821.7	822.2	822.2	821.7	821.1
152.5°	843.3	842.5	841.8	841.1	841.8	842.5	843.3	843.9	843.9	843.3	842.5
155°	871.2	870.7	870.1	869.5	870.1	870.7	871.2	871.7	871.6	870.7	869.8
157.5°	896.7	895.8	894.9	894.0	894.9	895.8	896.7	897.5	897.3	896.1	894.9
160°	911.4	910.7	910.0	909.2	910.0	910.7	911.4	912.2	911.9	910.9	909.7
162.5°	925.0	924.1	923.2	922.4	923.2	924.1	925.0	925.9	925.8	924.5	923.2
165°	942.5	941.6	940.7	939.7	940.7	941.6	942.5	943.4	943.2	941.9	940.7
167.5°	956.8	955.9	954.9	954.0	954.9	955.9	956.8	957.7	957.6	956.3	955.0
170°	964.5	963.4	962.3	961.2	962.3	963.4	964.5	965.6	965.6	964.3	963.0
172.5°	970.5	969.4	968.2	967.2	968.2	969.4	970.5	971.6	971.4	970.2	968.9
175°	976.9	975.8	974.7	973.6	974.7	975.8	976.9	978.0	977.9	976.6	975.3
177.5°	979.2	978.4	977.5	976.6	977.5	978.4	979.2	980.1	980.1	979.2	978.4
180°	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5



TEST NUMBER: P331854-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1
2.5°	1729.1	1736.1	1746.6	1752.6	1762.6	1769.1	1772.6	1779.1	1782.6	1795.1	1808.1
5°	1632.6	1642.5	1660.0	1676.3	1693.8	1711.9	1725.0	1740.0	1753.7	1777.4	1802.5
7.5°	1521.8	1535.7	1562.8	1588.7	1619.2	1644.8	1667.4	1693.0	1715.9	1749.9	1785.3
10°	1438.8	1463.2	1498.8	1523.2	1563.2	1588.8	1624.4	1652.5	1684.4	1729.3	1769.4
12.5°	1367.3	1396.8	1425.4	1459.2	1495.2	1537.8	1577.0	1613.1	1650.9	1697.4	1744.3
15°	1237.7	1280.2	1324.5	1358.9	1407.6	1452.6	1498.2	1546.9	1593.2	1648.8	1710.0
17.5°	1070.7	1120.0	1194.6	1253.4	1310.7	1355.8	1412.3	1471.2	1525.7	1592.8	1660.9
20°	995.2	1031.5	1082.1	1161.5	1247.7	1295.8	1353.2	1418.2	1480.7	1553.8	1626.9
22.5°	934.7	967.0	1007.6	1069.5	1165.7	1231.3	1291.3	1357.2	1429.7	1504.3	1585.4
25°	848.4	870.9	913.4	963.4	1029.6	1137.7	1203.3	1269.5	1348.3	1428.2	1520.7
27.5°	783.6	803.8	831.4	879.1	928.4	1006.0	1110.4	1182.6	1261.0	1351.0	1447.0
30°	734.1	757.8	788.5	822.2	876.0	936.5	1040.9	1124.6	1202.1	1294.5	1397.0
32.5°	698.1	716.9	743.0	777.2	822.0	880.0	963.4	1065.1	1140.6	1238.0	1345.0
35°	639.1	661.0	682.2	714.8	751.0	804.0	867.2	975.9	1050.8	1147.0	1254.5
37.5°	590.5	603.9	627.4	653.1	691.4	731.0	785.7	883.2	964.3	1058.7	1168.7
40°	553.5	570.4	587.9	616.6	647.9	686.0	739.7	812.2	905.3	997.8	1105.2
42.5°	517.6	538.9	557.4	576.7	610.9	649.0	692.8	754.2	849.3	936.8	1041.2
45°	474.2	488.0	507.3	528.6	556.7	589.1	627.9	681.6	772.8	848.4	946.6
47.5°	423.7	443.8	456.5	477.2	503.9	534.9	571.0	617.4	691.2	762.1	853.0
50°	389.2	409.9	428.0	446.7	470.4	500.4	530.4	575.4	634.8	709.1	794.1
52.5°	359.7	377.9	395.5	414.3	437.5	465.0	493.4	533.0	583.8	652.2	734.6
55°	319.3	330.5	348.6	367.4	388.0	414.3	441.7	474.8	518.5	576.0	642.9
57.5°	277.8	290.7	305.2	324.0	344.9	365.0	389.7	419.7	454.2	506.2	563.5
60°	254.3	264.2	276.1	295.5	314.9	333.0	356.8	381.7	414.3	459.2	507.9
62.5°	228.3	237.8	248.7	265.5	284.4	301.0	321.7	348.2	375.8	416.7	459.4
65°	184.9	198.7	209.3	224.3	239.9	257.4	273.6	294.9	319.3	351.7	389.9
67.5°	153.4	160.3	170.2	183.8	199.8	214.8	230.2	246.8	267.9	293.0	323.3
70°	139.3	141.9	143.7	156.8	171.8	186.8	201.2	216.8	234.9	255.5	281.8
72.5°	122.9	125.3	127.7	133.3	145.3	160.3	175.2	186.8	203.9	221.0	242.3
75°	97.4	101.2	103.1	106.2	110.6	120.6	134.4	145.5	155.6	168.7	185.6
77.5°	74.2	76.3	78.4	81.6	84.4	88.9	96.7	106.8	116.2	123.8	135.4
80°	58.7	59.4	61.9	63.1	66.9	70.0	73.7	81.9	91.2	94.3	102.5
82.5°	44.3	44.8	46.9	48.1	49.9	52.5	57.2	59.4	66.7	70.8	76.0
85°	24.4	23.7	25.6	25.6	26.9	28.1	29.4	32.4	34.3	39.4	40.6
87.5°	13.2	13.3	13.0	12.1	11.3	11.6	11.4	11.5	12.1	13.1	14.7
90°	28.5	28.9	24.9	20.8	16.8	12.7	9.6	7.4	5.2	3.0	0.8
92.5°	26.3	26.3	25.3	24.4	23.4	22.4	21.2	19.6	17.9	16.3	14.7
95°	52.8	52.8	52.5	52.1	51.8	51.4	50.3	48.4	46.6	44.8	43.0
97.5°	88.9	88.9	88.1	87.5	86.7	86.1	84.9	83.3	81.7	80.1	78.4
100°	114.0	114.0	113.4	112.8	112.3	111.8	110.7	109.3	107.8	106.3	104.8
102.5°	141.2	141.0	140.3	139.7	138.9	138.3	137.3	136.2	134.9	133.8	132.6
105°	182.1	181.6	181.3	180.9	180.6	180.2	179.8	179.2	178.6	178.1	177.6
107.5°	226.6	226.4	226.4	226.4	226.4	226.4	226.0	225.2	224.4	223.6	222.8
110°	256.8	256.8	256.8	256.8	256.8	256.8	256.2	255.2	254.0	253.0	251.8



TEST NUMBER: P331854-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	287.4	287.9	288.0	288.1	288.3	288.5	288.0	286.9	285.8	284.7	283.6
115°	333.5	333.6	333.9	334.4	334.7	335.1	334.7	333.6	332.5	331.4	330.3
117.5°	378.5	378.9	379.9	380.9	382.0	382.9	382.8	381.3	379.8	378.4	376.9
120°	408.0	408.0	409.4	410.9	412.4	413.8	413.8	412.4	410.9	409.4	408.0
122.5°	439.2	439.6	440.7	441.7	442.7	443.8	443.4	441.6	439.9	438.1	436.3
125°	485.0	485.6	486.1	486.7	487.2	487.8	487.2	485.6	483.9	482.2	480.6
127.5°	529.5	530.2	530.8	531.5	532.1	532.8	532.1	530.0	527.9	525.8	523.7
130°	559.5	559.9	560.3	560.6	561.0	561.3	560.4	558.0	555.5	553.2	550.8
132.5°	589.5	590.3	590.2	590.1	590.0	590.0	589.0	587.0	585.1	583.1	581.1
135°	632.3	632.5	632.2	631.8	631.4	631.0	629.9	627.9	625.8	623.9	621.8
137.5°	674.0	674.2	673.7	673.2	672.7	672.3	671.2	669.5	667.9	666.3	664.6
140°	701.9	701.9	701.0	700.1	699.2	698.2	696.9	695.3	693.7	692.0	690.3
142.5°	727.2	727.0	726.4	725.8	725.1	724.6	723.4	721.7	720.1	718.4	716.8
145°	765.6	765.5	764.4	763.3	762.2	761.1	759.9	758.6	757.3	756.0	754.7
147.5°	799.2	798.8	798.1	797.4	796.6	795.9	794.8	793.2	791.7	790.2	788.6
150°	820.5	820.0	819.3	818.6	817.8	817.1	816.1	815.1	813.9	812.9	811.7
152.5°	841.8	841.1	840.2	839.4	838.5	837.6	836.7	835.5	834.5	833.3	832.3
155°	868.8	867.9	867.3	866.8	866.3	865.7	865.1	864.6	864.1	863.5	862.9
157.5°	893.6	892.3	892.0	891.7	891.4	891.0	890.6	890.3	889.9	889.6	889.2
160°	908.7	907.5	907.3	907.2	907.0	906.8	906.5	906.1	905.8	905.4	905.1
162.5°	922.0	920.7	920.6	920.4	920.2	920.0	919.9	919.8	919.7	919.7	919.6
165°	939.4	938.1	938.1	938.1	938.1	938.1	938.2	938.3	938.6	938.7	938.9
167.5°	953.7	952.4	952.5	952.5	952.6	952.6	952.9	953.4	954.0	954.6	955.1
170°	961.6	960.4	960.6	960.7	960.9	961.2	961.5	962.1	962.6	963.1	963.7
172.5°	967.6	966.3	966.5	966.7	966.9	967.0	967.4	968.0	968.5	969.1	969.6
175°	974.0	972.7	973.1	973.5	973.9	974.2	974.7	975.3	975.8	976.3	976.9
177.5°	977.5	976.6	976.9	977.1	977.5	977.7	978.1	978.5	979.0	979.4	979.9
180°	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5



TEST NUMBER: P331854-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1
2.5°	1808.6	1810.0	1820.1	1824.6	1833.6	1837.0	1841.1	1840.0	1840.0	1842.1	1856.0
5°	1812.5	1825.0	1843.7	1861.8	1879.3	1894.3	1904.3	1914.3	1918.1	1936.2	1952.4
7.5°	1806.0	1829.0	1859.9	1887.6	1920.7	1946.5	1968.1	1987.4	2000.7	2027.0	2054.0
10°	1797.5	1829.9	1864.9	1900.5	1946.1	1980.5	2015.5	2042.4	2051.1	2090.5	2113.0
12.5°	1780.5	1824.0	1868.4	1914.6	1959.2	2006.5	2045.0	2071.8	2102.6	2138.0	2179.5
15°	1755.0	1805.0	1863.0	1922.4	1986.2	2043.6	2084.9	2131.7	2165.4	2204.2	2240.4
17.5°	1718.4	1782.7	1856.6	1925.3	1999.0	2060.8	2117.5	2162.4	2186.2	2208.3	2213.7
20°	1689.4	1758.8	1845.6	1926.8	2000.5	2071.8	2127.9	2165.4	2171.7	2172.3	2139.2
22.5°	1657.9	1736.3	1827.1	1910.3	1998.5	2077.7	2121.5	2137.5	2112.7	2070.4	2006.3
25°	1600.0	1690.6	1796.2	1891.2	1987.4	2062.4	2077.4	2049.3	1962.4	1871.2	1755.6
27.5°	1537.3	1639.2	1752.3	1857.9	1960.4	2006.9	1974.5	1873.2	1716.8	1580.8	1416.0
30°	1491.3	1605.7	1716.9	1834.9	1929.9	1949.9	1875.6	1726.2	1543.8	1338.9	1174.6
32.5°	1438.8	1558.7	1680.9	1803.0	1882.4	1863.0	1740.1	1556.3	1342.4	1140.9	985.6
35°	1363.8	1487.6	1619.4	1741.9	1792.4	1708.1	1524.4	1285.2	1066.5	878.4	771.6
37.5°	1277.2	1412.0	1549.1	1661.5	1657.9	1517.4	1267.1	1020.1	836.3	725.1	649.0
40°	1215.8	1352.0	1500.1	1595.1	1554.4	1371.3	1100.2	867.2	732.9	644.2	588.6
42.5°	1156.8	1293.6	1440.6	1516.0	1445.4	1220.4	950.3	767.7	656.9	587.7	542.6
45°	1056.5	1200.8	1337.0	1378.8	1252.6	1004.6	768.5	636.0	562.3	511.0	479.8
47.5°	958.4	1100.3	1224.7	1225.4	1054.8	814.7	648.2	550.4	487.5	447.8	425.1
50°	898.4	1033.4	1137.7	1121.4	927.8	724.7	579.8	495.5	443.0	412.4	388.6
52.5°	831.0	961.9	1052.2	1006.0	820.4	637.7	518.3	447.4	404.0	377.3	356.1
55°	732.9	849.1	912.8	842.8	669.1	530.4	438.0	382.4	349.8	327.3	309.2
57.5°	636.5	732.4	772.5	691.0	551.1	439.9	370.5	328.7	296.5	280.4	271.0
60°	576.0	657.9	686.0	596.1	479.2	384.8	328.0	289.3	265.5	254.9	245.6
62.5°	516.6	583.4	595.0	512.6	417.8	336.9	288.0	255.3	239.5	229.4	220.5
65°	428.6	476.7	471.1	404.9	330.5	267.4	231.8	211.8	199.9	185.6	169.9
67.5°	352.9	382.2	364.5	314.9	252.3	207.8	184.6	169.4	154.7	141.0	137.5
70°	304.9	321.7	303.0	257.4	206.8	174.3	155.6	137.5	128.7	125.6	119.9
72.5°	258.9	264.8	244.5	205.5	168.3	144.3	126.0	115.9	111.2	108.6	104.9
75°	194.3	190.0	172.4	141.9	116.8	100.6	95.0	91.2	88.1	85.6	83.7
77.5°	136.5	130.0	114.5	94.5	81.4	73.6	70.2	68.2	66.7	65.5	63.6
80°	102.5	98.1	82.5	67.5	61.9	58.1	56.3	53.7	53.7	52.5	50.6
82.5°	75.0	70.1	56.5	49.5	46.4	44.1	42.7	41.3	40.8	41.0	39.6
85°	39.4	31.9	28.1	26.9	25.0	23.7	24.4	23.2	23.2	23.2	22.5
87.5°	12.6	10.5	10.5	10.4	11.6	12.4	12.6	13.5	14.8	14.2	14.6
90°	3.0	5.2	7.4	9.6	12.7	16.8	20.8	24.9	28.9	28.5	28.1
92.5°	16.3	17.9	19.6	21.2	22.4	23.4	24.4	25.3	26.3	26.3	26.4
95°	44.8	46.6	48.4	50.3	51.4	51.8	52.1	52.5	52.8	52.8	52.8
97.5°	80.1	81.7	83.3	84.9	86.1	86.7	87.5	88.1	88.9	88.9	88.9
100°	106.3	107.8	109.3	110.7	111.8	112.3	112.8	113.4	114.0	114.0	114.0
102.5°	133.8	134.9	136.2	137.3	138.3	138.9	139.7	140.3	141.0	141.2	141.4
105°	178.1	178.6	179.2	179.8	180.2	180.6	180.9	181.3	181.6	182.1	182.4
107.5°	223.6	224.4	225.2	226.0	226.4	226.4	226.4	226.4	226.4	226.6	226.7
110°	253.0	254.0	255.2	256.2	256.8	256.8	256.8	256.8	256.8	256.8	256.8





TEST NUMBER: P331854-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	284.7	285.8	286.9	288.0	288.5	288.3	288.1	288.0	287.9	287.4	287.0
115°	331.4	332.5	333.6	334.7	335.1	334.7	334.4	333.9	333.6	333.5	333.2
117.5°	378.4	379.8	381.3	382.8	382.9	382.0	380.9	379.9	378.9	378.5	378.0
120°	409.4	410.9	412.4	413.8	413.8	412.4	410.9	409.4	408.0	408.0	408.0
122.5°	438.1	439.9	441.6	443.4	443.8	442.7	441.7	440.7	439.6	439.2	438.8
125°	482.2	483.9	485.6	487.2	487.8	487.2	486.7	486.1	485.6	485.0	484.5
127.5°	525.8	527.9	530.0	532.1	532.8	532.1	531.5	530.8	530.2	529.5	528.8
130°	553.2	555.5	558.0	560.4	561.3	561.0	560.6	560.3	559.9	559.5	559.1
132.5°	583.1	585.1	587.0	589.0	590.0	590.0	590.1	590.2	590.3	589.5	588.6
135°	623.9	625.8	627.9	629.9	631.0	631.4	631.8	632.2	632.5	632.3	632.2
137.5°	666.3	667.9	669.5	671.2	672.3	672.7	673.2	673.7	674.2	674.0	673.8
140°	692.0	693.7	695.3	696.9	698.2	699.2	700.1	701.0	701.9	701.9	701.9
142.5°	718.4	720.1	721.7	723.4	724.6	725.1	725.8	726.4	727.0	727.2	727.3
145°	756.0	757.3	758.6	759.9	761.1	762.2	763.3	764.4	765.5	765.6	765.9
147.5°	790.2	791.7	793.2	794.8	795.9	796.6	797.4	798.1	798.8	799.2	799.6
150°	812.9	813.9	815.1	816.1	817.1	817.8	818.6	819.3	820.0	820.5	821.1
152.5°	833.3	834.5	835.5	836.7	837.6	838.5	839.4	840.2	841.1	841.8	842.5
155°	863.5	864.1	864.6	865.1	865.7	866.3	866.8	867.3	867.9	868.8	869.8
157.5°	889.6	889.9	890.3	890.6	891.0	891.4	891.7	892.0	892.3	893.6	894.9
160°	905.4	905.8	906.1	906.5	906.8	907.0	907.2	907.3	907.5	908.7	909.7
162.5°	919.7	919.7	919.8	919.9	920.0	920.2	920.4	920.6	920.7	922.0	923.2
165°	938.7	938.6	938.3	938.2	938.1	938.1	938.1	938.1	938.1	939.4	940.7
167.5°	954.6	954.0	953.4	952.9	952.6	952.6	952.5	952.5	952.4	953.7	955.0
170°	963.1	962.6	962.1	961.5	961.2	960.9	960.7	960.6	960.4	961.6	963.0
172.5°	969.1	968.5	968.0	967.4	967.0	966.9	966.7	966.5	966.3	967.6	968.9
175°	976.3	975.8	975.3	974.7	974.2	973.9	973.5	973.1	972.7	974.0	975.3
177.5°	979.4	979.0	978.5	978.1	977.7	977.5	977.1	976.9	976.6	977.5	978.4
180°	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5



TEST NUMBER: P331854-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1	1798.1
2.5°	1861.1	1867.5	1870.5	1870.5	1874.0	1872.6	1871.0
5°	1968.1	1979.9	1982.4	1993.7	2001.7	1999.3	2000.5
7.5°	2074.4	2093.4	2112.4	2121.0	2122.3	2127.4	2129.2
10°	2139.8	2155.5	2184.8	2180.4	2202.3	2214.8	2194.2
12.5°	2202.8	2223.9	2244.3	2249.9	2262.3	2266.3	2258.1
15°	2259.8	2271.0	2272.3	2269.1	2272.9	2269.8	2257.9
17.5°	2206.5	2188.3	2151.3	2133.8	2119.9	2099.5	2091.2
20°	2118.6	2064.8	2002.4	1977.4	1948.0	1890.5	1904.3
22.5°	1928.7	1867.4	1805.0	1732.0	1697.1	1642.7	1639.4
25°	1633.1	1527.5	1411.4	1330.2	1282.6	1228.3	1204.5
27.5°	1269.7	1136.9	1041.6	993.4	949.5	906.4	904.7
30°	1030.9	930.9	857.2	816.0	789.0	770.9	774.7
32.5°	868.9	800.5	750.7	716.5	696.6	683.0	682.7
35°	710.4	663.5	631.6	617.3	602.9	592.9	593.5
37.5°	607.9	579.8	562.1	546.2	537.2	532.3	529.5
40°	555.4	532.3	518.5	509.2	501.7	494.8	493.6
42.5°	514.0	494.8	481.1	473.7	466.7	461.9	460.6
45°	456.1	440.4	428.0	419.9	416.7	412.4	412.4
47.5°	405.7	390.4	380.6	375.5	370.1	367.2	367.1
50°	371.8	359.9	351.1	348.0	343.6	341.8	341.1
52.5°	341.3	332.4	326.1	324.0	322.1	319.8	320.2
55°	299.9	294.9	292.4	290.5	287.4	283.6	286.2
57.5°	265.1	260.8	254.0	248.2	245.3	242.6	243.7
60°	240.5	231.8	223.1	216.1	214.3	208.6	208.6
62.5°	209.5	197.3	186.5	182.7	180.8	178.2	177.7
65°	161.2	156.2	153.7	151.2	149.9	149.9	148.7
67.5°	133.5	131.6	128.8	128.2	126.9	126.6	126.2
70°	118.1	115.6	114.3	113.7	112.4	113.1	111.2
72.5°	103.1	101.1	100.9	99.2	98.5	98.6	97.2
75°	81.2	81.2	80.6	80.0	78.8	78.1	78.8
77.5°	62.5	62.6	61.5	61.4	61.2	61.4	60.7
80°	50.0	50.6	50.0	49.3	48.8	49.3	48.8
82.5°	39.5	38.6	38.5	38.4	38.2	37.8	37.7
85°	22.5	23.2	22.5	21.9	21.9	21.9	22.5
87.5°	14.0	14.0	13.9	14.0	14.0	14.1	13.6
90°	27.8	27.4	27.3	27.6	27.7	27.9	28.0
92.5°	26.5	26.6	26.6	26.7	26.7	26.7	26.7
95°	52.8	52.8	52.7	52.3	51.9	51.5	51.2
97.5°	88.9	88.9	88.9	88.8	88.8	88.7	88.7
100°	114.0	114.0	113.9	113.7	113.5	113.3	113.2
102.5°	141.5	141.6	141.6	141.5	141.2	141.0	140.9
105°	182.8	183.1	183.4	183.4	183.4	183.4	183.4
107.5°	226.9	227.0	226.7	225.8	224.9	224.1	223.3
110°	256.8	256.8	256.6	256.0	255.4	254.9	254.4



TEST NUMBER: P331854-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	286.6	286.1	285.7	285.3	284.9	284.5	284.1
115°	333.0	332.9	332.5	332.0	331.4	330.8	330.3
117.5°	377.6	377.1	376.6	376.1	375.5	375.0	374.4
120°	408.0	408.0	407.6	407.1	406.6	406.0	405.4
122.5°	438.3	437.9	437.5	437.1	436.7	436.3	435.9
125°	483.9	483.4	483.0	482.8	482.7	482.4	482.2
127.5°	528.2	527.5	526.8	526.3	525.7	525.1	524.6
130°	558.8	558.4	557.8	557.1	556.4	555.6	554.9
132.5°	587.8	587.0	586.4	585.8	585.1	584.6	584.0
135°	632.0	631.8	631.4	630.9	630.3	629.8	629.2
137.5°	673.8	673.6	673.1	672.4	671.6	670.9	670.2
140°	701.9	701.9	701.6	700.8	700.1	699.4	698.6
142.5°	727.5	727.6	727.3	726.6	725.9	725.1	724.4
145°	766.1	766.2	766.0	765.2	764.5	763.8	763.0
147.5°	800.1	800.5	800.3	799.6	798.9	798.3	797.5
150°	821.7	822.2	822.2	821.7	821.1	820.5	820.0
152.5°	843.3	843.9	843.9	843.3	842.5	841.8	841.1
155°	870.7	871.6	871.7	871.2	870.7	870.1	869.5
157.5°	896.1	897.3	897.5	896.7	895.8	894.9	894.0
160°	910.9	911.9	912.2	911.4	910.7	910.0	909.2
162.5°	924.5	925.8	925.9	925.0	924.1	923.2	922.4
165°	941.9	943.2	943.4	942.5	941.6	940.7	939.7
167.5°	956.3	957.6	957.7	956.8	955.9	954.9	954.0
170°	964.3	965.6	965.6	964.5	963.4	962.3	961.2
172.5°	970.2	971.4	971.6	970.5	969.4	968.2	967.2
175°	976.6	977.9	978.0	976.9	975.8	974.7	973.6
177.5°	979.2	980.1	980.1	979.2	978.4	977.5	976.6
180°	978.5	978.5	978.5	978.5	978.5	978.5	978.5

(END OF REPORT)