

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331855-930

Luminaire Tested: **S122RDIW-S1005D970U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331855-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S1005D970U930-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 970 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5997.5 lumens
Efficiency: N/A
Efficacy: 89.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 67.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331855-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-F

Luminous Intensity Polar Plot

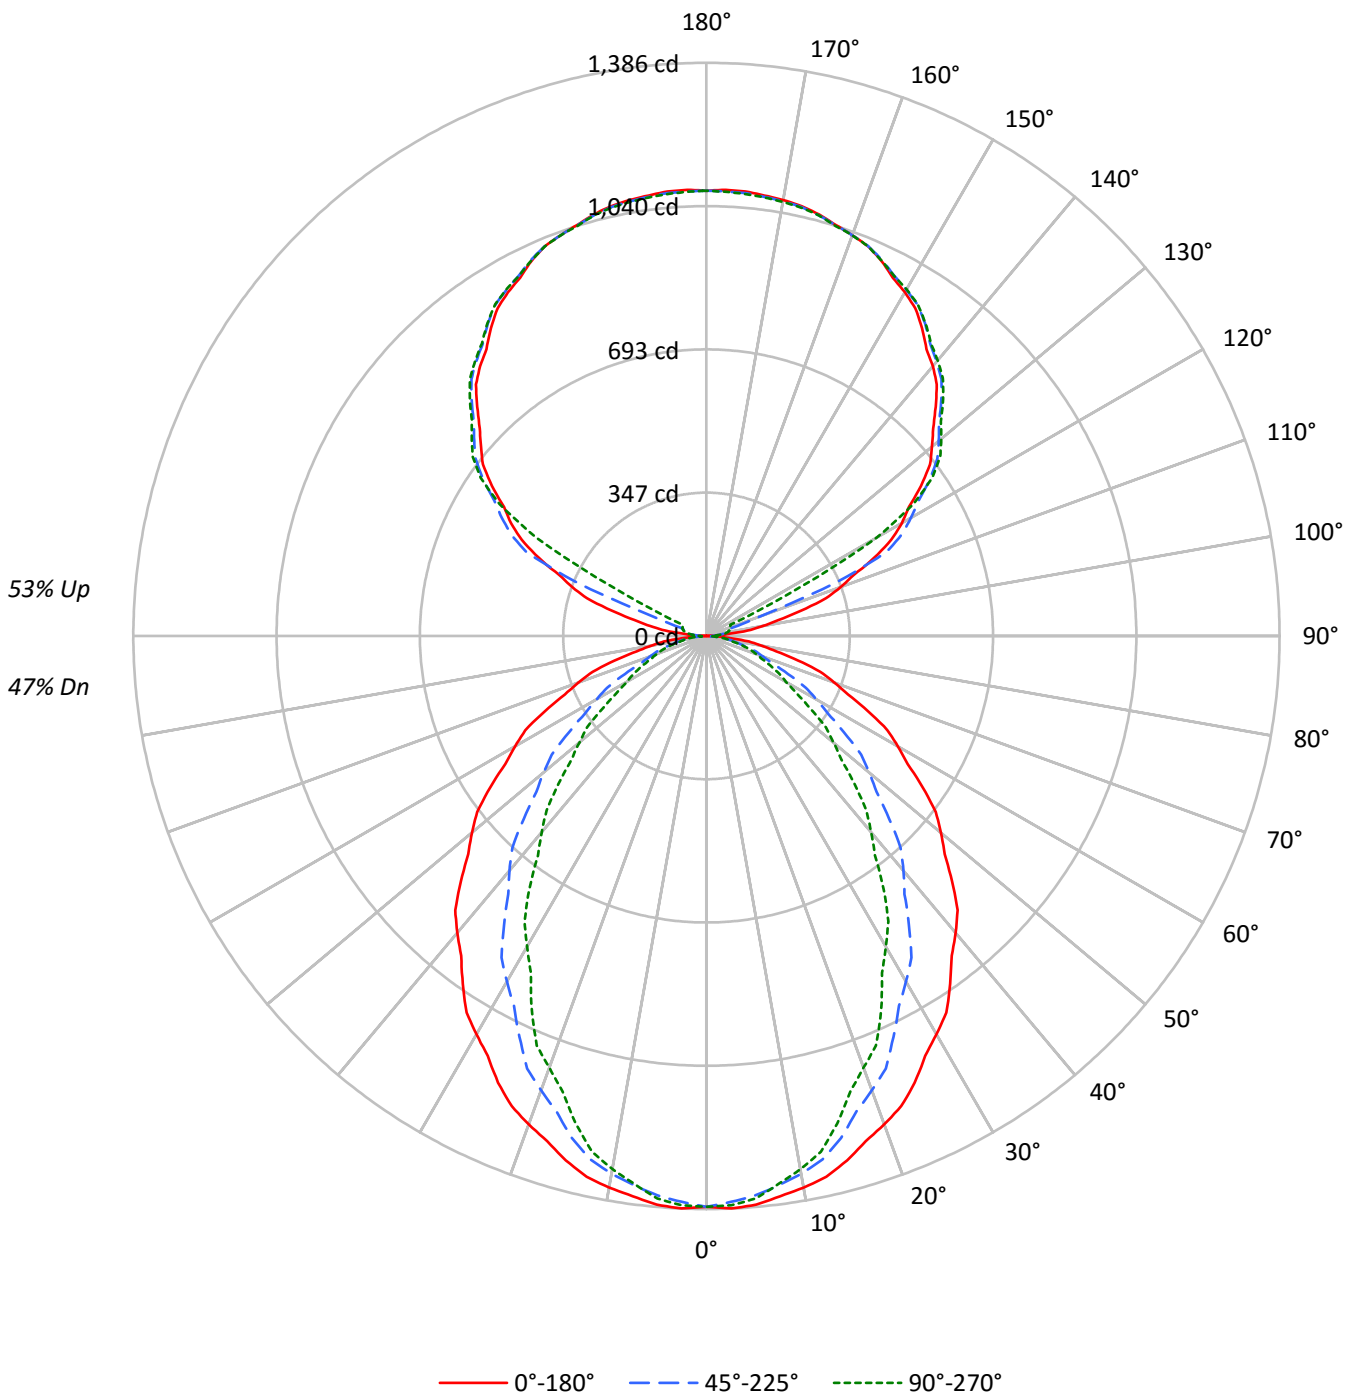



TEST NUMBER: P331855-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	82	82	82	67	67	67	54	54	54	47
1	98	94	90	86	90	86	83	80	72	70	68	60	58	57	48	47	46	41
2	89	82	76	71	82	76	71	66	64	60	57	53	50	48	43	41	40	35
3	82	73	66	60	75	67	61	56	57	52	49	47	44	41	38	36	34	30
4	75	65	57	51	69	60	53	48	51	46	42	42	39	36	35	32	30	26
5	69	58	50	44	63	54	47	41	46	40	36	38	34	31	31	29	26	23
6	64	52	44	38	58	48	41	36	41	36	32	35	31	28	29	26	23	21
7	59	47	39	34	54	44	37	32	38	32	28	32	28	25	26	23	21	18
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19	17
9	51	39	32	27	47	37	30	25	32	26	23	27	23	20	22	19	17	15
10	48	36	29	24	44	34	27	23	29	24	21	25	21	18	21	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	22291	22291	22291
5°	22376	22013	22135
10°	22207	21653	21469
15°	21951	21010	20404
20°	21596	20094	19086
25°	21235	19053	17808
30°	20734	17984	16168
35°	20243	16821	14728
40°	19751	15616	13061
45°	19173	14266	11556
50°	18580	12901	10073
55°	17973	11431	8653
60°	17270	9884	7182
65°	16466	8306	6541
70°	15512	6845	6014
75°	14342	6238	5608
80°	12664	5579	5114
85°	9948	4390	4390



TEST NUMBER: P331855-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	129.2	2.2
10°-20°	354.8	5.9
20°-30°	498.3	8.3
30°-40°	543.4	9.1
40°-50°	499.6	8.3
50°-60°	392.4	6.5
60°-70°	255.8	4.3
70°-80°	131.9	2.2
80°-90°	36.9	0.6
90°-100°	35.9	0.6
100°-110°	131.7	2.2
110°-120°	352.0	5.9
120°-130°	581.1	9.7
130°-140°	618.0	10.3
140°-150°	574.4	9.6
150°-160°	461.8	7.7
160°-170°	297.6	5.0
170°-180°	102.4	1.7
0°-30°	982.4	16.4
0°-40°	1525.7	25.4
0°-60°	2417.7	40.3
0°-90°	2842.3	47.4
90°-120°	519.7	8.7
90°-150°	2293.2	38.2
90°-180°	3155.0	52.6
0°-180°	5997.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1381	1381	1381	1381	1381	
5°	1381	1374	1358	1369	1366	131
15°	1313	1298	1257	1234	1221	370
25°	1192	1150	1070	1020	1000	548
35°	1027	961	853	778	747	642
45°	840	753	625	539	506	648
55°	638	539	406	334	307	570
65°	431	329	217	177	171	427
75°	230	145	100	92	90	243
85°	54	29	24	24	24	63
90°	1	9	16	19	21	5
95°	51	27	30	34	34	62
105°	237	247	48	56	59	253
115°	448	462	481	137	64	441
125°	633	644	658	664	666	565
135°	784	796	803	810	809	605
145°	909	909	922	927	923	568
155°	1001	995	1003	1007	1002	461
165°	1055	1051	1052	1057	1052	298
175°	1079	1074	1075	1080	1073	103
180°	1077	1077	1077	1077	1077	



TEST NUMBER: P331855-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6
2.5°	1385.7	1384.5	1383.4	1382.3	1381.2	1379.4	1377.0	1374.6	1372.1	1369.7	1371.9
5°	1380.6	1379.2	1377.9	1376.5	1375.1	1372.6	1369.0	1365.4	1361.8	1358.2	1360.7
7.5°	1366.4	1364.7	1363.0	1361.2	1359.5	1356.6	1352.3	1348.1	1343.9	1339.7	1340.4
10°	1354.5	1352.5	1350.5	1348.6	1346.6	1342.9	1337.3	1331.8	1326.2	1320.7	1319.9
12.5°	1339.5	1337.0	1334.6	1332.3	1329.9	1325.1	1318.0	1310.9	1303.8	1296.7	1295.2
15°	1313.2	1310.1	1307.1	1304.0	1301.0	1294.7	1285.3	1275.9	1266.4	1256.9	1251.7
17.5°	1280.9	1276.3	1271.6	1267.0	1262.3	1253.9	1241.8	1229.7	1217.6	1205.5	1199.2
20°	1256.9	1251.4	1245.9	1240.3	1234.8	1225.1	1211.1	1197.3	1183.4	1169.5	1162.5
22.5°	1230.9	1224.7	1218.5	1212.4	1206.1	1195.1	1179.5	1163.8	1148.2	1132.5	1123.6
25°	1192.0	1183.1	1174.2	1165.3	1156.4	1142.9	1124.5	1106.2	1087.9	1069.5	1058.2
27.5°	1145.0	1135.4	1125.7	1116.1	1106.4	1091.2	1070.6	1049.9	1029.2	1008.6	995.3
30°	1112.1	1101.5	1091.0	1080.4	1069.8	1053.4	1031.2	1009.0	986.8	964.6	950.4
32.5°	1080.0	1067.7	1055.4	1043.1	1030.7	1013.3	990.6	967.9	945.3	922.6	906.4
35°	1027.0	1012.9	998.7	984.6	970.5	951.1	926.7	902.3	877.8	853.4	835.9
37.5°	974.1	958.5	943.0	927.4	911.9	891.1	865.0	839.0	812.9	786.9	767.7
40°	937.1	920.5	903.8	887.1	870.5	848.6	821.7	794.8	767.8	740.9	721.2
42.5°	899.1	881.6	864.1	846.4	828.9	806.2	778.4	750.6	722.8	695.0	674.6
45°	839.7	821.0	802.4	783.8	765.2	741.4	712.2	683.1	653.9	624.8	605.0
47.5°	781.6	762.0	742.2	722.5	702.8	677.9	647.8	617.7	587.6	557.5	537.9
50°	739.7	720.0	700.3	680.5	660.8	635.7	605.2	574.6	544.0	513.6	494.4
52.5°	698.7	678.1	657.5	636.9	616.3	591.1	561.2	531.3	501.4	471.6	453.1
55°	638.5	616.9	595.2	573.5	551.9	526.0	496.0	466.0	436.1	406.1	389.4
57.5°	576.7	554.6	532.3	510.1	487.9	462.4	433.6	404.7	375.9	347.1	331.8
60°	534.8	512.6	490.3	468.1	445.9	420.5	391.9	363.3	334.7	306.1	292.0
62.5°	493.8	471.6	449.4	427.1	405.0	380.2	352.9	325.6	298.4	271.2	257.6
65°	431.0	408.5	386.1	363.6	341.1	317.4	292.4	267.4	242.4	217.4	208.0
67.5°	370.6	348.3	326.0	303.6	281.3	258.9	236.4	213.9	191.4	168.9	164.6
70°	328.6	307.0	285.3	263.7	242.0	221.6	202.4	183.3	164.1	145.0	142.2
72.5°	288.6	267.8	247.1	226.3	205.5	187.4	172.1	156.7	141.3	126.0	123.6
75°	229.9	210.4	191.0	171.6	152.1	137.7	128.2	118.9	109.4	100.0	98.0
77.5°	172.2	155.2	138.1	121.1	104.0	93.2	88.6	84.1	79.5	75.0	73.9
80°	136.2	122.1	107.9	93.7	79.6	71.1	68.3	65.6	62.8	60.0	58.9
82.5°	103.2	92.1	81.1	70.0	59.0	52.5	50.6	48.8	46.9	45.0	44.4
85°	53.7	47.9	42.1	36.2	30.4	27.1	26.3	25.4	24.5	23.7	23.7
87.5°	16.1	14.8	13.4	12.0	10.6	10.0	10.3	10.6	10.8	11.1	11.1
90°	0.8	2.7	4.6	6.5	8.4	10.0	11.4	12.8	14.2	15.6	16.5
92.5°	15.7	15.6	15.4	15.2	15.1	15.3	16.0	16.7	17.4	18.1	18.5
95°	50.6	44.9	39.2	33.5	27.8	25.5	26.7	28.0	29.2	30.4	31.2
97.5°	100.5	84.4	68.3	52.2	36.1	29.4	32.3	35.1	37.8	40.7	41.3
100°	137.9	114.1	90.4	66.8	43.0	32.6	35.5	38.5	41.5	44.4	45.8
102.5°	179.0	174.0	169.0	164.0	158.9	144.1	119.5	94.9	70.3	45.7	47.5
105°	236.8	242.1	247.2	252.4	257.6	236.6	189.3	142.0	94.8	47.5	49.4
107.5°	302.7	307.0	311.1	315.3	319.5	293.3	236.6	179.9	123.2	66.5	64.6
110°	345.1	348.8	352.4	356.0	359.6	336.5	286.4	236.4	186.4	136.3	119.0



TEST NUMBER: P331855-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	385.0	388.2	391.4	394.7	397.9	393.3	381.0	368.6	356.2	343.9	280.7
115°	447.9	450.9	453.9	456.8	459.7	463.3	467.7	472.0	476.4	480.7	400.5
117.5°	504.2	507.5	510.8	514.0	517.4	520.5	523.5	526.4	529.5	532.4	513.0
120°	545.4	548.0	550.5	553.1	555.7	558.6	561.7	564.8	567.9	571.0	573.2
122.5°	580.2	582.9	585.7	588.4	591.2	594.3	597.6	601.0	604.4	607.8	609.0
125°	633.3	635.6	637.9	640.1	642.4	645.1	648.4	651.8	655.0	658.3	659.5
127.5°	681.5	684.0	686.5	689.0	691.5	694.0	696.4	698.9	701.3	703.8	705.6
130°	712.1	714.9	717.6	720.3	723.1	725.5	727.3	729.3	731.2	733.1	735.0
132.5°	743.2	745.6	748.0	750.2	752.6	754.7	756.7	758.6	760.4	762.4	764.0
135°	783.7	786.5	789.3	792.1	794.8	797.0	798.5	800.1	801.6	803.2	804.9
137.5°	824.7	826.6	828.6	830.5	832.4	834.3	836.1	837.8	839.6	841.4	843.1
140°	851.5	852.9	854.3	855.7	857.0	858.7	860.5	862.5	864.4	866.3	867.9
142.5°	873.9	875.1	876.4	877.7	878.9	880.6	882.8	885.0	887.2	889.3	890.8
145°	909.1	909.0	908.8	908.7	908.5	909.9	912.8	915.7	918.7	921.6	922.8
147.5°	939.9	939.1	938.5	937.8	937.2	938.3	941.3	944.1	947.1	950.0	950.9
150°	959.8	958.5	957.3	956.2	955.0	955.7	958.5	961.2	964.0	966.8	967.8
152.5°	976.6	975.3	973.9	972.6	971.2	971.8	974.4	977.1	979.7	982.4	983.4
155°	1001.1	999.5	997.9	996.4	994.8	995.1	997.2	999.2	1001.4	1003.4	1004.4
157.5°	1020.3	1019.0	1017.6	1016.3	1015.0	1015.0	1016.5	1018.0	1019.4	1020.8	1022.1
160°	1031.4	1030.5	1029.4	1028.3	1027.3	1027.3	1028.3	1029.4	1030.5	1031.4	1032.5
162.5°	1041.5	1040.4	1039.3	1038.3	1037.3	1037.2	1038.1	1039.0	1039.9	1040.8	1042.0
165°	1054.8	1053.8	1052.7	1051.7	1050.7	1050.4	1050.9	1051.4	1052.0	1052.5	1053.7
167.5°	1064.8	1063.7	1062.7	1061.7	1060.6	1060.4	1060.9	1061.4	1061.8	1062.3	1063.5
170°	1070.4	1069.3	1068.4	1067.3	1066.2	1065.9	1066.2	1066.6	1067.0	1067.3	1068.5
172.5°	1074.2	1073.1	1072.0	1071.1	1070.0	1069.7	1070.0	1070.3	1070.7	1071.1	1072.3
175°	1079.0	1077.7	1076.5	1075.4	1074.2	1073.7	1074.1	1074.4	1074.7	1075.1	1076.3
177.5°	1079.8	1078.8	1077.8	1076.8	1075.9	1075.5	1075.6	1075.7	1075.9	1076.0	1077.0
180°	1076.6	1076.6	1076.6	1076.6	1076.6	1076.6	1076.6	1076.6	1076.6	1076.6	1076.6



TEST NUMBER: P331855-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6
2.5°	1374.1	1376.3	1378.6	1379.4	1379.0	1378.6	1378.1	1377.7
5°	1363.2	1365.7	1368.2	1369.0	1368.2	1367.3	1366.5	1365.7
7.5°	1341.1	1341.8	1342.6	1342.2	1340.8	1339.3	1337.9	1336.4
10°	1319.0	1318.2	1317.4	1316.1	1314.4	1312.8	1311.1	1309.5
12.5°	1293.7	1292.2	1290.7	1288.6	1285.8	1283.0	1280.3	1277.5
15°	1246.4	1241.1	1235.8	1231.8	1229.1	1226.3	1223.5	1220.7
17.5°	1192.9	1186.7	1180.4	1174.8	1170.1	1165.3	1160.5	1155.8
20°	1155.6	1148.7	1141.7	1135.2	1129.1	1123.0	1116.9	1110.8
22.5°	1114.7	1105.7	1096.7	1090.0	1085.5	1080.9	1076.4	1071.8
25°	1046.8	1035.4	1024.0	1016.3	1012.0	1007.9	1003.7	999.6
27.5°	982.0	968.7	955.4	945.5	938.9	932.3	925.7	919.1
30°	936.3	922.1	907.9	897.2	889.7	882.2	874.7	867.2
32.5°	890.3	874.2	857.9	846.4	839.4	832.3	825.2	818.2
35°	818.4	801.0	783.4	771.6	765.5	759.4	753.3	747.2
37.5°	748.4	729.1	709.8	696.7	689.7	682.7	675.7	668.7
40°	701.5	681.8	662.1	648.7	641.4	634.1	627.0	619.7
42.5°	654.2	633.8	613.4	599.7	592.7	585.7	578.8	571.8
45°	585.3	565.6	545.8	532.7	526.0	519.3	512.7	506.1
47.5°	518.3	498.7	479.1	466.3	460.2	454.2	448.1	442.1
50°	475.2	456.1	436.9	424.4	418.6	412.7	406.9	401.0
52.5°	434.6	416.0	397.6	385.6	380.3	374.9	369.5	364.1
55°	372.8	356.1	339.4	328.5	323.2	317.9	312.7	307.4
57.5°	316.6	301.3	286.0	276.1	271.7	267.3	262.9	258.4
60°	277.8	263.7	249.5	240.2	235.7	231.3	226.8	222.4
62.5°	244.2	230.6	217.2	209.0	206.4	203.7	201.1	198.4
65°	198.5	189.1	179.6	174.5	173.7	172.8	172.0	171.2
67.5°	160.3	156.0	151.6	149.0	148.1	147.2	146.3	145.4
70°	139.4	136.6	133.9	131.9	130.8	129.6	128.6	127.4
72.5°	121.3	119.0	116.6	115.1	114.5	113.8	113.1	112.4
75°	96.0	94.2	92.2	91.1	90.8	90.5	90.3	89.9
77.5°	72.7	71.7	70.5	69.7	69.3	68.9	68.4	68.0
80°	57.7	56.7	55.5	55.0	55.0	55.0	55.0	55.0
82.5°	43.6	43.0	42.3	42.0	42.0	42.0	42.0	42.0
85°	23.7	23.7	23.7	23.7	23.7	23.7	23.7	23.7
87.5°	11.0	10.9	10.9	10.9	11.0	11.1	11.2	11.2
90°	17.3	18.2	19.1	19.6	20.0	20.3	20.7	21.0
92.5°	19.0	19.4	19.9	20.2	20.4	20.6	20.8	21.0
95°	32.1	33.0	33.8	34.2	34.0	33.8	33.7	33.5
97.5°	42.1	42.7	43.5	43.9	44.1	44.3	44.5	44.7
100°	47.2	48.6	50.0	50.8	51.1	51.5	51.9	52.2
102.5°	49.2	51.0	52.8	54.0	54.5	55.0	55.4	55.9
105°	51.4	53.2	55.1	56.4	57.2	57.8	58.5	59.2
107.5°	62.6	60.7	58.8	58.1	58.9	59.5	60.3	60.9
110°	101.7	84.4	67.1	58.8	59.4	60.2	60.8	61.6



TEST NUMBER: P331855-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	217.5	154.4	91.2	59.9	60.5	61.1	61.6	62.2
115°	320.3	240.2	160.0	113.7	101.3	88.8	76.3	63.9
117.5°	493.6	474.3	454.9	424.7	383.7	342.8	301.8	260.8
120°	575.2	577.2	579.4	568.7	545.4	522.0	498.6	475.2
122.5°	610.3	611.6	612.8	611.1	606.6	602.1	597.5	593.0
125°	660.7	661.9	663.2	664.0	664.6	665.0	665.5	666.1
127.5°	707.4	709.1	710.9	711.8	711.9	712.0	712.1	712.2
130°	736.9	738.8	740.7	741.6	741.4	741.2	741.0	740.9
132.5°	765.6	767.3	768.9	769.6	769.4	769.2	769.1	768.9
135°	806.7	808.4	810.1	810.8	810.5	810.1	809.8	809.4
137.5°	844.7	846.4	848.2	848.7	848.2	847.5	846.9	846.4
140°	869.4	871.0	872.5	872.9	872.0	871.1	870.3	869.4
142.5°	892.2	893.6	895.0	895.3	894.5	893.6	892.8	891.9
145°	924.1	925.3	926.4	926.7	925.8	924.9	924.1	923.2
147.5°	951.8	952.7	953.6	953.7	952.9	952.2	951.5	950.7
150°	968.9	969.9	970.9	971.0	970.2	969.3	968.4	967.6
152.5°	984.5	985.5	986.5	986.5	985.4	984.2	983.1	981.9
155°	1005.5	1006.5	1007.5	1007.4	1006.0	1004.6	1003.2	1001.8
157.5°	1023.2	1024.4	1025.6	1025.5	1024.1	1022.8	1021.4	1020.1
160°	1033.6	1034.5	1035.6	1035.5	1034.3	1033.1	1031.9	1030.7
162.5°	1043.2	1044.3	1045.5	1045.4	1043.8	1042.4	1040.9	1039.4
165°	1054.9	1056.1	1057.4	1057.4	1056.1	1054.9	1053.7	1052.5
167.5°	1064.7	1065.9	1067.1	1067.0	1065.4	1063.9	1062.3	1060.8
170°	1069.8	1070.9	1072.1	1072.0	1070.4	1068.9	1067.3	1065.8
172.5°	1073.4	1074.6	1075.9	1075.7	1074.2	1072.6	1071.1	1069.5
175°	1077.5	1078.7	1079.9	1079.7	1077.9	1076.2	1074.5	1072.8
177.5°	1078.0	1078.9	1079.9	1079.8	1078.5	1077.3	1076.0	1074.8
180°	1076.6	1076.6	1076.6	1076.6	1076.6	1076.6	1076.6	1076.6

(END OF REPORT)