

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331856-930

Luminaire Tested: **S122RDIW-S1005D970U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331856-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S1005D970U930-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 970 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5579.8 lumens
Efficiency: N/A
Efficacy: 82.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 67.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331856-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

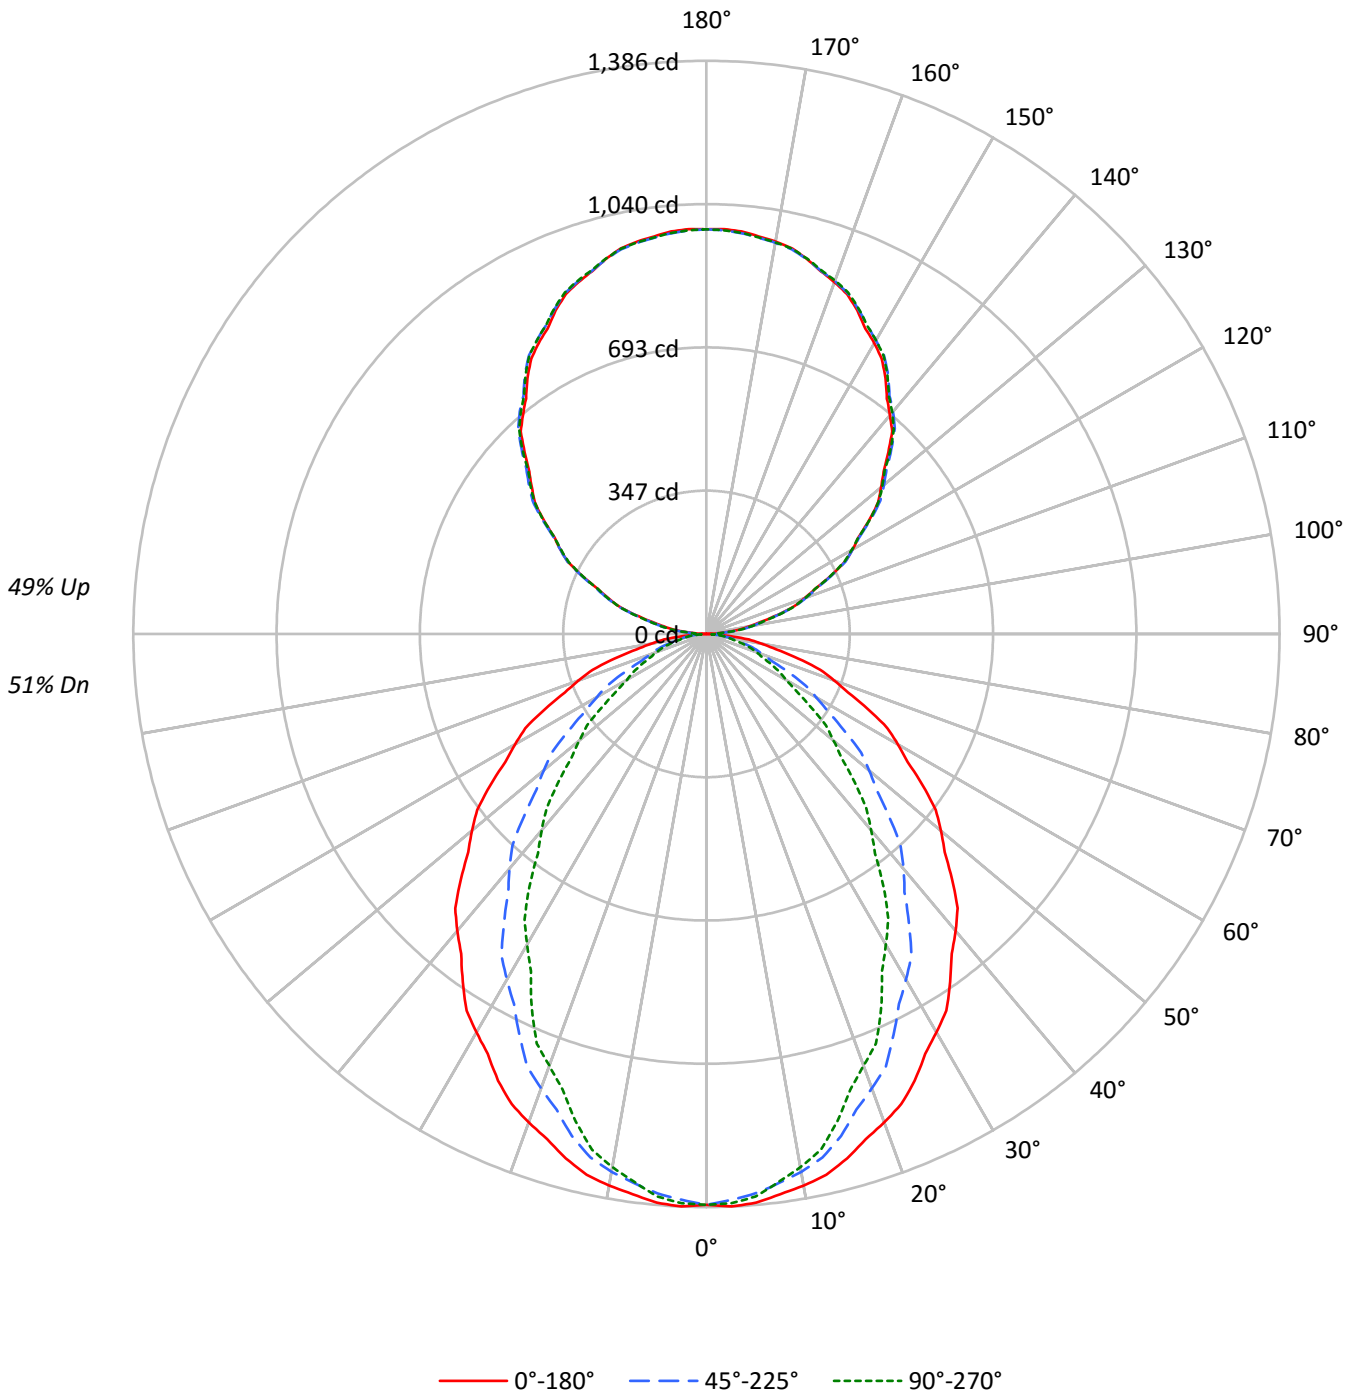



TEST NUMBER: P331856-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51
1	98	94	91	87	91	87	84	81	74	72	70	62	61	59	51	50	49	44
2	90	83	77	72	83	77	72	67	66	62	59	55	53	50	46	44	42	38
3	82	73	66	61	76	68	62	57	58	54	50	49	46	43	41	38	36	32
4	76	65	58	52	70	61	54	49	52	47	43	44	40	37	37	34	32	28
5	70	58	50	45	64	54	47	42	47	41	37	40	36	33	33	30	28	25
6	64	53	45	39	59	49	42	37	42	37	33	36	32	29	30	27	25	22
7	60	48	40	34	55	45	38	33	39	33	29	33	29	26	28	25	22	20
8	55	43	36	31	51	41	34	29	35	30	26	30	26	23	26	23	20	18
9	52	40	32	27	48	37	31	26	33	27	23	28	24	21	24	21	18	16
10	48	36	29	25	45	34	28	24	30	25	21	26	22	19	22	19	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	22291	22291	22291
5°	22376	22013	22135
10°	22207	21653	21469
15°	21951	21010	20404
20°	21596	20094	19086
25°	21235	19053	17808
30°	20734	17984	16168
35°	20243	16821	14728
40°	19751	15616	13061
45°	19173	14266	11556
50°	18580	12901	10073
55°	17973	11431	8653
60°	17270	9884	7182
65°	16466	8306	6541
70°	15512	6845	6014
75°	14342	6238	5608
80°	12664	5579	5114
85°	9948	4390	4390



TEST NUMBER: P331856-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	129.2	2.3
10°-20°	354.8	6.4
20°-30°	498.3	8.9
30°-40°	543.4	9.7
40°-50°	499.6	9.0
50°-60°	392.4	7.0
60°-70°	255.8	4.6
70°-80°	131.9	2.4
80°-90°	38.1	0.7
90°-100°	62.0	1.1
100°-110°	192.6	3.5
110°-120°	329.2	5.9
120°-130°	432.9	7.8
130°-140°	485.9	8.7
140°-150°	476.4	8.5
150°-160°	399.6	7.2
160°-170°	265.0	4.7
170°-180°	92.6	1.7
0°-30°	982.4	17.6
0°-40°	1525.7	27.3
0°-60°	2417.7	43.3
0°-90°	2843.6	51.0
90°-120°	583.8	10.5
90°-150°	1979.0	35.5
90°-180°	2736.0	49.0
0°-180°	5579.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1381	1381	1381	1381	1381	
5°	1381	1374	1358	1369	1366	131
15°	1313	1298	1257	1234	1221	370
25°	1192	1150	1070	1020	1000	548
35°	1027	961	853	778	747	642
45°	840	753	625	539	506	648
55°	638	539	406	334	307	570
65°	431	329	217	177	171	427
75°	230	145	100	92	90	243
85°	54	29	24	24	24	63
90°	1	11	29	27	28	4
95°	43	51	53	53	51	49
105°	178	180	182	183	183	188
115°	330	335	334	333	330	327
125°	481	488	486	483	482	429
135°	622	630	632	632	629	480
145°	755	760	766	766	763	471
155°	863	865	868	872	870	397
165°	939	938	938	943	940	265
175°	977	974	973	978	974	93
180°	978	978	978	978	978	



TEST NUMBER: P331856-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6
2.5°	1385.7	1384.5	1383.4	1382.3	1381.2	1379.4	1377.0	1374.6	1372.1	1369.7	1371.9
5°	1380.6	1379.2	1377.9	1376.5	1375.1	1372.6	1369.0	1365.4	1361.8	1358.2	1360.7
7.5°	1366.4	1364.7	1363.0	1361.2	1359.5	1356.6	1352.3	1348.1	1343.9	1339.7	1340.4
10°	1354.5	1352.5	1350.5	1348.6	1346.6	1342.9	1337.3	1331.8	1326.2	1320.7	1319.9
12.5°	1339.5	1337.0	1334.6	1332.3	1329.9	1325.1	1318.0	1310.9	1303.8	1296.7	1295.2
15°	1313.2	1310.1	1307.1	1304.0	1301.0	1294.7	1285.3	1275.9	1266.4	1256.9	1251.7
17.5°	1280.9	1276.3	1271.6	1267.0	1262.3	1253.9	1241.8	1229.7	1217.6	1205.5	1199.2
20°	1256.9	1251.4	1245.9	1240.3	1234.8	1225.1	1211.1	1197.3	1183.4	1169.5	1162.5
22.5°	1230.9	1224.7	1218.5	1212.4	1206.1	1195.1	1179.5	1163.8	1148.2	1132.5	1123.6
25°	1192.0	1183.1	1174.2	1165.3	1156.4	1142.9	1124.5	1106.2	1087.9	1069.5	1058.2
27.5°	1145.0	1135.4	1125.7	1116.1	1106.4	1091.2	1070.6	1049.9	1029.2	1008.6	995.3
30°	1112.1	1101.5	1091.0	1080.4	1069.8	1053.4	1031.2	1009.0	986.8	964.6	950.4
32.5°	1080.0	1067.7	1055.4	1043.1	1030.7	1013.3	990.6	967.9	945.3	922.6	906.4
35°	1027.0	1012.9	998.7	984.6	970.5	951.1	926.7	902.3	877.8	853.4	835.9
37.5°	974.1	958.5	943.0	927.4	911.9	891.1	865.0	839.0	812.9	786.9	767.7
40°	937.1	920.5	903.8	887.1	870.5	848.6	821.7	794.8	767.8	740.9	721.2
42.5°	899.1	881.6	864.1	846.4	828.9	806.2	778.4	750.6	722.8	695.0	674.6
45°	839.7	821.0	802.4	783.8	765.2	741.4	712.2	683.1	653.9	624.8	605.0
47.5°	781.6	762.0	742.2	722.5	702.8	677.9	647.8	617.7	587.6	557.5	537.9
50°	739.7	720.0	700.3	680.5	660.8	635.7	605.2	574.6	544.0	513.6	494.4
52.5°	698.7	678.1	657.5	636.9	616.3	591.1	561.2	531.3	501.4	471.6	453.1
55°	638.5	616.9	595.2	573.5	551.9	526.0	496.0	466.0	436.1	406.1	389.4
57.5°	576.7	554.6	532.3	510.1	487.9	462.4	433.6	404.7	375.9	347.1	331.8
60°	534.8	512.6	490.3	468.1	445.9	420.5	391.9	363.3	334.7	306.1	292.0
62.5°	493.8	471.6	449.4	427.1	405.0	380.2	352.9	325.6	298.4	271.2	257.6
65°	431.0	408.5	386.1	363.6	341.1	317.4	292.4	267.4	242.4	217.4	208.0
67.5°	370.6	348.3	326.0	303.6	281.3	258.9	236.4	213.9	191.4	168.9	164.6
70°	328.6	307.0	285.3	263.7	242.0	221.6	202.4	183.3	164.1	145.0	142.2
72.5°	288.6	267.8	247.1	226.3	205.5	187.4	172.1	156.7	141.3	126.0	123.6
75°	229.9	210.4	191.0	171.6	152.1	137.7	128.2	118.9	109.4	100.0	98.0
77.5°	172.2	155.2	138.1	121.1	104.0	93.2	88.6	84.1	79.5	75.0	73.9
80°	136.2	122.1	107.9	93.7	79.6	71.1	68.3	65.6	62.8	60.0	58.9
82.5°	103.2	92.1	81.1	70.0	59.0	52.5	50.6	48.8	46.9	45.0	44.4
85°	53.7	47.9	42.1	36.2	30.4	27.1	26.3	25.4	24.5	23.7	23.7
87.5°	16.1	14.8	13.5	12.1	10.8	10.5	11.3	12.1	13.0	13.8	13.5
90°	0.8	3.0	5.2	7.4	9.6	12.7	16.8	20.8	24.9	28.9	28.5
92.5°	14.7	16.3	17.9	19.6	21.2	22.4	23.4	24.4	25.3	26.3	26.3
95°	43.0	44.8	46.6	48.4	50.3	51.4	51.8	52.1	52.5	52.8	52.8
97.5°	78.4	80.1	81.7	83.3	84.9	86.1	86.7	87.5	88.1	88.9	88.9
100°	104.8	106.3	107.8	109.3	110.7	111.8	112.3	112.8	113.4	114.0	114.0
102.5°	132.6	133.8	134.9	136.2	137.3	138.3	138.9	139.7	140.3	141.0	141.2
105°	177.6	178.1	178.6	179.2	179.8	180.2	180.6	180.9	181.3	181.6	182.1
107.5°	222.8	223.6	224.4	225.2	226.0	226.4	226.4	226.4	226.4	226.4	226.6
110°	251.8	253.0	254.0	255.2	256.2	256.8	256.8	256.8	256.8	256.8	256.8



TEST NUMBER: P331856-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	283.6	284.7	285.8	286.9	288.0	288.5	288.3	288.1	288.0	287.9	287.4
115°	330.3	331.4	332.5	333.6	334.7	335.1	334.7	334.4	333.9	333.6	333.5
117.5°	376.9	378.4	379.8	381.3	382.8	382.9	382.0	380.9	379.9	378.9	378.5
120°	408.0	409.4	410.9	412.4	413.8	413.8	412.4	410.9	409.4	408.0	408.0
122.5°	436.3	438.1	439.9	441.6	443.4	443.8	442.7	441.7	440.7	439.6	439.2
125°	480.6	482.2	483.9	485.6	487.2	487.8	487.2	486.7	486.1	485.6	485.0
127.5°	523.7	525.8	527.9	530.0	532.1	532.8	532.1	531.5	530.8	530.2	529.5
130°	550.8	553.2	555.5	558.0	560.4	561.3	561.0	560.6	560.3	559.9	559.5
132.5°	581.1	583.1	585.1	587.0	589.0	590.0	590.0	590.1	590.2	590.3	589.5
135°	621.8	623.9	625.8	627.9	629.9	631.0	631.4	631.8	632.2	632.5	632.3
137.5°	664.6	666.3	667.9	669.5	671.2	672.3	672.7	673.2	673.7	674.2	674.0
140°	690.3	692.0	693.7	695.3	696.9	698.2	699.2	700.1	701.0	701.9	701.9
142.5°	716.8	718.4	720.1	721.7	723.4	724.6	725.1	725.8	726.4	727.0	727.2
145°	754.7	756.0	757.3	758.6	759.9	761.1	762.2	763.3	764.4	765.5	765.6
147.5°	788.6	790.2	791.7	793.2	794.8	795.9	796.6	797.4	798.1	798.8	799.2
150°	811.7	812.9	813.9	815.1	816.1	817.1	817.8	818.6	819.3	820.0	820.5
152.5°	832.3	833.3	834.5	835.5	836.7	837.6	838.5	839.4	840.2	841.1	841.8
155°	862.9	863.5	864.1	864.6	865.1	865.7	866.3	866.8	867.3	867.9	868.8
157.5°	889.2	889.6	889.9	890.3	890.6	891.0	891.4	891.7	892.0	892.3	893.6
160°	905.1	905.4	905.8	906.1	906.5	906.8	907.0	907.2	907.3	907.5	908.7
162.5°	919.6	919.7	919.7	919.8	919.9	920.0	920.2	920.4	920.6	920.7	922.0
165°	938.9	938.7	938.6	938.3	938.2	938.1	938.1	938.1	938.1	938.1	939.4
167.5°	955.1	954.6	954.0	953.4	952.9	952.6	952.6	952.5	952.5	952.4	953.7
170°	963.7	963.1	962.6	962.1	961.5	961.2	960.9	960.7	960.6	960.4	961.6
172.5°	969.6	969.1	968.5	968.0	967.4	967.0	966.9	966.7	966.5	966.3	967.6
175°	976.9	976.3	975.8	975.3	974.7	974.2	973.9	973.5	973.1	972.7	974.0
177.5°	979.9	979.4	979.0	978.5	978.1	977.7	977.5	977.1	976.9	976.6	977.5
180°	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5



TEST NUMBER: P331856-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6	1380.6
2.5°	1374.1	1376.3	1378.6	1379.4	1379.0	1378.6	1378.1	1377.7
5°	1363.2	1365.7	1368.2	1369.0	1368.2	1367.3	1366.5	1365.7
7.5°	1341.1	1341.8	1342.6	1342.2	1340.8	1339.3	1337.9	1336.4
10°	1319.0	1318.2	1317.4	1316.1	1314.4	1312.8	1311.1	1309.5
12.5°	1293.7	1292.2	1290.7	1288.6	1285.8	1283.0	1280.3	1277.5
15°	1246.4	1241.1	1235.8	1231.8	1229.1	1226.3	1223.5	1220.7
17.5°	1192.9	1186.7	1180.4	1174.8	1170.1	1165.3	1160.5	1155.8
20°	1155.6	1148.7	1141.7	1135.2	1129.1	1123.0	1116.9	1110.8
22.5°	1114.7	1105.7	1096.7	1090.0	1085.5	1080.9	1076.4	1071.8
25°	1046.8	1035.4	1024.0	1016.3	1012.0	1007.9	1003.7	999.6
27.5°	982.0	968.7	955.4	945.5	938.9	932.3	925.7	919.1
30°	936.3	922.1	907.9	897.2	889.7	882.2	874.7	867.2
32.5°	890.3	874.2	857.9	846.4	839.4	832.3	825.2	818.2
35°	818.4	801.0	783.4	771.6	765.5	759.4	753.3	747.2
37.5°	748.4	729.1	709.8	696.7	689.7	682.7	675.7	668.7
40°	701.5	681.8	662.1	648.7	641.4	634.1	627.0	619.7
42.5°	654.2	633.8	613.4	599.7	592.7	585.7	578.8	571.8
45°	585.3	565.6	545.8	532.7	526.0	519.3	512.7	506.1
47.5°	518.3	498.7	479.1	466.3	460.2	454.2	448.1	442.1
50°	475.2	456.1	436.9	424.4	418.6	412.7	406.9	401.0
52.5°	434.6	416.0	397.6	385.6	380.3	374.9	369.5	364.1
55°	372.8	356.1	339.4	328.5	323.2	317.9	312.7	307.4
57.5°	316.6	301.3	286.0	276.1	271.7	267.3	262.9	258.4
60°	277.8	263.7	249.5	240.2	235.7	231.3	226.8	222.4
62.5°	244.2	230.6	217.2	209.0	206.4	203.7	201.1	198.4
65°	198.5	189.1	179.6	174.5	173.7	172.8	172.0	171.2
67.5°	160.3	156.0	151.6	149.0	148.1	147.2	146.3	145.4
70°	139.4	136.6	133.9	131.9	130.8	129.6	128.6	127.4
72.5°	121.3	119.0	116.6	115.1	114.5	113.8	113.1	112.4
75°	96.0	94.2	92.2	91.1	90.8	90.5	90.3	89.9
77.5°	72.7	71.7	70.5	69.7	69.3	68.9	68.4	68.0
80°	57.7	56.7	55.5	55.0	55.0	55.0	55.0	55.0
82.5°	43.6	43.0	42.3	42.0	42.0	42.0	42.0	42.0
85°	23.7	23.7	23.7	23.7	23.7	23.7	23.7	23.7
87.5°	13.2	12.9	12.6	12.5	12.5	12.6	12.6	12.6
90°	28.1	27.8	27.4	27.3	27.6	27.7	27.9	28.0
92.5°	26.4	26.5	26.6	26.6	26.7	26.7	26.7	26.7
95°	52.8	52.8	52.8	52.7	52.3	51.9	51.5	51.2
97.5°	88.9	88.9	88.9	88.9	88.8	88.8	88.7	88.7
100°	114.0	114.0	114.0	113.9	113.7	113.5	113.3	113.2
102.5°	141.4	141.5	141.6	141.6	141.5	141.2	141.0	140.9
105°	182.4	182.8	183.1	183.4	183.4	183.4	183.4	183.4
107.5°	226.7	226.9	227.0	226.7	225.8	224.9	224.1	223.3
110°	256.8	256.8	256.8	256.6	256.0	255.4	254.9	254.4



TEST NUMBER: P331856-930

CATALOG NUMBER: S122RDIW-S1005D970U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	287.0	286.6	286.1	285.7	285.3	284.9	284.5	284.1
115°	333.2	333.0	332.9	332.5	332.0	331.4	330.8	330.3
117.5°	378.0	377.6	377.1	376.6	376.1	375.5	375.0	374.4
120°	408.0	408.0	408.0	407.6	407.1	406.6	406.0	405.4
122.5°	438.8	438.3	437.9	437.5	437.1	436.7	436.3	435.9
125°	484.5	483.9	483.4	483.0	482.8	482.7	482.4	482.2
127.5°	528.8	528.2	527.5	526.8	526.3	525.7	525.1	524.6
130°	559.1	558.8	558.4	557.8	557.1	556.4	555.6	554.9
132.5°	588.6	587.8	587.0	586.4	585.8	585.1	584.6	584.0
135°	632.2	632.0	631.8	631.4	630.9	630.3	629.8	629.2
137.5°	673.8	673.8	673.6	673.1	672.4	671.6	670.9	670.2
140°	701.9	701.9	701.9	701.6	700.8	700.1	699.4	698.6
142.5°	727.3	727.5	727.6	727.3	726.6	725.9	725.1	724.4
145°	765.9	766.1	766.2	766.0	765.2	764.5	763.8	763.0
147.5°	799.6	800.1	800.5	800.3	799.6	798.9	798.3	797.5
150°	821.1	821.7	822.2	822.2	821.7	821.1	820.5	820.0
152.5°	842.5	843.3	843.9	843.9	843.3	842.5	841.8	841.1
155°	869.8	870.7	871.6	871.7	871.2	870.7	870.1	869.5
157.5°	894.9	896.1	897.3	897.5	896.7	895.8	894.9	894.0
160°	909.7	910.9	911.9	912.2	911.4	910.7	910.0	909.2
162.5°	923.2	924.5	925.8	925.9	925.0	924.1	923.2	922.4
165°	940.7	941.9	943.2	943.4	942.5	941.6	940.7	939.7
167.5°	955.0	956.3	957.6	957.7	956.8	955.9	954.9	954.0
170°	963.0	964.3	965.6	965.6	964.5	963.4	962.3	961.2
172.5°	968.9	970.2	971.4	971.6	970.5	969.4	968.2	967.2
175°	975.3	976.6	977.9	978.0	976.9	975.8	974.7	973.6
177.5°	978.4	979.2	980.1	980.1	979.2	978.4	977.5	976.6
180°	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5

(END OF REPORT)