

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331816-930

Luminaire Tested: **S122RDIW-S675D970U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331816-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIW-S675D970U930-4F0-1E-UDD-F1  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 970 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4631.7 lumens  
Efficiency: N/A  
Efficacy: 88.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 52.6  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331816-930

CATALOG NUMBER: S122RDIW-S675D970U930-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

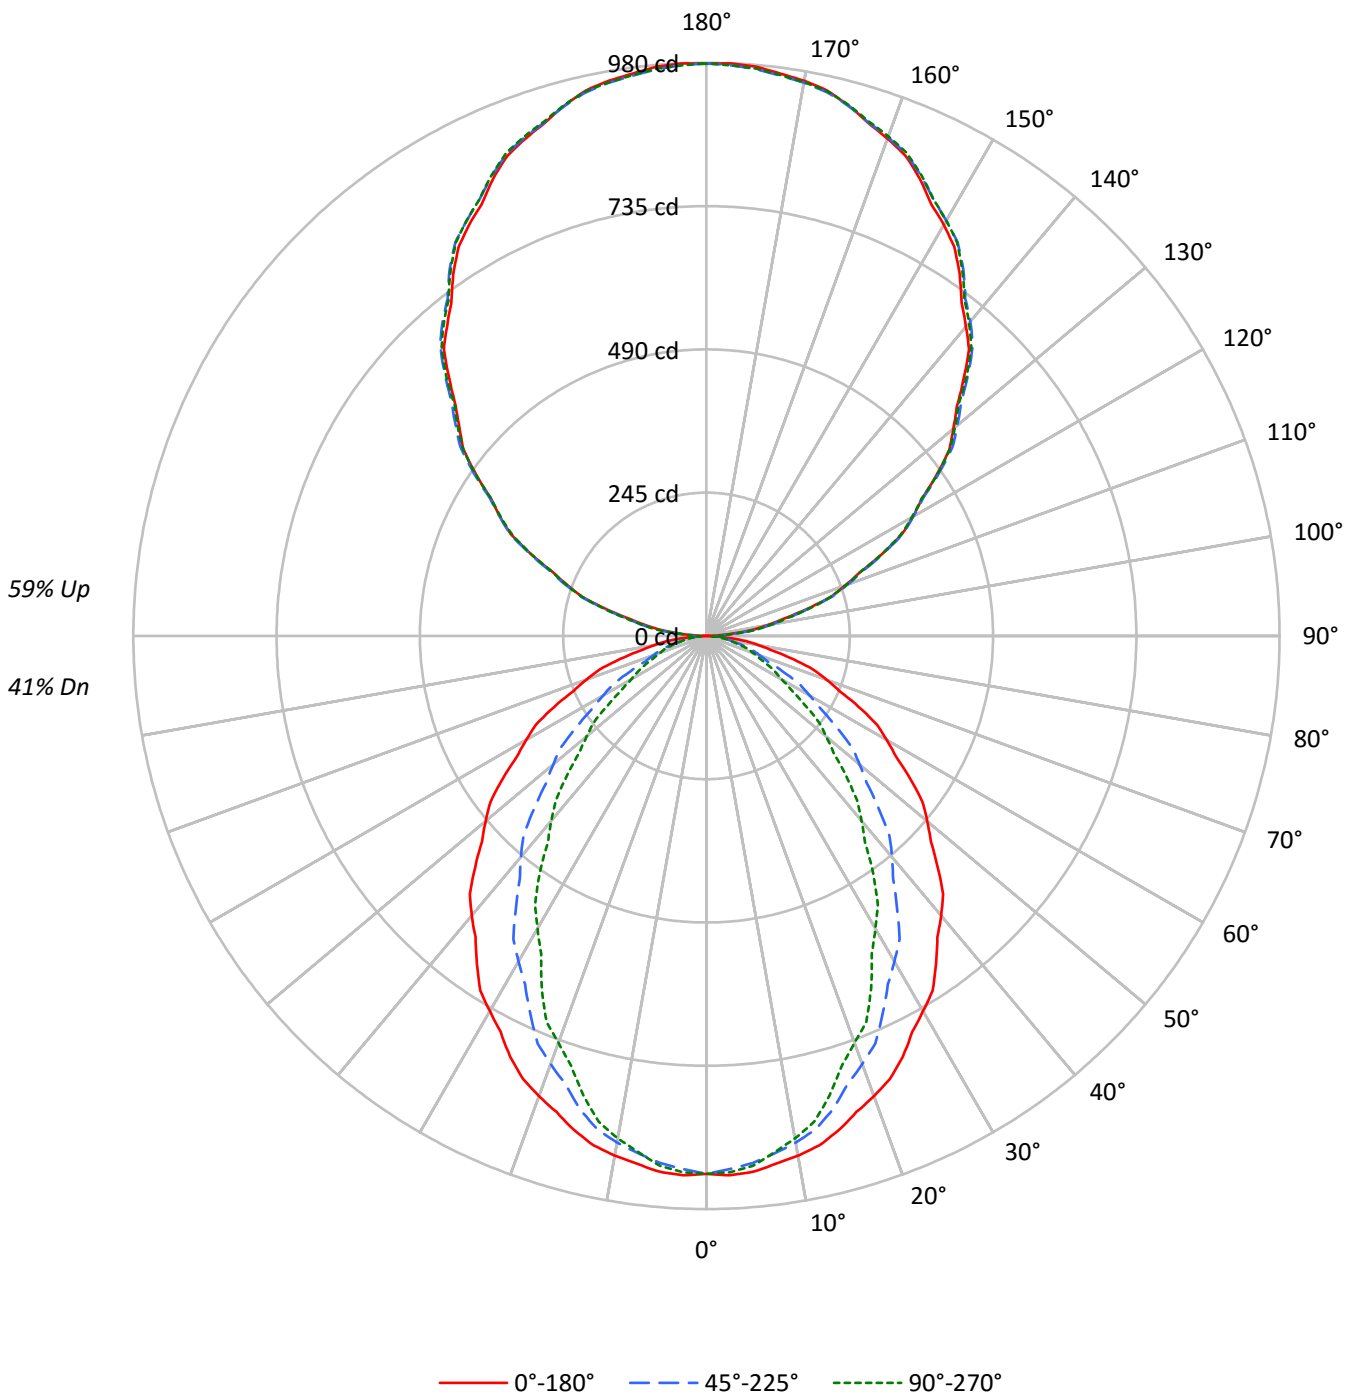



TEST NUMBER: P331816-930

CATALOG NUMBER: S122RDIW-S675D970U930-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	48	48	48	41
1	96	92	88	85	87	84	81	78	69	67	65	55	54	53	43	42	41	35
2	88	81	75	70	80	74	69	65	61	57	54	49	47	45	38	37	35	30
3	80	71	64	59	73	65	59	54	54	50	46	44	41	38	34	32	30	26
4	74	63	56	50	67	58	52	46	48	43	40	39	36	33	31	28	26	23
5	68	57	49	43	62	52	45	40	43	38	34	35	32	29	28	25	23	20
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	25	23	21	18
7	58	46	38	33	53	42	36	31	36	30	27	29	25	23	23	21	19	16
8	54	42	34	29	49	39	32	27	33	27	24	27	23	20	21	19	17	14
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	20	17	15	13
10	47	35	28	23	43	32	26	22	28	23	19	23	19	17	18	16	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	14849	14849	14849
5°	14906	14663	14744
10°	14791	14423	14300
15°	14621	13996	13593
20°	14387	13385	12713
25°	14145	12691	11863
30°	13811	11979	10769
35°	13484	11203	9810
40°	13156	10404	8701
45°	12771	9501	7695
50°	12376	8593	6712
55°	11972	7614	5762
60°	11502	6584	4782
65°	10968	5532	4359
70°	10334	4556	4008
75°	9551	4155	3737
80°	8433	3710	3403
85°	6632	2927	2927



TEST NUMBER: P331816-930

CATALOG NUMBER: S122RDIW-S675D970U930-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	86.1	1.9
10°-20°	236.4	5.1
20°-30°	331.9	7.2
30°-40°	361.9	7.8
40°-50°	332.8	7.2
50°-60°	261.4	5.6
60°-70°	170.4	3.7
70°-80°	87.9	1.9
80°-90°	26.7	0.6
90°-100°	62.0	1.3
100°-110°	192.6	4.2
110°-120°	329.2	7.1
120°-130°	432.9	9.3
130°-140°	485.9	10.5
140°-150°	476.4	10.3
150°-160°	399.6	8.6
160°-170°	265.0	5.7
170°-180°	92.6	2.0
0°-30°	654.4	14.1
0°-40°	1016.3	21.9
0°-60°	1610.5	34.8
0°-90°	1895.4	40.9
90°-120°	583.8	12.6
90°-150°	1979.0	42.7
90°-180°	2736.0	59.1
0°-180°	4631.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	920	920	920	920	920	
5°	920	915	905	912	910	87
15°	875	864	837	822	813	246
25°	794	766	712	680	666	365
35°	684	640	568	518	498	428
45°	559	502	416	359	337	432
55°	425	359	270	222	205	380
65°	287	219	145	118	114	285
75°	153	96	67	61	60	162
85°	36	19	16	16	16	42
90°	1	11	29	27	28	4
95°	43	51	53	53	51	49
105°	178	180	182	183	183	188
115°	330	335	334	333	330	327
125°	481	488	486	483	482	429
135°	622	630	632	632	629	480
145°	755	760	766	766	763	471
155°	863	865	868	872	870	397
165°	939	938	938	943	940	265
175°	977	974	973	978	974	93
180°	978	978	978	978	978	



TEST NUMBER: P331816-930

CATALOG NUMBER: S122RDIW-S675D970U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	919.7	919.7	919.7	919.7	919.7	919.7	919.7	919.7	919.7	919.7	919.7
2.5°	923.0	922.3	921.5	920.8	920.1	918.8	917.2	915.6	914.0	912.4	913.9
5°	919.7	918.8	917.9	916.9	916.0	914.4	911.9	909.5	907.1	904.7	906.4
7.5°	910.2	909.1	907.9	906.8	905.6	903.6	900.8	898.1	895.2	892.4	892.8
10°	902.2	900.9	899.6	898.3	897.0	894.5	890.8	887.1	883.5	879.7	879.2
12.5°	892.2	890.6	889.0	887.5	885.8	882.7	878.0	873.3	868.5	863.7	862.7
15°	874.7	872.7	870.7	868.6	866.6	862.4	856.1	849.9	843.6	837.3	833.8
17.5°	853.3	850.2	847.1	843.9	840.8	835.3	827.2	819.1	811.1	803.0	798.8
20°	837.3	833.6	829.9	826.2	822.5	816.0	806.7	797.5	788.3	779.0	774.4
22.5°	819.9	815.9	811.7	807.6	803.4	796.1	785.7	775.3	764.8	754.4	748.4
25°	794.0	788.1	782.2	776.2	770.4	761.2	749.1	736.9	724.6	712.4	704.8
27.5°	762.7	756.3	749.8	743.4	736.9	726.8	713.1	699.4	685.6	671.8	663.0
30°	740.8	733.7	726.7	719.7	712.7	701.7	686.9	672.1	657.3	642.5	633.1
32.5°	719.4	711.2	703.0	694.8	686.6	674.9	659.8	644.7	629.7	614.6	603.8
35°	684.1	674.7	665.3	655.8	646.5	633.6	617.3	601.0	584.7	568.4	556.8
37.5°	648.9	638.5	628.1	617.8	607.4	593.5	576.3	558.9	541.5	524.2	511.4
40°	624.2	613.1	602.0	590.9	579.8	565.3	547.4	529.5	511.5	493.6	480.5
42.5°	598.9	587.3	575.5	563.9	552.2	537.0	518.5	500.0	481.4	462.9	449.3
45°	559.3	546.9	534.5	522.1	509.7	493.8	474.4	455.0	435.5	416.1	403.0
47.5°	520.7	507.5	494.4	481.3	468.1	451.6	431.5	411.5	391.4	371.4	358.3
50°	492.7	479.6	466.4	453.3	440.2	423.5	403.1	382.8	362.4	342.1	329.3
52.5°	465.5	451.7	438.0	424.3	410.5	393.7	373.8	353.9	334.0	314.1	301.8
55°	425.3	410.9	396.5	382.0	367.6	350.4	330.4	310.5	290.5	270.5	259.4
57.5°	384.2	369.4	354.6	339.8	325.0	308.0	288.8	269.6	250.4	231.2	221.0
60°	356.2	341.4	326.6	311.9	297.0	280.1	261.1	242.0	223.0	203.9	194.4
62.5°	328.9	314.1	299.3	284.5	269.7	253.2	235.1	217.0	198.8	180.6	171.6
65°	287.1	272.1	257.1	242.2	227.2	211.4	194.8	178.1	161.4	144.8	138.5
67.5°	246.9	232.0	217.1	202.3	187.4	172.4	157.4	142.5	127.5	112.5	109.7
70°	218.9	204.5	190.0	175.6	161.2	147.6	134.9	122.1	109.3	96.5	94.7
72.5°	192.2	178.4	164.6	150.7	136.9	124.9	114.6	104.4	94.2	83.9	82.3
75°	153.1	140.2	127.3	114.3	101.3	91.7	85.4	79.2	72.9	66.6	65.3
77.5°	114.7	103.3	92.0	80.6	69.3	62.0	59.0	56.0	53.0	50.0	49.2
80°	90.7	81.3	71.8	62.5	53.0	47.4	45.5	43.6	41.8	39.9	39.2
82.5°	68.7	61.4	54.1	46.6	39.3	35.0	33.8	32.4	31.2	30.0	29.5
85°	35.8	31.9	28.0	24.1	20.2	18.0	17.4	17.0	16.4	15.8	15.8
87.5°	10.8	10.1	9.3	8.6	7.8	7.9	8.7	9.5	10.3	11.1	10.9
90°	0.8	3.0	5.2	7.4	9.6	12.7	16.8	20.8	24.9	28.9	28.5
92.5°	14.7	16.3	17.9	19.6	21.2	22.4	23.4	24.4	25.3	26.3	26.3
95°	43.0	44.8	46.6	48.4	50.3	51.4	51.8	52.1	52.5	52.8	52.8
97.5°	78.4	80.1	81.7	83.3	84.9	86.1	86.7	87.5	88.1	88.9	88.9
100°	104.8	106.3	107.8	109.3	110.7	111.8	112.3	112.8	113.4	114.0	114.0
102.5°	132.6	133.8	134.9	136.2	137.3	138.3	138.9	139.7	140.3	141.0	141.2
105°	177.6	178.1	178.6	179.2	179.8	180.2	180.6	180.9	181.3	181.6	182.1
107.5°	222.8	223.6	224.4	225.2	226.0	226.4	226.4	226.4	226.4	226.4	226.6
110°	251.8	253.0	254.0	255.2	256.2	256.8	256.8	256.8	256.8	256.8	256.8



TEST NUMBER: P331816-930

CATALOG NUMBER: S122RDIW-S675D970U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	283.6	284.7	285.8	286.9	288.0	288.5	288.3	288.1	288.0	287.9	287.4
115°	330.3	331.4	332.5	333.6	334.7	335.1	334.7	334.4	333.9	333.6	333.5
117.5°	376.9	378.4	379.8	381.3	382.8	382.9	382.0	380.9	379.9	378.9	378.5
120°	408.0	409.4	410.9	412.4	413.8	413.8	412.4	410.9	409.4	408.0	408.0
122.5°	436.3	438.1	439.9	441.6	443.4	443.8	442.7	441.7	440.7	439.6	439.2
125°	480.6	482.2	483.9	485.6	487.2	487.8	487.2	486.7	486.1	485.6	485.0
127.5°	523.7	525.8	527.9	530.0	532.1	532.8	532.1	531.5	530.8	530.2	529.5
130°	550.8	553.2	555.5	558.0	560.4	561.3	561.0	560.6	560.3	559.9	559.5
132.5°	581.1	583.1	585.1	587.0	589.0	590.0	590.0	590.1	590.2	590.3	589.5
135°	621.8	623.9	625.8	627.9	629.9	631.0	631.4	631.8	632.2	632.5	632.3
137.5°	664.6	666.3	667.9	669.5	671.2	672.3	672.7	673.2	673.7	674.2	674.0
140°	690.3	692.0	693.7	695.3	696.9	698.2	699.2	700.1	701.0	701.9	701.9
142.5°	716.8	718.4	720.1	721.7	723.4	724.6	725.1	725.8	726.4	727.0	727.2
145°	754.7	756.0	757.3	758.6	759.9	761.1	762.2	763.3	764.4	765.5	765.6
147.5°	788.6	790.2	791.7	793.2	794.8	795.9	796.6	797.4	798.1	798.8	799.2
150°	811.7	812.9	813.9	815.1	816.1	817.1	817.8	818.6	819.3	820.0	820.5
152.5°	832.3	833.3	834.5	835.5	836.7	837.6	838.5	839.4	840.2	841.1	841.8
155°	862.9	863.5	864.1	864.6	865.1	865.7	866.3	866.8	867.3	867.9	868.8
157.5°	889.2	889.6	889.9	890.3	890.6	891.0	891.4	891.7	892.0	892.3	893.6
160°	905.1	905.4	905.8	906.1	906.5	906.8	907.0	907.2	907.3	907.5	908.7
162.5°	919.6	919.7	919.7	919.8	919.9	920.0	920.2	920.4	920.6	920.7	922.0
165°	938.9	938.7	938.6	938.3	938.2	938.1	938.1	938.1	938.1	938.1	939.4
167.5°	955.1	954.6	954.0	953.4	952.9	952.6	952.6	952.5	952.5	952.4	953.7
170°	963.7	963.1	962.6	962.1	961.5	961.2	960.9	960.7	960.6	960.4	961.6
172.5°	969.6	969.1	968.5	968.0	967.4	967.0	966.9	966.7	966.5	966.3	967.6
175°	976.9	976.3	975.8	975.3	974.7	974.2	973.9	973.5	973.1	972.7	974.0
177.5°	979.9	979.4	979.0	978.5	978.1	977.7	977.5	977.1	976.9	976.6	977.5
180°	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5



TEST NUMBER: P331816-930

CATALOG NUMBER: S122RDIW-S675D970U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	919.7	919.7	919.7	919.7	919.7	919.7	919.7	919.7
2.5°	915.3	916.8	918.3	918.8	918.6	918.3	918.0	917.7
5°	908.0	909.7	911.3	911.9	911.3	910.8	910.3	909.7
7.5°	893.3	893.8	894.3	894.1	893.1	892.2	891.2	890.2
10°	878.6	878.1	877.5	876.7	875.5	874.5	873.3	872.2
12.5°	861.8	860.8	859.7	858.3	856.5	854.7	852.8	850.9
15°	830.3	826.7	823.2	820.5	818.7	816.8	815.0	813.2
17.5°	794.7	790.4	786.3	782.6	779.4	776.2	773.1	769.9
20°	769.8	765.2	760.5	756.2	752.1	748.0	744.0	739.9
22.5°	742.5	736.5	730.6	726.1	723.0	720.0	717.0	714.0
25°	697.2	689.7	682.1	676.9	674.2	671.4	668.6	665.9
27.5°	654.1	645.3	636.5	629.8	625.4	621.0	616.6	612.2
30°	623.7	614.2	604.8	597.6	592.6	587.6	582.6	577.6
32.5°	593.0	582.3	571.5	563.8	559.1	554.4	549.7	545.0
35°	545.2	533.5	521.9	514.0	509.9	505.8	501.8	497.7
37.5°	498.5	485.7	472.9	464.1	459.4	454.8	450.1	445.5
40°	467.2	454.1	441.0	432.0	427.2	422.4	417.6	412.8
42.5°	435.8	422.2	408.6	399.5	394.8	390.2	385.6	380.8
45°	389.9	376.7	363.6	354.8	350.4	345.9	341.5	337.0
47.5°	345.3	332.2	319.1	310.6	306.6	302.6	298.5	294.5
50°	316.6	303.8	291.1	282.7	278.8	274.9	271.1	267.2
52.5°	289.5	277.1	264.8	256.9	253.3	249.7	246.1	242.6
55°	248.3	237.2	226.1	218.8	215.3	211.7	208.2	204.7
57.5°	210.8	200.7	190.5	183.9	181.0	178.1	175.0	172.1
60°	185.1	175.6	166.2	160.0	157.0	154.1	151.1	148.1
62.5°	162.7	153.6	144.6	139.3	137.5	135.7	134.0	132.2
65°	132.2	126.0	119.7	116.3	115.7	115.1	114.5	114.1
67.5°	106.7	103.9	101.0	99.2	98.7	98.1	97.5	96.9
70°	92.9	91.0	89.1	87.9	87.1	86.3	85.6	84.9
72.5°	80.8	79.2	77.7	76.7	76.2	75.8	75.3	74.9
75°	64.0	62.7	61.4	60.7	60.5	60.3	60.1	59.9
77.5°	48.4	47.7	47.0	46.5	46.1	45.9	45.6	45.2
80°	38.5	37.7	37.0	36.6	36.6	36.6	36.6	36.6
82.5°	29.1	28.6	28.2	28.0	28.0	28.0	28.0	28.0
85°	15.8	15.8	15.8	15.8	15.8	15.8	15.8	15.8
87.5°	10.7	10.4	10.2	10.1	10.2	10.2	10.3	10.3
90°	28.1	27.8	27.4	27.3	27.6	27.7	27.9	28.0
92.5°	26.4	26.5	26.6	26.6	26.7	26.7	26.7	26.7
95°	52.8	52.8	52.8	52.7	52.3	51.9	51.5	51.2
97.5°	88.9	88.9	88.9	88.9	88.8	88.8	88.7	88.7
100°	114.0	114.0	114.0	113.9	113.7	113.5	113.3	113.2
102.5°	141.4	141.5	141.6	141.6	141.5	141.2	141.0	140.9
105°	182.4	182.8	183.1	183.4	183.4	183.4	183.4	183.4
107.5°	226.7	226.9	227.0	226.7	225.8	224.9	224.1	223.3
110°	256.8	256.8	256.8	256.6	256.0	255.4	254.9	254.4





TEST NUMBER: P331816-930

CATALOG NUMBER: S122RDIW-S675D970U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	287.0	286.6	286.1	285.7	285.3	284.9	284.5	284.1
115°	333.2	333.0	332.9	332.5	332.0	331.4	330.8	330.3
117.5°	378.0	377.6	377.1	376.6	376.1	375.5	375.0	374.4
120°	408.0	408.0	408.0	407.6	407.1	406.6	406.0	405.4
122.5°	438.8	438.3	437.9	437.5	437.1	436.7	436.3	435.9
125°	484.5	483.9	483.4	483.0	482.8	482.7	482.4	482.2
127.5°	528.8	528.2	527.5	526.8	526.3	525.7	525.1	524.6
130°	559.1	558.8	558.4	557.8	557.1	556.4	555.6	554.9
132.5°	588.6	587.8	587.0	586.4	585.8	585.1	584.6	584.0
135°	632.2	632.0	631.8	631.4	630.9	630.3	629.8	629.2
137.5°	673.8	673.8	673.6	673.1	672.4	671.6	670.9	670.2
140°	701.9	701.9	701.9	701.6	700.8	700.1	699.4	698.6
142.5°	727.3	727.5	727.6	727.3	726.6	725.9	725.1	724.4
145°	765.9	766.1	766.2	766.0	765.2	764.5	763.8	763.0
147.5°	799.6	800.1	800.5	800.3	799.6	798.9	798.3	797.5
150°	821.1	821.7	822.2	822.2	821.7	821.1	820.5	820.0
152.5°	842.5	843.3	843.9	843.9	843.3	842.5	841.8	841.1
155°	869.8	870.7	871.6	871.7	871.2	870.7	870.1	869.5
157.5°	894.9	896.1	897.3	897.5	896.7	895.8	894.9	894.0
160°	909.7	910.9	911.9	912.2	911.4	910.7	910.0	909.2
162.5°	923.2	924.5	925.8	925.9	925.0	924.1	923.2	922.4
165°	940.7	941.9	943.2	943.4	942.5	941.6	940.7	939.7
167.5°	955.0	956.3	957.6	957.7	956.8	955.9	954.9	954.0
170°	963.0	964.3	965.6	965.6	964.5	963.4	962.3	961.2
172.5°	968.9	970.2	971.4	971.6	970.5	969.4	968.2	967.2
175°	975.3	976.6	977.9	978.0	976.9	975.8	974.7	973.6
177.5°	978.4	979.2	980.1	980.1	979.2	978.4	977.5	976.6
180°	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5

(END OF REPORT)