

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331844-930

Luminaire Tested: **S122RDIW-S865D1440U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331844-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIW-S865D1440U930-4F0-1E-UDD-F1  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1440 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6537.2 lumens  
Efficiency: N/A  
Efficacy: 85.3 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 76.6  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331844-930

CATALOG NUMBER: S122RDIW-S865D1440U930-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

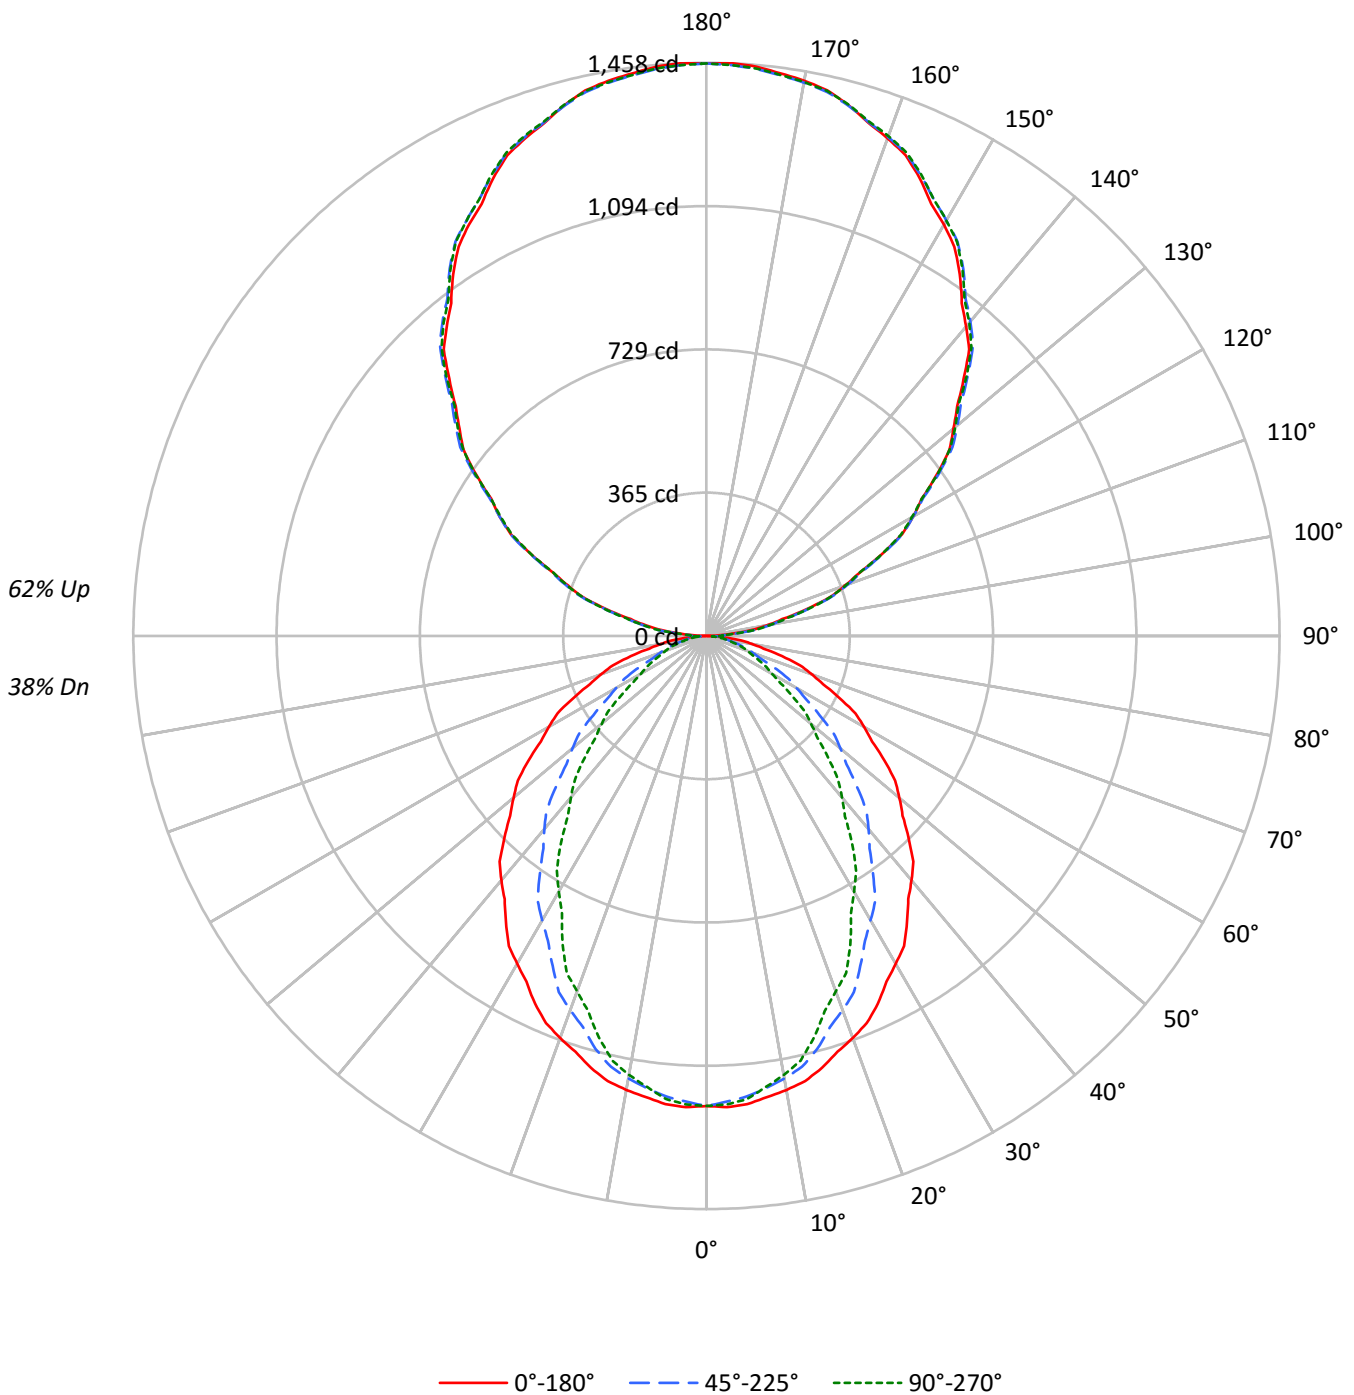



TEST NUMBER: P331844-930

CATALOG NUMBER: S122RDIW-S865D1440U930-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45	38								
1	95	91	88	84	86	83	80	77	67	65	63	53	52	51	40	39	38	32								
2	87	80	74	69	79	73	68	64	60	56	53	47	45	43	36	34	33	28								
3	80	71	64	58	72	64	58	54	53	48	45	42	39	37	32	30	28	24								
4	73	63	55	49	66	57	51	46	47	42	39	38	34	32	29	27	25	21								
5	67	56	48	42	61	51	44	39	42	37	33	34	30	28	26	24	22	18								
6	62	50	42	37	56	46	39	34	38	33	29	31	27	24	24	21	19	16								
7	57	45	38	32	52	42	35	30	35	30	26	28	24	22	22	19	17	15								
8	53	41	34	29	48	38	31	27	32	27	23	26	22	19	20	18	16	13								
9	49	38	30	26	45	35	28	24	29	24	21	24	20	17	19	16	14	12								
10	46	35	28	23	42	32	26	21	27	22	19	22	18	16	17	15	13	11								

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	19302	19302	19302
5°	19376	19060	19164
10°	19226	18748	18589
15°	19005	18191	17668
20°	18699	17399	16526
25°	18387	16498	15419
30°	17952	15571	13998
35°	17527	14564	12751
40°	17102	13523	11310
45°	16600	12353	10003
50°	16088	11170	8721
55°	15564	9897	7491
60°	14951	8561	6219
65°	14258	7194	5662
70°	13430	5925	5207
75°	12420	5402	4860
80°	10962	4826	4426
85°	8633	3798	3798



TEST NUMBER: P331844-930

CATALOG NUMBER: S122RDIW-S865D1440U930-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	111.9	1.7
10°-20°	307.2	4.7
20°-30°	431.5	6.6
30°-40°	470.5	7.2
40°-50°	432.6	6.6
50°-60°	339.7	5.2
60°-70°	221.5	3.4
70°-80°	114.2	1.7
80°-90°	35.4	0.5
90°-100°	92.3	1.4
100°-110°	286.6	4.4
110°-120°	490.0	7.5
120°-130°	644.3	9.9
130°-140°	723.2	11.1
140°-150°	709.1	10.8
150°-160°	594.8	9.1
160°-170°	394.5	6.0
170°-180°	137.9	2.1
0°-30°	850.6	13.0
0°-40°	1321.1	20.2
0°-60°	2093.4	32.0
0°-90°	2464.5	37.7
90°-120°	868.9	13.3
90°-150°	2945.5	45.1
90°-180°	4073.0	62.3
0°-180°	6537.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1196	1196	1196	1196	1196	
5°	1196	1190	1176	1185	1182	113
15°	1137	1124	1088	1068	1057	320
25°	1032	995	926	883	866	474
35°	889	832	739	673	647	556
45°	727	652	541	467	438	561
55°	553	467	352	289	266	494
65°	373	285	188	153	148	370
75°	199	126	87	79	78	211
85°	47	25	20	20	20	55
90°	1	17	43	41	42	5
95°	64	76	79	79	76	73
105°	264	268	270	273	273	279
115°	492	498	497	495	492	486
125°	715	726	723	719	718	639
135°	926	938	942	940	937	715
145°	1123	1132	1139	1140	1136	702
155°	1284	1288	1292	1297	1294	591
165°	1398	1396	1396	1404	1399	394
175°	1454	1450	1448	1456	1449	138
180°	1456	1456	1456	1456	1456	



TEST NUMBER: P331844-930

CATALOG NUMBER: S122RDIW-S865D1440U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5
2.5°	1199.8	1198.8	1197.8	1196.9	1196.0	1194.4	1192.3	1190.2	1188.1	1185.9	1187.9
5°	1195.5	1194.3	1193.0	1191.8	1190.7	1188.5	1185.4	1182.3	1179.1	1176.0	1178.1
7.5°	1183.1	1181.6	1180.1	1178.7	1177.1	1174.6	1170.9	1167.3	1163.6	1159.9	1160.6
10°	1172.7	1171.0	1169.4	1167.7	1166.0	1162.8	1158.0	1153.2	1148.3	1143.5	1142.8
12.5°	1159.8	1157.6	1155.6	1153.6	1151.4	1147.4	1141.2	1135.1	1128.9	1122.7	1121.4
15°	1137.0	1134.4	1131.7	1129.1	1126.4	1121.0	1112.9	1104.7	1096.5	1088.3	1083.8
17.5°	1109.1	1105.1	1101.1	1097.0	1093.0	1085.7	1075.2	1064.7	1054.3	1043.7	1038.4
20°	1088.3	1083.5	1078.7	1073.9	1069.1	1060.7	1048.6	1036.7	1024.7	1012.6	1006.6
22.5°	1065.8	1060.5	1055.1	1049.7	1044.3	1034.9	1021.2	1007.7	994.2	980.6	972.8
25°	1032.1	1024.4	1016.7	1009.0	1001.4	989.5	973.6	957.8	941.9	926.1	916.2
27.5°	991.4	983.0	974.7	966.3	958.0	944.9	926.9	909.1	891.1	873.3	861.8
30°	962.9	953.7	944.6	935.5	926.3	912.2	892.9	873.7	854.4	835.2	823.0
32.5°	935.1	924.5	913.8	903.1	892.4	877.3	857.7	838.0	818.5	798.8	784.9
35°	889.2	877.0	864.8	852.5	840.2	823.5	802.3	781.2	760.1	738.9	723.7
37.5°	843.4	830.0	816.5	803.0	789.5	771.5	749.0	726.4	703.9	681.3	664.6
40°	811.4	797.0	782.5	768.1	753.7	734.8	711.5	688.2	664.9	641.6	624.4
42.5°	778.5	763.3	748.1	733.0	717.7	698.1	674.0	649.9	625.8	601.7	584.1
45°	727.0	710.9	694.8	678.7	662.6	641.9	616.7	591.4	566.1	541.0	523.8
47.5°	676.8	659.7	642.7	625.6	608.5	586.9	560.9	534.8	508.7	482.7	465.8
50°	640.5	623.4	606.3	589.2	572.2	550.4	524.0	497.5	471.1	444.7	428.0
52.5°	605.0	587.1	569.3	551.5	533.6	511.8	485.9	460.0	434.1	408.3	392.2
55°	552.9	534.1	515.4	496.6	477.8	455.4	429.5	403.5	377.6	351.6	337.2
57.5°	499.4	480.1	460.9	441.6	422.5	400.4	375.4	350.4	325.5	300.5	287.3
60°	463.0	443.8	424.6	405.4	386.1	364.1	339.3	314.5	289.8	265.1	252.8
62.5°	427.5	408.3	389.1	369.8	350.6	329.2	305.6	282.0	258.4	234.7	223.1
65°	373.2	353.8	334.3	314.8	295.4	274.8	253.2	231.5	209.9	188.3	180.1
67.5°	320.9	301.6	282.3	262.9	243.5	224.1	204.7	185.2	165.8	146.3	142.5
70°	284.5	265.8	247.0	228.3	209.5	191.8	175.3	158.7	142.1	125.5	123.1
72.5°	249.9	232.0	213.9	196.0	178.0	162.3	149.0	135.7	122.4	109.1	107.0
75°	199.1	182.2	165.4	148.5	131.8	119.3	111.0	102.9	94.7	86.6	84.9
77.5°	149.1	134.3	119.5	104.8	90.0	80.7	76.7	72.8	68.9	64.9	63.9
80°	117.9	105.7	93.4	81.1	68.9	61.6	59.1	56.7	54.3	51.9	51.0
82.5°	89.4	79.8	70.2	60.7	51.1	45.5	43.9	42.2	40.6	39.0	38.4
85°	46.6	41.5	36.4	31.4	26.3	23.5	22.7	22.0	21.3	20.5	20.5
87.5°	14.1	13.2	12.3	11.4	10.6	10.7	11.9	13.1	14.3	15.5	15.2
90°	1.2	4.5	7.7	11.1	14.3	19.0	25.0	31.0	37.0	43.0	42.5
92.5°	21.9	24.3	26.7	29.1	31.5	33.4	34.8	36.3	37.7	39.1	39.2
95°	63.9	66.6	69.4	72.1	74.8	76.5	77.0	77.5	78.1	78.7	78.7
97.5°	116.8	119.2	121.6	124.0	126.4	128.1	129.1	130.2	131.2	132.2	132.2
100°	156.1	158.2	160.5	162.7	164.9	166.3	167.1	168.0	168.8	169.6	169.6
102.5°	197.4	199.2	200.9	202.6	204.4	205.8	206.8	207.8	208.9	209.9	210.2
105°	264.2	265.1	265.9	266.7	267.5	268.2	268.8	269.3	269.9	270.4	270.9
107.5°	331.6	332.8	334.0	335.3	336.4	337.0	337.0	337.0	337.0	337.0	337.2
110°	374.9	376.5	378.1	379.8	381.4	382.3	382.3	382.3	382.3	382.3	382.3



TEST NUMBER: P331844-930

CATALOG NUMBER: S122RDIW-S865D1440U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	422.1	423.7	425.3	427.0	428.6	429.3	429.1	428.9	428.7	428.4	427.8
115°	491.6	493.3	494.9	496.6	498.2	498.7	498.2	497.7	497.1	496.6	496.3
117.5°	561.0	563.1	565.3	567.5	569.7	570.1	568.5	567.0	565.4	563.9	563.3
120°	607.2	609.4	611.6	613.8	616.0	616.0	613.8	611.6	609.4	607.2	607.2
122.5°	649.5	652.1	654.7	657.3	660.0	660.5	659.0	657.5	655.9	654.4	653.7
125°	715.3	717.8	720.2	722.7	725.2	726.0	725.2	724.4	723.6	722.7	721.9
127.5°	779.5	782.6	785.7	788.9	792.0	793.0	792.1	791.1	790.1	789.1	788.1
130°	819.8	823.4	827.0	830.5	834.1	835.5	834.9	834.5	833.9	833.3	832.8
132.5°	865.0	868.0	870.8	873.8	876.6	878.2	878.2	878.3	878.5	878.6	877.3
135°	925.5	928.5	931.6	934.5	937.5	939.3	939.9	940.4	940.9	941.5	941.3
137.5°	989.2	991.6	994.1	996.5	999.0	1000.6	1001.4	1002.0	1002.7	1003.5	1003.2
140°	1027.5	1030.0	1032.5	1034.9	1037.4	1039.3	1040.6	1042.0	1043.4	1044.7	1044.7
142.5°	1066.9	1069.3	1071.8	1074.2	1076.7	1078.4	1079.3	1080.3	1081.2	1082.1	1082.3
145°	1123.4	1125.4	1127.2	1129.1	1131.1	1132.9	1134.5	1136.1	1137.8	1139.4	1139.6
147.5°	1173.8	1176.1	1178.4	1180.7	1183.0	1184.7	1185.8	1186.8	1188.0	1189.0	1189.7
150°	1208.2	1209.8	1211.5	1213.2	1214.8	1216.1	1217.2	1218.3	1219.4	1220.5	1221.3
152.5°	1238.7	1240.3	1241.9	1243.6	1245.3	1246.8	1248.1	1249.4	1250.7	1252.0	1253.0
155°	1284.4	1285.2	1286.1	1286.9	1287.7	1288.5	1289.3	1290.1	1290.9	1291.8	1293.1
157.5°	1323.5	1324.0	1324.6	1325.2	1325.7	1326.2	1326.7	1327.2	1327.7	1328.2	1330.0
160°	1347.1	1347.7	1348.2	1348.7	1349.3	1349.7	1350.0	1350.2	1350.5	1350.8	1352.4
162.5°	1368.7	1368.9	1369.0	1369.1	1369.2	1369.4	1369.6	1369.9	1370.2	1370.4	1372.3
165°	1397.5	1397.3	1396.9	1396.7	1396.4	1396.3	1396.3	1396.3	1396.3	1396.3	1398.2
167.5°	1421.6	1420.7	1419.9	1419.1	1418.3	1417.9	1417.8	1417.8	1417.7	1417.6	1419.6
170°	1434.4	1433.5	1432.7	1431.9	1431.1	1430.5	1430.3	1430.0	1429.7	1429.5	1431.3
172.5°	1443.2	1442.4	1441.6	1440.8	1440.0	1439.4	1439.2	1438.8	1438.6	1438.3	1440.2
175°	1454.0	1453.2	1452.4	1451.6	1450.7	1450.1	1449.5	1448.9	1448.5	1447.9	1449.8
177.5°	1458.5	1457.8	1457.2	1456.5	1455.9	1455.3	1454.8	1454.4	1454.0	1453.5	1454.8
180°	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5



TEST NUMBER: P331844-930

CATALOG NUMBER: S122RDIW-S865D1440U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5	1195.5
2.5°	1189.8	1191.7	1193.6	1194.4	1194.0	1193.6	1193.3	1192.9
5°	1180.3	1182.4	1184.6	1185.4	1184.6	1183.9	1183.2	1182.4
7.5°	1161.2	1161.8	1162.5	1162.1	1160.9	1159.7	1158.4	1157.2
10°	1142.1	1141.3	1140.6	1139.5	1138.1	1136.7	1135.2	1133.8
12.5°	1120.1	1118.8	1117.5	1115.7	1113.3	1110.9	1108.5	1106.1
15°	1079.2	1074.6	1070.1	1066.6	1064.2	1061.8	1059.4	1057.0
17.5°	1032.9	1027.4	1022.1	1017.2	1013.1	1009.0	1004.9	1000.7
20°	1000.6	994.6	988.6	982.9	977.6	972.3	967.0	961.8
22.5°	965.2	957.4	949.7	943.8	939.9	935.9	932.0	928.1
25°	906.4	896.5	886.6	879.9	876.3	872.7	869.1	865.5
27.5°	850.3	838.8	827.3	818.7	813.0	807.2	801.5	795.8
30°	810.7	798.4	786.1	776.7	770.3	763.8	757.3	750.8
32.5°	770.9	756.8	742.9	732.8	726.8	720.6	714.5	708.4
35°	708.6	693.5	678.3	668.1	662.8	657.5	652.2	646.9
37.5°	648.0	631.3	614.7	603.2	597.2	591.1	585.1	579.0
40°	607.4	590.4	573.2	561.6	555.4	549.1	542.8	536.6
42.5°	566.5	548.8	531.2	519.3	513.2	507.2	501.1	495.0
45°	506.8	489.8	472.6	461.2	455.4	449.7	443.9	438.1
47.5°	448.7	431.8	414.8	403.7	398.5	393.2	388.0	382.8
50°	411.5	394.8	378.3	367.5	362.4	357.3	352.3	347.2
52.5°	376.3	360.3	344.2	333.9	329.2	324.6	319.9	315.3
55°	322.8	308.3	293.9	284.4	279.8	275.2	270.7	266.1
57.5°	274.1	260.9	247.7	239.1	235.3	231.4	227.6	223.7
60°	240.5	228.3	216.0	208.0	204.1	200.2	196.4	192.6
62.5°	211.4	199.7	188.0	181.0	178.7	176.4	174.1	171.8
65°	171.9	163.7	155.6	151.1	150.3	149.7	149.0	148.2
67.5°	138.8	135.0	131.3	129.0	128.2	127.4	126.7	126.0
70°	120.7	118.3	115.9	114.2	113.2	112.3	111.3	110.3
72.5°	105.0	103.0	100.9	99.7	99.1	98.5	97.9	97.3
75°	83.2	81.5	79.8	78.8	78.6	78.4	78.1	77.9
77.5°	63.0	62.0	61.1	60.4	60.0	59.6	59.3	58.9
80°	50.0	49.1	48.1	47.6	47.6	47.6	47.6	47.6
82.5°	37.8	37.2	36.6	36.4	36.4	36.4	36.4	36.4
85°	20.5	20.5	20.5	20.5	20.5	20.5	20.5	20.5
87.5°	14.9	14.6	14.3	14.2	14.3	14.3	14.3	14.4
90°	41.9	41.4	40.8	40.7	41.0	41.3	41.5	41.8
92.5°	39.3	39.4	39.5	39.6	39.6	39.7	39.8	39.8
95°	78.7	78.7	78.7	78.4	77.9	77.3	76.7	76.2
97.5°	132.2	132.2	132.2	132.2	132.2	132.1	132.1	132.0
100°	169.6	169.6	169.6	169.5	169.2	168.9	168.7	168.4
102.5°	210.3	210.6	210.8	210.8	210.5	210.3	209.9	209.7
105°	271.5	272.1	272.6	272.9	272.9	272.9	272.9	272.9
107.5°	337.5	337.7	337.9	337.4	336.1	334.8	333.6	332.3
110°	382.3	382.3	382.3	381.8	381.0	380.2	379.4	378.5





TEST NUMBER: P331844-930

CATALOG NUMBER: S122RDIW-S865D1440U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	427.1	426.5	425.8	425.2	424.6	424.0	423.4	422.8
115°	496.0	495.7	495.5	494.9	494.1	493.3	492.4	491.6
117.5°	562.6	562.0	561.3	560.5	559.7	558.9	558.1	557.3
120°	607.2	607.2	607.2	606.7	605.9	605.1	604.3	603.5
122.5°	653.1	652.4	651.8	651.1	650.5	650.0	649.3	648.7
125°	721.1	720.2	719.4	718.9	718.6	718.4	718.1	717.8
127.5°	787.1	786.1	785.1	784.2	783.3	782.4	781.6	780.7
130°	832.3	831.7	831.1	830.3	829.2	828.2	827.0	826.0
132.5°	876.2	875.0	873.8	872.7	871.9	871.0	870.1	869.2
135°	940.9	940.7	940.4	939.9	939.1	938.2	937.4	936.6
137.5°	1003.0	1002.8	1002.6	1001.9	1000.9	999.7	998.7	997.5
140°	1044.7	1044.7	1044.7	1044.2	1043.1	1042.0	1040.9	1039.8
142.5°	1082.6	1082.8	1083.0	1082.6	1081.5	1080.4	1079.3	1078.2
145°	1140.0	1140.2	1140.4	1140.0	1139.0	1137.9	1136.8	1135.7
147.5°	1190.3	1190.8	1191.5	1191.2	1190.2	1189.1	1188.1	1187.1
150°	1222.1	1222.9	1223.8	1223.8	1222.9	1222.1	1221.3	1220.5
152.5°	1254.0	1255.1	1256.1	1256.1	1255.1	1254.0	1253.0	1252.0
155°	1294.5	1295.9	1297.2	1297.5	1296.7	1295.9	1295.1	1294.3
157.5°	1331.9	1333.7	1335.6	1335.9	1334.6	1333.3	1332.0	1330.6
160°	1354.0	1355.7	1357.3	1357.6	1356.5	1355.4	1354.4	1353.2
162.5°	1374.2	1376.1	1377.9	1378.2	1376.9	1375.6	1374.3	1372.9
165°	1400.1	1402.0	1403.9	1404.2	1402.8	1401.5	1400.1	1398.7
167.5°	1421.5	1423.4	1425.3	1425.6	1424.2	1422.7	1421.3	1419.8
170°	1433.3	1435.2	1437.1	1437.2	1435.6	1433.9	1432.3	1430.7
172.5°	1442.1	1444.1	1445.9	1446.1	1444.5	1442.8	1441.2	1439.6
175°	1451.7	1453.6	1455.6	1455.7	1454.0	1452.4	1450.7	1449.1
177.5°	1456.2	1457.5	1458.8	1458.8	1457.5	1456.2	1454.8	1453.5
180°	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5	1456.5

(END OF REPORT)