

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331834-930

Luminaire Tested: **S122RDIW-S865D970U930-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331834-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S865D970U930-4F0-1E-UDD-A1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 970 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5430.8 lumens
Efficiency: N/A
Efficacy: 88.7 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 61.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331834-930

CATALOG NUMBER: S122RDIW-S865D970U930-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

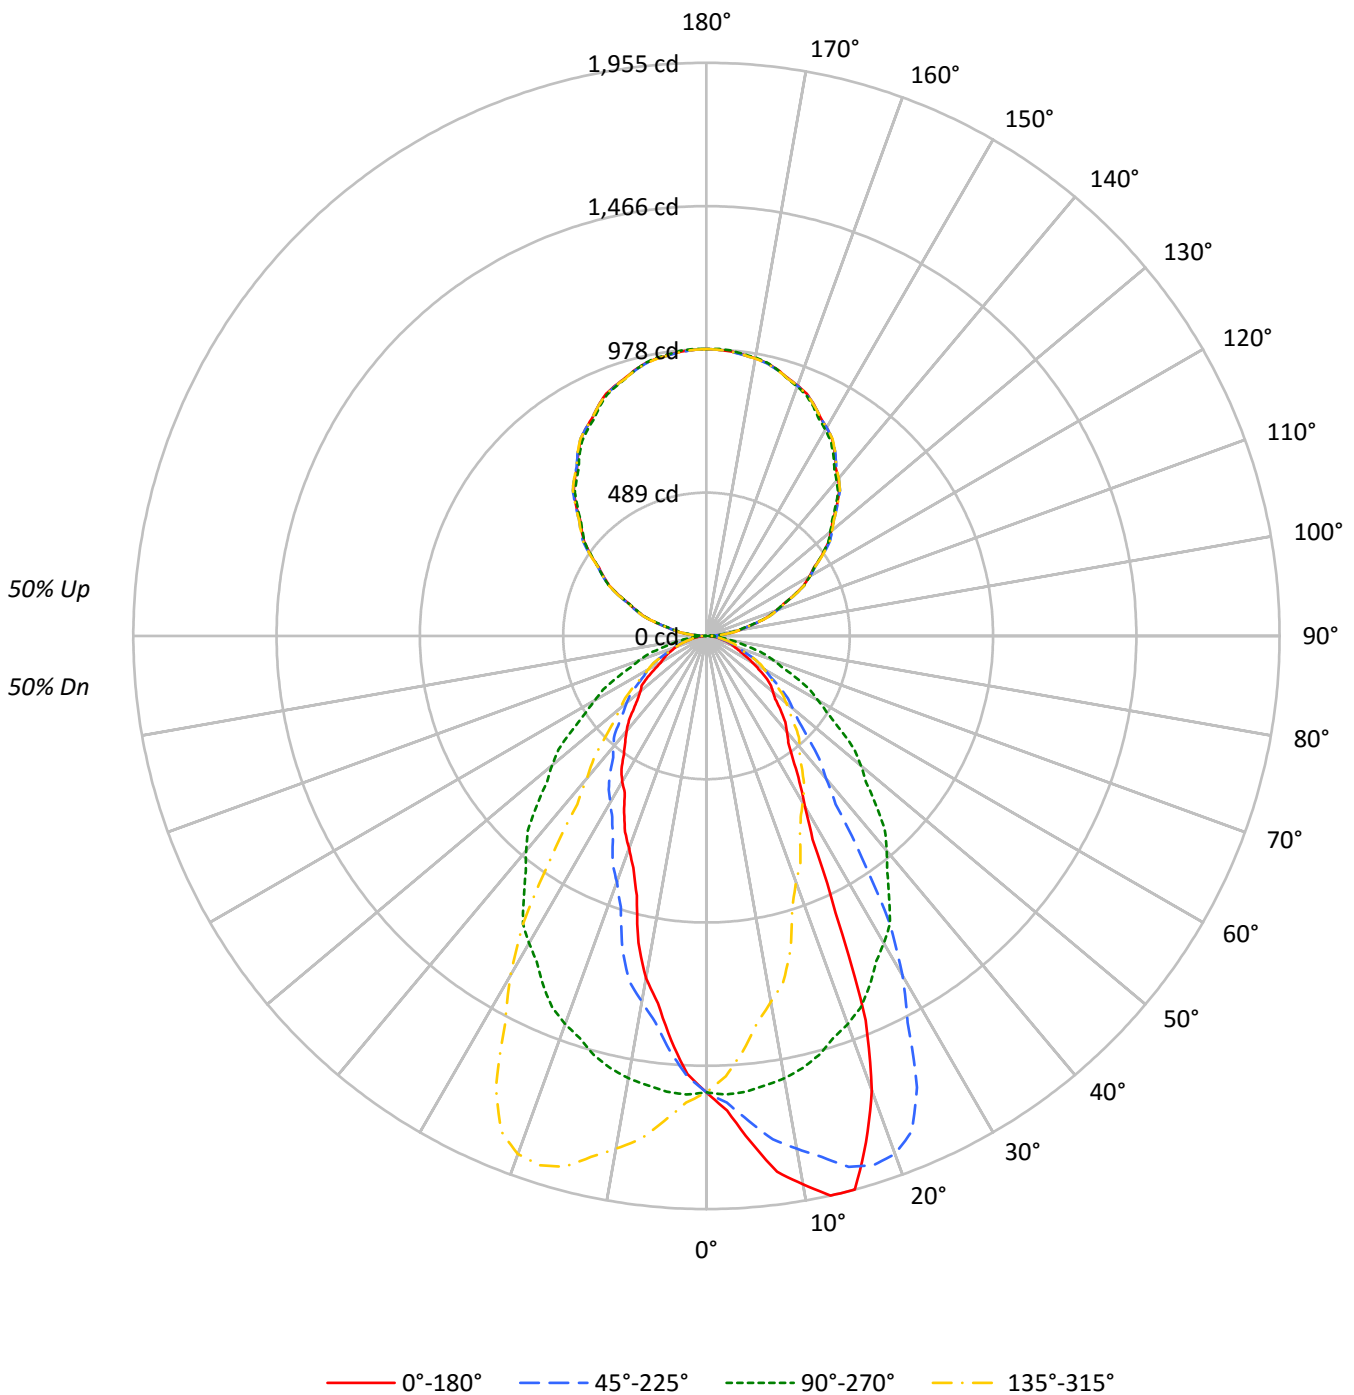



TEST NUMBER: P331834-930

CATALOG NUMBER: S122RDIW-S865D970U930-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	98	94	91	88	91	87	84	81	74	72	70	62	60	59	50	49	49	43
2	90	83	78	73	83	77	72	68	66	62	59	55	53	50	45	44	42	38
3	83	74	67	62	76	69	63	58	59	54	51	50	46	44	41	39	37	33
4	76	66	59	53	70	62	55	50	53	48	44	45	41	38	37	35	33	29
5	70	59	52	46	65	55	49	44	48	43	39	41	37	34	34	31	29	26
6	65	54	46	40	60	50	43	38	43	38	34	37	33	30	31	28	26	23
7	61	49	41	36	56	46	39	34	40	34	30	34	30	27	29	26	23	21
8	56	45	37	32	52	42	35	31	36	31	27	31	27	24	27	24	21	19
9	53	41	34	29	49	38	32	28	34	28	25	29	25	22	25	22	20	17
10	49	38	31	26	46	35	29	25	31	26	23	27	23	20	23	20	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	25137	25137	25137	25137
5°	28075	25293	22428	25293
10°	31147	25117	19441	25117
15°	32679	24749	15318	24749
20°	28331	24204	13254	24204
25°	18579	23457	11834	23457
30°	12506	22551	10711	22551
35°	10129	21409	9660	21409
40°	9008	20168	8939	20168
45°	8152	18712	7978	18712
50°	7420	17269	7390	17269
55°	6975	15671	6883	15671
60°	5835	14202	5767	14202
65°	4917	12894	5578	12894
70°	4546	11514	5264	11514
75°	4255	10025	4860	10025
80°	3924	8247	4333	8247
85°	3612	6502	3798	6502



TEST NUMBER: P331834-930

CATALOG NUMBER: S122RDIW-S865D970U930-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	147.6	2.7
10°-20°	411.2	7.6
20°-30°	529.9	9.8
30°-40°	503.6	9.3
40°-50°	431.4	7.9
50°-60°	328.5	6.0
60°-70°	207.7	3.8
70°-80°	103.7	1.9
80°-90°	30.9	0.6
90°-100°	62.0	1.1
100°-110°	192.6	3.5
110°-120°	329.2	6.1
120°-130°	432.9	8.0
130°-140°	485.9	8.9
140°-150°	476.4	8.8
150°-160°	399.6	7.4
160°-170°	265.0	4.9
170°-180°	92.6	1.7
0°-30°	1088.7	20.0
0°-40°	1592.3	29.3
0°-60°	2352.3	43.3
0°-90°	2694.5	49.6
90°-120°	583.8	10.7
90°-150°	1979.0	36.4
90°-180°	2736.0	50.4
0°-180°	5430.8	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1557	1557	1557	1557	1557	
5°	1732	1561	1384	1561	1732	171
15°	1955	1481	916	1481	1955	527
25°	1043	1317	664	1317	1043	495
35°	514	1086	490	1086	514	329
45°	357	820	349	820	357	276
55°	248	557	244	557	248	217
65°	129	338	146	338	129	131
75°	68	161	78	161	68	72
85°	20	35	20	35	20	22
90°	28	1	28	1	28	13
95°	51	43	51	43	51	57
105°	183	178	183	178	183	193
115°	330	330	330	330	330	326
125°	482	481	482	481	482	430
135°	629	622	629	622	629	484
145°	763	755	763	755	763	476
155°	870	863	870	863	870	400
165°	940	939	940	939	940	265
175°	974	977	974	977	974	92
180°	978	978	978	978	978	



TEST NUMBER: P331834-930

CATALOG NUMBER: S122RDIW-S865D970U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9
2.5°	1620.1	1621.4	1622.7	1619.6	1619.6	1617.1	1611.4	1607.1	1595.0	1593.3	1593.3
5°	1732.2	1731.0	1733.2	1726.2	1716.4	1714.3	1704.1	1690.5	1676.4	1660.8	1657.5
7.5°	1843.6	1841.9	1837.6	1836.5	1829.0	1812.7	1796.1	1778.5	1755.1	1732.3	1720.8
10°	1899.8	1917.7	1906.9	1887.9	1891.7	1866.3	1852.8	1829.5	1810.0	1776.0	1768.4
12.5°	1955.3	1962.3	1958.8	1948.1	1943.3	1925.6	1907.3	1887.1	1851.1	1820.6	1793.9
15°	1955.0	1965.3	1968.0	1964.8	1967.5	1966.4	1956.6	1939.8	1908.5	1874.9	1845.8
17.5°	1810.7	1817.9	1835.6	1847.5	1862.7	1894.8	1910.6	1916.7	1912.0	1892.9	1872.3
20°	1648.9	1637.0	1686.7	1712.1	1733.7	1787.9	1834.4	1852.3	1880.9	1880.4	1874.9
22.5°	1419.4	1422.3	1469.5	1499.7	1562.8	1616.9	1670.0	1737.2	1792.6	1829.3	1850.7
25°	1042.9	1063.6	1110.6	1151.7	1222.1	1322.7	1414.1	1520.1	1620.2	1699.2	1774.3
27.5°	783.3	784.8	822.1	860.1	901.9	984.3	1099.4	1226.0	1368.7	1486.5	1621.9
30°	670.8	667.6	683.2	706.5	742.2	806.0	892.6	1017.0	1159.3	1336.7	1494.7
32.5°	591.2	591.3	603.2	620.4	650.0	693.1	752.4	853.5	987.9	1162.3	1347.5
35°	513.9	513.4	522.0	534.4	546.9	574.5	615.1	668.1	760.6	923.4	1112.7
37.5°	458.5	460.9	465.1	472.9	486.7	502.0	526.4	562.0	627.9	724.1	883.3
40°	427.4	428.4	434.4	440.9	449.0	460.9	480.9	509.6	557.7	634.5	750.8
42.5°	398.8	399.9	404.1	410.2	416.5	428.4	445.0	469.8	508.8	568.8	664.7
45°	357.0	357.0	360.9	363.5	370.6	381.4	394.9	415.5	442.5	486.9	550.7
47.5°	317.9	318.0	320.5	325.1	329.5	338.0	351.3	368.1	387.8	422.1	476.6
50°	295.4	295.9	297.5	301.3	304.0	311.6	321.9	336.5	357.0	383.5	429.0
52.5°	277.2	276.9	278.9	280.5	282.4	287.8	295.5	308.3	326.8	349.8	387.4
55°	247.8	245.6	248.8	251.5	253.2	255.4	259.7	267.7	283.5	303.0	331.1
57.5°	211.0	210.1	212.4	214.8	220.0	225.8	229.5	234.6	242.8	256.7	284.6
60°	180.7	180.7	185.6	187.2	193.1	200.7	208.3	212.6	220.7	229.9	250.5
62.5°	153.8	154.3	156.5	158.2	161.5	170.8	181.4	190.9	198.6	207.4	221.0
65°	128.7	129.8	129.8	130.9	133.1	135.3	139.6	147.2	160.7	173.1	183.4
67.5°	109.3	109.6	109.9	111.0	111.5	113.9	115.7	119.0	122.1	134.0	146.7
70°	96.3	97.9	97.3	98.5	99.0	100.0	102.2	103.9	108.8	111.5	119.0
72.5°	84.1	85.4	85.3	85.9	87.3	87.6	89.3	90.9	94.0	96.3	100.4
75°	68.2	67.6	68.2	69.2	69.8	70.4	70.4	72.5	74.1	76.3	79.0
77.5°	52.6	53.2	53.0	53.2	53.2	54.2	54.1	55.0	56.7	57.8	59.1
80°	42.2	42.7	42.2	42.7	43.3	43.8	43.3	43.8	45.4	46.6	46.6
82.5°	32.7	32.8	33.1	33.2	33.3	33.4	34.2	34.3	35.5	35.3	35.7
85°	19.5	18.9	18.9	18.9	19.5	20.0	19.5	19.5	20.0	20.0	20.0
87.5°	12.6	13.0	12.9	12.9	12.8	12.9	12.9	13.5	13.0	13.5	12.3
90°	28.0	27.9	27.7	27.6	27.3	27.4	27.8	28.1	28.5	28.9	24.9
92.5°	26.7	26.7	26.7	26.7	26.6	26.6	26.5	26.4	26.3	26.3	25.3
95°	51.2	51.5	51.9	52.3	52.7	52.8	52.8	52.8	52.8	52.8	52.5
97.5°	88.7	88.7	88.8	88.8	88.9	88.9	88.9	88.9	88.9	88.9	88.1
100°	113.2	113.3	113.5	113.7	113.9	114.0	114.0	114.0	114.0	114.0	113.4
102.5°	140.9	141.0	141.2	141.5	141.6	141.6	141.5	141.4	141.2	141.0	140.3
105°	183.4	183.4	183.4	183.4	183.4	183.1	182.8	182.4	182.1	181.6	181.3
107.5°	223.3	224.1	224.9	225.8	226.7	227.0	226.9	226.7	226.6	226.4	226.4
110°	254.4	254.9	255.4	256.0	256.6	256.8	256.8	256.8	256.8	256.8	256.8



TEST NUMBER: P331834-930

CATALOG NUMBER: S122RDIW-S865D970U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	284.1	284.5	284.9	285.3	285.7	286.1	286.6	287.0	287.4	287.9	288.0
115°	330.3	330.8	331.4	332.0	332.5	332.9	333.0	333.2	333.5	333.6	333.9
117.5°	374.4	375.0	375.5	376.1	376.6	377.1	377.6	378.0	378.5	378.9	379.9
120°	405.4	406.0	406.6	407.1	407.6	408.0	408.0	408.0	408.0	408.0	409.4
122.5°	435.9	436.3	436.7	437.1	437.5	437.9	438.3	438.8	439.2	439.6	440.7
125°	482.2	482.4	482.7	482.8	483.0	483.4	483.9	484.5	485.0	485.6	486.1
127.5°	524.6	525.1	525.7	526.3	526.8	527.5	528.2	528.8	529.5	530.2	530.8
130°	554.9	555.6	556.4	557.1	557.8	558.4	558.8	559.1	559.5	559.9	560.3
132.5°	584.0	584.6	585.1	585.8	586.4	587.0	587.8	588.6	589.5	590.3	590.2
135°	629.2	629.8	630.3	630.9	631.4	631.8	632.0	632.2	632.3	632.5	632.2
137.5°	670.2	670.9	671.6	672.4	673.1	673.6	673.8	673.8	674.0	674.2	673.7
140°	698.6	699.4	700.1	700.8	701.6	701.9	701.9	701.9	701.9	701.9	701.0
142.5°	724.4	725.1	725.9	726.6	727.3	727.6	727.5	727.3	727.2	727.0	726.4
145°	763.0	763.8	764.5	765.2	766.0	766.2	766.1	765.9	765.6	765.5	764.4
147.5°	797.5	798.3	798.9	799.6	800.3	800.5	800.1	799.6	799.2	798.8	798.1
150°	820.0	820.5	821.1	821.7	822.2	822.2	821.7	821.1	820.5	820.0	819.3
152.5°	841.1	841.8	842.5	843.3	843.9	843.9	843.3	842.5	841.8	841.1	840.2
155°	869.5	870.1	870.7	871.2	871.7	871.6	870.7	869.8	868.8	867.9	867.3
157.5°	894.0	894.9	895.8	896.7	897.5	897.3	896.1	894.9	893.6	892.3	892.0
160°	909.2	910.0	910.7	911.4	912.2	911.9	910.9	909.7	908.7	907.5	907.3
162.5°	922.4	923.2	924.1	925.0	925.9	925.8	924.5	923.2	922.0	920.7	920.6
165°	939.7	940.7	941.6	942.5	943.4	943.2	941.9	940.7	939.4	938.1	938.1
167.5°	954.0	954.9	955.9	956.8	957.7	957.6	956.3	955.0	953.7	952.4	952.5
170°	961.2	962.3	963.4	964.5	965.6	965.6	964.3	963.0	961.6	960.4	960.6
172.5°	967.2	968.2	969.4	970.5	971.6	971.4	970.2	968.9	967.6	966.3	966.5
175°	973.6	974.7	975.8	976.9	978.0	977.9	976.6	975.3	974.0	972.7	973.1
177.5°	976.6	977.5	978.4	979.2	980.1	980.1	979.2	978.4	977.5	976.6	976.9
180°	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5



TEST NUMBER: P331834-930

CATALOG NUMBER: S122RDIW-S865D970U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9
2.5°	1594.1	1590.6	1587.6	1579.8	1575.9	1567.2	1565.9	1565.5	1554.3	1543.4	1540.4
5°	1648.9	1640.2	1627.2	1612.1	1596.4	1580.1	1569.3	1560.6	1539.0	1518.5	1506.6
7.5°	1704.1	1685.4	1663.0	1634.3	1610.5	1583.6	1563.7	1545.8	1515.2	1485.7	1465.9
10°	1745.1	1714.8	1685.1	1645.6	1614.8	1584.5	1556.3	1532.0	1497.4	1458.4	1430.9
12.5°	1770.7	1737.3	1696.3	1657.7	1617.8	1579.2	1541.6	1510.3	1469.7	1429.5	1396.6
15°	1805.2	1769.4	1719.7	1664.5	1613.2	1562.8	1519.6	1480.6	1427.6	1379.4	1339.4
17.5°	1833.4	1784.3	1730.9	1667.0	1607.5	1543.6	1487.8	1438.1	1379.1	1321.0	1273.8
20°	1842.5	1793.8	1732.2	1668.3	1598.0	1522.8	1462.7	1408.7	1345.3	1282.1	1228.0
22.5°	1836.9	1799.0	1730.4	1654.0	1582.0	1503.3	1435.5	1372.7	1302.5	1238.0	1175.2
25°	1798.7	1785.7	1720.8	1637.4	1555.3	1463.9	1385.4	1316.7	1236.6	1167.4	1099.2
27.5°	1709.7	1737.6	1697.5	1608.7	1517.3	1419.3	1331.1	1252.9	1169.8	1091.8	1023.9
30°	1624.0	1688.3	1671.0	1588.8	1486.5	1390.2	1291.3	1209.6	1120.9	1040.8	973.7
32.5°	1506.7	1613.0	1629.9	1561.1	1455.4	1349.6	1245.9	1164.6	1072.0	987.6	922.2
35°	1320.0	1479.0	1552.0	1508.2	1402.2	1288.0	1180.9	1086.2	993.2	909.9	845.0
37.5°	1097.1	1313.8	1435.5	1438.6	1341.2	1222.5	1106.0	1011.9	916.7	834.9	764.7
40°	952.6	1187.4	1345.9	1381.0	1298.9	1170.6	1052.7	956.9	863.9	783.8	703.3
42.5°	822.8	1056.7	1251.6	1312.7	1247.3	1120.0	1001.7	901.6	811.1	735.4	653.1
45°	665.4	869.8	1084.6	1193.9	1157.6	1039.8	914.8	819.5	734.6	669.2	590.2
47.5°	561.3	705.4	913.2	1061.0	1060.4	952.8	829.8	738.7	659.8	598.5	534.6
50°	502.0	627.5	803.3	971.0	985.0	894.7	777.9	687.5	614.0	549.6	498.2
52.5°	448.7	552.2	710.3	871.1	911.1	832.8	719.5	636.1	564.7	505.5	461.5
55°	379.2	459.3	579.4	729.8	790.4	735.2	634.5	556.7	498.8	449.0	411.2
57.5°	320.8	380.8	477.2	598.3	668.9	634.1	551.1	487.9	438.3	393.3	363.4
60°	284.0	333.2	414.9	516.1	593.9	569.6	498.8	439.8	397.6	358.7	330.5
62.5°	249.4	291.7	361.7	443.8	515.2	505.2	447.3	397.8	360.9	325.3	301.5
65°	200.7	231.5	286.2	350.6	407.9	412.8	371.1	337.5	304.6	276.5	255.4
67.5°	159.8	179.9	218.4	272.6	315.6	330.9	305.5	279.9	253.7	232.0	213.7
70°	134.7	150.9	179.0	222.9	262.4	278.6	264.0	243.9	221.3	203.4	187.7
72.5°	109.2	125.0	145.7	177.9	211.7	229.3	224.2	209.8	191.4	176.6	161.8
75°	82.3	87.1	101.2	122.8	149.3	164.4	168.3	160.7	146.0	134.7	126.0
77.5°	60.8	63.8	70.4	81.8	99.1	112.6	118.1	117.2	107.2	100.6	92.5
80°	48.7	50.3	53.6	58.5	71.4	85.0	88.7	88.7	81.7	79.0	70.8
82.5°	37.0	38.2	40.1	42.8	48.9	60.7	64.9	65.8	61.3	57.8	51.4
85°	21.1	20.5	21.6	23.2	24.4	27.6	34.1	35.1	34.1	29.8	28.1
87.5°	11.5	11.2	10.4	9.3	9.3	9.3	11.0	12.7	11.4	10.6	10.1
90°	20.8	16.8	12.7	9.6	7.4	5.2	3.0	0.8	3.0	5.2	7.4
92.5°	24.4	23.4	22.4	21.2	19.6	17.9	16.3	14.7	16.3	17.9	19.6
95°	52.1	51.8	51.4	50.3	48.4	46.6	44.8	43.0	44.8	46.6	48.4
97.5°	87.5	86.7	86.1	84.9	83.3	81.7	80.1	78.4	80.1	81.7	83.3
100°	112.8	112.3	111.8	110.7	109.3	107.8	106.3	104.8	106.3	107.8	109.3
102.5°	139.7	138.9	138.3	137.3	136.2	134.9	133.8	132.6	133.8	134.9	136.2
105°	180.9	180.6	180.2	179.8	179.2	178.6	178.1	177.6	178.1	178.6	179.2
107.5°	226.4	226.4	226.4	226.0	225.2	224.4	223.6	222.8	223.6	224.4	225.2
110°	256.8	256.8	256.8	256.2	255.2	254.0	253.0	251.8	253.0	254.0	255.2



TEST NUMBER: P331834-930

CATALOG NUMBER: S122RDIW-S865D970U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	288.1	288.3	288.5	288.0	286.9	285.8	284.7	283.6	284.7	285.8	286.9
115°	334.4	334.7	335.1	334.7	333.6	332.5	331.4	330.3	331.4	332.5	333.6
117.5°	380.9	382.0	382.9	382.8	381.3	379.8	378.4	376.9	378.4	379.8	381.3
120°	410.9	412.4	413.8	413.8	412.4	410.9	409.4	408.0	409.4	410.9	412.4
122.5°	441.7	442.7	443.8	443.4	441.6	439.9	438.1	436.3	438.1	439.9	441.6
125°	486.7	487.2	487.8	487.2	485.6	483.9	482.2	480.6	482.2	483.9	485.6
127.5°	531.5	532.1	532.8	532.1	530.0	527.9	525.8	523.7	525.8	527.9	530.0
130°	560.6	561.0	561.3	560.4	558.0	555.5	553.2	550.8	553.2	555.5	558.0
132.5°	590.1	590.0	590.0	589.0	587.0	585.1	583.1	581.1	583.1	585.1	587.0
135°	631.8	631.4	631.0	629.9	627.9	625.8	623.9	621.8	623.9	625.8	627.9
137.5°	673.2	672.7	672.3	671.2	669.5	667.9	666.3	664.6	666.3	667.9	669.5
140°	700.1	699.2	698.2	696.9	695.3	693.7	692.0	690.3	692.0	693.7	695.3
142.5°	725.8	725.1	724.6	723.4	721.7	720.1	718.4	716.8	718.4	720.1	721.7
145°	763.3	762.2	761.1	759.9	758.6	757.3	756.0	754.7	756.0	757.3	758.6
147.5°	797.4	796.6	795.9	794.8	793.2	791.7	790.2	788.6	790.2	791.7	793.2
150°	818.6	817.8	817.1	816.1	815.1	813.9	812.9	811.7	812.9	813.9	815.1
152.5°	839.4	838.5	837.6	836.7	835.5	834.5	833.3	832.3	833.3	834.5	835.5
155°	866.8	866.3	865.7	865.1	864.6	864.1	863.5	862.9	863.5	864.1	864.6
157.5°	891.7	891.4	891.0	890.6	890.3	889.9	889.6	889.2	889.6	889.9	890.3
160°	907.2	907.0	906.8	906.5	906.1	905.8	905.4	905.1	905.4	905.8	906.1
162.5°	920.4	920.2	920.0	919.9	919.8	919.7	919.7	919.6	919.7	919.7	919.8
165°	938.1	938.1	938.1	938.2	938.3	938.6	938.7	938.9	938.7	938.6	938.3
167.5°	952.5	952.6	952.6	952.9	953.4	954.0	954.6	955.1	954.6	954.0	953.4
170°	960.7	960.9	961.2	961.5	962.1	962.6	963.1	963.7	963.1	962.6	962.1
172.5°	966.7	966.9	967.0	967.4	968.0	968.5	969.1	969.6	969.1	968.5	968.0
175°	973.5	973.9	974.2	974.7	975.3	975.8	976.3	976.9	976.3	975.8	975.3
177.5°	977.1	977.5	977.7	978.1	978.5	979.0	979.4	979.9	979.4	979.0	978.5
180°	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5



TEST NUMBER: P331834-930

CATALOG NUMBER: S122RDIW-S865D970U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9
2.5°	1534.8	1531.8	1526.2	1517.5	1512.3	1503.2	1497.1	1500.6	1501.5	1500.6	1499.7
5°	1493.5	1482.2	1466.6	1451.4	1437.3	1422.2	1413.5	1409.7	1402.2	1397.8	1395.7
7.5°	1443.7	1424.2	1401.9	1375.6	1353.2	1329.7	1317.7	1311.7	1296.2	1287.8	1280.4
10°	1406.5	1375.7	1353.5	1318.8	1297.8	1266.9	1245.9	1246.3	1225.2	1213.3	1204.7
12.5°	1365.4	1331.5	1294.6	1263.5	1234.1	1209.3	1184.0	1173.6	1151.3	1139.8	1116.4
15°	1297.2	1257.8	1218.8	1176.6	1146.8	1108.4	1071.6	1026.7	990.5	959.1	950.5
17.5°	1222.8	1173.9	1134.8	1085.2	1034.3	969.7	927.1	901.0	879.1	862.6	850.3
20°	1171.7	1121.9	1080.3	1005.7	936.9	893.2	861.8	841.7	819.0	801.2	791.4
22.5°	1118.0	1066.1	1009.3	926.0	872.5	837.3	809.3	786.4	770.9	757.0	748.1
25°	1041.9	985.0	891.5	834.1	790.8	754.1	734.6	720.6	704.3	685.4	676.7
27.5°	961.4	871.1	803.9	761.2	719.9	696.0	678.5	657.5	642.9	634.5	625.4
30°	901.2	810.9	758.4	711.9	682.7	656.2	635.6	623.7	609.7	595.1	589.1
32.5°	834.1	762.0	711.7	672.9	643.3	620.7	604.5	585.2	575.0	566.1	553.6
35°	750.8	696.2	650.2	618.9	590.8	572.3	553.4	542.0	523.7	516.1	511.2
37.5°	680.3	632.9	598.6	565.5	543.2	522.9	511.3	493.3	485.3	474.7	464.5
40°	640.5	593.9	561.0	533.9	509.1	493.9	479.3	464.7	452.8	447.9	435.5
42.5°	599.8	562.0	529.0	499.3	482.7	466.6	448.2	437.4	425.1	417.2	409.5
45°	543.6	510.1	482.0	457.6	439.3	422.5	410.6	392.7	385.7	370.0	363.5
47.5°	494.3	463.2	436.3	413.2	395.3	384.3	366.9	352.9	341.7	332.1	323.7
50°	459.3	433.3	407.3	386.8	370.6	354.9	337.0	330.0	312.7	307.8	303.0
52.5°	427.2	402.6	378.8	358.7	342.4	327.2	311.4	302.3	290.6	285.8	282.2
55°	382.5	358.7	335.9	318.0	301.8	286.2	276.5	265.1	259.7	255.8	251.5
57.5°	337.5	316.0	298.6	280.5	264.2	251.8	240.5	233.7	228.0	223.1	217.9
60°	308.9	288.3	272.6	255.8	239.1	228.9	220.1	212.1	205.5	198.0	195.8
62.5°	278.6	260.7	246.2	229.9	215.3	205.9	197.6	190.0	182.2	171.1	168.1
65°	236.9	222.9	207.7	194.2	181.2	172.0	160.1	151.5	148.2	147.2	146.6
67.5°	199.3	186.0	173.0	159.1	147.3	138.8	132.7	131.4	129.1	128.5	127.0
70°	174.1	161.8	148.8	135.7	124.4	122.8	120.7	118.5	115.8	114.7	113.6
72.5°	151.6	138.8	125.8	115.4	110.6	108.5	106.3	104.2	102.3	101.3	100.6
75°	116.3	104.4	95.7	92.0	89.3	87.6	84.4	82.8	81.7	80.1	79.5
77.5°	83.7	77.0	73.1	70.7	67.8	66.1	64.2	62.6	61.5	61.1	60.3
80°	63.8	60.6	57.9	54.6	53.6	51.4	50.9	49.2	49.7	48.2	48.2
82.5°	49.6	45.4	43.1	41.7	40.6	38.8	38.3	37.5	37.7	36.4	36.4
85°	25.4	24.4	23.2	22.2	22.2	20.5	21.1	20.5	20.5	19.5	18.9
87.5°	10.1	10.4	10.3	11.1	11.9	12.3	12.2	11.7	11.7	11.6	11.1
90°	9.6	12.7	16.8	20.8	24.9	28.9	28.5	28.1	27.8	27.4	27.3
92.5°	21.2	22.4	23.4	24.4	25.3	26.3	26.3	26.4	26.5	26.6	26.6
95°	50.3	51.4	51.8	52.1	52.5	52.8	52.8	52.8	52.8	52.8	52.7
97.5°	84.9	86.1	86.7	87.5	88.1	88.9	88.9	88.9	88.9	88.9	88.9
100°	110.7	111.8	112.3	112.8	113.4	114.0	114.0	114.0	114.0	114.0	113.9
102.5°	137.3	138.3	138.9	139.7	140.3	141.0	141.2	141.4	141.5	141.6	141.6
105°	179.8	180.2	180.6	180.9	181.3	181.6	182.1	182.4	182.8	183.1	183.4
107.5°	226.0	226.4	226.4	226.4	226.4	226.4	226.6	226.7	226.9	227.0	226.7
110°	256.2	256.8	256.8	256.8	256.8	256.8	256.8	256.8	256.8	256.8	256.8



TEST NUMBER: P331834-930

CATALOG NUMBER: S122RDIW-S865D970U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	288.0	288.5	288.3	288.1	288.0	287.9	287.4	287.0	286.6	286.1	285.7
115°	334.7	335.1	334.7	334.4	333.9	333.6	333.5	333.2	333.0	332.9	332.5
117.5°	382.8	382.9	382.0	380.9	379.9	378.9	378.5	378.0	377.6	377.1	376.6
120°	413.8	413.8	412.4	410.9	409.4	408.0	408.0	408.0	408.0	408.0	407.6
122.5°	443.4	443.8	442.7	441.7	440.7	439.6	439.2	438.8	438.3	437.9	437.5
125°	487.2	487.8	487.2	486.7	486.1	485.6	485.0	484.5	483.9	483.4	483.0
127.5°	532.1	532.8	532.1	531.5	530.8	530.2	529.5	528.8	528.2	527.5	526.8
130°	560.4	561.3	561.0	560.6	560.3	559.9	559.5	559.1	558.8	558.4	557.8
132.5°	589.0	590.0	590.0	590.1	590.2	590.3	589.5	588.6	587.8	587.0	586.4
135°	629.9	631.0	631.4	631.8	632.2	632.5	632.3	632.2	632.0	631.8	631.4
137.5°	671.2	672.3	672.7	673.2	673.7	674.2	674.0	673.8	673.8	673.6	673.1
140°	696.9	698.2	699.2	700.1	701.0	701.9	701.9	701.9	701.9	701.9	701.6
142.5°	723.4	724.6	725.1	725.8	726.4	727.0	727.2	727.3	727.5	727.6	727.3
145°	759.9	761.1	762.2	763.3	764.4	765.5	765.6	765.9	766.1	766.2	766.0
147.5°	794.8	795.9	796.6	797.4	798.1	798.8	799.2	799.6	800.1	800.5	800.3
150°	816.1	817.1	817.8	818.6	819.3	820.0	820.5	821.1	821.7	822.2	822.2
152.5°	836.7	837.6	838.5	839.4	840.2	841.1	841.8	842.5	843.3	843.9	843.9
155°	865.1	865.7	866.3	866.8	867.3	867.9	868.8	869.8	870.7	871.6	871.7
157.5°	890.6	891.0	891.4	891.7	892.0	892.3	893.6	894.9	896.1	897.3	897.5
160°	906.5	906.8	907.0	907.2	907.3	907.5	908.7	909.7	910.9	911.9	912.2
162.5°	919.9	920.0	920.2	920.4	920.6	920.7	922.0	923.2	924.5	925.8	925.9
165°	938.2	938.1	938.1	938.1	938.1	938.1	939.4	940.7	941.9	943.2	943.4
167.5°	952.9	952.6	952.6	952.5	952.5	952.4	953.7	955.0	956.3	957.6	957.7
170°	961.5	961.2	960.9	960.7	960.6	960.4	961.6	963.0	964.3	965.6	965.6
172.5°	967.4	967.0	966.9	966.7	966.5	966.3	967.6	968.9	970.2	971.4	971.6
175°	974.7	974.2	973.9	973.5	973.1	972.7	974.0	975.3	976.6	977.9	978.0
177.5°	978.1	977.7	977.5	977.1	976.9	976.6	977.5	978.4	979.2	980.1	980.1
180°	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5



TEST NUMBER: P331834-930

CATALOG NUMBER: S122RDIW-S865D970U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9
2.5°	1495.0	1495.8	1494.5	1495.4	1494.5	1495.8	1495.0	1499.7	1500.6	1501.5	1500.6
5°	1392.9	1386.5	1385.4	1383.8	1385.4	1386.5	1392.9	1395.7	1397.8	1402.2	1409.7
7.5°	1271.1	1270.2	1267.5	1263.7	1267.5	1270.2	1271.1	1280.4	1287.8	1296.2	1311.7
10°	1192.8	1190.1	1189.6	1185.8	1189.6	1190.1	1192.8	1204.7	1213.3	1225.2	1246.3
12.5°	1101.1	1083.6	1081.8	1072.4	1081.8	1083.6	1101.1	1116.4	1139.8	1151.3	1173.6
15°	937.5	934.3	923.4	916.4	923.4	934.3	937.5	950.5	959.1	990.5	1026.7
17.5°	844.0	833.4	830.1	828.5	830.1	833.4	844.0	850.3	862.6	879.1	901.0
20°	783.8	774.1	772.5	771.4	772.5	774.1	783.8	791.4	801.2	819.0	841.7
22.5°	742.3	732.1	727.9	724.6	727.9	732.1	742.3	748.1	757.0	770.9	786.4
25°	671.3	667.6	665.4	664.3	665.4	667.6	671.3	676.7	685.4	704.3	720.6
27.5°	615.8	607.5	605.8	603.1	605.8	607.5	615.8	625.4	634.5	642.9	657.5
30°	584.2	581.6	577.7	574.5	577.7	581.6	584.2	589.1	595.1	609.7	623.7
32.5°	547.0	544.8	541.4	539.9	541.4	544.8	547.0	553.6	566.1	575.0	585.2
35°	505.8	498.2	495.0	490.1	495.0	498.2	505.8	511.2	516.1	523.7	542.0
37.5°	462.2	458.2	453.6	455.3	453.6	458.2	462.2	464.5	474.7	485.3	493.3
40°	428.4	425.7	424.7	424.1	424.7	425.7	428.4	435.5	447.9	452.8	464.7
42.5°	401.6	394.1	391.3	391.2	391.3	394.1	401.6	409.5	417.2	425.1	437.4
45°	360.9	353.8	348.9	349.4	348.9	353.8	360.9	363.5	370.0	385.7	392.7
47.5°	319.0	318.9	315.8	316.8	315.8	318.9	319.0	323.7	332.1	341.7	352.9
50°	299.1	295.9	293.8	294.2	293.8	295.9	299.1	303.0	307.8	312.7	330.0
52.5°	280.1	277.3	275.6	277.9	275.6	277.3	280.1	282.2	285.8	290.6	302.3
55°	248.8	245.6	245.1	244.5	245.1	245.6	248.8	251.5	255.8	259.7	265.1
57.5°	213.9	211.7	208.5	207.1	208.5	211.7	213.9	217.9	223.1	228.0	233.7
60°	188.8	184.5	179.0	178.6	179.0	184.5	188.8	195.8	198.0	205.5	212.1
62.5°	165.8	165.0	163.9	163.8	163.9	165.0	165.8	168.1	171.1	182.2	190.0
65°	145.5	145.0	145.5	146.0	145.5	145.0	145.5	146.6	147.2	148.2	151.5
67.5°	126.8	125.8	124.8	125.3	124.8	125.8	126.8	127.0	128.5	129.1	131.4
70°	112.5	111.9	111.5	111.5	111.5	111.9	112.5	113.6	114.7	115.8	118.5
72.5°	98.7	98.6	98.0	97.6	98.0	98.6	98.7	100.6	101.3	102.3	104.2
75°	79.0	77.9	77.9	77.9	77.9	77.9	79.0	79.5	80.1	81.7	82.8
77.5°	60.2	59.6	59.1	58.6	59.1	59.6	60.2	60.3	61.1	61.5	62.6
80°	47.6	47.0	46.6	46.6	46.6	47.0	47.6	48.2	48.2	49.7	49.2
82.5°	36.4	35.8	35.7	35.3	35.7	35.8	36.4	36.4	36.4	37.7	37.5
85°	19.5	20.0	19.5	20.5	19.5	20.0	19.5	18.9	19.5	20.5	20.5
87.5°	11.2	10.8	11.2	10.8	11.2	10.8	11.2	11.1	11.6	11.7	11.7
90°	27.6	27.7	27.9	28.0	27.9	27.7	27.6	27.3	27.4	27.8	28.1
92.5°	26.7	26.7	26.7	26.7	26.7	26.7	26.7	26.6	26.6	26.5	26.4
95°	52.3	51.9	51.5	51.2	51.5	51.9	52.3	52.7	52.8	52.8	52.8
97.5°	88.8	88.8	88.7	88.7	88.7	88.8	88.8	88.9	88.9	88.9	88.9
100°	113.7	113.5	113.3	113.2	113.3	113.5	113.7	113.9	114.0	114.0	114.0
102.5°	141.5	141.2	141.0	140.9	141.0	141.2	141.5	141.6	141.6	141.5	141.4
105°	183.4	183.4	183.4	183.4	183.4	183.4	183.4	183.4	183.1	182.8	182.4
107.5°	225.8	224.9	224.1	223.3	224.1	224.9	225.8	226.7	227.0	226.9	226.7
110°	256.0	255.4	254.9	254.4	254.9	255.4	256.0	256.6	256.8	256.8	256.8



TEST NUMBER: P331834-930

CATALOG NUMBER: S122RDIW-S865D970U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	285.3	284.9	284.5	284.1	284.5	284.9	285.3	285.7	286.1	286.6	287.0
115°	332.0	331.4	330.8	330.3	330.8	331.4	332.0	332.5	332.9	333.0	333.2
117.5°	376.1	375.5	375.0	374.4	375.0	375.5	376.1	376.6	377.1	377.6	378.0
120°	407.1	406.6	406.0	405.4	406.0	406.6	407.1	407.6	408.0	408.0	408.0
122.5°	437.1	436.7	436.3	435.9	436.3	436.7	437.1	437.5	437.9	438.3	438.8
125°	482.8	482.7	482.4	482.2	482.4	482.7	482.8	483.0	483.4	483.9	484.5
127.5°	526.3	525.7	525.1	524.6	525.1	525.7	526.3	526.8	527.5	528.2	528.8
130°	557.1	556.4	555.6	554.9	555.6	556.4	557.1	557.8	558.4	558.8	559.1
132.5°	585.8	585.1	584.6	584.0	584.6	585.1	585.8	586.4	587.0	587.8	588.6
135°	630.9	630.3	629.8	629.2	629.8	630.3	630.9	631.4	631.8	632.0	632.2
137.5°	672.4	671.6	670.9	670.2	670.9	671.6	672.4	673.1	673.6	673.8	673.8
140°	700.8	700.1	699.4	698.6	699.4	700.1	700.8	701.6	701.9	701.9	701.9
142.5°	726.6	725.9	725.1	724.4	725.1	725.9	726.6	727.3	727.6	727.5	727.3
145°	765.2	764.5	763.8	763.0	763.8	764.5	765.2	766.0	766.2	766.1	765.9
147.5°	799.6	798.9	798.3	797.5	798.3	798.9	799.6	800.3	800.5	800.1	799.6
150°	821.7	821.1	820.5	820.0	820.5	821.1	821.7	822.2	822.2	821.7	821.1
152.5°	843.3	842.5	841.8	841.1	841.8	842.5	843.3	843.9	843.9	843.3	842.5
155°	871.2	870.7	870.1	869.5	870.1	870.7	871.2	871.7	871.6	870.7	869.8
157.5°	896.7	895.8	894.9	894.0	894.9	895.8	896.7	897.5	897.3	896.1	894.9
160°	911.4	910.7	910.0	909.2	910.0	910.7	911.4	912.2	911.9	910.9	909.7
162.5°	925.0	924.1	923.2	922.4	923.2	924.1	925.0	925.9	925.8	924.5	923.2
165°	942.5	941.6	940.7	939.7	940.7	941.6	942.5	943.4	943.2	941.9	940.7
167.5°	956.8	955.9	954.9	954.0	954.9	955.9	956.8	957.7	957.6	956.3	955.0
170°	964.5	963.4	962.3	961.2	962.3	963.4	964.5	965.6	965.6	964.3	963.0
172.5°	970.5	969.4	968.2	967.2	968.2	969.4	970.5	971.6	971.4	970.2	968.9
175°	976.9	975.8	974.7	973.6	974.7	975.8	976.9	978.0	977.9	976.6	975.3
177.5°	979.2	978.4	977.5	976.6	977.5	978.4	979.2	980.1	980.1	979.2	978.4
180°	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5



TEST NUMBER: P331834-930

CATALOG NUMBER: S122RDIW-S865D970U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9
2.5°	1497.1	1503.2	1512.3	1517.5	1526.2	1531.8	1534.8	1540.4	1543.4	1554.3	1565.5
5°	1413.5	1422.2	1437.3	1451.4	1466.6	1482.2	1493.5	1506.6	1518.5	1539.0	1560.6
7.5°	1317.7	1329.7	1353.2	1375.6	1401.9	1424.2	1443.7	1465.9	1485.7	1515.2	1545.8
10°	1245.9	1266.9	1297.8	1318.8	1353.5	1375.7	1406.5	1430.9	1458.4	1497.4	1532.0
12.5°	1184.0	1209.3	1234.1	1263.5	1294.6	1331.5	1365.4	1396.6	1429.5	1469.7	1510.3
15°	1071.6	1108.4	1146.8	1176.6	1218.8	1257.8	1297.2	1339.4	1379.4	1427.6	1480.6
17.5°	927.1	969.7	1034.3	1085.2	1134.8	1173.9	1222.8	1273.8	1321.0	1379.1	1438.1
20°	861.8	893.2	936.9	1005.7	1080.3	1121.9	1171.7	1228.0	1282.1	1345.3	1408.7
22.5°	809.3	837.3	872.5	926.0	1009.3	1066.1	1118.0	1175.2	1238.0	1302.5	1372.7
25°	734.6	754.1	790.8	834.1	891.5	985.0	1041.9	1099.2	1167.4	1236.6	1316.7
27.5°	678.5	696.0	719.9	761.2	803.9	871.1	961.4	1023.9	1091.8	1169.8	1252.9
30°	635.6	656.2	682.7	711.9	758.4	810.9	901.2	973.7	1040.8	1120.9	1209.6
32.5°	604.5	620.7	643.3	672.9	711.7	762.0	834.1	922.2	987.6	1072.0	1164.6
35°	553.4	572.3	590.8	618.9	650.2	696.2	750.8	845.0	909.9	993.2	1086.2
37.5°	511.3	522.9	543.2	565.5	598.6	632.9	680.3	764.7	834.9	916.7	1011.9
40°	479.3	493.9	509.1	533.9	561.0	593.9	640.5	703.3	783.8	863.9	956.9
42.5°	448.2	466.6	482.7	499.3	529.0	562.0	599.8	653.1	735.4	811.1	901.6
45°	410.6	422.5	439.3	457.6	482.0	510.1	543.6	590.2	669.2	734.6	819.5
47.5°	366.9	384.3	395.3	413.2	436.3	463.2	494.3	534.6	598.5	659.8	738.7
50°	337.0	354.9	370.6	386.8	407.3	433.3	459.3	498.2	549.6	614.0	687.5
52.5°	311.4	327.2	342.4	358.7	378.8	402.6	427.2	461.5	505.5	564.7	636.1
55°	276.5	286.2	301.8	318.0	335.9	358.7	382.5	411.2	449.0	498.8	556.7
57.5°	240.5	251.8	264.2	280.5	298.6	316.0	337.5	363.4	393.3	438.3	487.9
60°	220.1	228.9	239.1	255.8	272.6	288.3	308.9	330.5	358.7	397.6	439.8
62.5°	197.6	205.9	215.3	229.9	246.2	260.7	278.6	301.5	325.3	360.9	397.8
65°	160.1	172.0	181.2	194.2	207.7	222.9	236.9	255.4	276.5	304.6	337.5
67.5°	132.7	138.8	147.3	159.1	173.0	186.0	199.3	213.7	232.0	253.7	279.9
70°	120.7	122.8	124.4	135.7	148.8	161.8	174.1	187.7	203.4	221.3	243.9
72.5°	106.3	108.5	110.6	115.4	125.8	138.8	151.6	161.8	176.6	191.4	209.8
75°	84.4	87.6	89.3	92.0	95.7	104.4	116.3	126.0	134.7	146.0	160.7
77.5°	64.2	66.1	67.8	70.7	73.1	77.0	83.7	92.5	100.6	107.2	117.2
80°	50.9	51.4	53.6	54.6	57.9	60.6	63.8	70.8	79.0	81.7	88.7
82.5°	38.3	38.8	40.6	41.7	43.1	45.4	49.6	51.4	57.8	61.3	65.8
85°	21.1	20.5	22.2	22.2	23.2	24.4	25.4	28.1	29.8	34.1	35.1
87.5°	12.2	12.3	11.9	11.1	10.3	10.4	10.1	10.1	10.6	11.4	12.7
90°	28.5	28.9	24.9	20.8	16.8	12.7	9.6	7.4	5.2	3.0	0.8
92.5°	26.3	26.3	25.3	24.4	23.4	22.4	21.2	19.6	17.9	16.3	14.7
95°	52.8	52.8	52.5	52.1	51.8	51.4	50.3	48.4	46.6	44.8	43.0
97.5°	88.9	88.9	88.1	87.5	86.7	86.1	84.9	83.3	81.7	80.1	78.4
100°	114.0	114.0	113.4	112.8	112.3	111.8	110.7	109.3	107.8	106.3	104.8
102.5°	141.2	141.0	140.3	139.7	138.9	138.3	137.3	136.2	134.9	133.8	132.6
105°	182.1	181.6	181.3	180.9	180.6	180.2	179.8	179.2	178.6	178.1	177.6
107.5°	226.6	226.4	226.4	226.4	226.4	226.4	226.0	225.2	224.4	223.6	222.8
110°	256.8	256.8	256.8	256.8	256.8	256.8	256.2	255.2	254.0	253.0	251.8



TEST NUMBER: P331834-930

CATALOG NUMBER: S122RDIW-S865D970U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	287.4	287.9	288.0	288.1	288.3	288.5	288.0	286.9	285.8	284.7	283.6
115°	333.5	333.6	333.9	334.4	334.7	335.1	334.7	333.6	332.5	331.4	330.3
117.5°	378.5	378.9	379.9	380.9	382.0	382.9	382.8	381.3	379.8	378.4	376.9
120°	408.0	408.0	409.4	410.9	412.4	413.8	413.8	412.4	410.9	409.4	408.0
122.5°	439.2	439.6	440.7	441.7	442.7	443.8	443.4	441.6	439.9	438.1	436.3
125°	485.0	485.6	486.1	486.7	487.2	487.8	487.2	485.6	483.9	482.2	480.6
127.5°	529.5	530.2	530.8	531.5	532.1	532.8	532.1	530.0	527.9	525.8	523.7
130°	559.5	559.9	560.3	560.6	561.0	561.3	560.4	558.0	555.5	553.2	550.8
132.5°	589.5	590.3	590.2	590.1	590.0	590.0	589.0	587.0	585.1	583.1	581.1
135°	632.3	632.5	632.2	631.8	631.4	631.0	629.9	627.9	625.8	623.9	621.8
137.5°	674.0	674.2	673.7	673.2	672.7	672.3	671.2	669.5	667.9	666.3	664.6
140°	701.9	701.9	701.0	700.1	699.2	698.2	696.9	695.3	693.7	692.0	690.3
142.5°	727.2	727.0	726.4	725.8	725.1	724.6	723.4	721.7	720.1	718.4	716.8
145°	765.6	765.5	764.4	763.3	762.2	761.1	759.9	758.6	757.3	756.0	754.7
147.5°	799.2	798.8	798.1	797.4	796.6	795.9	794.8	793.2	791.7	790.2	788.6
150°	820.5	820.0	819.3	818.6	817.8	817.1	816.1	815.1	813.9	812.9	811.7
152.5°	841.8	841.1	840.2	839.4	838.5	837.6	836.7	835.5	834.5	833.3	832.3
155°	868.8	867.9	867.3	866.8	866.3	865.7	865.1	864.6	864.1	863.5	862.9
157.5°	893.6	892.3	892.0	891.7	891.4	891.0	890.6	890.3	889.9	889.6	889.2
160°	908.7	907.5	907.3	907.2	907.0	906.8	906.5	906.1	905.8	905.4	905.1
162.5°	922.0	920.7	920.6	920.4	920.2	920.0	919.9	919.8	919.7	919.7	919.6
165°	939.4	938.1	938.1	938.1	938.1	938.1	938.2	938.3	938.6	938.7	938.9
167.5°	953.7	952.4	952.5	952.5	952.6	952.6	952.9	953.4	954.0	954.6	955.1
170°	961.6	960.4	960.6	960.7	960.9	961.2	961.5	962.1	962.6	963.1	963.7
172.5°	967.6	966.3	966.5	966.7	966.9	967.0	967.4	968.0	968.5	969.1	969.6
175°	974.0	972.7	973.1	973.5	973.9	974.2	974.7	975.3	975.8	976.3	976.9
177.5°	977.5	976.6	976.9	977.1	977.5	977.7	978.1	978.5	979.0	979.4	979.9
180°	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5



TEST NUMBER: P331834-930

CATALOG NUMBER: S122RDIW-S865D970U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9
2.5°	1565.9	1567.2	1575.9	1579.8	1587.6	1590.6	1594.1	1593.3	1593.3	1595.0	1607.1
5°	1569.3	1580.1	1596.4	1612.1	1627.2	1640.2	1648.9	1657.5	1660.8	1676.4	1690.5
7.5°	1563.7	1583.6	1610.5	1634.3	1663.0	1685.4	1704.1	1720.8	1732.3	1755.1	1778.5
10°	1556.3	1584.5	1614.8	1645.6	1685.1	1714.8	1745.1	1768.4	1776.0	1810.0	1829.5
12.5°	1541.6	1579.2	1617.8	1657.7	1696.3	1737.3	1770.7	1793.9	1820.6	1851.1	1887.1
15°	1519.6	1562.8	1613.2	1664.5	1719.7	1769.4	1805.2	1845.8	1874.9	1908.5	1939.8
17.5°	1487.8	1543.6	1607.5	1667.0	1730.9	1784.3	1833.4	1872.3	1892.9	1912.0	1916.7
20°	1462.7	1522.8	1598.0	1668.3	1732.2	1793.8	1842.5	1874.9	1880.4	1880.9	1852.3
22.5°	1435.5	1503.3	1582.0	1654.0	1730.4	1799.0	1836.9	1850.7	1829.3	1792.6	1737.2
25°	1385.4	1463.9	1555.3	1637.4	1720.8	1785.7	1798.7	1774.3	1699.2	1620.2	1520.1
27.5°	1331.1	1419.3	1517.3	1608.7	1697.5	1737.6	1709.7	1621.9	1486.5	1368.7	1226.0
30°	1291.3	1390.2	1486.5	1588.8	1671.0	1688.3	1624.0	1494.7	1336.7	1159.3	1017.0
32.5°	1245.9	1349.6	1455.4	1561.1	1629.9	1613.0	1506.7	1347.5	1162.3	987.9	853.5
35°	1180.9	1288.0	1402.2	1508.2	1552.0	1479.0	1320.0	1112.7	923.4	760.6	668.1
37.5°	1106.0	1222.5	1341.2	1438.6	1435.5	1313.8	1097.1	883.3	724.1	627.9	562.0
40°	1052.7	1170.6	1298.9	1381.0	1345.9	1187.4	952.6	750.8	634.5	557.7	509.6
42.5°	1001.7	1120.0	1247.3	1312.7	1251.6	1056.7	822.8	664.7	568.8	508.8	469.8
45°	914.8	1039.8	1157.6	1193.9	1084.6	869.8	665.4	550.7	486.9	442.5	415.5
47.5°	829.8	952.8	1060.4	1061.0	913.2	705.4	561.3	476.6	422.1	387.8	368.1
50°	777.9	894.7	985.0	971.0	803.3	627.5	502.0	429.0	383.5	357.0	336.5
52.5°	719.5	832.8	911.1	871.1	710.3	552.2	448.7	387.4	349.8	326.8	308.3
55°	634.5	735.2	790.4	729.8	579.4	459.3	379.2	331.1	303.0	283.5	267.7
57.5°	551.1	634.1	668.9	598.3	477.2	380.8	320.8	284.6	256.7	242.8	234.6
60°	498.8	569.6	593.9	516.1	414.9	333.2	284.0	250.5	229.9	220.7	212.6
62.5°	447.3	505.2	515.2	443.8	361.7	291.7	249.4	221.0	207.4	198.6	190.9
65°	371.1	412.8	407.9	350.6	286.2	231.5	200.7	183.4	173.1	160.7	147.2
67.5°	305.5	330.9	315.6	272.6	218.4	179.9	159.8	146.7	134.0	122.1	119.0
70°	264.0	278.6	262.4	222.9	179.0	150.9	134.7	119.0	111.5	108.8	103.9
72.5°	224.2	229.3	211.7	177.9	145.7	125.0	109.2	100.4	96.3	94.0	90.9
75°	168.3	164.4	149.3	122.8	101.2	87.1	82.3	79.0	76.3	74.1	72.5
77.5°	118.1	112.6	99.1	81.8	70.4	63.8	60.8	59.1	57.8	56.7	55.0
80°	88.7	85.0	71.4	58.5	53.6	50.3	48.7	46.6	46.6	45.4	43.8
82.5°	64.9	60.7	48.9	42.8	40.1	38.2	37.0	35.7	35.3	35.5	34.3
85°	34.1	27.6	24.4	23.2	21.6	20.5	21.1	20.0	20.0	20.0	19.5
87.5°	11.0	9.3	9.3	9.3	10.4	11.2	11.5	12.3	13.5	13.0	13.5
90°	3.0	5.2	7.4	9.6	12.7	16.8	20.8	24.9	28.9	28.5	28.1
92.5°	16.3	17.9	19.6	21.2	22.4	23.4	24.4	25.3	26.3	26.3	26.4
95°	44.8	46.6	48.4	50.3	51.4	51.8	52.1	52.5	52.8	52.8	52.8
97.5°	80.1	81.7	83.3	84.9	86.1	86.7	87.5	88.1	88.9	88.9	88.9
100°	106.3	107.8	109.3	110.7	111.8	112.3	112.8	113.4	114.0	114.0	114.0
102.5°	133.8	134.9	136.2	137.3	138.3	138.9	139.7	140.3	141.0	141.2	141.4
105°	178.1	178.6	179.2	179.8	180.2	180.6	180.9	181.3	181.6	182.1	182.4
107.5°	223.6	224.4	225.2	226.0	226.4	226.4	226.4	226.4	226.4	226.6	226.7
110°	253.0	254.0	255.2	256.2	256.8	256.8	256.8	256.8	256.8	256.8	256.8



TEST NUMBER: P331834-930

CATALOG NUMBER: S122RDIW-S865D970U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	284.7	285.8	286.9	288.0	288.5	288.3	288.1	288.0	287.9	287.4	287.0
115°	331.4	332.5	333.6	334.7	335.1	334.7	334.4	333.9	333.6	333.5	333.2
117.5°	378.4	379.8	381.3	382.8	382.9	382.0	380.9	379.9	378.9	378.5	378.0
120°	409.4	410.9	412.4	413.8	413.8	412.4	410.9	409.4	408.0	408.0	408.0
122.5°	438.1	439.9	441.6	443.4	443.8	442.7	441.7	440.7	439.6	439.2	438.8
125°	482.2	483.9	485.6	487.2	487.8	487.2	486.7	486.1	485.6	485.0	484.5
127.5°	525.8	527.9	530.0	532.1	532.8	532.1	531.5	530.8	530.2	529.5	528.8
130°	553.2	555.5	558.0	560.4	561.3	561.0	560.6	560.3	559.9	559.5	559.1
132.5°	583.1	585.1	587.0	589.0	590.0	590.0	590.1	590.2	590.3	589.5	588.6
135°	623.9	625.8	627.9	629.9	631.0	631.4	631.8	632.2	632.5	632.3	632.2
137.5°	666.3	667.9	669.5	671.2	672.3	672.7	673.2	673.7	674.2	674.0	673.8
140°	692.0	693.7	695.3	696.9	698.2	699.2	700.1	701.0	701.9	701.9	701.9
142.5°	718.4	720.1	721.7	723.4	724.6	725.1	725.8	726.4	727.0	727.2	727.3
145°	756.0	757.3	758.6	759.9	761.1	762.2	763.3	764.4	765.5	765.6	765.9
147.5°	790.2	791.7	793.2	794.8	795.9	796.6	797.4	798.1	798.8	799.2	799.6
150°	812.9	813.9	815.1	816.1	817.1	817.8	818.6	819.3	820.0	820.5	821.1
152.5°	833.3	834.5	835.5	836.7	837.6	838.5	839.4	840.2	841.1	841.8	842.5
155°	863.5	864.1	864.6	865.1	865.7	866.3	866.8	867.3	867.9	868.8	869.8
157.5°	889.6	889.9	890.3	890.6	891.0	891.4	891.7	892.0	892.3	893.6	894.9
160°	905.4	905.8	906.1	906.5	906.8	907.0	907.2	907.3	907.5	908.7	909.7
162.5°	919.7	919.7	919.8	919.9	920.0	920.2	920.4	920.6	920.7	922.0	923.2
165°	938.7	938.6	938.3	938.2	938.1	938.1	938.1	938.1	938.1	939.4	940.7
167.5°	954.6	954.0	953.4	952.9	952.6	952.6	952.5	952.5	952.4	953.7	955.0
170°	963.1	962.6	962.1	961.5	961.2	960.9	960.7	960.6	960.4	961.6	963.0
172.5°	969.1	968.5	968.0	967.4	967.0	966.9	966.7	966.5	966.3	967.6	968.9
175°	976.3	975.8	975.3	974.7	974.2	973.9	973.5	973.1	972.7	974.0	975.3
177.5°	979.4	979.0	978.5	978.1	977.7	977.5	977.1	976.9	976.6	977.5	978.4
180°	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5	978.5



TEST NUMBER: P331834-930

CATALOG NUMBER: S122RDIW-S865D970U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9	1556.9
2.5°	1611.4	1617.1	1619.6	1619.6	1622.7	1621.4	1620.1
5°	1704.1	1714.3	1716.4	1726.2	1733.2	1731.0	1732.2
7.5°	1796.1	1812.7	1829.0	1836.5	1837.6	1841.9	1843.6
10°	1852.8	1866.3	1891.7	1887.9	1906.9	1917.7	1899.8
12.5°	1907.3	1925.6	1943.3	1948.1	1958.8	1962.3	1955.3
15°	1956.6	1966.4	1967.5	1964.8	1968.0	1965.3	1955.0
17.5°	1910.6	1894.8	1862.7	1847.5	1835.6	1817.9	1810.7
20°	1834.4	1787.9	1733.7	1712.1	1686.7	1637.0	1648.9
22.5°	1670.0	1616.9	1562.8	1499.7	1469.5	1422.3	1419.4
25°	1414.1	1322.7	1222.1	1151.7	1110.6	1063.6	1042.9
27.5°	1099.4	984.3	901.9	860.1	822.1	784.8	783.3
30°	892.6	806.0	742.2	706.5	683.2	667.6	670.8
32.5°	752.4	693.1	650.0	620.4	603.2	591.3	591.2
35°	615.1	574.5	546.9	534.4	522.0	513.4	513.9
37.5°	526.4	502.0	486.7	472.9	465.1	460.9	458.5
40°	480.9	460.9	449.0	440.9	434.4	428.4	427.4
42.5°	445.0	428.4	416.5	410.2	404.1	399.9	398.8
45°	394.9	381.4	370.6	363.5	360.9	357.0	357.0
47.5°	351.3	338.0	329.5	325.1	320.5	318.0	317.9
50°	321.9	311.6	304.0	301.3	297.5	295.9	295.4
52.5°	295.5	287.8	282.4	280.5	278.9	276.9	277.2
55°	259.7	255.4	253.2	251.5	248.8	245.6	247.8
57.5°	229.5	225.8	220.0	214.8	212.4	210.1	211.0
60°	208.3	200.7	193.1	187.2	185.6	180.7	180.7
62.5°	181.4	170.8	161.5	158.2	156.5	154.3	153.8
65°	139.6	135.3	133.1	130.9	129.8	129.8	128.7
67.5°	115.7	113.9	111.5	111.0	109.9	109.6	109.3
70°	102.2	100.0	99.0	98.5	97.3	97.9	96.3
72.5°	89.3	87.6	87.3	85.9	85.3	85.4	84.1
75°	70.4	70.4	69.8	69.2	68.2	67.6	68.2
77.5°	54.1	54.2	53.2	53.2	53.0	53.2	52.6
80°	43.3	43.8	43.3	42.7	42.2	42.7	42.2
82.5°	34.2	33.4	33.3	33.2	33.1	32.8	32.7
85°	19.5	20.0	19.5	18.9	18.9	18.9	19.5
87.5°	12.9	12.9	12.8	12.9	12.9	13.0	12.6
90°	27.8	27.4	27.3	27.6	27.7	27.9	28.0
92.5°	26.5	26.6	26.6	26.7	26.7	26.7	26.7
95°	52.8	52.8	52.7	52.3	51.9	51.5	51.2
97.5°	88.9	88.9	88.9	88.8	88.8	88.7	88.7
100°	114.0	114.0	113.9	113.7	113.5	113.3	113.2
102.5°	141.5	141.6	141.6	141.5	141.2	141.0	140.9
105°	182.8	183.1	183.4	183.4	183.4	183.4	183.4
107.5°	226.9	227.0	226.7	225.8	224.9	224.1	223.3
110°	256.8	256.8	256.6	256.0	255.4	254.9	254.4



TEST NUMBER: P331834-930

CATALOG NUMBER: S122RDIW-S865D970U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	286.6	286.1	285.7	285.3	284.9	284.5	284.1
115°	333.0	332.9	332.5	332.0	331.4	330.8	330.3
117.5°	377.6	377.1	376.6	376.1	375.5	375.0	374.4
120°	408.0	408.0	407.6	407.1	406.6	406.0	405.4
122.5°	438.3	437.9	437.5	437.1	436.7	436.3	435.9
125°	483.9	483.4	483.0	482.8	482.7	482.4	482.2
127.5°	528.2	527.5	526.8	526.3	525.7	525.1	524.6
130°	558.8	558.4	557.8	557.1	556.4	555.6	554.9
132.5°	587.8	587.0	586.4	585.8	585.1	584.6	584.0
135°	632.0	631.8	631.4	630.9	630.3	629.8	629.2
137.5°	673.8	673.6	673.1	672.4	671.6	670.9	670.2
140°	701.9	701.9	701.6	700.8	700.1	699.4	698.6
142.5°	727.5	727.6	727.3	726.6	725.9	725.1	724.4
145°	766.1	766.2	766.0	765.2	764.5	763.8	763.0
147.5°	800.1	800.5	800.3	799.6	798.9	798.3	797.5
150°	821.7	822.2	822.2	821.7	821.1	820.5	820.0
152.5°	843.3	843.9	843.9	843.3	842.5	841.8	841.1
155°	870.7	871.6	871.7	871.2	870.7	870.1	869.5
157.5°	896.1	897.3	897.5	896.7	895.8	894.9	894.0
160°	910.9	911.9	912.2	911.4	910.7	910.0	909.2
162.5°	924.5	925.8	925.9	925.0	924.1	923.2	922.4
165°	941.9	943.2	943.4	942.5	941.6	940.7	939.7
167.5°	956.3	957.6	957.7	956.8	955.9	954.9	954.0
170°	964.3	965.6	965.6	964.5	963.4	962.3	961.2
172.5°	970.2	971.4	971.6	970.5	969.4	968.2	967.2
175°	976.6	977.9	978.0	976.9	975.8	974.7	973.6
177.5°	979.2	980.1	980.1	979.2	978.4	977.5	976.6
180°	978.5	978.5	978.5	978.5	978.5	978.5	978.5

(END OF REPORT)