

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331523

Luminaire Tested: **S122DIW-S485D1440U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331523
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S485D1440U835-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1440 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7740.9 lumens
Efficiency: N/A
Efficacy: 127.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 60.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331523

CATALOG NUMBER: S122DIW-S485D1440U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

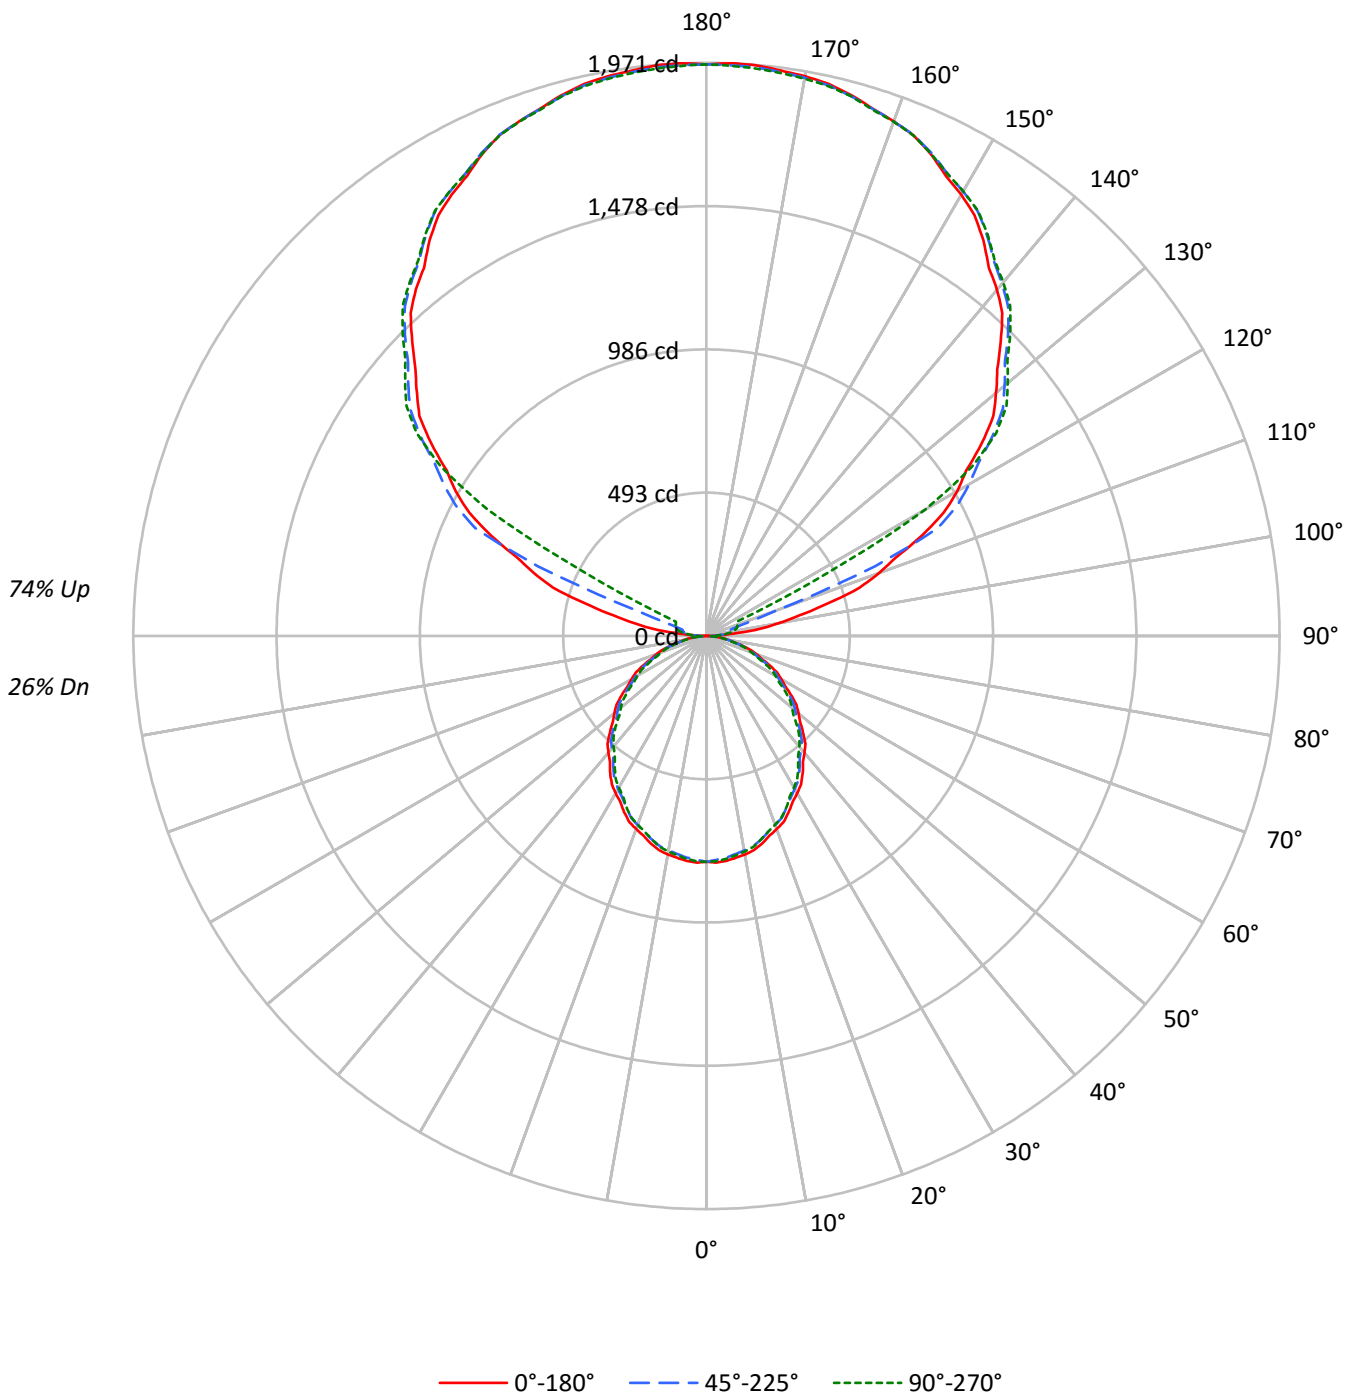



TEST NUMBER: P331523

CATALOG NUMBER: S122DIW-S485D1440U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	70	70	70	51	51	51	34	34	34	26
1	92	88	84	81	82	79	76	73	61	59	57	45	43	42	30	29	28	22
2	84	77	71	66	75	69	64	60	53	50	47	39	37	35	26	25	24	18
3	77	68	61	55	68	60	54	50	47	43	40	35	32	30	23	22	20	15
4	70	60	52	46	62	53	47	42	42	37	34	31	28	25	21	19	17	13
5	64	53	45	39	57	48	41	36	37	32	29	28	24	22	19	17	15	11
6	59	47	40	34	52	43	36	31	33	29	25	25	22	19	17	15	13	10
7	54	43	35	30	48	38	32	27	30	25	22	23	19	17	15	13	12	9
8	50	38	31	26	45	35	28	24	27	23	19	21	17	15	14	12	11	8
9	47	35	28	23	42	32	25	21	25	20	17	19	16	13	13	11	9	7
10	44	32	25	20	39	29	23	19	23	18	15	17	14	12	12	10	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12540	12540	12540
5°	12588	12407	12480
10°	12514	12281	12342
15°	12359	12122	12109
20°	12139	11883	11869
25°	11922	11589	11589
30°	11641	11320	11222
35°	11379	10996	10835
40°	11051	10673	10467
45°	10727	10351	10095
50°	10374	10017	9661
55°	10007	9627	9272
60°	9597	9164	8825
65°	9158	8703	8302
70°	8601	8143	7756
75°	7829	7498	7317
80°	6946	6732	6388
85°	5669	5391	4835



TEST NUMBER: P331523

CATALOG NUMBER: S122DIW-S485D1440U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.0	0.9
10°-20°	205.5	2.7
20°-30°	302.1	3.9
30°-40°	350.9	4.5
40°-50°	350.5	4.5
50°-60°	305.6	3.9
60°-70°	226.0	2.9
70°-80°	128.0	1.7
80°-90°	39.3	0.5
90°-100°	65.6	0.8
100°-110°	240.4	3.1
110°-120°	642.7	8.3
120°-130°	1060.9	13.7
130°-140°	1128.3	14.6
140°-150°	1048.7	13.5
150°-160°	843.1	10.9
160°-170°	543.3	7.0
170°-180°	187.0	2.4
0°-30°	580.6	7.5
0°-40°	931.5	12.0
0°-60°	1587.6	20.5
0°-90°	1980.9	25.6
90°-120°	948.7	12.3
90°-150°	4186.6	54.1
90°-180°	5760.0	74.4
0°-180°	7740.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	777	777	777	777	777	
5°	777	773	766	771	770	74
15°	739	735	725	728	724	208
25°	669	663	650	652	650	308
35°	577	570	558	553	550	360
45°	470	464	453	445	442	362
55°	356	351	342	333	329	318
65°	240	235	228	221	217	237
75°	126	124	120	116	117	134
85°	31	30	29	27	26	35
90°	1	17	28	35	38	6
95°	92	49	56	62	61	113
105°	432	451	87	102	108	462
115°	818	843	878	250	117	805
125°	1156	1175	1202	1211	1216	1031
135°	1431	1453	1466	1480	1478	1105
145°	1660	1660	1682	1692	1685	1038
155°	1828	1816	1832	1839	1829	842
165°	1926	1918	1921	1930	1921	544
175°	1970	1961	1963	1971	1958	187
180°	1966	1966	1966	1966	1966	



TEST NUMBER: P331523

CATALOG NUMBER: S122DIW-S485D1440U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7
2.5°	780.3	779.6	779.0	778.3	777.6	776.6	775.1	773.7	772.2	770.7	772.1
5°	776.7	776.0	775.4	774.7	774.1	772.8	771.0	769.2	767.3	765.5	766.8
7.5°	769.8	768.8	767.8	766.7	765.7	764.3	762.4	760.6	758.7	756.8	758.2
10°	763.3	762.1	760.9	759.8	758.6	757.0	755.0	753.1	751.1	749.1	750.4
12.5°	754.3	753.3	752.2	751.2	750.2	748.7	746.7	744.7	742.7	740.7	741.6
15°	739.4	738.4	737.4	736.4	735.4	733.8	731.6	729.5	727.3	725.2	725.8
17.5°	720.2	719.3	718.3	717.3	716.3	714.7	712.5	710.3	708.1	705.9	706.7
20°	706.5	705.5	704.5	703.5	702.5	700.9	698.5	696.2	693.9	691.6	692.1
22.5°	692.8	691.4	690.0	688.6	687.2	685.4	683.2	681.0	678.8	676.6	676.7
25°	669.2	667.8	666.5	665.2	663.9	661.8	659.0	656.1	653.3	650.5	650.8
27.5°	642.3	641.1	639.9	638.7	637.5	635.8	633.6	631.3	629.1	626.9	626.4
30°	624.4	623.0	621.7	620.4	619.0	617.1	614.6	612.2	609.7	607.2	606.7
32.5°	605.2	604.2	603.1	602.0	601.0	599.1	596.5	593.9	591.3	588.7	587.8
35°	577.3	575.6	574.0	572.3	570.7	568.5	565.9	563.2	560.5	557.9	556.9
37.5°	545.8	544.3	542.9	541.4	539.9	537.9	535.2	532.6	529.9	527.3	526.0
40°	524.3	522.9	521.6	520.3	519.0	517.0	514.3	511.7	509.0	506.4	504.9
42.5°	503.4	502.0	500.7	499.4	498.1	496.1	493.4	490.8	488.1	485.4	483.8
45°	469.8	468.6	467.4	466.3	465.1	463.3	460.8	458.3	455.8	453.3	451.5
47.5°	436.3	435.2	434.1	433.0	431.9	430.1	427.5	424.9	422.3	419.7	417.8
50°	413.0	412.2	411.3	410.5	409.7	408.1	405.8	403.5	401.1	398.8	396.5
52.5°	390.3	389.2	388.1	387.0	385.9	384.3	382.1	379.9	377.7	375.5	373.6
55°	355.5	354.5	353.5	352.5	351.5	350.0	348.0	346.0	344.0	342.0	340.1
57.5°	320.5	319.7	318.9	318.2	317.4	315.9	313.7	311.5	309.3	307.1	305.1
60°	297.2	296.6	295.9	295.2	294.6	293.1	290.8	288.4	286.1	283.8	282.0
62.5°	274.5	273.5	272.4	271.3	270.3	268.9	267.1	265.3	263.5	261.7	260.0
65°	239.7	238.7	237.7	236.7	235.8	234.4	232.8	231.1	229.4	227.8	226.3
67.5°	204.3	203.5	202.7	201.9	201.1	200.0	198.5	197.0	195.5	194.0	192.9
70°	182.2	181.6	180.9	180.2	179.6	178.5	177.0	175.5	174.0	172.5	171.4
72.5°	159.5	158.9	158.2	157.5	156.9	156.1	155.1	154.1	153.2	152.2	151.0
75°	125.5	125.1	124.8	124.5	124.1	123.6	122.7	121.9	121.1	120.2	119.2
77.5°	95.0	94.4	93.9	93.3	92.7	92.3	92.0	91.6	91.3	91.0	90.5
80°	74.7	74.5	74.4	74.2	74.0	73.8	73.4	73.1	72.8	72.4	71.9
82.5°	55.6	55.5	55.5	55.5	55.4	55.3	55.1	54.9	54.7	54.5	53.9
85°	30.6	30.5	30.3	30.1	30.0	29.8	29.6	29.5	29.3	29.1	28.6
87.5°	11.0	11.5	11.9	12.3	12.8	13.1	13.3	13.6	13.8	14.1	14.0
90°	1.4	4.9	8.4	11.9	15.3	18.3	20.9	23.4	25.9	28.4	30.0
92.5°	28.7	28.4	28.1	27.8	27.5	27.9	29.2	30.5	31.7	33.0	33.8
95°	92.4	82.0	71.6	61.2	50.7	46.6	48.8	51.0	53.3	55.5	57.0
97.5°	183.5	154.1	124.7	95.3	65.9	53.8	58.9	64.0	69.1	74.2	75.5
100°	251.7	208.4	165.1	121.8	78.5	59.6	64.9	70.3	75.7	81.1	83.6
102.5°	326.8	317.7	308.5	299.3	290.2	263.1	218.2	173.2	128.3	83.3	86.6
105°	432.4	441.8	451.3	460.8	470.3	431.9	345.6	259.3	173.0	86.8	90.2
107.5°	552.7	560.3	568.0	575.6	583.3	535.4	431.9	328.4	224.9	121.5	117.9
110°	630.1	636.7	643.3	650.0	656.6	614.2	522.9	431.6	340.2	248.9	217.3



TEST NUMBER: P331523

CATALOG NUMBER: S122DIW-S485D1440U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	702.9	708.7	714.6	720.5	726.4	718.0	695.5	672.9	650.3	627.8	512.5
115°	817.8	823.2	828.5	833.9	839.3	845.9	853.8	861.7	869.6	877.5	731.2
117.5°	920.5	926.5	932.5	938.5	944.5	950.2	955.6	961.1	966.5	972.0	936.6
120°	995.6	1000.3	1005.0	1009.8	1014.5	1019.7	1025.4	1031.1	1036.8	1042.5	1046.3
122.5°	1059.3	1064.3	1069.3	1074.3	1079.3	1084.9	1091.0	1097.2	1103.4	1109.6	1111.9
125°	1156.3	1160.4	1164.5	1168.6	1172.7	1177.8	1183.8	1189.8	1195.8	1201.8	1204.0
127.5°	1244.2	1248.7	1253.3	1257.8	1262.4	1266.9	1271.4	1275.9	1280.4	1284.9	1288.1
130°	1299.9	1305.0	1310.0	1315.1	1320.2	1324.4	1327.9	1331.4	1334.8	1338.3	1341.8
132.5°	1356.8	1361.1	1365.4	1369.7	1374.0	1377.9	1381.4	1384.8	1388.3	1391.8	1394.8
135°	1430.8	1435.8	1440.9	1445.9	1451.0	1454.9	1457.8	1460.6	1463.5	1466.3	1469.5
137.5°	1505.6	1509.1	1512.7	1516.2	1519.7	1523.1	1526.3	1529.6	1532.8	1536.0	1539.1
140°	1554.5	1557.0	1559.6	1562.1	1564.6	1567.6	1571.1	1574.6	1578.1	1581.5	1584.4
142.5°	1595.5	1597.7	1600.0	1602.3	1604.6	1607.7	1611.7	1615.7	1619.6	1623.6	1626.2
145°	1659.8	1659.4	1659.1	1658.8	1658.5	1661.0	1666.4	1671.8	1677.1	1682.5	1684.7
147.5°	1715.8	1714.6	1713.4	1712.2	1711.0	1713.0	1718.3	1723.7	1729.0	1734.3	1735.9
150°	1752.2	1750.0	1747.8	1745.6	1743.3	1744.8	1749.8	1754.9	1759.9	1765.0	1766.9
152.5°	1782.9	1780.5	1778.0	1775.5	1773.1	1774.2	1779.0	1783.8	1788.6	1793.4	1795.3
155°	1827.6	1824.7	1821.9	1819.0	1816.2	1816.7	1820.5	1824.3	1828.1	1831.8	1833.7
157.5°	1862.6	1860.2	1857.8	1855.4	1853.0	1853.1	1855.7	1858.4	1861.0	1863.7	1865.9
160°	1883.0	1881.1	1879.3	1877.4	1875.5	1875.5	1877.4	1879.3	1881.1	1883.0	1884.9
162.5°	1901.2	1899.4	1897.5	1895.6	1893.7	1893.5	1895.2	1896.8	1898.5	1900.1	1902.3
165°	1925.7	1923.8	1921.9	1920.0	1918.1	1917.7	1918.6	1919.5	1920.5	1921.4	1923.7
167.5°	1943.9	1942.0	1940.1	1938.2	1936.3	1935.8	1936.7	1937.6	1938.5	1939.4	1941.6
170°	1954.2	1952.3	1950.4	1948.5	1946.6	1945.9	1946.6	1947.2	1947.8	1948.5	1950.7
172.5°	1961.0	1959.1	1957.2	1955.3	1953.4	1952.8	1953.4	1954.0	1954.7	1955.3	1957.5
175°	1969.8	1967.6	1965.4	1963.2	1961.0	1960.2	1960.8	1961.4	1962.1	1962.7	1964.9
177.5°	1971.2	1969.5	1967.7	1965.9	1964.1	1963.4	1963.6	1963.9	1964.1	1964.4	1966.2
180°	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5



TEST NUMBER: P331523

CATALOG NUMBER: S122DIW-S485D1440U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7
2.5°	773.4	774.7	776.0	776.6	776.3	776.0	775.8	775.5
5°	768.2	769.5	770.8	771.3	771.0	770.6	770.3	770.0
7.5°	759.5	760.8	762.2	762.6	762.3	761.9	761.5	761.2
10°	751.7	753.1	754.4	754.8	754.3	753.8	753.3	752.8
12.5°	742.6	743.5	744.4	744.7	744.3	744.0	743.6	743.2
15°	726.5	727.2	727.8	727.7	726.9	726.1	725.3	724.4
17.5°	707.4	708.2	709.0	708.9	708.1	707.4	706.6	705.8
20°	692.6	693.1	693.6	693.5	692.8	692.1	691.5	690.8
22.5°	676.8	676.9	677.0	676.9	676.5	676.1	675.7	675.3
25°	651.2	651.5	651.8	651.8	651.5	651.2	650.8	650.5
27.5°	625.9	625.4	624.9	624.3	623.5	622.7	621.9	621.1
30°	606.2	605.7	605.2	604.6	603.9	603.3	602.6	601.9
32.5°	586.9	586.0	585.1	584.3	583.6	583.0	582.3	581.6
35°	555.9	554.9	553.9	553.0	552.2	551.3	550.5	549.7
37.5°	524.8	523.6	522.4	521.3	520.5	519.7	518.9	518.2
40°	503.4	501.9	500.4	499.3	498.6	498.0	497.3	496.6
42.5°	482.2	480.6	478.9	477.7	476.7	475.8	474.9	473.9
45°	449.7	447.9	446.0	444.8	444.1	443.5	442.8	442.1
47.5°	415.9	413.9	412.0	410.6	409.6	408.7	407.7	406.7
50°	394.2	391.8	389.5	387.9	387.1	386.3	385.4	384.6
52.5°	371.7	369.7	367.8	366.3	365.2	364.1	363.0	361.9
55°	338.1	336.1	334.1	332.7	331.8	331.0	330.2	329.4
57.5°	303.2	301.2	299.3	298.0	297.3	296.7	296.1	295.4
60°	280.1	278.3	276.5	275.3	274.8	274.3	273.8	273.3
62.5°	258.3	256.6	254.9	253.8	253.1	252.5	251.9	251.2
65°	224.8	223.3	221.8	220.6	219.8	219.0	218.2	217.3
67.5°	191.7	190.5	189.4	188.5	187.8	187.1	186.5	185.8
70°	170.2	169.0	167.9	167.0	166.3	165.6	165.0	164.3
72.5°	149.9	148.7	147.6	146.7	146.2	145.6	145.1	144.6
75°	118.2	117.3	116.3	115.9	116.3	116.6	116.9	117.3
77.5°	90.0	89.5	89.0	88.5	88.0	87.6	87.1	86.6
80°	71.4	70.9	70.5	70.0	69.7	69.4	69.0	68.7
82.5°	53.3	52.6	52.0	51.6	51.6	51.5	51.4	51.4
85°	28.1	27.6	27.1	26.8	26.6	26.5	26.3	26.1
87.5°	13.9	13.8	13.7	13.7	13.7	13.7	13.7	13.7
90°	31.6	33.2	34.8	35.9	36.5	37.1	37.8	38.4
92.5°	34.6	35.5	36.3	36.9	37.3	37.6	38.0	38.4
95°	58.6	60.2	61.8	62.4	62.1	61.8	61.5	61.2
97.5°	76.8	78.0	79.3	80.1	80.5	80.9	81.3	81.6
100°	86.1	88.7	91.2	92.8	93.4	94.0	94.7	95.3
102.5°	89.9	93.2	96.5	98.6	99.5	100.3	101.2	102.1
105°	93.7	97.2	100.7	103.0	104.3	105.6	106.8	108.1
107.5°	114.4	110.8	107.3	106.2	107.4	108.7	110.0	111.2
110°	185.7	154.1	122.5	107.3	108.6	109.8	111.1	112.4



TEST NUMBER: P331523

CATALOG NUMBER: S122DIW-S485D1440U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	397.2	281.9	166.6	109.4	110.5	111.5	112.5	113.5
115°	584.9	438.5	292.2	207.6	184.9	162.1	139.4	116.6
117.5°	901.2	865.8	830.4	775.3	700.5	625.7	550.9	476.2
120°	1050.1	1053.9	1057.7	1038.2	995.6	952.9	910.2	867.6
122.5°	1114.2	1116.5	1118.7	1115.7	1107.4	1099.2	1090.9	1082.6
125°	1206.2	1208.4	1210.6	1212.2	1213.2	1214.1	1215.1	1216.0
127.5°	1291.3	1294.5	1297.7	1299.5	1299.6	1299.8	1300.0	1300.2
130°	1345.3	1348.8	1352.2	1353.8	1353.5	1353.2	1352.9	1352.5
132.5°	1397.7	1400.7	1403.7	1405.0	1404.7	1404.4	1404.1	1403.7
135°	1472.6	1475.8	1479.0	1480.2	1479.6	1479.0	1478.3	1477.7
137.5°	1542.2	1545.3	1548.4	1549.4	1548.3	1547.3	1546.2	1545.1
140°	1587.2	1590.1	1592.9	1593.5	1592.0	1590.4	1588.8	1587.2
142.5°	1628.8	1631.4	1634.0	1634.5	1632.9	1631.3	1629.8	1628.2
145°	1686.9	1689.1	1691.4	1691.7	1690.1	1688.5	1686.9	1685.4
147.5°	1737.6	1739.2	1740.9	1741.0	1739.7	1738.4	1737.0	1735.7
150°	1768.8	1770.7	1772.6	1772.7	1771.2	1769.6	1768.0	1766.4
152.5°	1797.2	1799.1	1801.0	1800.9	1798.8	1796.8	1794.7	1792.6
155°	1835.6	1837.5	1839.4	1839.1	1836.6	1834.1	1831.5	1829.0
157.5°	1868.0	1870.1	1872.3	1872.1	1869.7	1867.2	1864.7	1862.3
160°	1886.8	1888.7	1890.6	1890.5	1888.3	1886.0	1883.8	1881.6
162.5°	1904.4	1906.6	1908.7	1908.4	1905.7	1903.0	1900.3	1897.6
165°	1925.9	1928.1	1930.3	1930.3	1928.1	1925.9	1923.7	1921.4
167.5°	1943.8	1946.0	1948.2	1947.9	1945.1	1942.2	1939.4	1936.5
170°	1952.9	1955.1	1957.3	1957.0	1954.2	1951.3	1948.5	1945.6
172.5°	1959.7	1961.9	1964.1	1963.8	1961.0	1958.1	1955.3	1952.4
175°	1967.1	1969.3	1971.5	1971.1	1967.9	1964.7	1961.6	1958.4
177.5°	1967.9	1969.7	1971.5	1971.2	1968.9	1966.7	1964.4	1962.1
180°	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5

(END OF REPORT)