

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331511

Luminaire Tested: **S122DIW-S485D970U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331511
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S485D970U835-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 970 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5849.2 lumens
Efficiency: N/A
Efficacy: 129.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 45.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331511

CATALOG NUMBER: S122DIW-S485D970U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

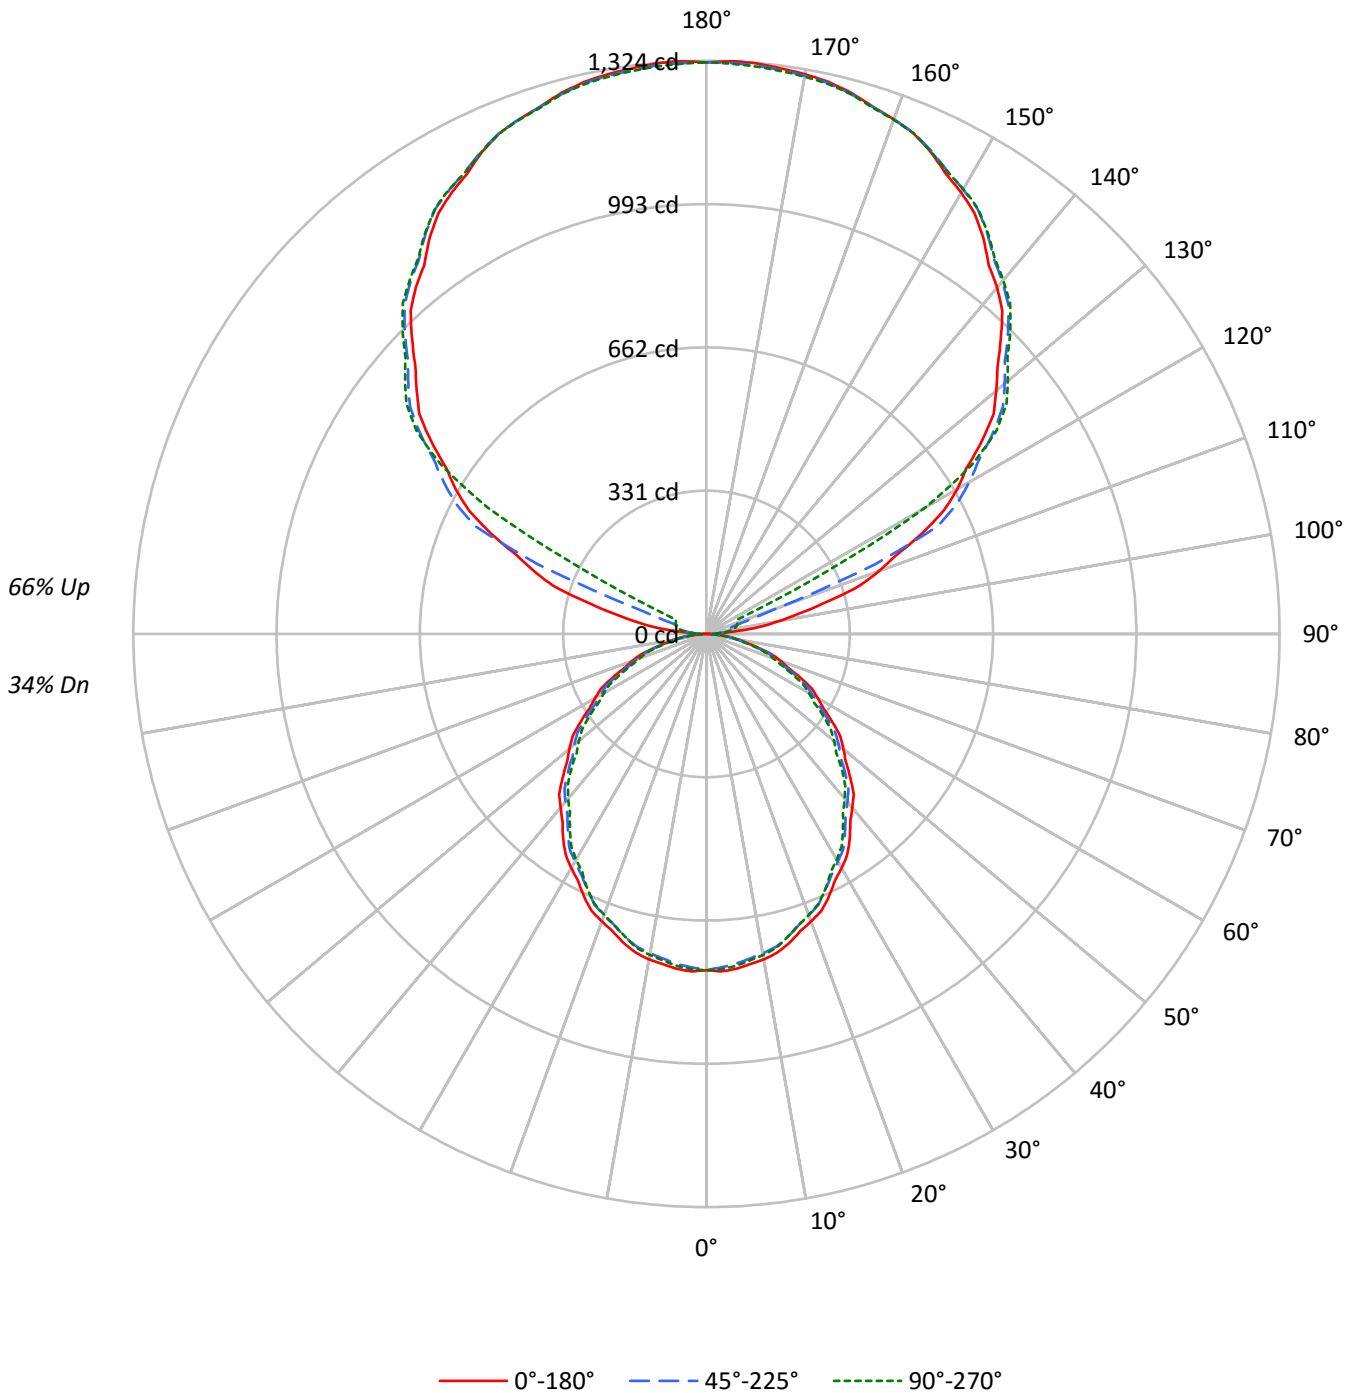



TEST NUMBER: P331511

CATALOG NUMBER: S122DIW-S485D970U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	34
1	94	90	86	83	85	81	78	75	65	63	61	50	49	47	36	36	35	28
2	86	78	73	67	77	71	66	62	57	53	50	44	42	40	32	31	29	24
3	78	69	62	56	70	62	56	51	50	46	42	39	36	33	28	27	25	20
4	71	61	53	47	64	55	49	44	45	40	36	35	31	29	25	23	21	17
5	65	54	46	40	59	49	42	37	40	35	31	31	27	25	23	21	19	15
6	60	48	41	35	54	44	37	32	36	31	27	28	24	22	21	18	16	13
7	56	44	36	31	50	40	33	28	32	27	24	25	22	19	19	16	15	12
8	52	40	32	27	46	36	29	25	29	24	21	23	20	17	17	15	13	11
9	48	36	29	24	43	33	26	22	27	22	19	21	18	15	16	14	12	9
10	45	33	26	21	40	30	24	20	25	20	17	20	16	14	15	12	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12540	12540	12540
5°	12588	12407	12480
10°	12514	12281	12342
15°	12359	12122	12109
20°	12139	11883	11869
25°	11922	11589	11589
30°	11641	11320	11222
35°	11379	10996	10835
40°	11051	10673	10467
45°	10727	10351	10095
50°	10374	10017	9661
55°	10007	9627	9272
60°	9597	9164	8825
65°	9158	8703	8302
70°	8601	8143	7756
75°	7829	7498	7317
80°	6946	6732	6388
85°	5669	5391	4835



TEST NUMBER: P331511

CATALOG NUMBER: S122DIW-S485D970U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.0	1.2
10°-20°	205.5	3.5
20°-30°	302.1	5.2
30°-40°	350.9	6.0
40°-50°	350.5	6.0
50°-60°	305.6	5.2
60°-70°	226.0	3.9
70°-80°	128.0	2.2
80°-90°	37.7	0.6
90°-100°	44.1	0.8
100°-110°	161.5	2.8
110°-120°	431.8	7.4
120°-130°	712.8	12.2
130°-140°	758.0	13.0
140°-150°	704.6	12.0
150°-160°	566.5	9.7
160°-170°	365.0	6.2
170°-180°	125.6	2.1
0°-30°	580.6	9.9
0°-40°	931.5	15.9
0°-60°	1587.6	27.1
0°-90°	1979.3	33.8
90°-120°	637.4	10.9
90°-150°	2812.8	48.1
90°-180°	3870.0	66.2
0°-180°	5849.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	777	777	777	777	777	
5°	777	773	766	771	770	74
15°	739	735	725	728	724	208
25°	669	663	650	652	650	308
35°	577	570	558	553	550	360
45°	470	464	453	445	442	362
55°	356	351	342	333	329	318
65°	240	235	228	221	217	237
75°	126	124	120	116	117	134
85°	31	30	29	27	26	35
90°	1	11	19	24	26	4
95°	62	33	37	42	41	76
105°	290	303	58	68	73	310
115°	549	566	590	168	78	541
125°	777	790	807	814	817	692
135°	961	976	985	994	993	742
145°	1115	1115	1130	1136	1132	697
155°	1228	1220	1231	1236	1229	566
165°	1294	1289	1291	1297	1291	365
175°	1323	1317	1319	1324	1316	126
180°	1320	1320	1320	1320	1320	



TEST NUMBER: P331511

CATALOG NUMBER: S122DIW-S485D970U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7
2.5°	780.3	779.6	779.0	778.3	777.6	776.6	775.1	773.7	772.2	770.7	772.1
5°	776.7	776.0	775.4	774.7	774.1	772.8	771.0	769.2	767.3	765.5	766.8
7.5°	769.8	768.8	767.8	766.7	765.7	764.3	762.4	760.6	758.7	756.8	758.2
10°	763.3	762.1	760.9	759.8	758.6	757.0	755.0	753.1	751.1	749.1	750.4
12.5°	754.3	753.3	752.2	751.2	750.2	748.7	746.7	744.7	742.7	740.7	741.6
15°	739.4	738.4	737.4	736.4	735.4	733.8	731.6	729.5	727.3	725.2	725.8
17.5°	720.2	719.3	718.3	717.3	716.3	714.7	712.5	710.3	708.1	705.9	706.7
20°	706.5	705.5	704.5	703.5	702.5	700.9	698.5	696.2	693.9	691.6	692.1
22.5°	692.8	691.4	690.0	688.6	687.2	685.4	683.2	681.0	678.8	676.6	676.7
25°	669.2	667.8	666.5	665.2	663.9	661.8	659.0	656.1	653.3	650.5	650.8
27.5°	642.3	641.1	639.9	638.7	637.5	635.8	633.6	631.3	629.1	626.9	626.4
30°	624.4	623.0	621.7	620.4	619.0	617.1	614.6	612.2	609.7	607.2	606.7
32.5°	605.2	604.2	603.1	602.0	601.0	599.1	596.5	593.9	591.3	588.7	587.8
35°	577.3	575.6	574.0	572.3	570.7	568.5	565.9	563.2	560.5	557.9	556.9
37.5°	545.8	544.3	542.9	541.4	539.9	537.9	535.2	532.6	529.9	527.3	526.0
40°	524.3	522.9	521.6	520.3	519.0	517.0	514.3	511.7	509.0	506.4	504.9
42.5°	503.4	502.0	500.7	499.4	498.1	496.1	493.4	490.8	488.1	485.4	483.8
45°	469.8	468.6	467.4	466.3	465.1	463.3	460.8	458.3	455.8	453.3	451.5
47.5°	436.3	435.2	434.1	433.0	431.9	430.1	427.5	424.9	422.3	419.7	417.8
50°	413.0	412.2	411.3	410.5	409.7	408.1	405.8	403.5	401.1	398.8	396.5
52.5°	390.3	389.2	388.1	387.0	385.9	384.3	382.1	379.9	377.7	375.5	373.6
55°	355.5	354.5	353.5	352.5	351.5	350.0	348.0	346.0	344.0	342.0	340.1
57.5°	320.5	319.7	318.9	318.2	317.4	315.9	313.7	311.5	309.3	307.1	305.1
60°	297.2	296.6	295.9	295.2	294.6	293.1	290.8	288.4	286.1	283.8	282.0
62.5°	274.5	273.5	272.4	271.3	270.3	268.9	267.1	265.3	263.5	261.7	260.0
65°	239.7	238.7	237.7	236.7	235.8	234.4	232.8	231.1	229.4	227.8	226.3
67.5°	204.3	203.5	202.7	201.9	201.1	200.0	198.5	197.0	195.5	194.0	192.9
70°	182.2	181.6	180.9	180.2	179.6	178.5	177.0	175.5	174.0	172.5	171.4
72.5°	159.5	158.9	158.2	157.5	156.9	156.1	155.1	154.1	153.2	152.2	151.0
75°	125.5	125.1	124.8	124.5	124.1	123.6	122.7	121.9	121.1	120.2	119.2
77.5°	95.0	94.4	93.9	93.3	92.7	92.3	92.0	91.6	91.3	91.0	90.5
80°	74.7	74.5	74.4	74.2	74.0	73.8	73.4	73.1	72.8	72.4	71.9
82.5°	55.6	55.5	55.5	55.5	55.4	55.3	55.1	54.9	54.7	54.5	53.9
85°	30.6	30.5	30.3	30.1	30.0	29.8	29.6	29.5	29.3	29.1	28.6
87.5°	10.9	11.1	11.3	11.6	11.8	11.9	12.0	12.0	12.1	12.2	12.0
90°	1.0	3.3	5.6	8.0	10.3	12.3	14.0	15.7	17.4	19.1	20.2
92.5°	19.3	19.1	18.9	18.7	18.5	18.8	19.6	20.5	21.3	22.2	22.7
95°	62.1	55.1	48.1	41.1	34.1	31.3	32.8	34.3	35.8	37.3	38.3
97.5°	123.3	103.5	83.8	64.0	44.3	36.1	39.6	43.0	46.4	49.9	50.7
100°	169.1	140.0	110.9	81.9	52.8	40.0	43.6	47.2	50.9	54.5	56.2
102.5°	219.6	213.4	207.3	201.1	194.9	176.8	146.6	116.4	86.2	56.0	58.2
105°	290.5	296.9	303.2	309.6	316.0	290.2	232.2	174.2	116.3	58.3	60.6
107.5°	371.3	376.5	381.6	386.7	391.9	359.7	290.2	220.6	151.1	81.6	79.2
110°	423.3	427.8	432.2	436.7	441.1	412.7	351.3	290.0	228.6	167.2	146.0



TEST NUMBER: P331511

CATALOG NUMBER: S122DIW-S485D970U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	472.2	476.2	480.1	484.1	488.0	482.4	467.3	452.1	436.9	421.8	344.3
115°	549.4	553.0	556.7	560.3	563.9	568.3	573.6	578.9	584.3	589.6	491.2
117.5°	618.4	622.5	626.5	630.5	634.6	638.4	642.1	645.7	649.4	653.0	629.2
120°	668.9	672.1	675.2	678.4	681.6	685.1	688.9	692.8	696.6	700.4	703.0
122.5°	711.7	715.0	718.4	721.7	725.1	728.9	733.0	737.2	741.3	745.5	747.0
125°	776.8	779.6	782.4	785.1	787.9	791.3	795.3	799.4	803.4	807.4	808.9
127.5°	835.9	839.0	842.0	845.1	848.1	851.2	854.2	857.2	860.2	863.2	865.4
130°	873.4	876.8	880.2	883.5	886.9	889.8	892.1	894.5	896.8	899.2	901.5
132.5°	911.6	914.5	917.4	920.2	923.1	925.7	928.1	930.4	932.7	935.1	937.1
135°	961.3	964.7	968.1	971.5	974.9	977.5	979.4	981.3	983.2	985.2	987.3
137.5°	1011.5	1013.9	1016.3	1018.7	1021.0	1023.3	1025.5	1027.6	1029.8	1032.0	1034.1
140°	1044.4	1046.1	1047.8	1049.5	1051.2	1053.2	1055.5	1057.9	1060.2	1062.6	1064.5
142.5°	1071.9	1073.4	1075.0	1076.5	1078.0	1080.1	1082.8	1085.5	1088.2	1090.8	1092.6
145°	1115.1	1114.9	1114.7	1114.5	1114.3	1116.0	1119.6	1123.2	1126.8	1130.4	1131.9
147.5°	1152.8	1151.9	1151.1	1150.3	1149.5	1150.9	1154.5	1158.0	1161.6	1165.2	1166.3
150°	1177.2	1175.7	1174.2	1172.8	1171.3	1172.2	1175.6	1179.0	1182.4	1185.8	1187.1
152.5°	1197.9	1196.2	1194.5	1192.9	1191.2	1192.0	1195.2	1198.5	1201.7	1204.9	1206.2
155°	1227.9	1225.9	1224.0	1222.1	1220.2	1220.5	1223.1	1225.6	1228.2	1230.7	1232.0
157.5°	1251.4	1249.8	1248.1	1246.5	1244.9	1245.0	1246.8	1248.6	1250.3	1252.1	1253.6
160°	1265.1	1263.9	1262.6	1261.3	1260.0	1260.0	1261.3	1262.6	1263.9	1265.1	1266.4
162.5°	1277.4	1276.1	1274.8	1273.5	1272.3	1272.2	1273.3	1274.4	1275.5	1276.6	1278.0
165°	1293.8	1292.5	1291.2	1290.0	1288.7	1288.4	1289.0	1289.6	1290.3	1290.9	1292.4
167.5°	1306.0	1304.7	1303.5	1302.2	1300.9	1300.6	1301.2	1301.8	1302.4	1303.0	1304.4
170°	1312.9	1311.6	1310.4	1309.1	1307.8	1307.4	1307.8	1308.2	1308.7	1309.1	1310.6
172.5°	1317.5	1316.2	1314.9	1313.7	1312.4	1312.0	1312.4	1312.8	1313.2	1313.7	1315.2
175°	1323.4	1321.9	1320.4	1319.0	1317.5	1316.9	1317.4	1317.8	1318.2	1318.6	1320.1
177.5°	1324.4	1323.2	1322.0	1320.8	1319.6	1319.1	1319.3	1319.4	1319.6	1319.8	1321.0
180°	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5



TEST NUMBER: P331511

CATALOG NUMBER: S122DIW-S485D970U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7
2.5°	773.4	774.7	776.0	776.6	776.3	776.0	775.8	775.5
5°	768.2	769.5	770.8	771.3	771.0	770.6	770.3	770.0
7.5°	759.5	760.8	762.2	762.6	762.3	761.9	761.5	761.2
10°	751.7	753.1	754.4	754.8	754.3	753.8	753.3	752.8
12.5°	742.6	743.5	744.4	744.7	744.3	744.0	743.6	743.2
15°	726.5	727.2	727.8	727.7	726.9	726.1	725.3	724.4
17.5°	707.4	708.2	709.0	708.9	708.1	707.4	706.6	705.8
20°	692.6	693.1	693.6	693.5	692.8	692.1	691.5	690.8
22.5°	676.8	676.9	677.0	676.9	676.5	676.1	675.7	675.3
25°	651.2	651.5	651.8	651.8	651.5	651.2	650.8	650.5
27.5°	625.9	625.4	624.9	624.3	623.5	622.7	621.9	621.1
30°	606.2	605.7	605.2	604.6	603.9	603.3	602.6	601.9
32.5°	586.9	586.0	585.1	584.3	583.6	583.0	582.3	581.6
35°	555.9	554.9	553.9	553.0	552.2	551.3	550.5	549.7
37.5°	524.8	523.6	522.4	521.3	520.5	519.7	518.9	518.2
40°	503.4	501.9	500.4	499.3	498.6	498.0	497.3	496.6
42.5°	482.2	480.6	478.9	477.7	476.7	475.8	474.9	473.9
45°	449.7	447.9	446.0	444.8	444.1	443.5	442.8	442.1
47.5°	415.9	413.9	412.0	410.6	409.6	408.7	407.7	406.7
50°	394.2	391.8	389.5	387.9	387.1	386.3	385.4	384.6
52.5°	371.7	369.7	367.8	366.3	365.2	364.1	363.0	361.9
55°	338.1	336.1	334.1	332.7	331.8	331.0	330.2	329.4
57.5°	303.2	301.2	299.3	298.0	297.3	296.7	296.1	295.4
60°	280.1	278.3	276.5	275.3	274.8	274.3	273.8	273.3
62.5°	258.3	256.6	254.9	253.8	253.1	252.5	251.9	251.2
65°	224.8	223.3	221.8	220.6	219.8	219.0	218.2	217.3
67.5°	191.7	190.5	189.4	188.5	187.8	187.1	186.5	185.8
70°	170.2	169.0	167.9	167.0	166.3	165.6	165.0	164.3
72.5°	149.9	148.7	147.6	146.7	146.2	145.6	145.1	144.6
75°	118.2	117.3	116.3	115.9	116.3	116.6	116.9	117.3
77.5°	90.0	89.5	89.0	88.5	88.0	87.6	87.1	86.6
80°	71.4	70.9	70.5	70.0	69.7	69.4	69.0	68.7
82.5°	53.3	52.6	52.0	51.6	51.6	51.5	51.4	51.4
85°	28.1	27.6	27.1	26.8	26.6	26.5	26.3	26.1
87.5°	11.8	11.6	11.4	11.3	11.3	11.2	11.2	11.1
90°	21.2	22.3	23.4	24.1	24.5	24.9	25.4	25.8
92.5°	23.3	23.8	24.4	24.8	25.0	25.3	25.5	25.8
95°	39.4	40.5	41.5	41.9	41.7	41.5	41.3	41.1
97.5°	51.6	52.4	53.3	53.8	54.1	54.3	54.6	54.8
100°	57.9	59.6	61.3	62.3	62.7	63.2	63.6	64.0
102.5°	60.4	62.6	64.8	66.2	66.8	67.4	68.0	68.6
105°	63.0	65.3	67.6	69.2	70.1	70.9	71.8	72.6
107.5°	76.8	74.5	72.1	71.3	72.2	73.0	73.9	74.7
110°	124.7	103.5	82.3	72.1	72.9	73.8	74.6	75.5



TEST NUMBER: P331511

CATALOG NUMBER: S122DIW-S485D970U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	266.8	189.4	111.9	73.5	74.2	74.9	75.6	76.3
115°	392.9	294.6	196.3	139.5	124.2	108.9	93.6	78.4
117.5°	605.4	581.7	557.9	520.9	470.6	420.4	370.2	319.9
120°	705.5	708.0	710.6	697.5	668.9	640.2	611.5	582.9
122.5°	748.6	750.1	751.6	749.6	744.0	738.5	732.9	727.4
125°	810.4	811.9	813.4	814.4	815.1	815.7	816.3	817.0
127.5°	867.6	869.7	871.9	873.0	873.2	873.3	873.4	873.5
130°	903.8	906.2	908.5	909.6	909.3	909.1	908.9	908.7
132.5°	939.1	941.1	943.1	944.0	943.7	943.5	943.3	943.1
135°	989.4	991.5	993.6	994.5	994.1	993.6	993.2	992.8
137.5°	1036.1	1038.2	1040.3	1041.0	1040.3	1039.5	1038.8	1038.1
140°	1066.4	1068.3	1070.2	1070.6	1069.6	1068.5	1067.4	1066.4
142.5°	1094.3	1096.1	1097.8	1098.1	1097.1	1096.0	1095.0	1093.9
145°	1133.4	1134.9	1136.3	1136.6	1135.5	1134.4	1133.4	1132.3
147.5°	1167.4	1168.5	1169.6	1169.7	1168.8	1167.9	1167.0	1166.1
150°	1188.4	1189.6	1190.9	1191.0	1190.0	1188.9	1187.8	1186.8
152.5°	1207.5	1208.7	1210.0	1210.0	1208.6	1207.2	1205.8	1204.4
155°	1233.3	1234.5	1235.8	1235.6	1233.9	1232.2	1230.5	1228.8
157.5°	1255.0	1256.5	1257.9	1257.8	1256.1	1254.5	1252.8	1251.2
160°	1267.7	1268.9	1270.2	1270.1	1268.6	1267.1	1265.7	1264.2
162.5°	1279.5	1280.9	1282.4	1282.2	1280.3	1278.5	1276.7	1274.9
165°	1293.9	1295.4	1296.9	1296.9	1295.4	1293.9	1292.4	1290.9
167.5°	1305.9	1307.4	1308.9	1308.7	1306.8	1304.9	1303.0	1301.1
170°	1312.1	1313.5	1315.0	1314.8	1312.9	1311.0	1309.1	1307.2
172.5°	1316.6	1318.1	1319.6	1319.4	1317.5	1315.6	1313.7	1311.8
175°	1321.6	1323.1	1324.6	1324.3	1322.1	1320.0	1317.9	1315.8
177.5°	1322.2	1323.3	1324.5	1324.4	1322.8	1321.3	1319.8	1318.3
180°	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5

(END OF REPORT)