

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331512

Luminaire Tested: **S122DIW-S485D970U835-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331512
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S485D970U835-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 970 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5336.9 lumens
Efficiency: N/A
Efficacy: 118.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 45.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331512

CATALOG NUMBER: S122DIW-S485D970U835-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

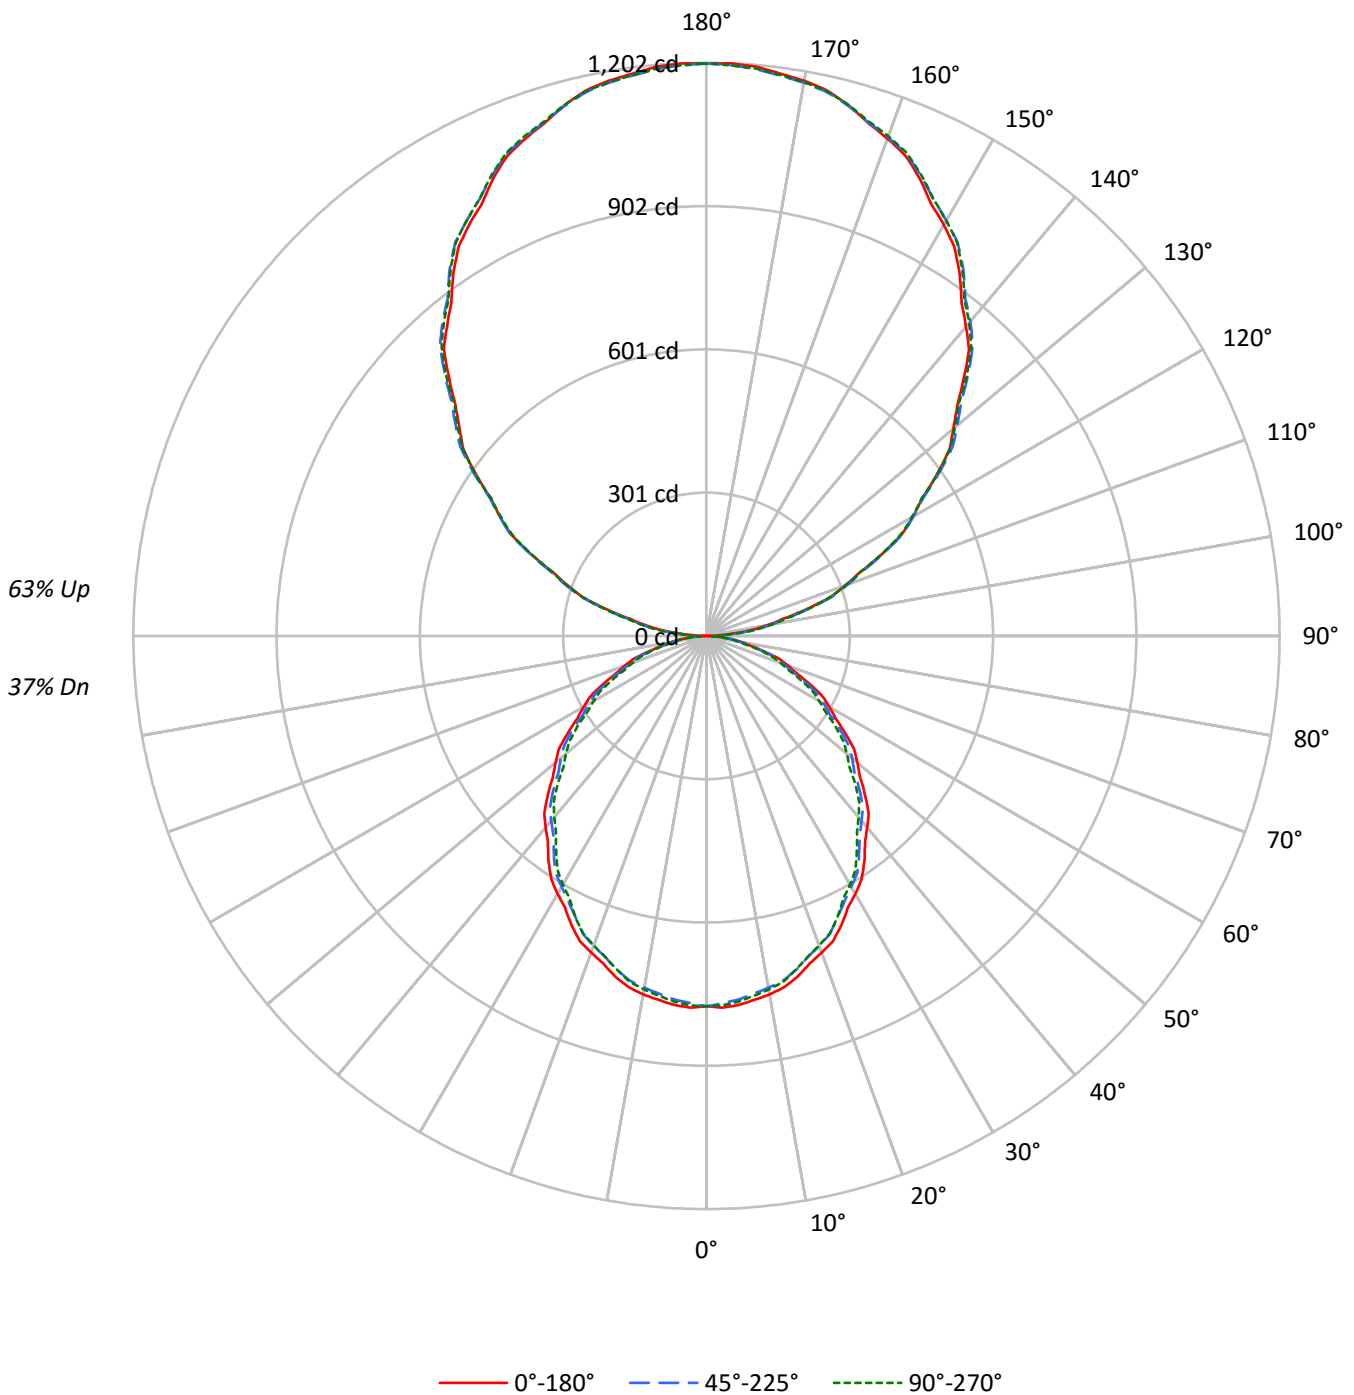



TEST NUMBER: P331512

CATALOG NUMBER: S122DIW-S485D970U835-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	76	76	76	60	60	60	44	44	44	37
1	95	91	87	83	86	82	79	76	67	64	62	52	51	49	39	38	37	31
2	86	79	73	68	78	72	67	62	58	55	52	46	43	41	34	33	31	26
3	79	69	62	57	71	63	57	52	51	47	43	41	37	35	30	28	27	22
4	72	61	54	48	65	56	49	44	46	41	37	36	33	30	27	25	23	19
5	66	55	47	41	60	50	43	38	41	36	32	32	29	26	25	22	20	17
6	61	49	41	35	55	45	38	33	37	31	28	29	25	23	22	20	18	15
7	56	44	36	31	51	40	33	29	33	28	24	27	23	20	20	18	16	13
8	52	40	32	27	47	37	30	25	30	25	21	24	20	18	19	16	14	12
9	48	36	29	24	44	33	27	22	28	23	19	22	19	16	17	15	13	10
10	45	33	26	22	41	31	24	20	25	21	17	21	17	14	16	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12540	12540	12540
5°	12588	12407	12480
10°	12514	12281	12342
15°	12359	12122	12109
20°	12139	11883	11869
25°	11922	11589	11589
30°	11641	11320	11222
35°	11379	10996	10835
40°	11051	10673	10467
45°	10727	10351	10095
50°	10374	10017	9661
55°	10007	9627	9272
60°	9597	9164	8825
65°	9158	8703	8302
70°	8601	8143	7756
75°	7829	7498	7317
80°	6946	6732	6388
85°	5669	5391	4835



TEST NUMBER: P331512

CATALOG NUMBER: S122DIW-S485D970U835-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.0	1.4
10°-20°	205.5	3.9
20°-30°	302.1	5.7
30°-40°	350.9	6.6
40°-50°	350.5	6.6
50°-60°	305.6	5.7
60°-70°	226.0	4.2
70°-80°	128.0	2.4
80°-90°	39.2	0.7
90°-100°	76.0	1.4
100°-110°	236.2	4.4
110°-120°	403.8	7.6
120°-130°	531.0	9.9
130°-140°	595.9	11.2
140°-150°	584.3	10.9
150°-160°	490.1	9.2
160°-170°	325.1	6.1
170°-180°	113.6	2.1
0°-30°	580.6	10.9
0°-40°	931.5	17.5
0°-60°	1587.6	29.7
0°-90°	1980.8	37.1
90°-120°	716.0	13.4
90°-150°	2427.3	45.5
90°-180°	3356.0	62.9
0°-180°	5336.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	777	777	777	777	777	
5°	777	773	766	771	770	74
15°	739	735	725	728	724	208
25°	669	663	650	652	650	308
35°	577	570	558	553	550	360
45°	470	464	453	445	442	362
55°	356	351	342	333	329	318
65°	240	235	228	221	217	237
75°	126	124	120	116	117	134
85°	31	30	29	27	26	35
90°	1	14	35	34	34	4
95°	53	62	65	65	63	60
105°	218	221	223	225	225	230
115°	405	411	409	408	405	401
125°	590	598	596	593	592	527
135°	763	773	776	775	772	589
145°	926	933	939	940	936	578
155°	1058	1061	1064	1069	1066	487
165°	1152	1151	1151	1157	1153	325
175°	1198	1195	1193	1200	1194	114
180°	1200	1200	1200	1200	1200	



TEST NUMBER: P331512

CATALOG NUMBER: S122DIW-S485D970U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7
2.5°	780.3	779.6	779.0	778.3	777.6	776.6	775.1	773.7	772.2	770.7	772.1
5°	776.7	776.0	775.4	774.7	774.1	772.8	771.0	769.2	767.3	765.5	766.8
7.5°	769.8	768.8	767.8	766.7	765.7	764.3	762.4	760.6	758.7	756.8	758.2
10°	763.3	762.1	760.9	759.8	758.6	757.0	755.0	753.1	751.1	749.1	750.4
12.5°	754.3	753.3	752.2	751.2	750.2	748.7	746.7	744.7	742.7	740.7	741.6
15°	739.4	738.4	737.4	736.4	735.4	733.8	731.6	729.5	727.3	725.2	725.8
17.5°	720.2	719.3	718.3	717.3	716.3	714.7	712.5	710.3	708.1	705.9	706.7
20°	706.5	705.5	704.5	703.5	702.5	700.9	698.5	696.2	693.9	691.6	692.1
22.5°	692.8	691.4	690.0	688.6	687.2	685.4	683.2	681.0	678.8	676.6	676.7
25°	669.2	667.8	666.5	665.2	663.9	661.8	659.0	656.1	653.3	650.5	650.8
27.5°	642.3	641.1	639.9	638.7	637.5	635.8	633.6	631.3	629.1	626.9	626.4
30°	624.4	623.0	621.7	620.4	619.0	617.1	614.6	612.2	609.7	607.2	606.7
32.5°	605.2	604.2	603.1	602.0	601.0	599.1	596.5	593.9	591.3	588.7	587.8
35°	577.3	575.6	574.0	572.3	570.7	568.5	565.9	563.2	560.5	557.9	556.9
37.5°	545.8	544.3	542.9	541.4	539.9	537.9	535.2	532.6	529.9	527.3	526.0
40°	524.3	522.9	521.6	520.3	519.0	517.0	514.3	511.7	509.0	506.4	504.9
42.5°	503.4	502.0	500.7	499.4	498.1	496.1	493.4	490.8	488.1	485.4	483.8
45°	469.8	468.6	467.4	466.3	465.1	463.3	460.8	458.3	455.8	453.3	451.5
47.5°	436.3	435.2	434.1	433.0	431.9	430.1	427.5	424.9	422.3	419.7	417.8
50°	413.0	412.2	411.3	410.5	409.7	408.1	405.8	403.5	401.1	398.8	396.5
52.5°	390.3	389.2	388.1	387.0	385.9	384.3	382.1	379.9	377.7	375.5	373.6
55°	355.5	354.5	353.5	352.5	351.5	350.0	348.0	346.0	344.0	342.0	340.1
57.5°	320.5	319.7	318.9	318.2	317.4	315.9	313.7	311.5	309.3	307.1	305.1
60°	297.2	296.6	295.9	295.2	294.6	293.1	290.8	288.4	286.1	283.8	282.0
62.5°	274.5	273.5	272.4	271.3	270.3	268.9	267.1	265.3	263.5	261.7	260.0
65°	239.7	238.7	237.7	236.7	235.8	234.4	232.8	231.1	229.4	227.8	226.3
67.5°	204.3	203.5	202.7	201.9	201.1	200.0	198.5	197.0	195.5	194.0	192.9
70°	182.2	181.6	180.9	180.2	179.6	178.5	177.0	175.5	174.0	172.5	171.4
72.5°	159.5	158.9	158.2	157.5	156.9	156.1	155.1	154.1	153.2	152.2	151.0
75°	125.5	125.1	124.8	124.5	124.1	123.6	122.7	121.9	121.1	120.2	119.2
77.5°	95.0	94.4	93.9	93.3	92.7	92.3	92.0	91.6	91.3	91.0	90.5
80°	74.7	74.5	74.4	74.2	74.0	73.8	73.4	73.1	72.8	72.4	71.9
82.5°	55.6	55.5	55.5	55.5	55.4	55.3	55.1	54.9	54.7	54.5	53.9
85°	30.6	30.5	30.3	30.1	30.0	29.8	29.6	29.5	29.3	29.1	28.6
87.5°	11.0	11.2	11.5	11.8	12.1	12.6	13.3	14.0	14.7	15.5	15.0
90°	1.0	3.7	6.4	9.1	11.8	15.6	20.6	25.5	30.5	35.4	35.0
92.5°	18.0	20.0	22.0	24.0	26.0	27.5	28.7	29.9	31.0	32.2	32.3
95°	52.7	54.9	57.2	59.4	61.7	63.0	63.5	63.9	64.4	64.8	64.8
97.5°	96.2	98.2	100.2	102.2	104.1	105.6	106.4	107.3	108.1	109.0	109.0
100°	128.6	130.4	132.2	134.0	135.8	137.1	137.7	138.4	139.1	139.8	139.8
102.5°	162.7	164.1	165.5	167.0	168.4	169.6	170.4	171.3	172.1	173.0	173.2
105°	217.8	218.4	219.1	219.8	220.5	221.0	221.5	221.9	222.4	222.8	223.3
107.5°	273.3	274.3	275.2	276.2	277.2	277.7	277.7	277.7	277.7	277.7	277.9
110°	308.9	310.3	311.6	313.0	314.3	315.0	315.0	315.0	315.0	315.0	315.0



TEST NUMBER: P331512

CATALOG NUMBER: S122DIW-S485D970U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	347.8	349.2	350.5	351.9	353.2	353.8	353.6	353.4	353.3	353.1	352.5
115°	405.1	406.5	407.8	409.2	410.5	411.0	410.5	410.1	409.6	409.2	409.0
117.5°	462.3	464.1	465.9	467.7	469.5	469.7	468.5	467.2	466.0	464.7	464.2
120°	500.4	502.2	504.0	505.8	507.6	507.6	505.8	504.0	502.2	500.4	500.4
122.5°	535.2	537.4	539.5	541.7	543.8	544.3	543.0	541.8	540.5	539.2	538.7
125°	589.5	591.5	593.5	595.6	597.6	598.3	597.6	596.9	596.2	595.6	594.9
127.5°	642.4	644.9	647.5	650.1	652.6	653.5	652.7	651.9	651.1	650.3	649.4
130°	675.6	678.5	681.4	684.4	687.3	688.5	688.1	687.6	687.2	686.7	686.3
132.5°	712.8	715.2	717.6	720.0	722.4	723.6	723.7	723.8	723.9	724.0	723.0
135°	762.7	765.2	767.6	770.1	772.6	774.0	774.5	774.9	775.4	775.8	775.6
137.5°	815.1	817.2	819.2	821.2	823.2	824.6	825.1	825.7	826.3	826.9	826.7
140°	846.7	848.8	850.8	852.8	854.8	856.4	857.6	858.7	859.8	860.9	860.9
142.5°	879.2	881.2	883.2	885.2	887.3	888.7	889.4	890.2	891.0	891.7	891.9
145°	925.7	927.3	928.9	930.5	932.1	933.5	934.9	936.2	937.6	938.9	939.1
147.5°	967.3	969.2	971.1	972.9	974.8	976.2	977.1	978.0	978.9	979.8	980.3
150°	995.6	997.0	998.3	999.7	1001.0	1002.2	1003.1	1004.0	1004.9	1005.8	1006.4
152.5°	1020.8	1022.1	1023.5	1024.8	1026.2	1027.4	1028.5	1029.5	1030.6	1031.7	1032.5
155°	1058.4	1059.1	1059.8	1060.5	1061.1	1061.8	1062.5	1063.2	1063.8	1064.5	1065.6
157.5°	1090.6	1091.1	1091.5	1092.0	1092.4	1092.9	1093.3	1093.7	1094.1	1094.5	1096.0
160°	1110.1	1110.5	1111.0	1111.4	1111.9	1112.2	1112.5	1112.7	1112.9	1113.1	1114.5
162.5°	1127.9	1128.0	1128.1	1128.2	1128.3	1128.4	1128.7	1128.9	1129.1	1129.3	1130.9
165°	1151.6	1151.4	1151.2	1150.9	1150.7	1150.6	1150.6	1150.6	1150.6	1150.6	1152.2
167.5°	1171.5	1170.8	1170.1	1169.4	1168.8	1168.4	1168.4	1168.3	1168.3	1168.2	1169.8
170°	1182.0	1181.3	1180.7	1180.0	1179.3	1178.9	1178.6	1178.4	1178.2	1178.0	1179.5
172.5°	1189.3	1188.6	1187.9	1187.3	1186.6	1186.1	1185.9	1185.7	1185.5	1185.2	1186.8
175°	1198.2	1197.5	1196.9	1196.2	1195.5	1194.9	1194.5	1194.0	1193.6	1193.1	1194.7
177.5°	1201.9	1201.3	1200.8	1200.2	1199.7	1199.2	1198.9	1198.5	1198.2	1197.8	1198.9
180°	1200.2	1200.2	1200.2	1200.2	1200.2	1200.2	1200.2	1200.2	1200.2	1200.2	1200.2



TEST NUMBER: P331512

CATALOG NUMBER: S122DIW-S485D970U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	776.7	776.7	776.7	776.7	776.7	776.7	776.7	776.7
2.5°	773.4	774.7	776.0	776.6	776.3	776.0	775.8	775.5
5°	768.2	769.5	770.8	771.3	771.0	770.6	770.3	770.0
7.5°	759.5	760.8	762.2	762.6	762.3	761.9	761.5	761.2
10°	751.7	753.1	754.4	754.8	754.3	753.8	753.3	752.8
12.5°	742.6	743.5	744.4	744.7	744.3	744.0	743.6	743.2
15°	726.5	727.2	727.8	727.7	726.9	726.1	725.3	724.4
17.5°	707.4	708.2	709.0	708.9	708.1	707.4	706.6	705.8
20°	692.6	693.1	693.6	693.5	692.8	692.1	691.5	690.8
22.5°	676.8	676.9	677.0	676.9	676.5	676.1	675.7	675.3
25°	651.2	651.5	651.8	651.8	651.5	651.2	650.8	650.5
27.5°	625.9	625.4	624.9	624.3	623.5	622.7	621.9	621.1
30°	606.2	605.7	605.2	604.6	603.9	603.3	602.6	601.9
32.5°	586.9	586.0	585.1	584.3	583.6	583.0	582.3	581.6
35°	555.9	554.9	553.9	553.0	552.2	551.3	550.5	549.7
37.5°	524.8	523.6	522.4	521.3	520.5	519.7	518.9	518.2
40°	503.4	501.9	500.4	499.3	498.6	498.0	497.3	496.6
42.5°	482.2	480.6	478.9	477.7	476.7	475.8	474.9	473.9
45°	449.7	447.9	446.0	444.8	444.1	443.5	442.8	442.1
47.5°	415.9	413.9	412.0	410.6	409.6	408.7	407.7	406.7
50°	394.2	391.8	389.5	387.9	387.1	386.3	385.4	384.6
52.5°	371.7	369.7	367.8	366.3	365.2	364.1	363.0	361.9
55°	338.1	336.1	334.1	332.7	331.8	331.0	330.2	329.4
57.5°	303.2	301.2	299.3	298.0	297.3	296.7	296.1	295.4
60°	280.1	278.3	276.5	275.3	274.8	274.3	273.8	273.3
62.5°	258.3	256.6	254.9	253.8	253.1	252.5	251.9	251.2
65°	224.8	223.3	221.8	220.6	219.8	219.0	218.2	217.3
67.5°	191.7	190.5	189.4	188.5	187.8	187.1	186.5	185.8
70°	170.2	169.0	167.9	167.0	166.3	165.6	165.0	164.3
72.5°	149.9	148.7	147.6	146.7	146.2	145.6	145.1	144.6
75°	118.2	117.3	116.3	115.9	116.3	116.6	116.9	117.3
77.5°	90.0	89.5	89.0	88.5	88.0	87.6	87.1	86.6
80°	71.4	70.9	70.5	70.0	69.7	69.4	69.0	68.7
82.5°	53.3	52.6	52.0	51.6	51.6	51.5	51.4	51.4
85°	28.1	27.6	27.1	26.8	26.6	26.5	26.3	26.1
87.5°	14.5	14.0	13.5	13.2	13.1	13.0	12.9	12.9
90°	34.5	34.1	33.6	33.5	33.8	34.0	34.2	34.4
92.5°	32.4	32.5	32.6	32.6	32.7	32.7	32.8	32.8
95°	64.8	64.8	64.8	64.6	64.1	63.7	63.2	62.8
97.5°	109.0	109.0	109.0	109.0	108.9	108.9	108.8	108.8
100°	139.8	139.8	139.8	139.7	139.4	139.2	139.0	138.8
102.5°	173.4	173.5	173.7	173.7	173.5	173.2	173.0	172.8
105°	223.7	224.2	224.6	224.9	224.9	224.9	224.9	224.9
107.5°	278.1	278.3	278.4	278.0	277.0	275.9	274.9	273.9
110°	315.0	315.0	315.0	314.7	314.0	313.3	312.6	312.0



TEST NUMBER: P331512

CATALOG NUMBER: S122DIW-S485D970U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	352.0	351.5	350.9	350.4	349.9	349.4	348.9	348.4
115°	408.7	408.5	408.3	407.8	407.2	406.5	405.8	405.1
117.5°	463.6	463.1	462.5	461.9	461.3	460.6	459.9	459.2
120°	500.4	500.4	500.4	500.0	499.3	498.7	498.0	497.3
122.5°	538.2	537.6	537.1	536.6	536.1	535.6	535.1	534.6
125°	594.2	593.5	592.9	592.4	592.2	592.0	591.7	591.5
127.5°	648.6	647.8	647.0	646.2	645.5	644.8	644.1	643.4
130°	685.8	685.4	684.9	684.2	683.3	682.4	681.5	680.6
132.5°	722.0	721.0	720.0	719.2	718.5	717.7	717.0	716.3
135°	775.4	775.2	774.9	774.5	773.8	773.1	772.5	771.8
137.5°	826.5	826.4	826.2	825.6	824.7	823.8	822.9	822.0
140°	860.9	860.9	860.9	860.5	859.6	858.7	857.8	856.9
142.5°	892.1	892.3	892.4	892.1	891.2	890.3	889.4	888.5
145°	939.4	939.6	939.8	939.5	938.6	937.7	936.8	935.9
147.5°	980.8	981.3	981.8	981.6	980.8	979.9	979.1	978.2
150°	1007.1	1007.8	1008.5	1008.5	1007.8	1007.1	1006.4	1005.8
152.5°	1033.4	1034.3	1035.1	1035.1	1034.3	1033.4	1032.5	1031.7
155°	1066.8	1067.9	1069.0	1069.2	1068.6	1067.9	1067.2	1066.5
157.5°	1097.6	1099.1	1100.6	1100.8	1099.8	1098.7	1097.6	1096.5
160°	1115.8	1117.2	1118.5	1118.8	1117.9	1117.0	1116.1	1115.2
162.5°	1132.4	1133.9	1135.5	1135.7	1134.6	1133.5	1132.4	1131.4
165°	1153.8	1155.3	1156.9	1157.1	1156.0	1154.9	1153.8	1152.6
167.5°	1171.4	1173.0	1174.5	1174.7	1173.6	1172.4	1171.2	1170.1
170°	1181.1	1182.7	1184.3	1184.4	1183.0	1181.7	1180.3	1179.0
172.5°	1188.4	1190.0	1191.5	1191.7	1190.3	1189.0	1187.6	1186.3
175°	1196.3	1197.9	1199.4	1199.6	1198.2	1196.9	1195.5	1194.2
177.5°	1200.0	1201.0	1202.1	1202.1	1201.0	1200.0	1198.9	1197.8
180°	1200.2	1200.2	1200.2	1200.2	1200.2	1200.2	1200.2	1200.2

(END OF REPORT)