

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331548

Luminaire Tested: **S122DIW-S675D1240U835-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331548
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S675D1240U835-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1240 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7003.6 lumens
Efficiency: N/A
Efficacy: 114.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 61.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331548

CATALOG NUMBER: S122DIW-S675D1240U835-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

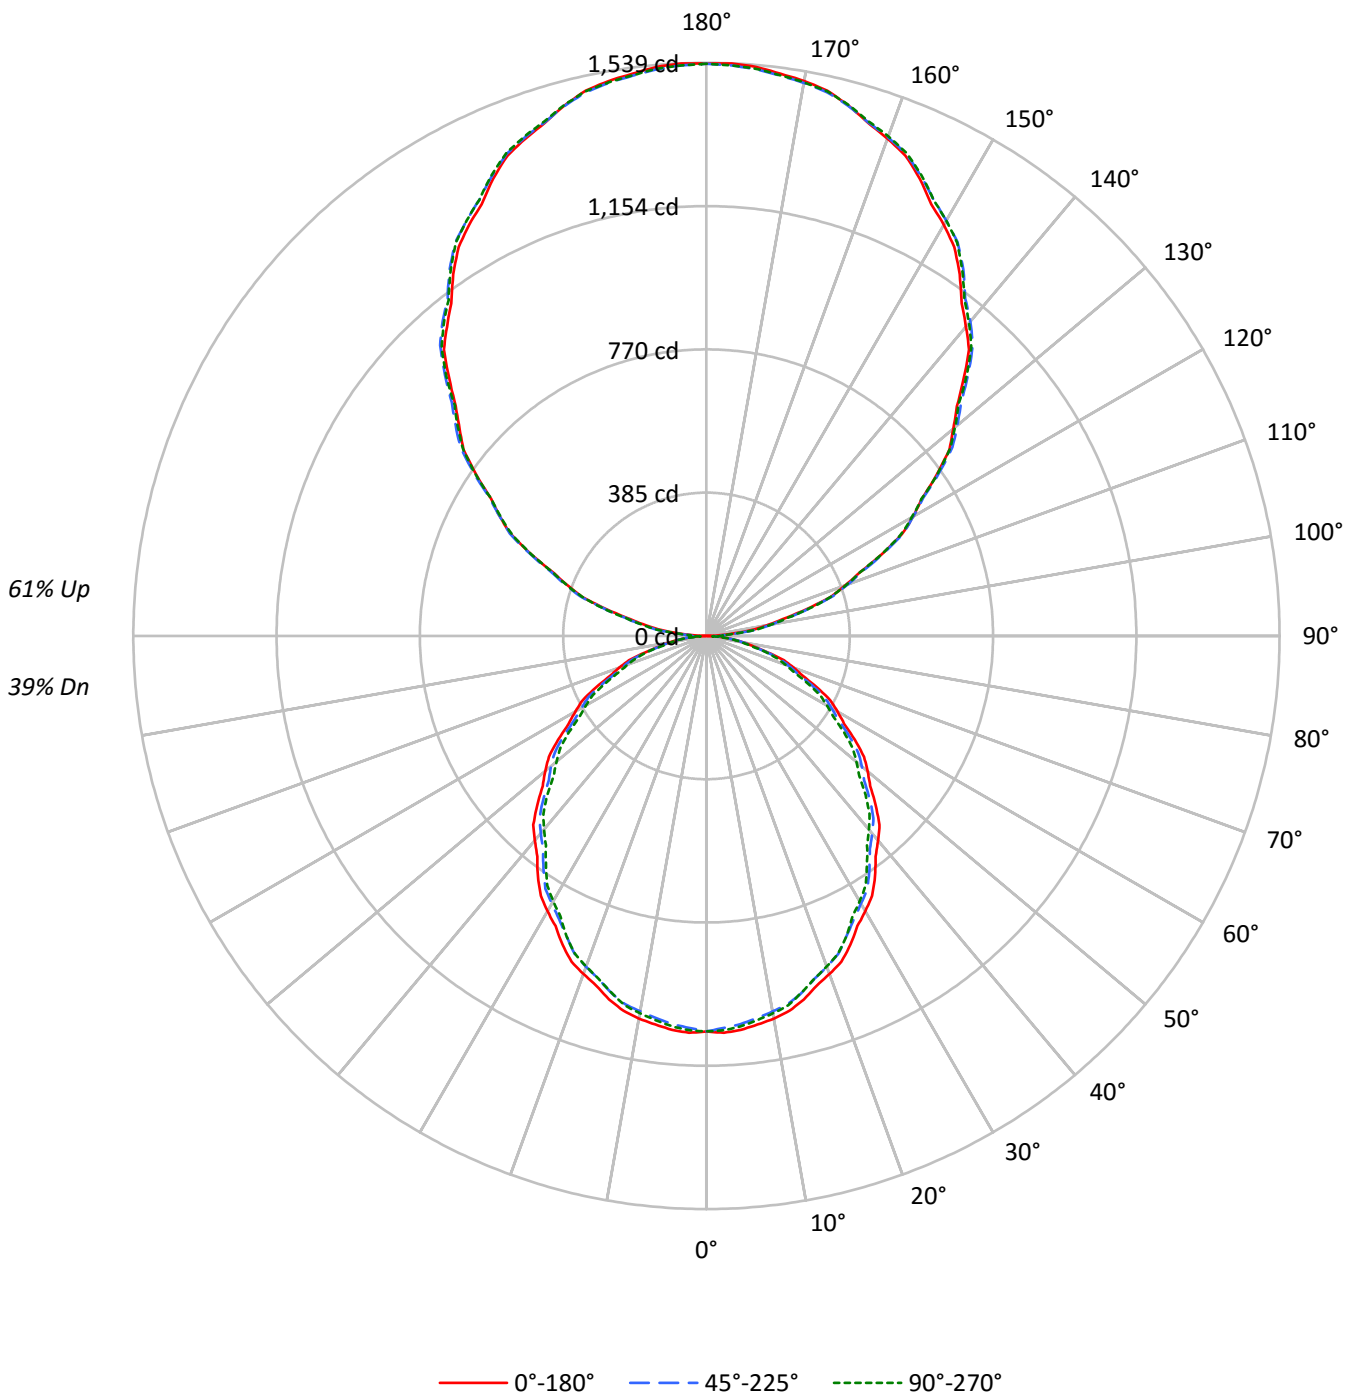



TEST NUMBER: P331548

CATALOG NUMBER: S122DIW-S675D1240U835-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	46	46	46	39
1	95	91	87	84	86	83	80	77	67	65	63	53	52	50	40	39	39	33
2	87	79	73	68	78	72	67	63	59	55	52	47	44	42	35	34	32	27
3	79	70	63	57	72	64	57	52	52	48	44	41	38	36	31	29	28	23
4	72	62	54	48	65	56	50	44	46	41	37	37	33	30	28	26	24	20
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	23	21	17
6	61	49	41	35	55	45	38	33	37	32	28	30	26	23	23	20	18	15
7	56	44	36	31	51	41	34	29	34	28	25	27	23	20	21	18	16	13
8	52	40	33	27	47	37	30	25	31	25	22	25	21	18	19	17	14	12
9	49	37	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13	11
10	45	33	26	22	41	31	25	20	26	21	17	21	17	15	16	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17142	17142	17142
5°	17208	16960	17058
10°	17105	16787	16870
15°	16893	16568	16552
20°	16593	16242	16225
25°	16295	15841	15841
30°	15910	15474	15340
35°	15554	15031	14808
40°	15104	14587	14309
45°	14661	14150	13798
50°	14179	13692	13205
55°	13678	13163	12673
60°	13120	12526	12064
65°	12520	11897	11351
70°	11759	11131	10603
75°	10699	10256	10000
80°	9493	9205	8731
85°	7762	7373	6614



TEST NUMBER: P331548

CATALOG NUMBER: S122DIW-S675D1240U835-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	99.8	1.4
10°-20°	280.9	4.0
20°-30°	412.9	5.9
30°-40°	479.6	6.8
40°-50°	479.1	6.8
50°-60°	417.8	6.0
60°-70°	308.9	4.4
70°-80°	175.0	2.5
80°-90°	53.2	0.8
90°-100°	97.4	1.4
100°-110°	302.4	4.3
110°-120°	516.9	7.4
120°-130°	679.7	9.7
130°-140°	762.9	10.9
140°-150°	748.1	10.7
150°-160°	627.4	9.0
160°-170°	416.2	5.9
170°-180°	145.5	2.1
0°-30°	793.6	11.3
0°-40°	1273.2	18.2
0°-60°	2170.1	31.0
0°-90°	2707.2	38.7
90°-120°	916.6	13.1
90°-150°	3107.4	44.4
90°-180°	4296.0	61.3
0°-180°	7003.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1062	1062	1062	1062	1062	
5°	1062	1057	1046	1054	1052	101
15°	1011	1004	991	995	990	284
25°	915	906	889	891	889	421
35°	789	779	763	756	751	492
45°	642	635	620	609	604	495
55°	486	479	468	456	450	434
65°	328	321	311	302	297	324
75°	172	169	164	159	160	183
85°	42	41	40	37	36	48
90°	1	18	45	43	44	6
95°	67	80	83	83	80	77
105°	279	283	285	288	288	294
115°	519	526	524	522	519	513
125°	755	765	762	759	757	674
135°	976	990	993	992	988	754
145°	1185	1194	1202	1203	1198	740
155°	1355	1359	1363	1369	1365	623
165°	1474	1473	1473	1481	1476	416
175°	1534	1530	1527	1536	1529	146
180°	1536	1536	1536	1536	1536	



TEST NUMBER: P331548

CATALOG NUMBER: S122DIW-S675D1240U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7
2.5°	1066.6	1065.7	1064.8	1063.9	1063.0	1061.5	1059.5	1057.5	1055.5	1053.5	1055.3
5°	1061.7	1060.8	1059.9	1059.0	1058.1	1056.4	1053.9	1051.4	1048.9	1046.4	1048.2
7.5°	1052.3	1050.9	1049.5	1048.1	1046.7	1044.7	1042.2	1039.6	1037.1	1034.5	1036.3
10°	1043.3	1041.7	1040.1	1038.5	1037.0	1034.8	1032.1	1029.4	1026.6	1023.9	1025.7
12.5°	1031.1	1029.7	1028.2	1026.8	1025.4	1023.4	1020.6	1017.9	1015.2	1012.5	1013.8
15°	1010.6	1009.3	1007.9	1006.6	1005.2	1003.0	1000.1	997.1	994.2	991.2	992.2
17.5°	984.5	983.1	981.8	980.4	979.1	976.9	973.9	970.9	967.9	964.9	966.0
20°	965.7	964.4	963.0	961.6	960.3	958.0	954.8	951.7	948.5	945.3	946.0
22.5°	946.9	945.0	943.1	941.2	939.3	936.9	933.9	930.9	927.9	924.9	925.0
25°	914.7	912.9	911.1	909.2	907.4	904.6	900.7	896.9	893.0	889.2	889.6
27.5°	877.9	876.3	874.7	873.0	871.4	869.1	866.0	863.0	859.9	856.9	856.2
30°	853.4	851.6	849.8	848.0	846.2	843.6	840.2	836.8	833.4	830.0	829.3
32.5°	827.3	825.8	824.4	822.9	821.5	819.0	815.4	811.8	808.2	804.6	803.4
35°	789.1	786.9	784.6	782.3	780.0	777.1	773.5	769.8	766.2	762.6	761.2
37.5°	746.0	744.0	742.0	740.0	738.1	735.2	731.6	728.0	724.4	720.7	719.0
40°	716.6	714.8	713.0	711.2	709.4	706.7	703.0	699.4	695.8	692.1	690.1
42.5°	688.1	686.2	684.4	682.6	680.8	678.1	674.4	670.8	667.2	663.6	661.3
45°	642.1	640.5	638.9	637.4	635.8	633.3	629.9	626.5	623.1	619.7	617.2
47.5°	596.4	594.9	593.4	591.9	590.4	587.9	584.3	580.8	577.3	573.7	571.1
50°	564.5	563.4	562.3	561.1	560.0	557.8	554.7	551.5	548.3	545.1	542.0
52.5°	533.5	532.0	530.5	529.0	527.5	525.3	522.3	519.3	516.3	513.3	510.7
55°	485.9	484.6	483.2	481.8	480.5	478.4	475.7	473.0	470.3	467.6	464.8
57.5°	438.1	437.1	436.0	434.9	433.8	431.8	428.8	425.8	422.8	419.8	417.1
60°	406.3	405.4	404.5	403.6	402.7	400.6	397.5	394.3	391.1	387.9	385.4
62.5°	375.3	373.8	372.4	370.9	369.5	367.5	365.1	362.6	360.2	357.7	355.4
65°	327.7	326.3	325.0	323.6	322.2	320.4	318.2	315.9	313.6	311.4	309.3
67.5°	279.3	278.2	277.1	276.0	274.9	273.4	271.3	269.3	267.3	265.2	263.6
70°	249.1	248.2	247.3	246.4	245.5	244.0	241.9	239.9	237.9	235.8	234.2
72.5°	218.1	217.1	216.2	215.3	214.4	213.3	212.0	210.7	209.4	208.0	206.5
75°	171.5	171.0	170.6	170.1	169.7	168.9	167.8	166.6	165.5	164.4	163.0
77.5°	129.9	129.1	128.3	127.5	126.8	126.2	125.7	125.2	124.8	124.3	123.7
80°	102.1	101.9	101.6	101.4	101.2	100.8	100.4	99.9	99.5	99.0	98.3
82.5°	76.0	75.9	75.9	75.8	75.8	75.6	75.3	75.1	74.8	74.5	73.7
85°	41.9	41.6	41.4	41.2	40.9	40.7	40.5	40.3	40.0	39.8	39.1
87.5°	15.0	15.3	15.6	15.9	16.3	16.9	17.8	18.7	19.6	20.5	19.9
90°	1.3	4.8	8.2	11.7	15.1	20.0	26.4	32.7	39.0	45.4	44.8
92.5°	23.1	25.6	28.2	30.7	33.2	35.2	36.7	38.2	39.7	41.2	41.3
95°	67.4	70.3	73.2	76.1	79.0	80.7	81.3	81.8	82.4	83.0	83.0
97.5°	123.2	125.7	128.3	130.8	133.3	135.1	136.2	137.3	138.4	139.5	139.5
100°	164.7	167.0	169.3	171.6	173.9	175.5	176.3	177.2	178.1	178.9	178.9
102.5°	208.2	210.1	211.9	213.8	215.6	217.1	218.2	219.3	220.4	221.5	221.7
105°	278.8	279.6	280.5	281.4	282.2	283.0	283.5	284.1	284.7	285.3	285.8
107.5°	349.8	351.1	352.4	353.6	354.9	355.5	355.5	355.5	355.5	355.5	355.8
110°	395.5	397.2	398.9	400.7	402.4	403.3	403.3	403.3	403.3	403.3	403.3



TEST NUMBER: P331548

CATALOG NUMBER: S122DIW-S675D1240U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	445.3	447.0	448.7	450.5	452.2	452.9	452.7	452.5	452.2	452.0	451.3
115°	518.7	520.4	522.1	523.8	525.6	526.1	525.6	525.0	524.4	523.8	523.6
117.5°	591.8	594.1	596.4	598.7	601.0	601.4	599.7	598.1	596.5	594.9	594.2
120°	640.5	642.8	645.2	647.5	649.8	649.8	647.5	645.2	642.8	640.5	640.5
122.5°	685.1	687.9	690.7	693.4	696.2	696.8	695.2	693.6	691.9	690.3	689.6
125°	754.6	757.2	759.8	762.4	765.0	765.9	765.0	764.2	763.3	762.4	761.6
127.5°	822.3	825.6	828.9	832.2	835.5	836.6	835.6	834.5	833.5	832.4	831.4
130°	864.9	868.6	872.4	876.1	879.8	881.4	880.9	880.3	879.7	879.1	878.5
132.5°	912.6	915.6	918.7	921.7	924.8	926.4	926.5	926.6	926.7	926.8	925.6
135°	976.4	979.5	982.7	985.9	989.1	990.9	991.5	992.1	992.7	993.2	992.9
137.5°	1043.5	1046.1	1048.7	1051.3	1053.9	1055.6	1056.3	1057.1	1057.8	1058.6	1058.4
140°	1084.0	1086.6	1089.2	1091.8	1094.4	1096.4	1097.8	1099.3	1100.7	1102.1	1102.1
142.5°	1125.5	1128.1	1130.7	1133.3	1135.9	1137.6	1138.6	1139.6	1140.6	1141.6	1141.8
145°	1185.1	1187.2	1189.2	1191.2	1193.2	1195.1	1196.8	1198.5	1200.3	1202.0	1202.3
147.5°	1238.3	1240.7	1243.1	1245.6	1248.0	1249.8	1250.9	1252.1	1253.2	1254.4	1255.0
150°	1274.6	1276.3	1278.1	1279.8	1281.5	1283.0	1284.1	1285.3	1286.4	1287.6	1288.4
152.5°	1306.8	1308.5	1310.2	1311.9	1313.7	1315.2	1316.6	1318.0	1319.4	1320.8	1321.9
155°	1355.0	1355.9	1356.7	1357.6	1358.5	1359.3	1360.2	1361.0	1361.9	1362.8	1364.2
157.5°	1396.2	1396.8	1397.4	1398.0	1398.5	1399.1	1399.6	1400.1	1400.6	1401.2	1403.1
160°	1421.1	1421.7	1422.3	1422.9	1423.4	1423.9	1424.1	1424.4	1424.7	1425.0	1426.7
162.5°	1443.9	1444.1	1444.2	1444.3	1444.4	1444.6	1444.9	1445.2	1445.5	1445.8	1447.7
165°	1474.3	1474.0	1473.7	1473.4	1473.1	1473.0	1473.0	1473.0	1473.0	1473.0	1475.0
167.5°	1499.7	1498.8	1498.0	1497.1	1496.2	1495.8	1495.7	1495.7	1495.6	1495.5	1497.6
170°	1513.2	1512.3	1511.5	1510.6	1509.7	1509.2	1508.9	1508.6	1508.3	1508.0	1510.0
172.5°	1522.5	1521.7	1520.8	1519.9	1519.1	1518.5	1518.2	1517.9	1517.6	1517.3	1519.4
175°	1533.9	1533.1	1532.2	1531.3	1530.5	1529.8	1529.2	1528.6	1528.0	1527.4	1529.5
177.5°	1538.6	1537.9	1537.2	1536.5	1535.8	1535.3	1534.8	1534.3	1533.9	1533.4	1534.8
180°	1536.5	1536.5	1536.5	1536.5	1536.5	1536.5	1536.5	1536.5	1536.5	1536.5	1536.5



TEST NUMBER: P331548

CATALOG NUMBER: S122DIW-S675D1240U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7	1061.7
2.5°	1057.1	1059.0	1060.8	1061.5	1061.1	1060.8	1060.4	1060.1
5°	1050.0	1051.8	1053.6	1054.3	1053.9	1053.4	1053.0	1052.5
7.5°	1038.2	1040.0	1041.8	1042.4	1041.9	1041.5	1041.0	1040.5
10°	1027.5	1029.4	1031.2	1031.7	1031.1	1030.4	1029.7	1029.0
12.5°	1015.0	1016.3	1017.6	1017.9	1017.4	1017.0	1016.5	1016.0
15°	993.1	994.0	994.9	994.8	993.6	992.5	991.4	990.2
17.5°	967.0	968.0	969.1	969.1	968.0	966.9	965.8	964.7
20°	946.7	947.4	948.0	947.9	947.0	946.1	945.2	944.3
22.5°	925.2	925.3	925.4	925.2	924.7	924.1	923.6	923.1
25°	890.1	890.5	891.0	891.0	890.5	890.1	889.6	889.2
27.5°	855.5	854.9	854.2	853.3	852.2	851.1	850.0	848.9
30°	828.6	827.9	827.2	826.4	825.5	824.6	823.7	822.8
32.5°	802.2	801.0	799.7	798.7	797.8	796.9	795.9	795.0
35°	759.9	758.5	757.1	755.9	754.8	753.6	752.5	751.3
37.5°	717.4	715.7	714.0	712.6	711.5	710.4	709.4	708.3
40°	688.1	686.0	684.0	682.5	681.6	680.7	679.8	678.9
42.5°	659.1	656.9	654.7	652.9	651.6	650.4	649.1	647.8
45°	614.7	612.2	609.7	608.0	607.1	606.2	605.3	604.3
47.5°	568.5	565.8	563.2	561.2	559.9	558.6	557.3	556.0
50°	538.8	535.6	532.4	530.3	529.1	528.0	526.9	525.7
52.5°	508.0	505.4	502.8	500.7	499.2	497.7	496.2	494.7
55°	462.1	459.4	456.7	454.7	453.6	452.5	451.3	450.2
57.5°	414.4	411.7	409.1	407.3	406.4	405.6	404.7	403.8
60°	382.9	380.4	377.9	376.4	375.7	375.0	374.3	373.6
62.5°	353.1	350.8	348.5	346.9	346.0	345.1	344.3	343.4
65°	307.3	305.2	303.2	301.6	300.5	299.3	298.2	297.1
67.5°	262.0	260.5	258.9	257.6	256.7	255.8	254.9	254.0
70°	232.6	231.1	229.5	228.2	227.3	226.4	225.5	224.6
72.5°	204.9	203.3	201.7	200.5	199.8	199.1	198.4	197.6
75°	161.6	160.3	158.9	158.5	158.9	159.4	159.8	160.3
77.5°	123.0	122.3	121.6	121.0	120.3	119.7	119.1	118.4
80°	97.7	97.0	96.3	95.7	95.3	94.8	94.4	93.9
82.5°	72.8	71.9	71.1	70.6	70.5	70.4	70.3	70.2
85°	38.5	37.8	37.1	36.6	36.4	36.2	36.0	35.7
87.5°	19.2	18.5	17.9	17.5	17.4	17.2	17.1	17.0
90°	44.2	43.7	43.1	42.9	43.2	43.5	43.8	44.1
92.5°	41.5	41.6	41.7	41.8	41.8	41.9	42.0	42.0
95°	83.0	83.0	83.0	82.7	82.1	81.5	81.0	80.4
97.5°	139.5	139.5	139.5	139.5	139.4	139.4	139.3	139.3
100°	178.9	178.9	178.9	178.8	178.5	178.2	177.9	177.6
102.5°	221.9	222.2	222.4	222.4	222.1	221.8	221.5	221.2
105°	286.4	287.0	287.6	287.9	287.9	287.9	287.9	287.9
107.5°	356.0	356.2	356.5	355.9	354.6	353.3	351.9	350.6
110°	403.3	403.3	403.3	402.8	402.0	401.1	400.2	399.4



TEST NUMBER: P331548

CATALOG NUMBER: S122DIW-S675D1240U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	450.6	449.9	449.2	448.6	447.9	447.3	446.7	446.0
115°	523.3	523.0	522.7	522.1	521.3	520.4	519.5	518.7
117.5°	593.5	592.8	592.1	591.4	590.5	589.6	588.8	587.9
120°	640.5	640.5	640.5	640.1	639.2	638.4	637.5	636.7
122.5°	689.0	688.3	687.6	686.9	686.3	685.6	685.0	684.4
125°	760.7	759.8	759.0	758.4	758.1	757.8	757.5	757.2
127.5°	830.4	829.3	828.3	827.3	826.4	825.5	824.6	823.6
130°	878.0	877.4	876.8	876.0	874.8	873.7	872.5	871.3
132.5°	924.3	923.0	921.8	920.7	919.8	918.8	917.9	917.0
135°	992.7	992.4	992.1	991.5	990.6	989.8	988.9	988.0
137.5°	1058.1	1057.9	1057.7	1057.0	1055.8	1054.7	1053.5	1052.4
140°	1102.1	1102.1	1102.1	1101.6	1100.4	1099.3	1098.1	1097.0
142.5°	1142.0	1142.3	1142.5	1142.0	1140.9	1139.7	1138.6	1137.4
145°	1202.6	1202.9	1203.1	1202.7	1201.6	1200.4	1199.3	1198.1
147.5°	1255.6	1256.3	1256.9	1256.7	1255.6	1254.5	1253.4	1252.3
150°	1289.3	1290.2	1291.0	1291.0	1290.2	1289.3	1288.4	1287.6
152.5°	1323.0	1324.0	1325.1	1325.1	1324.0	1323.0	1321.9	1320.8
155°	1365.7	1367.1	1368.5	1368.8	1368.0	1367.1	1366.2	1365.4
157.5°	1405.1	1407.0	1409.0	1409.3	1407.9	1406.5	1405.1	1403.7
160°	1428.5	1430.2	1431.9	1432.2	1431.1	1429.9	1428.8	1427.6
162.5°	1449.7	1451.6	1453.6	1453.9	1452.5	1451.1	1449.7	1448.4
165°	1477.0	1479.0	1481.1	1481.3	1479.9	1478.5	1477.0	1475.6
167.5°	1499.6	1501.6	1503.6	1503.9	1502.4	1500.9	1499.4	1497.9
170°	1512.0	1514.0	1516.1	1516.2	1514.5	1512.8	1511.0	1509.3
172.5°	1521.4	1523.4	1525.4	1525.5	1523.8	1522.1	1520.4	1518.6
175°	1531.5	1533.5	1535.5	1535.7	1533.9	1532.2	1530.5	1528.7
177.5°	1536.2	1537.6	1538.9	1538.9	1537.6	1536.2	1534.8	1533.4
180°	1536.5	1536.5	1536.5	1536.5	1536.5	1536.5	1536.5	1536.5

(END OF REPORT)