

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331859

Luminaire Tested: **S122RDIW-S1005D1240U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331859
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S1005D1240U835-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1240 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8441.4 lumens
Efficiency: N/A
Efficacy: 110.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 76.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331859

CATALOG NUMBER: S122RDIW-S1005D1240U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

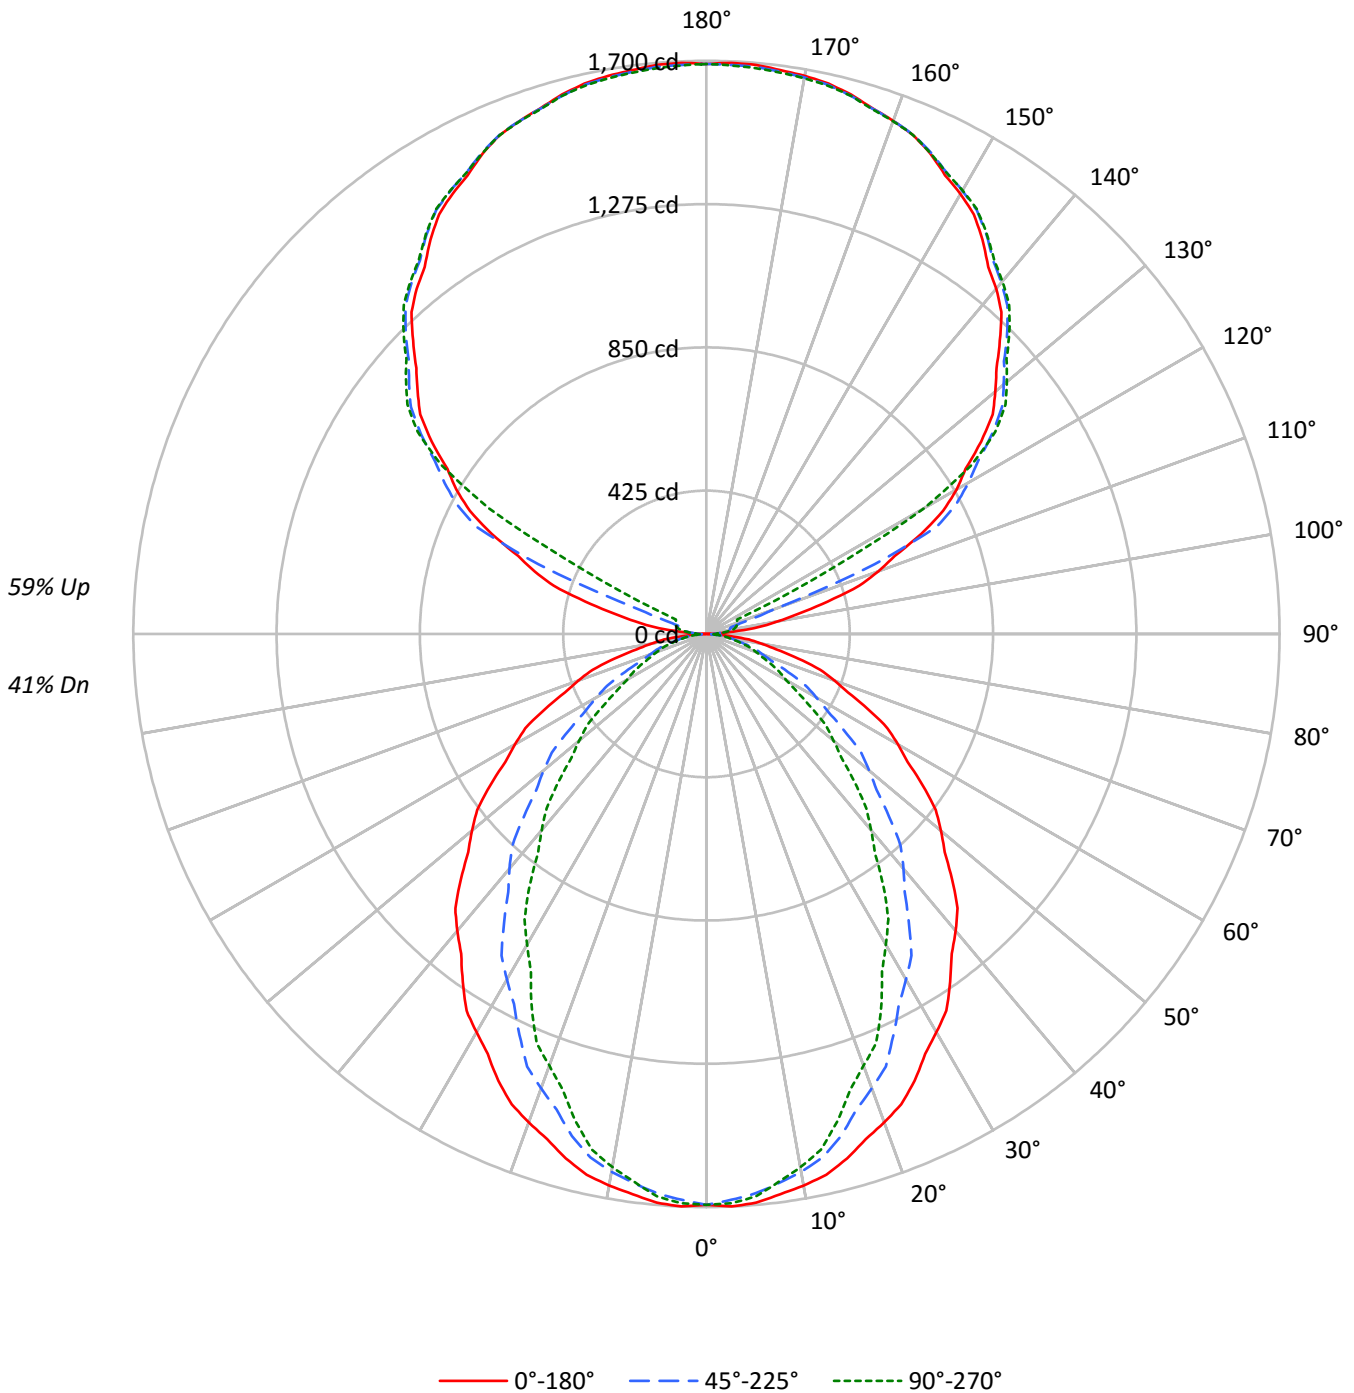



TEST NUMBER: P331859

CATALOG NUMBER: S122RDIW-S1005D1240U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	48	48	48	41
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	43	42	41	36
2	88	81	75	70	80	74	69	65	61	58	55	49	47	45	38	37	35	30
3	80	71	64	59	73	65	59	55	54	50	46	44	41	38	34	32	31	26
4	74	63	56	50	67	58	52	47	48	44	40	39	36	33	31	29	27	23
5	68	57	49	43	62	52	45	40	44	38	35	36	32	29	28	26	24	20
6	63	51	43	37	57	47	40	35	39	34	30	32	28	26	26	23	21	18
7	58	46	38	33	53	42	36	31	36	31	27	29	26	23	24	21	19	16
8	54	42	34	29	49	39	32	27	33	28	24	27	23	20	22	19	17	14
9	50	38	31	26	46	35	29	25	30	25	21	25	21	18	20	17	15	13
10	47	35	28	23	43	33	26	22	28	23	19	23	19	17	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	27341	27341	27341
5°	27446	27000	27149
10°	27237	26558	26332
15°	26924	25770	25028
20°	26490	24646	23409
25°	26045	23370	21841
30°	25430	22057	19829
35°	24829	20631	18065
40°	24226	19155	16021
45°	23516	17497	14173
50°	22790	15822	12356
55°	22044	14021	10612
60°	21180	12126	8809
65°	20199	10189	8023
70°	19029	8393	7378
75°	17592	7648	6881
80°	15528	6843	6267
85°	12208	5391	5391



TEST NUMBER: P331859

CATALOG NUMBER: S122RDIW-S1005D1240U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	158.5	1.9
10°-20°	435.2	5.2
20°-30°	611.2	7.2
30°-40°	666.5	7.9
40°-50°	612.8	7.3
50°-60°	481.3	5.7
60°-70°	313.8	3.7
70°-80°	161.8	1.9
80°-90°	46.1	0.5
90°-100°	56.4	0.7
100°-110°	206.8	2.4
110°-120°	552.8	6.5
120°-130°	912.5	10.8
130°-140°	970.4	11.5
140°-150°	902.0	10.7
150°-160°	725.2	8.6
160°-170°	467.3	5.5
170°-180°	160.9	1.9
0°-30°	1204.9	14.3
0°-40°	1871.4	22.2
0°-60°	2965.4	35.1
0°-90°	3487.2	41.3
90°-120°	816.0	9.7
90°-150°	3600.9	42.7
90°-180°	4954.0	58.7
0°-180°	8441.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1693	1693	1693	1693	1693	
5°	1693	1685	1666	1679	1675	160
15°	1611	1592	1542	1513	1497	454
25°	1462	1410	1312	1251	1226	672
35°	1260	1178	1047	954	916	788
45°	1030	924	766	661	621	795
55°	783	661	498	410	377	700
65°	529	404	267	217	210	524
75°	282	178	123	112	110	298
85°	66	35	29	29	29	78
90°	1	14	24	30	33	6
95°	80	42	48	53	53	97
105°	372	388	75	88	93	397
115°	703	725	755	215	100	692
125°	994	1011	1034	1042	1046	886
135°	1231	1250	1261	1273	1271	950
145°	1428	1428	1447	1455	1450	893
155°	1572	1562	1576	1582	1573	724
165°	1656	1650	1653	1660	1653	468
175°	1694	1686	1688	1696	1684	161
180°	1690	1690	1690	1690	1690	



TEST NUMBER: P331859

CATALOG NUMBER: S122RDIW-S1005D1240U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4
2.5°	1699.6	1698.2	1696.8	1695.5	1694.1	1691.9	1688.9	1686.0	1683.0	1680.0	1682.7
5°	1693.4	1691.7	1690.0	1688.3	1686.6	1683.6	1679.1	1674.7	1670.3	1665.9	1668.9
7.5°	1676.0	1673.9	1671.8	1669.6	1667.5	1663.9	1658.7	1653.5	1648.4	1643.2	1644.1
10°	1661.3	1658.9	1656.5	1654.1	1651.7	1647.1	1640.3	1633.5	1626.7	1619.9	1618.9
12.5°	1642.9	1639.9	1637.0	1634.1	1631.2	1625.3	1616.6	1607.9	1599.2	1590.5	1588.6
15°	1610.7	1606.9	1603.2	1599.4	1595.7	1588.0	1576.5	1564.9	1553.3	1541.7	1535.3
17.5°	1571.1	1565.4	1559.7	1554.0	1548.3	1538.0	1523.1	1508.3	1493.4	1478.6	1470.9
20°	1541.7	1534.9	1528.1	1521.3	1514.5	1502.6	1485.5	1468.5	1451.5	1434.4	1425.9
22.5°	1509.8	1502.2	1494.6	1487.0	1479.3	1465.9	1446.7	1427.5	1408.3	1389.1	1378.1
25°	1462.0	1451.1	1440.2	1429.3	1418.4	1401.8	1379.3	1356.8	1334.3	1311.8	1297.9
27.5°	1404.4	1392.6	1380.7	1368.9	1357.0	1338.4	1313.1	1287.7	1262.4	1237.1	1220.8
30°	1364.0	1351.0	1338.1	1325.1	1312.2	1292.1	1264.8	1237.6	1210.4	1183.1	1165.7
32.5°	1324.7	1309.6	1294.5	1279.4	1264.2	1242.8	1215.0	1187.2	1159.4	1131.6	1111.8
35°	1259.7	1242.4	1225.0	1207.6	1190.3	1166.6	1136.6	1106.7	1076.7	1046.7	1025.3
37.5°	1194.8	1175.7	1156.6	1137.5	1118.5	1093.0	1061.0	1029.1	997.1	965.2	941.6
40°	1149.4	1129.0	1108.5	1088.1	1067.7	1040.9	1007.9	974.9	941.8	908.8	884.6
42.5°	1102.8	1081.3	1059.8	1038.2	1016.7	988.9	954.8	920.6	886.5	852.4	827.4
45°	1029.9	1007.0	984.2	961.4	938.6	909.3	873.5	837.8	802.0	766.3	742.1
47.5°	958.7	934.6	910.4	886.2	862.0	831.5	794.6	757.6	720.7	683.8	659.8
50°	907.3	883.1	858.9	834.7	810.5	779.7	742.3	704.8	667.3	629.9	606.4
52.5°	857.0	831.7	806.5	781.2	755.9	725.0	688.3	651.7	615.0	578.4	555.7
55°	783.1	756.6	730.0	703.4	676.9	645.2	608.4	571.6	534.9	498.1	477.6
57.5°	707.4	680.2	652.9	625.7	598.4	567.1	531.8	496.4	461.1	425.7	407.0
60°	655.9	628.7	601.4	574.2	546.9	515.8	480.7	445.6	410.5	375.5	358.1
62.5°	605.7	578.4	551.2	523.9	496.7	466.3	432.9	399.4	366.0	332.6	316.0
65°	528.7	501.1	473.6	446.0	418.4	389.3	358.6	328.0	297.3	266.7	255.1
67.5°	454.5	427.2	399.8	372.4	345.0	317.5	290.0	262.4	234.8	207.2	201.9
70°	403.1	376.5	349.9	323.4	296.8	271.8	248.3	224.8	201.3	177.8	174.4
72.5°	354.0	328.5	303.1	277.6	252.1	229.9	211.1	192.2	173.3	154.5	151.6
75°	282.0	258.1	234.3	210.5	186.6	168.9	157.3	145.8	134.2	122.6	120.2
77.5°	211.2	190.3	169.4	148.5	127.5	114.3	108.7	103.1	97.5	92.0	90.6
80°	167.0	149.7	132.3	114.9	97.6	87.2	83.8	80.4	77.0	73.6	72.2
82.5°	126.6	113.0	99.5	85.9	72.4	64.4	62.1	59.8	57.5	55.2	54.4
85°	65.9	58.7	51.6	44.4	37.3	33.2	32.2	31.2	30.1	29.1	29.1
87.5°	19.9	18.3	16.7	15.1	13.5	13.0	13.4	13.8	14.3	14.7	14.7
90°	1.2	4.2	7.2	10.2	13.2	15.8	17.9	20.1	22.3	24.5	25.8
92.5°	24.7	24.4	24.2	23.9	23.6	24.0	25.1	26.2	27.3	28.4	29.1
95°	79.5	70.5	61.6	52.6	43.6	40.1	42.0	43.9	45.8	47.7	49.1
97.5°	157.8	132.5	107.2	82.0	56.7	46.2	50.6	55.0	59.5	63.9	64.9
100°	216.5	179.3	142.0	104.8	67.6	51.2	55.9	60.5	65.1	69.7	71.9
102.5°	281.1	273.2	265.3	257.5	249.6	226.3	187.6	149.0	110.3	71.7	74.5
105°	371.9	380.0	388.2	396.3	404.5	371.5	297.3	223.0	148.8	74.6	77.6
107.5°	475.4	481.9	488.5	495.1	501.7	460.5	371.5	282.5	193.5	104.5	101.4
110°	541.9	547.6	553.3	559.0	564.7	528.3	449.8	371.2	292.6	214.1	186.9



TEST NUMBER: P331859

CATALOG NUMBER: S122RDIW-S1005D1240U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	604.5	609.6	614.6	619.7	624.8	617.6	598.2	578.8	559.4	539.9	440.8
115°	703.4	708.0	712.6	717.2	721.9	727.6	734.4	741.2	748.0	754.8	628.9
117.5°	791.7	796.9	802.0	807.2	812.4	817.3	821.9	826.6	831.3	836.0	805.5
120°	856.3	860.4	864.4	868.5	872.6	877.1	882.0	886.9	891.8	896.6	899.9
122.5°	911.1	915.4	919.7	924.0	928.3	933.1	938.4	943.7	949.1	954.4	956.3
125°	994.5	998.0	1001.6	1005.1	1008.6	1013.0	1018.2	1023.3	1028.5	1033.7	1035.6
127.5°	1070.1	1074.0	1077.9	1081.9	1085.8	1089.7	1093.5	1097.4	1101.2	1105.1	1107.9
130°	1118.1	1122.4	1126.8	1131.1	1135.5	1139.1	1142.1	1145.1	1148.1	1151.1	1154.1
132.5°	1167.0	1170.7	1174.4	1178.1	1181.8	1185.1	1188.1	1191.1	1194.1	1197.1	1199.6
135°	1230.6	1234.9	1239.3	1243.6	1248.0	1251.4	1253.8	1256.3	1258.7	1261.2	1263.9
137.5°	1294.9	1298.0	1301.0	1304.1	1307.1	1310.0	1312.8	1315.6	1318.3	1321.1	1323.8
140°	1337.0	1339.2	1341.4	1343.5	1345.7	1348.3	1351.3	1354.3	1357.3	1360.3	1362.7
142.5°	1372.3	1374.2	1376.2	1378.1	1380.1	1382.8	1386.2	1389.6	1393.0	1396.5	1398.7
145°	1427.5	1427.3	1427.0	1426.7	1426.5	1428.6	1433.3	1437.9	1442.5	1447.1	1449.0
147.5°	1475.7	1474.7	1473.7	1472.6	1471.6	1473.4	1477.9	1482.5	1487.1	1491.6	1493.1
150°	1507.1	1505.2	1503.3	1501.3	1499.4	1500.7	1505.0	1509.4	1513.7	1518.1	1519.7
152.5°	1533.5	1531.4	1529.2	1527.1	1525.0	1526.0	1530.1	1534.3	1538.4	1542.5	1544.2
155°	1571.9	1569.4	1567.0	1564.5	1562.1	1562.5	1565.8	1569.0	1572.3	1575.6	1577.2
157.5°	1602.0	1599.9	1597.8	1595.8	1593.7	1593.8	1596.1	1598.4	1600.7	1603.0	1604.8
160°	1619.6	1618.0	1616.3	1614.7	1613.1	1613.1	1614.7	1616.3	1618.0	1619.6	1621.2
162.5°	1635.3	1633.6	1632.0	1630.4	1628.7	1628.6	1630.0	1631.4	1632.9	1634.3	1636.1
165°	1656.3	1654.7	1653.0	1651.4	1649.8	1649.4	1650.2	1651.0	1651.8	1652.6	1654.5
167.5°	1672.0	1670.3	1668.7	1667.1	1665.4	1665.0	1665.8	1666.5	1667.3	1668.0	1669.9
170°	1680.8	1679.1	1677.5	1675.9	1674.2	1673.7	1674.2	1674.8	1675.3	1675.9	1677.8
172.5°	1686.6	1685.0	1683.4	1681.7	1680.1	1679.6	1680.1	1680.6	1681.2	1681.7	1683.6
175°	1694.2	1692.3	1690.4	1688.5	1686.6	1685.9	1686.5	1687.0	1687.6	1688.1	1690.0
177.5°	1695.4	1693.9	1692.4	1690.9	1689.3	1688.7	1688.9	1689.1	1689.3	1689.6	1691.1
180°	1690.5	1690.5	1690.5	1690.5	1690.5	1690.5	1690.5	1690.5	1690.5	1690.5	1690.5



TEST NUMBER: P331859

CATALOG NUMBER: S122RDIW-S1005D1240U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4
2.5°	1685.4	1688.1	1690.9	1691.9	1691.4	1690.9	1690.3	1689.8
5°	1672.0	1675.1	1678.1	1679.1	1678.1	1677.1	1676.1	1675.1
7.5°	1644.9	1645.8	1646.7	1646.3	1644.5	1642.7	1641.0	1639.2
10°	1617.8	1616.8	1615.8	1614.3	1612.2	1610.2	1608.1	1606.1
12.5°	1586.8	1584.9	1583.1	1580.5	1577.1	1573.7	1570.3	1566.9
15°	1528.8	1522.3	1515.8	1510.9	1507.5	1504.1	1500.7	1497.3
17.5°	1463.2	1455.5	1447.8	1441.0	1435.2	1429.3	1423.4	1417.6
20°	1417.4	1408.9	1400.4	1392.4	1384.9	1377.4	1369.9	1362.4
22.5°	1367.2	1356.2	1345.2	1336.9	1331.4	1325.8	1320.2	1314.6
25°	1283.9	1270.0	1256.0	1246.5	1241.3	1236.2	1231.1	1226.0
27.5°	1204.5	1188.2	1171.9	1159.7	1151.6	1143.5	1135.4	1127.3
30°	1148.4	1131.0	1113.6	1100.4	1091.2	1082.0	1072.8	1063.6
32.5°	1092.0	1072.2	1052.3	1038.1	1029.5	1020.8	1012.1	1003.5
35°	1003.8	982.4	960.9	946.4	938.9	931.4	923.9	916.5
37.5°	917.9	894.3	870.6	854.5	846.0	837.4	828.8	820.2
40°	860.4	836.2	812.1	795.6	786.7	777.8	769.0	760.1
42.5°	802.4	777.4	752.4	735.6	727.0	718.4	709.9	701.3
45°	717.9	693.7	669.5	653.4	645.2	637.0	628.8	620.7
47.5°	635.7	611.7	587.6	571.9	564.5	557.1	549.6	542.2
50°	582.9	559.4	535.9	520.5	513.4	506.2	499.1	491.9
52.5°	533.0	510.3	487.7	473.0	466.4	459.8	453.2	446.6
55°	457.2	436.8	416.3	402.9	396.4	389.9	383.5	377.0
57.5°	388.3	369.5	350.8	338.7	333.3	327.8	322.4	316.9
60°	340.7	323.4	306.0	294.6	289.1	283.7	278.2	272.8
62.5°	299.5	282.9	266.4	256.4	253.2	249.9	246.6	243.4
65°	243.5	231.9	220.3	214.0	213.0	212.0	211.0	210.0
67.5°	196.6	191.3	185.9	182.7	181.7	180.6	179.5	178.4
70°	171.0	167.6	164.2	161.8	160.4	159.0	157.7	156.3
72.5°	148.8	145.9	143.0	141.2	140.4	139.6	138.7	137.9
75°	117.8	115.5	113.1	111.7	111.4	111.0	110.7	110.3
77.5°	89.2	87.9	86.5	85.5	85.0	84.5	83.9	83.4
80°	70.8	69.5	68.1	67.4	67.4	67.4	67.4	67.4
82.5°	53.5	52.7	51.9	51.5	51.5	51.5	51.5	51.5
85°	29.1	29.1	29.1	29.1	29.1	29.1	29.1	29.1
87.5°	14.7	14.7	14.7	14.8	14.9	15.0	15.1	15.2
90°	27.2	28.5	29.9	30.9	31.4	31.9	32.5	33.0
92.5°	29.8	30.5	31.2	31.7	32.0	32.4	32.7	33.0
95°	50.4	51.8	53.1	53.7	53.4	53.1	52.9	52.6
97.5°	66.0	67.1	68.2	68.9	69.2	69.6	69.9	70.2
100°	74.1	76.2	78.4	79.8	80.3	80.9	81.4	82.0
102.5°	77.3	80.2	83.0	84.8	85.5	86.3	87.1	87.8
105°	80.6	83.6	86.6	88.6	89.7	90.8	91.9	93.0
107.5°	98.4	95.3	92.3	91.3	92.4	93.5	94.6	95.7
110°	159.7	132.5	105.3	92.3	93.4	94.5	95.6	96.6



TEST NUMBER: P331859

CATALOG NUMBER: S122RDIW-S1005D1240U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	341.6	242.5	143.3	94.1	95.0	95.9	96.7	97.6
115°	503.0	377.2	251.3	178.6	159.0	139.5	119.9	100.3
117.5°	775.1	744.6	714.2	666.8	602.5	538.2	473.9	409.5
120°	903.2	906.4	909.7	893.0	856.3	819.6	782.9	746.2
122.5°	958.3	960.3	962.2	959.6	952.5	945.4	938.3	931.1
125°	1037.5	1039.4	1041.3	1042.6	1043.4	1044.3	1045.1	1045.9
127.5°	1110.6	1113.4	1116.2	1117.7	1117.8	1118.0	1118.1	1118.3
130°	1157.1	1160.1	1163.0	1164.4	1164.1	1163.9	1163.6	1163.3
132.5°	1202.2	1204.7	1207.3	1208.4	1208.2	1207.9	1207.6	1207.4
135°	1266.6	1269.3	1272.1	1273.1	1272.6	1272.1	1271.5	1271.0
137.5°	1326.4	1329.1	1331.8	1332.6	1331.7	1330.8	1329.9	1328.9
140°	1365.2	1367.6	1370.1	1370.6	1369.2	1367.9	1366.5	1365.2
142.5°	1400.9	1403.2	1405.4	1405.8	1404.5	1403.1	1401.7	1400.4
145°	1450.9	1452.8	1454.7	1455.0	1453.6	1452.3	1450.9	1449.6
147.5°	1494.5	1495.9	1497.3	1497.4	1496.3	1495.1	1494.0	1492.9
150°	1521.3	1523.0	1524.6	1524.7	1523.4	1522.0	1520.6	1519.3
152.5°	1545.8	1547.4	1549.1	1549.0	1547.2	1545.4	1543.6	1541.8
155°	1578.8	1580.5	1582.1	1581.8	1579.6	1577.5	1575.3	1573.1
157.5°	1606.7	1608.5	1610.4	1610.2	1608.1	1606.0	1603.9	1601.7
160°	1622.9	1624.5	1626.1	1626.0	1624.1	1622.2	1620.3	1618.4
162.5°	1638.0	1639.8	1641.7	1641.4	1639.1	1636.7	1634.4	1632.1
165°	1656.4	1658.3	1660.2	1660.2	1658.3	1656.4	1654.5	1652.6
167.5°	1671.8	1673.7	1675.6	1675.4	1672.9	1670.5	1668.0	1665.6
170°	1679.7	1681.6	1683.5	1683.2	1680.8	1678.3	1675.9	1673.4
172.5°	1685.5	1687.4	1689.3	1689.1	1686.6	1684.2	1681.7	1679.3
175°	1691.9	1693.8	1695.7	1695.3	1692.6	1689.9	1687.1	1684.4
177.5°	1692.6	1694.1	1695.7	1695.4	1693.5	1691.5	1689.6	1687.6
180°	1690.5	1690.5	1690.5	1690.5	1690.5	1690.5	1690.5	1690.5

(END OF REPORT)