

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331863

Luminaire Tested: **S122RDIW-S1005D1440U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331863  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIW-S1005D1440U835-4F0-1E-UDD-F  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1440 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9247.9 lumens  
Efficiency: N/A  
Efficacy: 111.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 82.9  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331863

CATALOG NUMBER: S122RDIW-S1005D1440U835-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

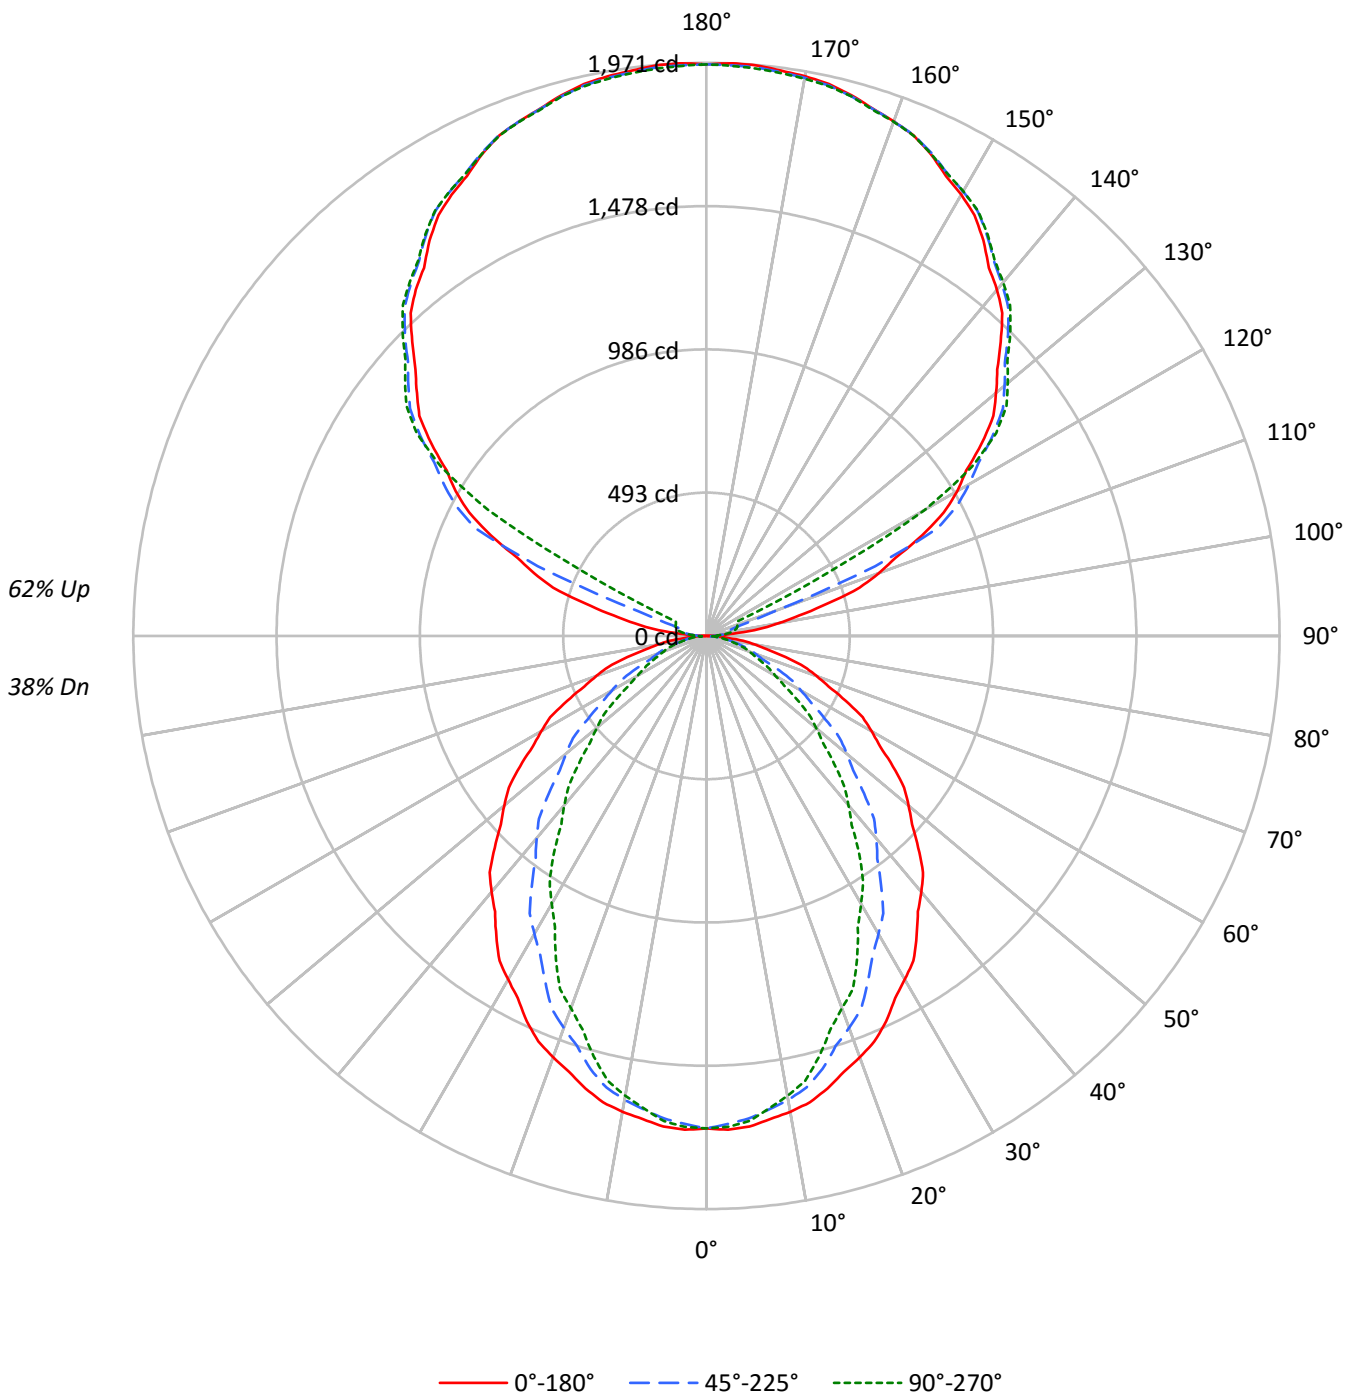



TEST NUMBER: P331863

CATALOG NUMBER: S122RDIW-S1005D1440U835-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45	38																				
1	95	91	88	84	86	83	80	77	67	65	63	53	52	51	40	39	39	32																				
2	87	80	74	69	79	73	68	64	60	56	53	47	45	43	36	34	33	28																				
3	80	71	64	58	72	64	59	54	53	49	45	42	39	37	32	30	28	24																				
4	73	63	55	49	66	57	51	46	47	42	39	38	34	32	29	27	25	21																				
5	67	56	48	42	61	51	44	39	42	37	33	34	30	28	26	24	22	18																				
6	62	50	43	37	56	46	39	34	38	33	29	31	27	24	24	21	19	16																				
7	57	45	38	32	52	42	35	30	35	30	26	28	24	22	22	19	17	15																				
8	53	41	34	29	48	38	31	27	32	27	23	26	22	19	20	18	16	13																				
9	49	38	30	26	45	35	28	24	29	24	21	24	20	17	19	16	14	12																				
10	46	35	28	23	42	32	26	21	27	22	19	22	18	16	17	15	13	11																				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	27341	27341	27341
5°	27446	27000	27149
10°	27237	26558	26332
15°	26924	25770	25028
20°	26490	24646	23409
25°	26045	23370	21841
30°	25430	22057	19829
35°	24829	20631	18065
40°	24226	19155	16021
45°	23516	17497	14173
50°	22790	15822	12356
55°	22044	14021	10612
60°	21180	12126	8809
65°	20199	10189	8023
70°	19029	8393	7378
75°	17592	7648	6881
80°	15528	6843	6267
85°	12208	5391	5391



TEST NUMBER: P331863

CATALOG NUMBER: S122RDIW-S1005D1440U835-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	158.5	1.7
10°-20°	435.2	4.7
20°-30°	611.2	6.6
30°-40°	666.5	7.2
40°-50°	612.8	6.6
50°-60°	481.3	5.2
60°-70°	313.8	3.4
70°-80°	161.8	1.7
80°-90°	46.8	0.5
90°-100°	65.6	0.7
100°-110°	240.4	2.6
110°-120°	642.7	6.9
120°-130°	1060.9	11.5
130°-140°	1128.3	12.2
140°-150°	1048.7	11.3
150°-160°	843.1	9.1
160°-170°	543.3	5.9
170°-180°	187.0	2.0
0°-30°	1204.9	13.0
0°-40°	1871.4	20.2
0°-60°	2965.4	32.1
0°-90°	3487.8	37.7
90°-120°	948.7	10.3
90°-150°	4186.6	45.3
90°-180°	5760.0	62.3
0°-180°	9247.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1693	1693	1693	1693	1693	
5°	1693	1685	1666	1679	1675	160
15°	1611	1592	1542	1513	1497	454
25°	1462	1410	1312	1251	1226	672
35°	1260	1178	1047	954	916	788
45°	1030	924	766	661	621	795
55°	783	661	498	410	377	700
65°	529	404	267	217	210	524
75°	282	178	123	112	110	298
85°	66	35	29	29	29	78
90°	1	17	28	35	38	7
95°	92	49	56	62	61	113
105°	432	451	87	102	108	462
115°	818	843	878	250	117	805
125°	1156	1175	1202	1211	1216	1031
135°	1431	1453	1466	1480	1478	1105
145°	1660	1660	1682	1692	1685	1038
155°	1828	1816	1832	1839	1829	842
165°	1926	1918	1921	1930	1921	544
175°	1970	1961	1963	1971	1958	187
180°	1966	1966	1966	1966	1966	



TEST NUMBER: P331863

CATALOG NUMBER: S122RDIW-S1005D1440U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4
2.5°	1699.6	1698.2	1696.8	1695.5	1694.1	1691.9	1688.9	1686.0	1683.0	1680.0	1682.7
5°	1693.4	1691.7	1690.0	1688.3	1686.6	1683.6	1679.1	1674.7	1670.3	1665.9	1668.9
7.5°	1676.0	1673.9	1671.8	1669.6	1667.5	1663.9	1658.7	1653.5	1648.4	1643.2	1644.1
10°	1661.3	1658.9	1656.5	1654.1	1651.7	1647.1	1640.3	1633.5	1626.7	1619.9	1618.9
12.5°	1642.9	1639.9	1637.0	1634.1	1631.2	1625.3	1616.6	1607.9	1599.2	1590.5	1588.6
15°	1610.7	1606.9	1603.2	1599.4	1595.7	1588.0	1576.5	1564.9	1553.3	1541.7	1535.3
17.5°	1571.1	1565.4	1559.7	1554.0	1548.3	1538.0	1523.1	1508.3	1493.4	1478.6	1470.9
20°	1541.7	1534.9	1528.1	1521.3	1514.5	1502.6	1485.5	1468.5	1451.5	1434.4	1425.9
22.5°	1509.8	1502.2	1494.6	1487.0	1479.3	1465.9	1446.7	1427.5	1408.3	1389.1	1378.1
25°	1462.0	1451.1	1440.2	1429.3	1418.4	1401.8	1379.3	1356.8	1334.3	1311.8	1297.9
27.5°	1404.4	1392.6	1380.7	1368.9	1357.0	1338.4	1313.1	1287.7	1262.4	1237.1	1220.8
30°	1364.0	1351.0	1338.1	1325.1	1312.2	1292.1	1264.8	1237.6	1210.4	1183.1	1165.7
32.5°	1324.7	1309.6	1294.5	1279.4	1264.2	1242.8	1215.0	1187.2	1159.4	1131.6	1111.8
35°	1259.7	1242.4	1225.0	1207.6	1190.3	1166.6	1136.6	1106.7	1076.7	1046.7	1025.3
37.5°	1194.8	1175.7	1156.6	1137.5	1118.5	1093.0	1061.0	1029.1	997.1	965.2	941.6
40°	1149.4	1129.0	1108.5	1088.1	1067.7	1040.9	1007.9	974.9	941.8	908.8	884.6
42.5°	1102.8	1081.3	1059.8	1038.2	1016.7	988.9	954.8	920.6	886.5	852.4	827.4
45°	1029.9	1007.0	984.2	961.4	938.6	909.3	873.5	837.8	802.0	766.3	742.1
47.5°	958.7	934.6	910.4	886.2	862.0	831.5	794.6	757.6	720.7	683.8	659.8
50°	907.3	883.1	858.9	834.7	810.5	779.7	742.3	704.8	667.3	629.9	606.4
52.5°	857.0	831.7	806.5	781.2	755.9	725.0	688.3	651.7	615.0	578.4	555.7
55°	783.1	756.6	730.0	703.4	676.9	645.2	608.4	571.6	534.9	498.1	477.6
57.5°	707.4	680.2	652.9	625.7	598.4	567.1	531.8	496.4	461.1	425.7	407.0
60°	655.9	628.7	601.4	574.2	546.9	515.8	480.7	445.6	410.5	375.5	358.1
62.5°	605.7	578.4	551.2	523.9	496.7	466.3	432.9	399.4	366.0	332.6	316.0
65°	528.7	501.1	473.6	446.0	418.4	389.3	358.6	328.0	297.3	266.7	255.1
67.5°	454.5	427.2	399.8	372.4	345.0	317.5	290.0	262.4	234.8	207.2	201.9
70°	403.1	376.5	349.9	323.4	296.8	271.8	248.3	224.8	201.3	177.8	174.4
72.5°	354.0	328.5	303.1	277.6	252.1	229.9	211.1	192.2	173.3	154.5	151.6
75°	282.0	258.1	234.3	210.5	186.6	168.9	157.3	145.8	134.2	122.6	120.2
77.5°	211.2	190.3	169.4	148.5	127.5	114.3	108.7	103.1	97.5	92.0	90.6
80°	167.0	149.7	132.3	114.9	97.6	87.2	83.8	80.4	77.0	73.6	72.2
82.5°	126.6	113.0	99.5	85.9	72.4	64.4	62.1	59.8	57.5	55.2	54.4
85°	65.9	58.7	51.6	44.4	37.3	33.2	32.2	31.2	30.1	29.1	29.1
87.5°	19.9	18.4	16.9	15.4	14.0	13.5	14.0	14.5	15.0	15.5	15.5
90°	1.4	4.9	8.4	11.9	15.3	18.3	20.9	23.4	25.9	28.4	30.0
92.5°	28.7	28.4	28.1	27.8	27.5	27.9	29.2	30.5	31.7	33.0	33.8
95°	92.4	82.0	71.6	61.2	50.7	46.6	48.8	51.0	53.3	55.5	57.0
97.5°	183.5	154.1	124.7	95.3	65.9	53.8	58.9	64.0	69.1	74.2	75.5
100°	251.7	208.4	165.1	121.8	78.5	59.6	64.9	70.3	75.7	81.1	83.6
102.5°	326.8	317.7	308.5	299.3	290.2	263.1	218.2	173.2	128.3	83.3	86.6
105°	432.4	441.8	451.3	460.8	470.3	431.9	345.6	259.3	173.0	86.8	90.2
107.5°	552.7	560.3	568.0	575.6	583.3	535.4	431.9	328.4	224.9	121.5	117.9
110°	630.1	636.7	643.3	650.0	656.6	614.2	522.9	431.6	340.2	248.9	217.3



TEST NUMBER: P331863

CATALOG NUMBER: S122RDIW-S1005D1440U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	702.9	708.7	714.6	720.5	726.4	718.0	695.5	672.9	650.3	627.8	512.5
115°	817.8	823.2	828.5	833.9	839.3	845.9	853.8	861.7	869.6	877.5	731.2
117.5°	920.5	926.5	932.5	938.5	944.5	950.2	955.6	961.1	966.5	972.0	936.6
120°	995.6	1000.3	1005.0	1009.8	1014.5	1019.7	1025.4	1031.1	1036.8	1042.5	1046.3
122.5°	1059.3	1064.3	1069.3	1074.3	1079.3	1084.9	1091.0	1097.2	1103.4	1109.6	1111.9
125°	1156.3	1160.4	1164.5	1168.6	1172.7	1177.8	1183.8	1189.8	1195.8	1201.8	1204.0
127.5°	1244.2	1248.7	1253.3	1257.8	1262.4	1266.9	1271.4	1275.9	1280.4	1284.9	1288.1
130°	1299.9	1305.0	1310.0	1315.1	1320.2	1324.4	1327.9	1331.4	1334.8	1338.3	1341.8
132.5°	1356.8	1361.1	1365.4	1369.7	1374.0	1377.9	1381.4	1384.8	1388.3	1391.8	1394.8
135°	1430.8	1435.8	1440.9	1445.9	1451.0	1454.9	1457.8	1460.6	1463.5	1466.3	1469.5
137.5°	1505.6	1509.1	1512.7	1516.2	1519.7	1523.1	1526.3	1529.6	1532.8	1536.0	1539.1
140°	1554.5	1557.0	1559.6	1562.1	1564.6	1567.6	1571.1	1574.6	1578.1	1581.5	1584.4
142.5°	1595.5	1597.7	1600.0	1602.3	1604.6	1607.7	1611.7	1615.7	1619.6	1623.6	1626.2
145°	1659.8	1659.4	1659.1	1658.8	1658.5	1661.0	1666.4	1671.8	1677.1	1682.5	1684.7
147.5°	1715.8	1714.6	1713.4	1712.2	1711.0	1713.0	1718.3	1723.7	1729.0	1734.3	1735.9
150°	1752.2	1750.0	1747.8	1745.6	1743.3	1744.8	1749.8	1754.9	1759.9	1765.0	1766.9
152.5°	1782.9	1780.5	1778.0	1775.5	1773.1	1774.2	1779.0	1783.8	1788.6	1793.4	1795.3
155°	1827.6	1824.7	1821.9	1819.0	1816.2	1816.7	1820.5	1824.3	1828.1	1831.8	1833.7
157.5°	1862.6	1860.2	1857.8	1855.4	1853.0	1853.1	1855.7	1858.4	1861.0	1863.7	1865.9
160°	1883.0	1881.1	1879.3	1877.4	1875.5	1875.5	1877.4	1879.3	1881.1	1883.0	1884.9
162.5°	1901.2	1899.4	1897.5	1895.6	1893.7	1893.5	1895.2	1896.8	1898.5	1900.1	1902.3
165°	1925.7	1923.8	1921.9	1920.0	1918.1	1917.7	1918.6	1919.5	1920.5	1921.4	1923.7
167.5°	1943.9	1942.0	1940.1	1938.2	1936.3	1935.8	1936.7	1937.6	1938.5	1939.4	1941.6
170°	1954.2	1952.3	1950.4	1948.5	1946.6	1945.9	1946.6	1947.2	1947.8	1948.5	1950.7
172.5°	1961.0	1959.1	1957.2	1955.3	1953.4	1952.8	1953.4	1954.0	1954.7	1955.3	1957.5
175°	1969.8	1967.6	1965.4	1963.2	1961.0	1960.2	1960.8	1961.4	1962.1	1962.7	1964.9
177.5°	1971.2	1969.5	1967.7	1965.9	1964.1	1963.4	1963.6	1963.9	1964.1	1964.4	1966.2
180°	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5



TEST NUMBER: P331863

CATALOG NUMBER: S122RDIW-S1005D1440U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4
2.5°	1685.4	1688.1	1690.9	1691.9	1691.4	1690.9	1690.3	1689.8
5°	1672.0	1675.1	1678.1	1679.1	1678.1	1677.1	1676.1	1675.1
7.5°	1644.9	1645.8	1646.7	1646.3	1644.5	1642.7	1641.0	1639.2
10°	1617.8	1616.8	1615.8	1614.3	1612.2	1610.2	1608.1	1606.1
12.5°	1586.8	1584.9	1583.1	1580.5	1577.1	1573.7	1570.3	1566.9
15°	1528.8	1522.3	1515.8	1510.9	1507.5	1504.1	1500.7	1497.3
17.5°	1463.2	1455.5	1447.8	1441.0	1435.2	1429.3	1423.4	1417.6
20°	1417.4	1408.9	1400.4	1392.4	1384.9	1377.4	1369.9	1362.4
22.5°	1367.2	1356.2	1345.2	1336.9	1331.4	1325.8	1320.2	1314.6
25°	1283.9	1270.0	1256.0	1246.5	1241.3	1236.2	1231.1	1226.0
27.5°	1204.5	1188.2	1171.9	1159.7	1151.6	1143.5	1135.4	1127.3
30°	1148.4	1131.0	1113.6	1100.4	1091.2	1082.0	1072.8	1063.6
32.5°	1092.0	1072.2	1052.3	1038.1	1029.5	1020.8	1012.1	1003.5
35°	1003.8	982.4	960.9	946.4	938.9	931.4	923.9	916.5
37.5°	917.9	894.3	870.6	854.5	846.0	837.4	828.8	820.2
40°	860.4	836.2	812.1	795.6	786.7	777.8	769.0	760.1
42.5°	802.4	777.4	752.4	735.6	727.0	718.4	709.9	701.3
45°	717.9	693.7	669.5	653.4	645.2	637.0	628.8	620.7
47.5°	635.7	611.7	587.6	571.9	564.5	557.1	549.6	542.2
50°	582.9	559.4	535.9	520.5	513.4	506.2	499.1	491.9
52.5°	533.0	510.3	487.7	473.0	466.4	459.8	453.2	446.6
55°	457.2	436.8	416.3	402.9	396.4	389.9	383.5	377.0
57.5°	388.3	369.5	350.8	338.7	333.3	327.8	322.4	316.9
60°	340.7	323.4	306.0	294.6	289.1	283.7	278.2	272.8
62.5°	299.5	282.9	266.4	256.4	253.2	249.9	246.6	243.4
65°	243.5	231.9	220.3	214.0	213.0	212.0	211.0	210.0
67.5°	196.6	191.3	185.9	182.7	181.7	180.6	179.5	178.4
70°	171.0	167.6	164.2	161.8	160.4	159.0	157.7	156.3
72.5°	148.8	145.9	143.0	141.2	140.4	139.6	138.7	137.9
75°	117.8	115.5	113.1	111.7	111.4	111.0	110.7	110.3
77.5°	89.2	87.9	86.5	85.5	85.0	84.5	83.9	83.4
80°	70.8	69.5	68.1	67.4	67.4	67.4	67.4	67.4
82.5°	53.5	52.7	51.9	51.5	51.5	51.5	51.5	51.5
85°	29.1	29.1	29.1	29.1	29.1	29.1	29.1	29.1
87.5°	15.6	15.6	15.7	15.8	15.9	16.0	16.1	16.3
90°	31.6	33.2	34.8	35.9	36.5	37.1	37.8	38.4
92.5°	34.6	35.5	36.3	36.9	37.3	37.6	38.0	38.4
95°	58.6	60.2	61.8	62.4	62.1	61.8	61.5	61.2
97.5°	76.8	78.0	79.3	80.1	80.5	80.9	81.3	81.6
100°	86.1	88.7	91.2	92.8	93.4	94.0	94.7	95.3
102.5°	89.9	93.2	96.5	98.6	99.5	100.3	101.2	102.1
105°	93.7	97.2	100.7	103.0	104.3	105.6	106.8	108.1
107.5°	114.4	110.8	107.3	106.2	107.4	108.7	110.0	111.2
110°	185.7	154.1	122.5	107.3	108.6	109.8	111.1	112.4





TEST NUMBER: P331863

CATALOG NUMBER: S122RDIW-S1005D1440U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	397.2	281.9	166.6	109.4	110.5	111.5	112.5	113.5
115°	584.9	438.5	292.2	207.6	184.9	162.1	139.4	116.6
117.5°	901.2	865.8	830.4	775.3	700.5	625.7	550.9	476.2
120°	1050.1	1053.9	1057.7	1038.2	995.6	952.9	910.2	867.6
122.5°	1114.2	1116.5	1118.7	1115.7	1107.4	1099.2	1090.9	1082.6
125°	1206.2	1208.4	1210.6	1212.2	1213.2	1214.1	1215.1	1216.0
127.5°	1291.3	1294.5	1297.7	1299.5	1299.6	1299.8	1300.0	1300.2
130°	1345.3	1348.8	1352.2	1353.8	1353.5	1353.2	1352.9	1352.5
132.5°	1397.7	1400.7	1403.7	1405.0	1404.7	1404.4	1404.1	1403.7
135°	1472.6	1475.8	1479.0	1480.2	1479.6	1479.0	1478.3	1477.7
137.5°	1542.2	1545.3	1548.4	1549.4	1548.3	1547.3	1546.2	1545.1
140°	1587.2	1590.1	1592.9	1593.5	1592.0	1590.4	1588.8	1587.2
142.5°	1628.8	1631.4	1634.0	1634.5	1632.9	1631.3	1629.8	1628.2
145°	1686.9	1689.1	1691.4	1691.7	1690.1	1688.5	1686.9	1685.4
147.5°	1737.6	1739.2	1740.9	1741.0	1739.7	1738.4	1737.0	1735.7
150°	1768.8	1770.7	1772.6	1772.7	1771.2	1769.6	1768.0	1766.4
152.5°	1797.2	1799.1	1801.0	1800.9	1798.8	1796.8	1794.7	1792.6
155°	1835.6	1837.5	1839.4	1839.1	1836.6	1834.1	1831.5	1829.0
157.5°	1868.0	1870.1	1872.3	1872.1	1869.7	1867.2	1864.7	1862.3
160°	1886.8	1888.7	1890.6	1890.5	1888.3	1886.0	1883.8	1881.6
162.5°	1904.4	1906.6	1908.7	1908.4	1905.7	1903.0	1900.3	1897.6
165°	1925.9	1928.1	1930.3	1930.3	1928.1	1925.9	1923.7	1921.4
167.5°	1943.8	1946.0	1948.2	1947.9	1945.1	1942.2	1939.4	1936.5
170°	1952.9	1955.1	1957.3	1957.0	1954.2	1951.3	1948.5	1945.6
172.5°	1959.7	1961.9	1964.1	1963.8	1961.0	1958.1	1955.3	1952.4
175°	1967.1	1969.3	1971.5	1971.1	1967.9	1964.7	1961.6	1958.4
177.5°	1967.9	1969.7	1971.5	1971.2	1968.9	1966.7	1964.4	1962.1
180°	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5

(END OF REPORT)