

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331853

Luminaire Tested: **S122RDIW-S1005D970U835-4F0-1E-UDD-A**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331853  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIW-S1005D970U835-4F0-1E-UDD-A  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 970 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 7684.6 lumens  
Efficiency: N/A  
Efficacy: 114.0 lumens/watt  
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02  
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 67.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331853

CATALOG NUMBER: S122RDIW-S1005D970U835-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

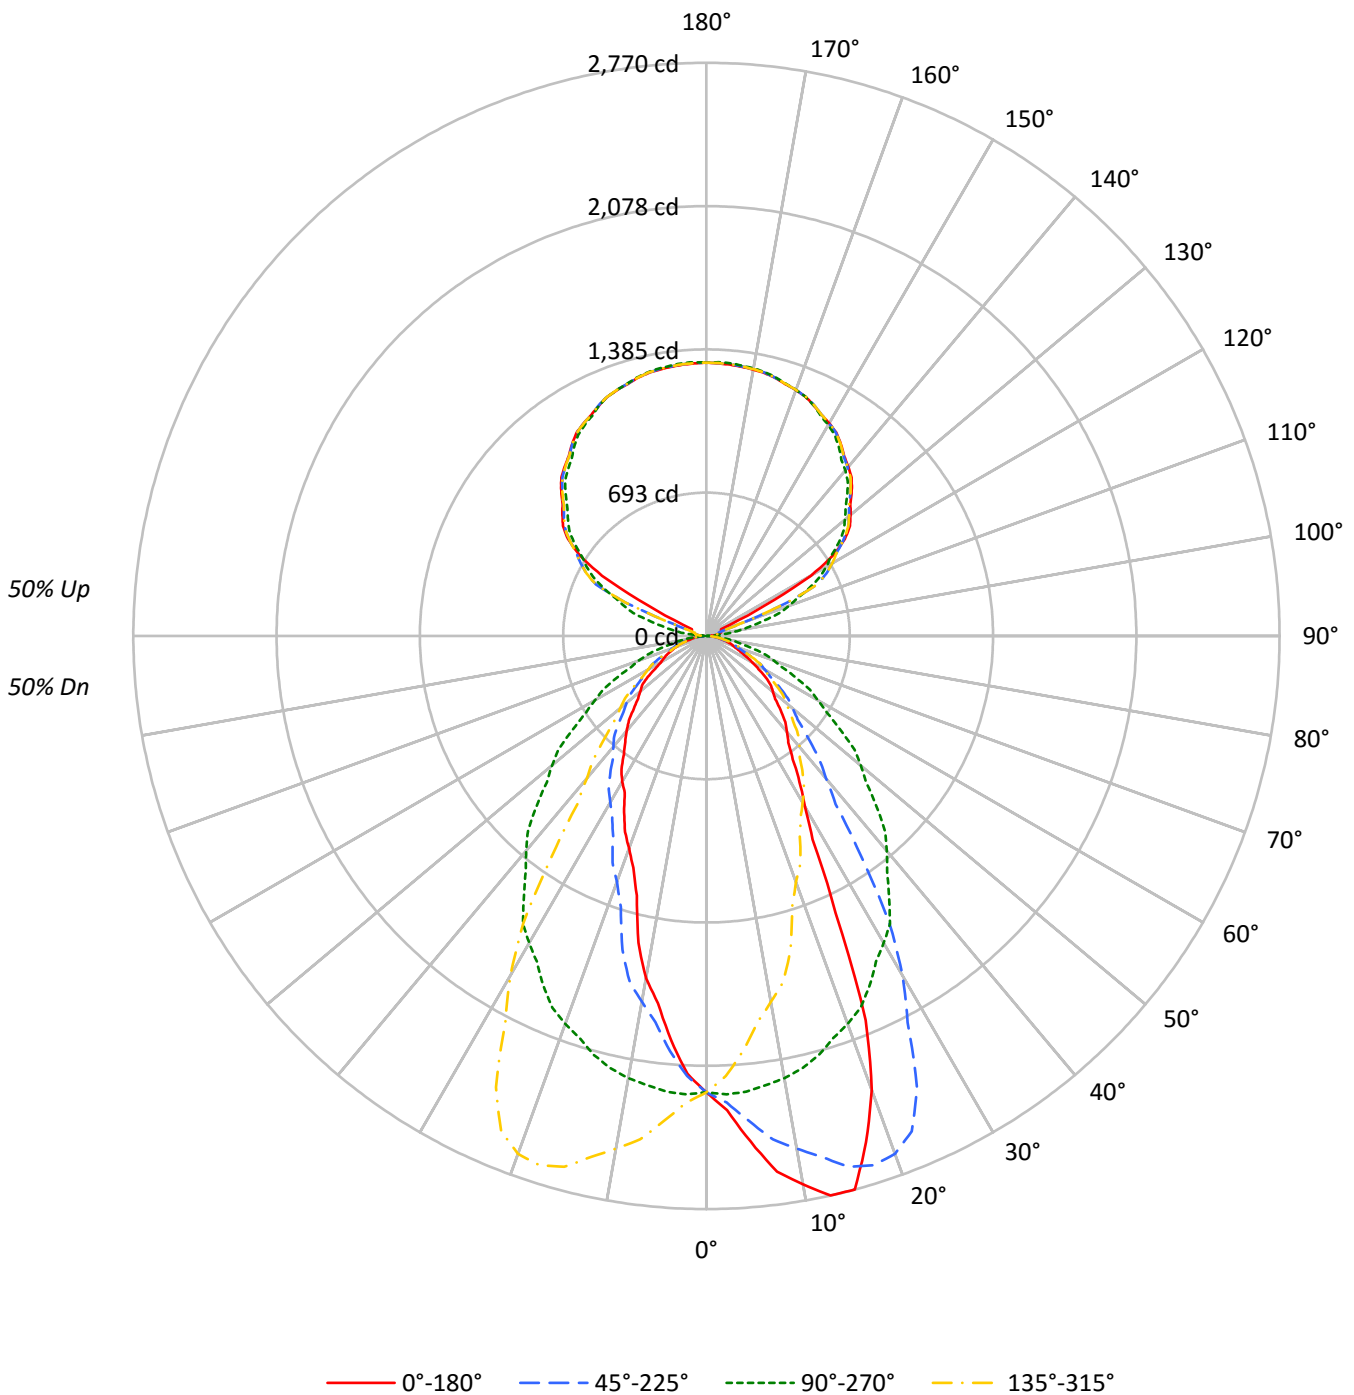



TEST NUMBER: P331853

CATALOG NUMBER: S122RDIW-S1005D970U835-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																			
RCR																																														
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50									50																			
1	98	94	91	88	91	87	84	81	74	72	70	62	60	59	50	49	49	43									43																			
2	90	83	78	73	83	77	72	68	66	62	59	55	53	50	45	44	42	38									38																			
3	83	74	67	62	76	69	63	58	59	54	51	50	46	44	41	39	37	33									33																			
4	76	66	59	53	70	62	55	50	53	48	44	45	41	38	37	35	33	29									29																			
5	70	59	52	46	65	55	49	44	48	43	39	41	37	34	34	31	29	26									26																			
6	65	54	46	40	60	50	43	38	43	38	34	37	33	30	31	28	26	23									23																			
7	61	49	41	36	56	46	39	34	40	34	31	34	30	27	29	26	24	21									21																			
8	56	45	37	32	52	42	35	31	36	31	27	31	27	24	27	24	21	19									19																			
9	53	41	34	29	49	38	32	28	34	28	25	29	25	22	25	22	20	17									17																			
10	49	38	31	26	46	35	29	25	31	26	23	27	23	20	23	20	18	16									16																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	35608	35608	35608	35608
5°	39768	35832	31770	35832
10°	44124	35580	27539	35580
15°	46292	35059	21698	35059
20°	40132	34287	18777	34287
25°	26320	33228	16764	33228
30°	17715	31946	15172	31946
35°	14349	30328	13685	30328
40°	12760	28572	12663	28572
45°	11549	26510	11303	26510
50°	10510	24465	10472	24465
55°	9880	22196	9751	22196
60°	8263	20118	8167	20118
65°	6968	18269	7904	18269
70°	6439	16315	7454	16315
75°	6026	14198	6881	14198
80°	5560	11688	6127	11688
85°	5113	9226	5391	9226



TEST NUMBER: P331853

CATALOG NUMBER: S122RDIW-S1005D970U835-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	209.1	2.7
10°-20°	582.5	7.6
20°-30°	750.7	9.8
30°-40°	713.4	9.3
40°-50°	611.1	8.0
50°-60°	465.4	6.1
60°-70°	294.2	3.8
70°-80°	146.9	1.9
80°-90°	41.5	0.5
90°-100°	44.1	0.6
100°-110°	161.5	2.1
110°-120°	431.8	5.6
120°-130°	712.8	9.3
130°-140°	758.0	9.9
140°-150°	704.6	9.2
150°-160°	566.5	7.4
160°-170°	365.0	4.8
170°-180°	125.6	1.6
0°-30°	1542.3	20.1
0°-40°	2255.7	29.4
0°-60°	3332.1	43.4
0°-90°	3814.7	49.6
90°-120°	637.4	8.3
90°-150°	2812.8	36.6
90°-180°	3870.0	50.4
0°-180°	7684.6	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	2205	2205	2205	2205	2205	
5°	2454	2211	1960	2211	2454	242
15°	2769	2097	1298	2097	2769	747
25°	1477	1865	941	1865	1477	701
35°	728	1539	694	1539	728	466
45°	506	1161	495	1161	506	391
55°	351	788	346	788	351	308
65°	182	478	207	478	182	186
75°	97	228	110	228	97	102
85°	28	50	29	50	28	30
90°	26	1	26	1	26	13
95°	41	62	41	62	41	38
105°	73	290	73	290	73	76
115°	78	549	78	549	78	196
125°	817	777	817	777	817	707
135°	993	961	993	961	993	765
145°	1132	1115	1132	1115	1132	708
155°	1229	1228	1229	1228	1229	567
165°	1291	1294	1291	1294	1291	364
175°	1316	1323	1316	1323	1316	125
180°	1320	1320	1320	1320	1320	



TEST NUMBER: P331853

CATALOG NUMBER: S122RDIW-S1005D970U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4
2.5°	2294.9	2296.8	2298.6	2294.3	2294.3	2290.6	2282.7	2276.5	2259.4	2256.9	2256.9
5°	2453.7	2452.2	2455.2	2445.3	2431.5	2428.4	2413.9	2394.7	2374.8	2352.6	2348.0
7.5°	2611.6	2609.3	2603.1	2601.5	2590.9	2567.7	2544.3	2519.3	2486.2	2453.9	2437.6
10°	2691.3	2716.6	2701.2	2674.4	2679.8	2643.8	2624.6	2591.7	2564.1	2515.8	2505.1
12.5°	2769.7	2779.7	2774.8	2759.6	2752.7	2727.7	2701.8	2673.2	2622.3	2578.9	2541.2
15°	2769.4	2784.0	2787.8	2783.2	2787.1	2785.5	2771.7	2748.0	2703.5	2656.0	2614.6
17.5°	2565.0	2575.1	2600.2	2617.2	2638.7	2684.1	2706.4	2715.2	2708.6	2681.5	2652.3
20°	2335.7	2318.8	2389.3	2425.4	2456.0	2532.6	2598.5	2623.8	2664.4	2663.7	2656.0
22.5°	2010.8	2014.8	2081.6	2124.4	2213.9	2290.5	2365.6	2460.8	2539.4	2591.3	2621.7
25°	1477.4	1506.6	1573.2	1631.5	1731.1	1873.6	2003.1	2153.3	2295.1	2407.0	2513.5
27.5°	1109.6	1111.8	1164.6	1218.4	1277.6	1394.4	1557.4	1736.8	1938.9	2105.7	2297.5
30°	950.2	945.6	967.8	1000.8	1051.4	1141.8	1264.4	1440.7	1642.2	1893.5	2117.3
32.5°	837.4	837.7	854.4	878.8	920.8	981.8	1065.8	1208.9	1399.4	1646.5	1908.9
35°	728.0	727.2	739.5	757.1	774.7	813.8	871.3	946.4	1077.4	1308.1	1576.3
37.5°	649.5	652.9	658.9	669.9	689.4	711.1	745.6	796.0	889.4	1025.8	1251.2
40°	605.4	606.9	615.3	624.5	636.0	652.9	681.2	721.9	790.1	898.9	1063.6
42.5°	564.9	566.5	572.4	581.0	590.1	606.9	630.4	665.5	720.8	805.7	941.6
45°	505.8	505.8	511.1	515.0	524.9	540.2	559.4	588.5	626.8	689.7	780.1
47.5°	450.3	450.4	454.0	460.6	466.8	478.8	497.6	521.4	549.3	597.9	675.1
50°	418.4	419.2	421.5	426.8	430.7	441.4	456.0	476.6	505.8	543.3	607.7
52.5°	392.7	392.2	395.1	397.4	400.0	407.7	418.6	436.8	462.8	495.5	548.8
55°	351.0	347.9	352.5	356.3	358.6	361.7	367.8	379.3	401.5	429.1	469.0
57.5°	298.9	297.6	300.9	304.4	311.6	319.9	325.1	332.4	343.9	363.7	403.2
60°	255.9	255.9	262.8	265.1	273.6	284.3	295.0	301.2	312.7	325.7	354.8
62.5°	217.9	218.6	221.8	224.1	228.8	242.0	257.0	270.5	281.4	293.8	313.1
65°	182.4	183.9	183.9	185.4	188.5	191.6	197.7	208.4	227.6	245.2	259.8
67.5°	154.8	155.3	155.7	157.2	158.0	161.4	163.8	168.6	173.0	189.7	207.8
70°	136.4	138.7	137.9	139.5	140.2	141.8	144.8	147.1	154.0	157.9	168.6
72.5°	119.2	120.9	120.8	121.7	123.7	124.0	126.4	128.7	133.2	136.4	142.2
75°	96.6	95.8	96.6	98.1	98.9	99.6	99.6	102.7	105.0	108.0	111.9
77.5°	74.5	75.3	75.1	75.3	75.4	76.8	76.6	78.0	80.3	81.8	83.7
80°	59.8	60.5	59.8	60.5	61.3	62.1	61.3	62.1	64.4	65.9	65.9
82.5°	46.3	46.4	46.9	47.1	47.2	47.4	48.4	48.6	50.3	50.0	50.6
85°	27.6	26.8	26.8	26.8	27.6	28.4	27.6	27.6	28.4	28.4	28.4
87.5°	15.0	15.5	15.4	15.3	15.2	15.1	14.9	15.3	14.5	14.9	13.9
90°	25.8	25.4	24.9	24.5	24.1	23.4	22.3	21.2	20.2	19.1	17.4
92.5°	25.8	25.5	25.3	25.0	24.8	24.4	23.8	23.3	22.7	22.2	21.3
95°	41.1	41.3	41.5	41.7	41.9	41.5	40.5	39.4	38.3	37.3	35.8
97.5°	54.8	54.6	54.3	54.1	53.8	53.3	52.4	51.6	50.7	49.9	46.4
100°	64.0	63.6	63.2	62.7	62.3	61.3	59.6	57.9	56.2	54.5	50.9
102.5°	68.6	68.0	67.4	66.8	66.2	64.8	62.6	60.4	58.2	56.0	86.2
105°	72.6	71.8	70.9	70.1	69.2	67.6	65.3	63.0	60.6	58.3	116.3
107.5°	74.7	73.9	73.0	72.2	71.3	72.1	74.5	76.8	79.2	81.6	151.1
110°	75.5	74.6	73.8	72.9	72.1	82.3	103.5	124.7	146.0	167.2	228.6



TEST NUMBER: P331853

CATALOG NUMBER: S122RDIW-S1005D970U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	76.3	75.6	74.9	74.2	73.5	111.9	189.4	266.8	344.3	421.8	436.9
115°	78.4	93.6	108.9	124.2	139.5	196.3	294.6	392.9	491.2	589.6	584.3
117.5°	319.9	370.2	420.4	470.6	520.9	557.9	581.7	605.4	629.2	653.0	649.4
120°	582.9	611.5	640.2	668.9	697.5	710.6	708.0	705.5	703.0	700.4	696.6
122.5°	727.4	732.9	738.5	744.0	749.6	751.6	750.1	748.6	747.0	745.5	741.3
125°	817.0	816.3	815.7	815.1	814.4	813.4	811.9	810.4	808.9	807.4	803.4
127.5°	873.5	873.4	873.3	873.2	873.0	871.9	869.7	867.6	865.4	863.2	860.2
130°	908.7	908.9	909.1	909.3	909.6	908.5	906.2	903.8	901.5	899.2	896.8
132.5°	943.1	943.3	943.5	943.7	944.0	943.1	941.1	939.1	937.1	935.1	932.7
135°	992.8	993.2	993.6	994.1	994.5	993.6	991.5	989.4	987.3	985.2	983.2
137.5°	1038.1	1038.8	1039.5	1040.3	1041.0	1040.3	1038.2	1036.1	1034.1	1032.0	1029.8
140°	1066.4	1067.4	1068.5	1069.6	1070.6	1070.2	1068.3	1066.4	1064.5	1062.6	1060.2
142.5°	1093.9	1095.0	1096.0	1097.1	1098.1	1097.8	1096.1	1094.3	1092.6	1090.8	1088.2
145°	1132.3	1133.4	1134.4	1135.5	1136.6	1136.3	1134.9	1133.4	1131.9	1130.4	1126.8
147.5°	1166.1	1167.0	1167.9	1168.8	1169.7	1169.6	1168.5	1167.4	1166.3	1165.2	1161.6
150°	1186.8	1187.8	1188.9	1190.0	1191.0	1190.9	1189.6	1188.4	1187.1	1185.8	1182.4
152.5°	1204.4	1205.8	1207.2	1208.6	1210.0	1210.0	1208.7	1207.5	1206.2	1204.9	1201.7
155°	1228.8	1230.5	1232.2	1233.9	1235.6	1235.8	1234.5	1233.3	1232.0	1230.7	1228.2
157.5°	1251.2	1252.8	1254.5	1256.1	1257.8	1257.9	1256.5	1255.0	1253.6	1252.1	1250.3
160°	1264.2	1265.7	1267.1	1268.6	1270.1	1270.2	1268.9	1267.7	1266.4	1265.1	1263.9
162.5°	1274.9	1276.7	1278.5	1280.3	1282.2	1282.4	1280.9	1279.5	1278.0	1276.6	1275.5
165°	1290.9	1292.4	1293.9	1295.4	1296.9	1296.9	1295.4	1293.9	1292.4	1290.9	1290.3
167.5°	1301.1	1303.0	1304.9	1306.8	1308.7	1308.9	1307.4	1305.9	1304.4	1303.0	1302.4
170°	1307.2	1309.1	1311.0	1312.9	1314.8	1315.0	1313.5	1312.1	1310.6	1309.1	1308.7
172.5°	1311.8	1313.7	1315.6	1317.5	1319.4	1319.6	1318.1	1316.6	1315.2	1313.7	1313.2
175°	1315.8	1317.9	1320.0	1322.1	1324.3	1324.6	1323.1	1321.6	1320.1	1318.6	1318.2
177.5°	1318.3	1319.8	1321.3	1322.8	1324.4	1324.5	1323.3	1322.2	1321.0	1319.8	1319.6
180°	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5



TEST NUMBER: P331853

CATALOG NUMBER: S122RDIW-S1005D970U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4
2.5°	2258.2	2253.2	2249.0	2237.9	2232.4	2220.1	2218.3	2217.7	2201.8	2186.4	2182.1
5°	2335.7	2323.4	2305.1	2283.6	2261.4	2238.4	2223.1	2210.8	2180.1	2151.0	2134.2
7.5°	2413.9	2387.5	2355.8	2315.2	2281.3	2243.3	2215.1	2189.8	2146.3	2104.6	2076.5
10°	2472.1	2429.2	2387.0	2331.1	2287.4	2244.5	2204.7	2170.2	2121.1	2066.0	2026.9
12.5°	2508.3	2461.1	2403.0	2348.3	2291.7	2237.2	2183.8	2139.5	2081.9	2024.9	1978.5
15°	2557.2	2506.6	2436.1	2357.9	2285.1	2213.9	2152.6	2097.4	2022.3	1954.1	1897.4
17.5°	2597.2	2527.6	2451.9	2361.5	2277.2	2186.6	2107.7	2037.2	1953.6	1871.3	1804.5
20°	2610.0	2541.1	2453.7	2363.3	2263.7	2157.2	2072.1	1995.5	1905.8	1816.1	1739.5
22.5°	2602.1	2548.4	2451.3	2343.1	2241.0	2129.6	2033.5	1944.6	1845.1	1753.6	1664.7
25°	2548.0	2529.6	2437.6	2319.6	2203.1	2073.6	1962.5	1865.2	1751.8	1653.7	1557.1
27.5°	2421.8	2461.5	2404.5	2278.8	2149.3	2010.5	1885.6	1774.8	1657.1	1546.7	1450.5
30°	2300.5	2391.6	2367.1	2250.6	2105.8	1969.4	1829.2	1713.5	1587.8	1474.4	1379.4
32.5°	2134.3	2285.0	2308.9	2211.4	2061.7	1911.8	1764.8	1649.7	1518.5	1399.0	1306.4
35°	1869.8	2095.1	2198.5	2136.5	1986.3	1824.6	1672.8	1538.7	1406.9	1288.9	1197.0
37.5°	1554.2	1861.1	2033.5	2037.9	1900.0	1731.9	1566.6	1433.5	1298.6	1182.7	1083.3
40°	1349.5	1682.0	1906.6	1956.4	1839.9	1658.3	1491.2	1355.6	1223.8	1110.4	996.2
42.5°	1165.6	1496.9	1772.9	1859.5	1767.0	1586.6	1418.9	1277.1	1149.0	1041.7	925.1
45°	942.6	1232.2	1536.4	1691.2	1639.9	1472.8	1295.8	1161.0	1040.6	947.9	836.0
47.5°	795.1	999.3	1293.7	1503.0	1502.1	1349.6	1175.5	1046.3	934.7	847.8	757.3
50°	711.1	888.9	1138.0	1375.5	1395.4	1267.5	1101.9	974.0	869.8	778.6	705.8
52.5°	635.7	782.2	1006.2	1233.9	1290.6	1179.8	1019.2	901.0	799.9	716.0	653.7
55°	537.2	650.6	820.7	1033.7	1119.6	1041.4	898.9	788.5	706.5	636.0	582.4
57.5°	454.4	539.5	676.0	847.5	947.5	898.3	780.7	691.1	620.9	557.1	514.8
60°	402.3	472.0	587.8	731.1	841.4	806.9	706.5	623.0	563.2	508.1	468.2
62.5°	353.3	413.2	512.4	628.7	729.8	715.6	633.6	563.5	511.1	460.9	427.1
65°	284.3	328.0	405.4	496.6	577.8	584.7	525.7	478.2	431.4	391.6	361.7
67.5°	226.4	254.9	309.4	386.2	447.1	468.8	432.8	396.5	359.4	328.6	302.7
70°	190.8	213.8	253.6	315.7	371.7	394.6	374.0	345.6	313.4	288.1	265.9
72.5°	154.6	177.0	206.4	252.0	299.9	324.8	317.6	297.2	271.1	250.1	229.1
75°	116.5	123.4	143.3	174.0	211.5	233.0	238.3	227.6	206.9	190.8	178.5
77.5°	86.1	90.3	99.8	115.9	140.4	159.5	167.4	166.1	151.9	142.5	131.0
80°	69.0	71.3	75.9	82.8	101.2	120.3	125.7	125.7	115.7	111.9	100.4
82.5°	52.4	54.1	56.9	60.7	69.3	86.0	92.0	93.2	86.9	81.8	72.8
85°	29.9	29.1	30.7	33.0	34.5	39.1	48.3	49.8	48.3	42.1	39.8
87.5°	13.6	13.8	13.5	12.5	12.6	12.8	15.4	18.0	16.0	14.6	13.9
90°	15.7	14.0	12.3	10.3	8.0	5.6	3.3	1.0	3.3	5.6	8.0
92.5°	20.5	19.6	18.8	18.5	18.7	18.9	19.1	19.3	19.1	18.9	18.7
95°	34.3	32.8	31.3	34.1	41.1	48.1	55.1	62.1	55.1	48.1	41.1
97.5°	43.0	39.6	36.1	44.3	64.0	83.8	103.5	123.3	103.5	83.8	64.0
100°	47.2	43.6	40.0	52.8	81.9	110.9	140.0	169.1	140.0	110.9	81.9
102.5°	116.4	146.6	176.8	194.9	201.1	207.3	213.4	219.6	213.4	207.3	201.1
105°	174.2	232.2	290.2	316.0	309.6	303.2	296.9	290.5	296.9	303.2	309.6
107.5°	220.6	290.2	359.7	391.9	386.7	381.6	376.5	371.3	376.5	381.6	386.7
110°	290.0	351.3	412.7	441.1	436.7	432.2	427.8	423.3	427.8	432.2	436.7





TEST NUMBER: P331853

CATALOG NUMBER: S122RDIW-S1005D970U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	452.1	467.3	482.4	488.0	484.1	480.1	476.2	472.2	476.2	480.1	484.1
115°	578.9	573.6	568.3	563.9	560.3	556.7	553.0	549.4	553.0	556.7	560.3
117.5°	645.7	642.1	638.4	634.6	630.5	626.5	622.5	618.4	622.5	626.5	630.5
120°	692.8	688.9	685.1	681.6	678.4	675.2	672.1	668.9	672.1	675.2	678.4
122.5°	737.2	733.0	728.9	725.1	721.7	718.4	715.0	711.7	715.0	718.4	721.7
125°	799.4	795.3	791.3	787.9	785.1	782.4	779.6	776.8	779.6	782.4	785.1
127.5°	857.2	854.2	851.2	848.1	845.1	842.0	839.0	835.9	839.0	842.0	845.1
130°	894.5	892.1	889.8	886.9	883.5	880.2	876.8	873.4	876.8	880.2	883.5
132.5°	930.4	928.1	925.7	923.1	920.2	917.4	914.5	911.6	914.5	917.4	920.2
135°	981.3	979.4	977.5	974.9	971.5	968.1	964.7	961.3	964.7	968.1	971.5
137.5°	1027.6	1025.5	1023.3	1021.0	1018.7	1016.3	1013.9	1011.5	1013.9	1016.3	1018.7
140°	1057.9	1055.5	1053.2	1051.2	1049.5	1047.8	1046.1	1044.4	1046.1	1047.8	1049.5
142.5°	1085.5	1082.8	1080.1	1078.0	1076.5	1075.0	1073.4	1071.9	1073.4	1075.0	1076.5
145°	1123.2	1119.6	1116.0	1114.3	1114.5	1114.7	1114.9	1115.1	1114.9	1114.7	1114.5
147.5°	1158.0	1154.5	1150.9	1149.5	1150.3	1151.1	1151.9	1152.8	1151.9	1151.1	1150.3
150°	1179.0	1175.6	1172.2	1171.3	1172.8	1174.2	1175.7	1177.2	1175.7	1174.2	1172.8
152.5°	1198.5	1195.2	1192.0	1191.2	1192.9	1194.5	1196.2	1197.9	1196.2	1194.5	1192.9
155°	1225.6	1223.1	1220.5	1220.2	1222.1	1224.0	1225.9	1227.9	1225.9	1224.0	1222.1
157.5°	1248.6	1246.8	1245.0	1244.9	1246.5	1248.1	1249.8	1251.4	1249.8	1248.1	1246.5
160°	1262.6	1261.3	1260.0	1260.0	1261.3	1262.6	1263.9	1265.1	1263.9	1262.6	1261.3
162.5°	1274.4	1273.3	1272.2	1272.3	1273.5	1274.8	1276.1	1277.4	1276.1	1274.8	1273.5
165°	1289.6	1289.0	1288.4	1288.7	1290.0	1291.2	1292.5	1293.8	1292.5	1291.2	1290.0
167.5°	1301.8	1301.2	1300.6	1300.9	1302.2	1303.5	1304.7	1306.0	1304.7	1303.5	1302.2
170°	1308.2	1307.8	1307.4	1307.8	1309.1	1310.4	1311.6	1312.9	1311.6	1310.4	1309.1
172.5°	1312.8	1312.4	1312.0	1312.4	1313.7	1314.9	1316.2	1317.5	1316.2	1314.9	1313.7
175°	1317.8	1317.4	1316.9	1317.5	1319.0	1320.4	1321.9	1323.4	1321.9	1320.4	1319.0
177.5°	1319.4	1319.3	1319.1	1319.6	1320.8	1322.0	1323.2	1324.4	1323.2	1322.0	1320.8
180°	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5



TEST NUMBER: P331853

CATALOG NUMBER: S122RDIW-S1005D970U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4
2.5°	2174.2	2169.9	2161.9	2149.6	2142.3	2129.4	2120.8	2125.7	2127.0	2125.7	2124.5
5°	2115.8	2099.7	2077.5	2056.0	2036.1	2014.6	2002.4	1997.0	1986.3	1980.1	1977.1
7.5°	2045.1	2017.4	1986.0	1948.6	1916.8	1883.6	1866.6	1858.1	1836.2	1824.3	1813.8
10°	1992.4	1948.7	1917.3	1868.3	1838.4	1794.7	1764.8	1765.6	1735.7	1718.8	1706.6
12.5°	1934.2	1886.2	1833.9	1789.8	1748.3	1713.2	1677.1	1662.6	1630.9	1614.6	1581.5
15°	1837.6	1781.7	1726.5	1666.7	1624.6	1570.2	1518.1	1454.5	1403.1	1358.7	1346.4
17.5°	1732.2	1662.9	1607.6	1537.4	1465.2	1373.7	1313.3	1276.4	1245.4	1222.0	1204.5
20°	1659.8	1589.3	1530.3	1424.6	1327.2	1265.2	1220.7	1192.4	1160.2	1134.9	1121.1
22.5°	1583.8	1510.2	1429.8	1311.8	1235.9	1186.1	1146.5	1113.9	1092.1	1072.4	1059.8
25°	1475.9	1395.4	1262.9	1181.6	1120.3	1068.2	1040.6	1020.7	997.7	970.9	958.7
27.5°	1361.9	1233.9	1138.7	1078.3	1019.8	985.9	961.1	931.4	910.8	898.7	886.0
30°	1276.7	1148.7	1074.4	1008.5	967.1	929.5	900.4	883.6	863.6	842.9	834.5
32.5°	1181.6	1079.4	1008.2	953.3	911.3	879.3	856.3	829.0	814.6	801.9	784.2
35°	1063.6	986.2	921.1	876.7	836.8	810.8	783.9	767.8	741.8	731.1	724.2
37.5°	963.7	896.6	848.0	801.1	769.5	740.7	724.3	698.7	687.4	672.5	658.0
40°	907.3	841.4	794.7	756.3	721.1	699.6	678.9	658.3	641.4	634.5	616.9
42.5°	849.7	796.0	749.3	707.3	683.7	661.0	634.8	619.6	602.2	591.0	580.1
45°	770.1	722.6	682.8	648.3	622.2	598.5	581.6	556.3	546.4	524.2	515.0
47.5°	700.3	656.1	618.1	585.3	559.9	544.4	519.7	499.9	484.0	470.4	458.6
50°	650.6	613.8	577.0	547.9	524.9	502.7	477.4	467.4	442.9	436.0	429.1
52.5°	605.2	570.3	536.6	508.1	485.1	463.5	441.2	428.2	411.7	404.8	399.7
55°	541.8	508.1	475.9	450.6	427.6	405.4	391.6	375.5	367.8	362.5	356.3
57.5°	478.0	447.7	423.0	397.4	374.3	356.6	340.7	331.0	323.1	316.0	308.7
60°	437.6	408.4	386.2	362.5	338.7	324.1	311.9	300.4	291.2	280.5	277.4
62.5°	394.6	369.2	348.8	325.7	305.0	291.7	280.0	269.1	258.1	242.5	238.2
65°	335.6	315.7	294.3	275.1	256.7	243.7	226.8	214.6	210.0	208.4	207.7
67.5°	282.3	263.5	245.1	225.4	208.7	196.6	188.1	186.2	183.0	182.1	179.9
70°	246.8	229.1	210.7	192.3	176.3	174.0	170.9	167.8	164.0	162.5	160.9
72.5°	214.9	196.6	178.2	163.5	156.6	153.7	150.7	147.6	145.0	143.5	142.5
75°	164.8	147.9	135.6	130.3	126.4	124.1	119.5	117.2	115.7	113.4	112.6
77.5°	118.6	109.1	103.5	100.1	96.1	93.6	91.0	88.7	87.1	86.6	85.4
80°	90.4	85.8	82.0	77.4	75.9	72.8	72.0	69.7	70.5	68.2	68.2
82.5°	70.2	64.4	61.2	59.0	57.5	55.0	54.3	53.2	53.3	51.6	51.6
85°	36.0	34.5	33.0	31.4	31.4	29.1	29.9	29.1	29.1	27.6	26.8
87.5°	13.7	13.5	12.6	13.0	13.3	13.0	13.2	12.8	13.0	13.3	12.8
90°	10.3	12.3	14.0	15.7	17.4	19.1	20.2	21.2	22.3	23.4	24.1
92.5°	18.5	18.8	19.6	20.5	21.3	22.2	22.7	23.3	23.8	24.4	24.8
95°	34.1	31.3	32.8	34.3	35.8	37.3	38.3	39.4	40.5	41.5	41.9
97.5°	44.3	36.1	39.6	43.0	46.4	49.9	50.7	51.6	52.4	53.3	53.8
100°	52.8	40.0	43.6	47.2	50.9	54.5	56.2	57.9	59.6	61.3	62.3
102.5°	194.9	176.8	146.6	116.4	86.2	56.0	58.2	60.4	62.6	64.8	66.2
105°	316.0	290.2	232.2	174.2	116.3	58.3	60.6	63.0	65.3	67.6	69.2
107.5°	391.9	359.7	290.2	220.6	151.1	81.6	79.2	76.8	74.5	72.1	71.3
110°	441.1	412.7	351.3	290.0	228.6	167.2	146.0	124.7	103.5	82.3	72.1



TEST NUMBER: P331853

CATALOG NUMBER: S122RDIW-S1005D970U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	488.0	482.4	467.3	452.1	436.9	421.8	344.3	266.8	189.4	111.9	73.5
115°	563.9	568.3	573.6	578.9	584.3	589.6	491.2	392.9	294.6	196.3	139.5
117.5°	634.6	638.4	642.1	645.7	649.4	653.0	629.2	605.4	581.7	557.9	520.9
120°	681.6	685.1	688.9	692.8	696.6	700.4	703.0	705.5	708.0	710.6	697.5
122.5°	725.1	728.9	733.0	737.2	741.3	745.5	747.0	748.6	750.1	751.6	749.6
125°	787.9	791.3	795.3	799.4	803.4	807.4	808.9	810.4	811.9	813.4	814.4
127.5°	848.1	851.2	854.2	857.2	860.2	863.2	865.4	867.6	869.7	871.9	873.0
130°	886.9	889.8	892.1	894.5	896.8	899.2	901.5	903.8	906.2	908.5	909.6
132.5°	923.1	925.7	928.1	930.4	932.7	935.1	937.1	939.1	941.1	943.1	944.0
135°	974.9	977.5	979.4	981.3	983.2	985.2	987.3	989.4	991.5	993.6	994.5
137.5°	1021.0	1023.3	1025.5	1027.6	1029.8	1032.0	1034.1	1036.1	1038.2	1040.3	1041.0
140°	1051.2	1053.2	1055.5	1057.9	1060.2	1062.6	1064.5	1066.4	1068.3	1070.2	1070.6
142.5°	1078.0	1080.1	1082.8	1085.5	1088.2	1090.8	1092.6	1094.3	1096.1	1097.8	1098.1
145°	1114.3	1116.0	1119.6	1123.2	1126.8	1130.4	1131.9	1133.4	1134.9	1136.3	1136.6
147.5°	1149.5	1150.9	1154.5	1158.0	1161.6	1165.2	1166.3	1167.4	1168.5	1169.6	1169.7
150°	1171.3	1172.2	1175.6	1179.0	1182.4	1185.8	1187.1	1188.4	1189.6	1190.9	1191.0
152.5°	1191.2	1192.0	1195.2	1198.5	1201.7	1204.9	1206.2	1207.5	1208.7	1210.0	1210.0
155°	1220.2	1220.5	1223.1	1225.6	1228.2	1230.7	1232.0	1233.3	1234.5	1235.8	1235.6
157.5°	1244.9	1245.0	1246.8	1248.6	1250.3	1252.1	1253.6	1255.0	1256.5	1257.9	1257.8
160°	1260.0	1260.0	1261.3	1262.6	1263.9	1265.1	1266.4	1267.7	1268.9	1270.2	1270.1
162.5°	1272.3	1272.2	1273.3	1274.4	1275.5	1276.6	1278.0	1279.5	1280.9	1282.4	1282.2
165°	1288.7	1288.4	1289.0	1289.6	1290.3	1290.9	1292.4	1293.9	1295.4	1296.9	1296.9
167.5°	1300.9	1300.6	1301.2	1301.8	1302.4	1303.0	1304.4	1305.9	1307.4	1308.9	1308.7
170°	1307.8	1307.4	1307.8	1308.2	1308.7	1309.1	1310.6	1312.1	1313.5	1315.0	1314.8
172.5°	1312.4	1312.0	1312.4	1312.8	1313.2	1313.7	1315.2	1316.6	1318.1	1319.6	1319.4
175°	1317.5	1316.9	1317.4	1317.8	1318.2	1318.6	1320.1	1321.6	1323.1	1324.6	1324.3
177.5°	1319.6	1319.1	1319.3	1319.4	1319.6	1319.8	1321.0	1322.2	1323.3	1324.5	1324.4
180°	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5



TEST NUMBER: P331853

CATALOG NUMBER: S122RDIW-S1005D970U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4
2.5°	2117.8	2119.0	2117.2	2118.4	2117.2	2119.0	2117.8	2124.5	2125.7	2127.0	2125.7
5°	1973.2	1964.0	1962.5	1960.2	1962.5	1964.0	1973.2	1977.1	1980.1	1986.3	1997.0
7.5°	1800.7	1799.3	1795.5	1790.1	1795.5	1799.3	1800.7	1813.8	1824.3	1836.2	1858.1
10°	1689.7	1685.9	1685.1	1679.7	1685.1	1685.9	1689.7	1706.6	1718.8	1735.7	1765.6
12.5°	1559.7	1535.1	1532.5	1519.1	1532.5	1535.1	1559.7	1581.5	1614.6	1630.9	1662.6
15°	1328.0	1323.4	1308.1	1298.1	1308.1	1323.4	1328.0	1346.4	1358.7	1403.1	1454.5
17.5°	1195.6	1180.6	1175.8	1173.7	1175.8	1180.6	1195.6	1204.5	1222.0	1245.4	1276.4
20°	1110.4	1096.6	1094.3	1092.8	1094.3	1096.6	1110.4	1121.1	1134.9	1160.2	1192.4
22.5°	1051.5	1037.1	1031.1	1026.5	1031.1	1037.1	1051.5	1059.8	1072.4	1092.1	1113.9
25°	951.0	945.6	942.6	941.0	942.6	945.6	951.0	958.7	970.9	997.7	1020.7
27.5°	872.4	860.6	858.3	854.3	858.3	860.6	872.4	886.0	898.7	910.8	931.4
30°	827.6	823.8	818.4	813.8	818.4	823.8	827.6	834.5	842.9	863.6	883.6
32.5°	774.9	771.7	766.9	764.8	766.9	771.7	774.9	784.2	801.9	814.6	829.0
35°	716.5	705.8	701.2	694.3	701.2	705.8	716.5	724.2	731.1	741.8	767.8
37.5°	654.7	649.1	642.6	644.9	642.6	649.1	654.7	658.0	672.5	687.4	698.7
40°	606.9	603.1	601.6	600.8	601.6	603.1	606.9	616.9	634.5	641.4	658.3
42.5°	568.9	558.3	554.3	554.2	554.3	558.3	568.9	580.1	591.0	602.2	619.6
45°	511.1	501.2	494.3	495.0	494.3	501.2	511.1	515.0	524.2	546.4	556.3
47.5°	452.0	451.7	447.4	448.7	447.4	451.7	452.0	458.6	470.4	484.0	499.9
50°	423.8	419.2	416.1	416.9	416.1	419.2	423.8	429.1	436.0	442.9	467.4
52.5°	396.8	392.8	390.4	393.6	390.4	392.8	396.8	399.7	404.8	411.7	428.2
55°	352.5	347.9	347.1	346.4	347.1	347.9	352.5	356.3	362.5	367.8	375.5
57.5°	303.0	299.9	295.3	293.3	295.3	299.9	303.0	308.7	316.0	323.1	331.0
60°	267.4	261.3	253.6	252.9	253.6	261.3	267.4	277.4	280.5	291.2	300.4
62.5°	234.9	233.7	232.2	232.0	232.2	233.7	234.9	238.2	242.5	258.1	269.1
65°	206.1	205.4	206.1	206.9	206.1	205.4	206.1	207.7	208.4	210.0	214.6
67.5°	179.6	178.2	176.9	177.5	176.9	178.2	179.6	179.9	182.1	183.0	186.2
70°	159.4	158.6	157.9	157.9	157.9	158.6	159.4	160.9	162.5	164.0	167.8
72.5°	139.8	139.6	138.9	138.2	138.9	139.6	139.8	142.5	143.5	145.0	147.6
75°	111.9	110.3	110.3	110.3	110.3	110.3	111.9	112.6	113.4	115.7	117.2
77.5°	85.2	84.4	83.7	83.1	83.7	84.4	85.2	85.4	86.6	87.1	88.7
80°	67.4	66.7	65.9	65.9	65.9	66.7	67.4	68.2	68.2	70.5	69.7
82.5°	51.5	50.7	50.6	50.0	50.6	50.7	51.5	51.6	51.6	53.3	53.2
85°	27.6	28.4	27.6	29.1	27.6	28.4	27.6	26.8	27.6	29.1	29.1
87.5°	12.9	12.3	13.0	12.5	13.0	12.3	12.9	12.8	13.3	13.0	12.8
90°	24.5	24.9	25.4	25.8	25.4	24.9	24.5	24.1	23.4	22.3	21.2
92.5°	25.0	25.3	25.5	25.8	25.5	25.3	25.0	24.8	24.4	23.8	23.3
95°	41.7	41.5	41.3	41.1	41.3	41.5	41.7	41.9	41.5	40.5	39.4
97.5°	54.1	54.3	54.6	54.8	54.6	54.3	54.1	53.8	53.3	52.4	51.6
100°	62.7	63.2	63.6	64.0	63.6	63.2	62.7	62.3	61.3	59.6	57.9
102.5°	66.8	67.4	68.0	68.6	68.0	67.4	66.8	66.2	64.8	62.6	60.4
105°	70.1	70.9	71.8	72.6	71.8	70.9	70.1	69.2	67.6	65.3	63.0
107.5°	72.2	73.0	73.9	74.7	73.9	73.0	72.2	71.3	72.1	74.5	76.8
110°	72.9	73.8	74.6	75.5	74.6	73.8	72.9	72.1	82.3	103.5	124.7



TEST NUMBER: P331853

CATALOG NUMBER: S122RDIW-S1005D970U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	74.2	74.9	75.6	76.3	75.6	74.9	74.2	73.5	111.9	189.4	266.8
115°	124.2	108.9	93.6	78.4	93.6	108.9	124.2	139.5	196.3	294.6	392.9
117.5°	470.6	420.4	370.2	319.9	370.2	420.4	470.6	520.9	557.9	581.7	605.4
120°	668.9	640.2	611.5	582.9	611.5	640.2	668.9	697.5	710.6	708.0	705.5
122.5°	744.0	738.5	732.9	727.4	732.9	738.5	744.0	749.6	751.6	750.1	748.6
125°	815.1	815.7	816.3	817.0	816.3	815.7	815.1	814.4	813.4	811.9	810.4
127.5°	873.2	873.3	873.4	873.5	873.4	873.3	873.2	873.0	871.9	869.7	867.6
130°	909.3	909.1	908.9	908.7	908.9	909.1	909.3	909.6	908.5	906.2	903.8
132.5°	943.7	943.5	943.3	943.1	943.3	943.5	943.7	944.0	943.1	941.1	939.1
135°	994.1	993.6	993.2	992.8	993.2	993.6	994.1	994.5	993.6	991.5	989.4
137.5°	1040.3	1039.5	1038.8	1038.1	1038.8	1039.5	1040.3	1041.0	1040.3	1038.2	1036.1
140°	1069.6	1068.5	1067.4	1066.4	1067.4	1068.5	1069.6	1070.6	1070.2	1068.3	1066.4
142.5°	1097.1	1096.0	1095.0	1093.9	1095.0	1096.0	1097.1	1098.1	1097.8	1096.1	1094.3
145°	1135.5	1134.4	1133.4	1132.3	1133.4	1134.4	1135.5	1136.6	1136.3	1134.9	1133.4
147.5°	1168.8	1167.9	1167.0	1166.1	1167.0	1167.9	1168.8	1169.7	1169.6	1168.5	1167.4
150°	1190.0	1188.9	1187.8	1186.8	1187.8	1188.9	1190.0	1191.0	1190.9	1189.6	1188.4
152.5°	1208.6	1207.2	1205.8	1204.4	1205.8	1207.2	1208.6	1210.0	1210.0	1208.7	1207.5
155°	1233.9	1232.2	1230.5	1228.8	1230.5	1232.2	1233.9	1235.6	1235.8	1234.5	1233.3
157.5°	1256.1	1254.5	1252.8	1251.2	1252.8	1254.5	1256.1	1257.8	1257.9	1256.5	1255.0
160°	1268.6	1267.1	1265.7	1264.2	1265.7	1267.1	1268.6	1270.1	1270.2	1268.9	1267.7
162.5°	1280.3	1278.5	1276.7	1274.9	1276.7	1278.5	1280.3	1282.2	1282.4	1280.9	1279.5
165°	1295.4	1293.9	1292.4	1290.9	1292.4	1293.9	1295.4	1296.9	1296.9	1295.4	1293.9
167.5°	1306.8	1304.9	1303.0	1301.1	1303.0	1304.9	1306.8	1308.7	1308.9	1307.4	1305.9
170°	1312.9	1311.0	1309.1	1307.2	1309.1	1311.0	1312.9	1314.8	1315.0	1313.5	1312.1
172.5°	1317.5	1315.6	1313.7	1311.8	1313.7	1315.6	1317.5	1319.4	1319.6	1318.1	1316.6
175°	1322.1	1320.0	1317.9	1315.8	1317.9	1320.0	1322.1	1324.3	1324.6	1323.1	1321.6
177.5°	1322.8	1321.3	1319.8	1318.3	1319.8	1321.3	1322.8	1324.4	1324.5	1323.3	1322.2
180°	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5



TEST NUMBER: P331853

CATALOG NUMBER: S122RDIW-S1005D970U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4
2.5°	2120.8	2129.4	2142.3	2149.6	2161.9	2169.9	2174.2	2182.1	2186.4	2201.8	2217.7
5°	2002.4	2014.6	2036.1	2056.0	2077.5	2099.7	2115.8	2134.2	2151.0	2180.1	2210.8
7.5°	1866.6	1883.6	1916.8	1948.6	1986.0	2017.4	2045.1	2076.5	2104.6	2146.3	2189.8
10°	1764.8	1794.7	1838.4	1868.3	1917.3	1948.7	1992.4	2026.9	2066.0	2121.1	2170.2
12.5°	1677.1	1713.2	1748.3	1789.8	1833.9	1886.2	1934.2	1978.5	2024.9	2081.9	2139.5
15°	1518.1	1570.2	1624.6	1666.7	1726.5	1781.7	1837.6	1897.4	1954.1	2022.3	2097.4
17.5°	1313.3	1373.7	1465.2	1537.4	1607.6	1662.9	1732.2	1804.5	1871.3	1953.6	2037.2
20°	1220.7	1265.2	1327.2	1424.6	1530.3	1589.3	1659.8	1739.5	1816.1	1905.8	1995.5
22.5°	1146.5	1186.1	1235.9	1311.8	1429.8	1510.2	1583.8	1664.7	1753.6	1845.1	1944.6
25°	1040.6	1068.2	1120.3	1181.6	1262.9	1395.4	1475.9	1557.1	1653.7	1751.8	1865.2
27.5°	961.1	985.9	1019.8	1078.3	1138.7	1233.9	1361.9	1450.5	1546.7	1657.1	1774.8
30°	900.4	929.5	967.1	1008.5	1074.4	1148.7	1276.7	1379.4	1474.4	1587.8	1713.5
32.5°	856.3	879.3	911.3	953.3	1008.2	1079.4	1181.6	1306.4	1399.0	1518.5	1649.7
35°	783.9	810.8	836.8	876.7	921.1	986.2	1063.6	1197.0	1288.9	1406.9	1538.7
37.5°	724.3	740.7	769.5	801.1	848.0	896.6	963.7	1083.3	1182.7	1298.6	1433.5
40°	678.9	699.6	721.1	756.3	794.7	841.4	907.3	996.2	1110.4	1223.8	1355.6
42.5°	634.8	661.0	683.7	707.3	749.3	796.0	849.7	925.1	1041.7	1149.0	1277.1
45°	581.6	598.5	622.2	648.3	682.8	722.6	770.1	836.0	947.9	1040.6	1161.0
47.5°	519.7	544.4	559.9	585.3	618.1	656.1	700.3	757.3	847.8	934.7	1046.3
50°	477.4	502.7	524.9	547.9	577.0	613.8	650.6	705.8	778.6	869.8	974.0
52.5°	441.2	463.5	485.1	508.1	536.6	570.3	605.2	653.7	716.0	799.9	901.0
55°	391.6	405.4	427.6	450.6	475.9	508.1	541.8	582.4	636.0	706.5	788.5
57.5°	340.7	356.6	374.3	397.4	423.0	447.7	478.0	514.8	557.1	620.9	691.1
60°	311.9	324.1	338.7	362.5	386.2	408.4	437.6	468.2	508.1	563.2	623.0
62.5°	280.0	291.7	305.0	325.7	348.8	369.2	394.6	427.1	460.9	511.1	563.5
65°	226.8	243.7	256.7	275.1	294.3	315.7	335.6	361.7	391.6	431.4	478.2
67.5°	188.1	196.6	208.7	225.4	245.1	263.5	282.3	302.7	328.6	359.4	396.5
70°	170.9	174.0	176.3	192.3	210.7	229.1	246.8	265.9	288.1	313.4	345.6
72.5°	150.7	153.7	156.6	163.5	178.2	196.6	214.9	229.1	250.1	271.1	297.2
75°	119.5	124.1	126.4	130.3	135.6	147.9	164.8	178.5	190.8	206.9	227.6
77.5°	91.0	93.6	96.1	100.1	103.5	109.1	118.6	131.0	142.5	151.9	166.1
80°	72.0	72.8	75.9	77.4	82.0	85.8	90.4	100.4	111.9	115.7	125.7
82.5°	54.3	55.0	57.5	59.0	61.2	64.4	70.2	72.8	81.8	86.9	93.2
85°	29.9	29.1	31.4	31.4	33.0	34.5	36.0	39.8	42.1	48.3	49.8
87.5°	13.2	13.0	13.3	13.0	12.6	13.5	13.7	13.9	14.6	16.0	18.0
90°	20.2	19.1	17.4	15.7	14.0	12.3	10.3	8.0	5.6	3.3	1.0
92.5°	22.7	22.2	21.3	20.5	19.6	18.8	18.5	18.7	18.9	19.1	19.3
95°	38.3	37.3	35.8	34.3	32.8	31.3	34.1	41.1	48.1	55.1	62.1
97.5°	50.7	49.9	46.4	43.0	39.6	36.1	44.3	64.0	83.8	103.5	123.3
100°	56.2	54.5	50.9	47.2	43.6	40.0	52.8	81.9	110.9	140.0	169.1
102.5°	58.2	56.0	86.2	116.4	146.6	176.8	194.9	201.1	207.3	213.4	219.6
105°	60.6	58.3	116.3	174.2	232.2	290.2	316.0	309.6	303.2	296.9	290.5
107.5°	79.2	81.6	151.1	220.6	290.2	359.7	391.9	386.7	381.6	376.5	371.3
110°	146.0	167.2	228.6	290.0	351.3	412.7	441.1	436.7	432.2	427.8	423.3



TEST NUMBER: P331853

CATALOG NUMBER: S122RDIW-S1005D970U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	344.3	421.8	436.9	452.1	467.3	482.4	488.0	484.1	480.1	476.2	472.2
115°	491.2	589.6	584.3	578.9	573.6	568.3	563.9	560.3	556.7	553.0	549.4
117.5°	629.2	653.0	649.4	645.7	642.1	638.4	634.6	630.5	626.5	622.5	618.4
120°	703.0	700.4	696.6	692.8	688.9	685.1	681.6	678.4	675.2	672.1	668.9
122.5°	747.0	745.5	741.3	737.2	733.0	728.9	725.1	721.7	718.4	715.0	711.7
125°	808.9	807.4	803.4	799.4	795.3	791.3	787.9	785.1	782.4	779.6	776.8
127.5°	865.4	863.2	860.2	857.2	854.2	851.2	848.1	845.1	842.0	839.0	835.9
130°	901.5	899.2	896.8	894.5	892.1	889.8	886.9	883.5	880.2	876.8	873.4
132.5°	937.1	935.1	932.7	930.4	928.1	925.7	923.1	920.2	917.4	914.5	911.6
135°	987.3	985.2	983.2	981.3	979.4	977.5	974.9	971.5	968.1	964.7	961.3
137.5°	1034.1	1032.0	1029.8	1027.6	1025.5	1023.3	1021.0	1018.7	1016.3	1013.9	1011.5
140°	1064.5	1062.6	1060.2	1057.9	1055.5	1053.2	1051.2	1049.5	1047.8	1046.1	1044.4
142.5°	1092.6	1090.8	1088.2	1085.5	1082.8	1080.1	1078.0	1076.5	1075.0	1073.4	1071.9
145°	1131.9	1130.4	1126.8	1123.2	1119.6	1116.0	1114.3	1114.5	1114.7	1114.9	1115.1
147.5°	1166.3	1165.2	1161.6	1158.0	1154.5	1150.9	1149.5	1150.3	1151.1	1151.9	1152.8
150°	1187.1	1185.8	1182.4	1179.0	1175.6	1172.2	1171.3	1172.8	1174.2	1175.7	1177.2
152.5°	1206.2	1204.9	1201.7	1198.5	1195.2	1192.0	1191.2	1192.9	1194.5	1196.2	1197.9
155°	1232.0	1230.7	1228.2	1225.6	1223.1	1220.5	1220.2	1222.1	1224.0	1225.9	1227.9
157.5°	1253.6	1252.1	1250.3	1248.6	1246.8	1245.0	1244.9	1246.5	1248.1	1249.8	1251.4
160°	1266.4	1265.1	1263.9	1262.6	1261.3	1260.0	1260.0	1261.3	1262.6	1263.9	1265.1
162.5°	1278.0	1276.6	1275.5	1274.4	1273.3	1272.2	1272.3	1273.5	1274.8	1276.1	1277.4
165°	1292.4	1290.9	1290.3	1289.6	1289.0	1288.4	1288.7	1290.0	1291.2	1292.5	1293.8
167.5°	1304.4	1303.0	1302.4	1301.8	1301.2	1300.6	1300.9	1302.2	1303.5	1304.7	1306.0
170°	1310.6	1309.1	1308.7	1308.2	1307.8	1307.4	1307.8	1309.1	1310.4	1311.6	1312.9
172.5°	1315.2	1313.7	1313.2	1312.8	1312.4	1312.0	1312.4	1313.7	1314.9	1316.2	1317.5
175°	1320.1	1318.6	1318.2	1317.8	1317.4	1316.9	1317.5	1319.0	1320.4	1321.9	1323.4
177.5°	1321.0	1319.8	1319.6	1319.4	1319.3	1319.1	1319.6	1320.8	1322.0	1323.2	1324.4
180°	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5



TEST NUMBER: P331853

CATALOG NUMBER: S122RDIW-S1005D970U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4
2.5°	2218.3	2220.1	2232.4	2237.9	2249.0	2253.2	2258.2	2256.9	2256.9	2259.4	2276.5
5°	2223.1	2238.4	2261.4	2283.6	2305.1	2323.4	2335.7	2348.0	2352.6	2374.8	2394.7
7.5°	2215.1	2243.3	2281.3	2315.2	2355.8	2387.5	2413.9	2437.6	2453.9	2486.2	2519.3
10°	2204.7	2244.5	2287.4	2331.1	2387.0	2429.2	2472.1	2505.1	2515.8	2564.1	2591.7
12.5°	2183.8	2237.2	2291.7	2348.3	2403.0	2461.1	2508.3	2541.2	2578.9	2622.3	2673.2
15°	2152.6	2213.9	2285.1	2357.9	2436.1	2506.6	2557.2	2614.6	2656.0	2703.5	2748.0
17.5°	2107.7	2186.6	2277.2	2361.5	2451.9	2527.6	2597.2	2652.3	2681.5	2708.6	2715.2
20°	2072.1	2157.2	2263.7	2363.3	2453.7	2541.1	2610.0	2656.0	2663.7	2664.4	2623.8
22.5°	2033.5	2129.6	2241.0	2343.1	2451.3	2548.4	2602.1	2621.7	2591.3	2539.4	2460.8
25°	1962.5	2073.6	2203.1	2319.6	2437.6	2529.6	2548.0	2513.5	2407.0	2295.1	2153.3
27.5°	1885.6	2010.5	2149.3	2278.8	2404.5	2461.5	2421.8	2297.5	2105.7	1938.9	1736.8
30°	1829.2	1969.4	2105.8	2250.6	2367.1	2391.6	2300.5	2117.3	1893.5	1642.2	1440.7
32.5°	1764.8	1911.8	2061.7	2211.4	2308.9	2285.0	2134.3	1908.9	1646.5	1399.4	1208.9
35°	1672.8	1824.6	1986.3	2136.5	2198.5	2095.1	1869.8	1576.3	1308.1	1077.4	946.4
37.5°	1566.6	1731.9	1900.0	2037.9	2033.5	1861.1	1554.2	1251.2	1025.8	889.4	796.0
40°	1491.2	1658.3	1839.9	1956.4	1906.6	1682.0	1349.5	1063.6	898.9	790.1	721.9
42.5°	1418.9	1586.6	1767.0	1859.5	1772.9	1496.9	1165.6	941.6	805.7	720.8	665.5
45°	1295.8	1472.8	1639.9	1691.2	1536.4	1232.2	942.6	780.1	689.7	626.8	588.5
47.5°	1175.5	1349.6	1502.1	1503.0	1293.7	999.3	795.1	675.1	597.9	549.3	521.4
50°	1101.9	1267.5	1395.4	1375.5	1138.0	888.9	711.1	607.7	543.3	505.8	476.6
52.5°	1019.2	1179.8	1290.6	1233.9	1006.2	782.2	635.7	548.8	495.5	462.8	436.8
55°	898.9	1041.4	1119.6	1033.7	820.7	650.6	537.2	469.0	429.1	401.5	379.3
57.5°	780.7	898.3	947.5	847.5	676.0	539.5	454.4	403.2	363.7	343.9	332.4
60°	706.5	806.9	841.4	731.1	587.8	472.0	402.3	354.8	325.7	312.7	301.2
62.5°	633.6	715.6	729.8	628.7	512.4	413.2	353.3	313.1	293.8	281.4	270.5
65°	525.7	584.7	577.8	496.6	405.4	328.0	284.3	259.8	245.2	227.6	208.4
67.5°	432.8	468.8	447.1	386.2	309.4	254.9	226.4	207.8	189.7	173.0	168.6
70°	374.0	394.6	371.7	315.7	253.6	213.8	190.8	168.6	157.9	154.0	147.1
72.5°	317.6	324.8	299.9	252.0	206.4	177.0	154.6	142.2	136.4	133.2	128.7
75°	238.3	233.0	211.5	174.0	143.3	123.4	116.5	111.9	108.0	105.0	102.7
77.5°	167.4	159.5	140.4	115.9	99.8	90.3	86.1	83.7	81.8	80.3	78.0
80°	125.7	120.3	101.2	82.8	75.9	71.3	69.0	65.9	65.9	64.4	62.1
82.5°	92.0	86.0	69.3	60.7	56.9	54.1	52.4	50.6	50.0	50.3	48.6
85°	48.3	39.1	34.5	33.0	30.7	29.1	29.9	28.4	28.4	28.4	27.6
87.5°	15.4	12.8	12.6	12.5	13.5	13.8	13.6	13.9	14.9	14.5	15.3
90°	3.3	5.6	8.0	10.3	12.3	14.0	15.7	17.4	19.1	20.2	21.2
92.5°	19.1	18.9	18.7	18.5	18.8	19.6	20.5	21.3	22.2	22.7	23.3
95°	55.1	48.1	41.1	34.1	31.3	32.8	34.3	35.8	37.3	38.3	39.4
97.5°	103.5	83.8	64.0	44.3	36.1	39.6	43.0	46.4	49.9	50.7	51.6
100°	140.0	110.9	81.9	52.8	40.0	43.6	47.2	50.9	54.5	56.2	57.9
102.5°	213.4	207.3	201.1	194.9	176.8	146.6	116.4	86.2	56.0	58.2	60.4
105°	296.9	303.2	309.6	316.0	290.2	232.2	174.2	116.3	58.3	60.6	63.0
107.5°	376.5	381.6	386.7	391.9	359.7	290.2	220.6	151.1	81.6	79.2	76.8
110°	427.8	432.2	436.7	441.1	412.7	351.3	290.0	228.6	167.2	146.0	124.7





TEST NUMBER: P331853

CATALOG NUMBER: S122RDIW-S1005D970U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	476.2	480.1	484.1	488.0	482.4	467.3	452.1	436.9	421.8	344.3	266.8
115°	553.0	556.7	560.3	563.9	568.3	573.6	578.9	584.3	589.6	491.2	392.9
117.5°	622.5	626.5	630.5	634.6	638.4	642.1	645.7	649.4	653.0	629.2	605.4
120°	672.1	675.2	678.4	681.6	685.1	688.9	692.8	696.6	700.4	703.0	705.5
122.5°	715.0	718.4	721.7	725.1	728.9	733.0	737.2	741.3	745.5	747.0	748.6
125°	779.6	782.4	785.1	787.9	791.3	795.3	799.4	803.4	807.4	808.9	810.4
127.5°	839.0	842.0	845.1	848.1	851.2	854.2	857.2	860.2	863.2	865.4	867.6
130°	876.8	880.2	883.5	886.9	889.8	892.1	894.5	896.8	899.2	901.5	903.8
132.5°	914.5	917.4	920.2	923.1	925.7	928.1	930.4	932.7	935.1	937.1	939.1
135°	964.7	968.1	971.5	974.9	977.5	979.4	981.3	983.2	985.2	987.3	989.4
137.5°	1013.9	1016.3	1018.7	1021.0	1023.3	1025.5	1027.6	1029.8	1032.0	1034.1	1036.1
140°	1046.1	1047.8	1049.5	1051.2	1053.2	1055.5	1057.9	1060.2	1062.6	1064.5	1066.4
142.5°	1073.4	1075.0	1076.5	1078.0	1080.1	1082.8	1085.5	1088.2	1090.8	1092.6	1094.3
145°	1114.9	1114.7	1114.5	1114.3	1116.0	1119.6	1123.2	1126.8	1130.4	1131.9	1133.4
147.5°	1151.9	1151.1	1150.3	1149.5	1150.9	1154.5	1158.0	1161.6	1165.2	1166.3	1167.4
150°	1175.7	1174.2	1172.8	1171.3	1172.2	1175.6	1179.0	1182.4	1185.8	1187.1	1188.4
152.5°	1196.2	1194.5	1192.9	1191.2	1192.0	1195.2	1198.5	1201.7	1204.9	1206.2	1207.5
155°	1225.9	1224.0	1222.1	1220.2	1220.5	1223.1	1225.6	1228.2	1230.7	1232.0	1233.3
157.5°	1249.8	1248.1	1246.5	1244.9	1245.0	1246.8	1248.6	1250.3	1252.1	1253.6	1255.0
160°	1263.9	1262.6	1261.3	1260.0	1260.0	1261.3	1262.6	1263.9	1265.1	1266.4	1267.7
162.5°	1276.1	1274.8	1273.5	1272.3	1272.2	1273.3	1274.4	1275.5	1276.6	1278.0	1279.5
165°	1292.5	1291.2	1290.0	1288.7	1288.4	1289.0	1289.6	1290.3	1290.9	1292.4	1293.9
167.5°	1304.7	1303.5	1302.2	1300.9	1300.6	1301.2	1301.8	1302.4	1303.0	1304.4	1305.9
170°	1311.6	1310.4	1309.1	1307.8	1307.4	1307.8	1308.2	1308.7	1309.1	1310.6	1312.1
172.5°	1316.2	1314.9	1313.7	1312.4	1312.0	1312.4	1312.8	1313.2	1313.7	1315.2	1316.6
175°	1321.9	1320.4	1319.0	1317.5	1316.9	1317.4	1317.8	1318.2	1318.6	1320.1	1321.6
177.5°	1323.2	1322.0	1320.8	1319.6	1319.1	1319.3	1319.4	1319.6	1319.8	1321.0	1322.2
180°	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5



TEST NUMBER: P331853

CATALOG NUMBER: S122RDIW-S1005D970U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4	2205.4
2.5°	2282.7	2290.6	2294.3	2294.3	2298.6	2296.8	2294.9
5°	2413.9	2428.4	2431.5	2445.3	2455.2	2452.2	2453.7
7.5°	2544.3	2567.7	2590.9	2601.5	2603.1	2609.3	2611.6
10°	2624.6	2643.8	2679.8	2674.4	2701.2	2716.6	2691.3
12.5°	2701.8	2727.7	2752.7	2759.6	2774.8	2779.7	2769.7
15°	2771.7	2785.5	2787.1	2783.2	2787.8	2784.0	2769.4
17.5°	2706.4	2684.1	2638.7	2617.2	2600.2	2575.1	2565.0
20°	2598.5	2532.6	2456.0	2425.4	2389.3	2318.8	2335.7
22.5°	2365.6	2290.5	2213.9	2124.4	2081.6	2014.8	2010.8
25°	2003.1	1873.6	1731.1	1631.5	1573.2	1506.6	1477.4
27.5°	1557.4	1394.4	1277.6	1218.4	1164.6	1111.8	1109.6
30°	1264.4	1141.8	1051.4	1000.8	967.8	945.6	950.2
32.5°	1065.8	981.8	920.8	878.8	854.4	837.7	837.4
35°	871.3	813.8	774.7	757.1	739.5	727.2	728.0
37.5°	745.6	711.1	689.4	669.9	658.9	652.9	649.5
40°	681.2	652.9	636.0	624.5	615.3	606.9	605.4
42.5°	630.4	606.9	590.1	581.0	572.4	566.5	564.9
45°	559.4	540.2	524.9	515.0	511.1	505.8	505.8
47.5°	497.6	478.8	466.8	460.6	454.0	450.4	450.3
50°	456.0	441.4	430.7	426.8	421.5	419.2	418.4
52.5°	418.6	407.7	400.0	397.4	395.1	392.2	392.7
55°	367.8	361.7	358.6	356.3	352.5	347.9	351.0
57.5°	325.1	319.9	311.6	304.4	300.9	297.6	298.9
60°	295.0	284.3	273.6	265.1	262.8	255.9	255.9
62.5°	257.0	242.0	228.8	224.1	221.8	218.6	217.9
65°	197.7	191.6	188.5	185.4	183.9	183.9	182.4
67.5°	163.8	161.4	158.0	157.2	155.7	155.3	154.8
70°	144.8	141.8	140.2	139.5	137.9	138.7	136.4
72.5°	126.4	124.0	123.7	121.7	120.8	120.9	119.2
75°	99.6	99.6	98.9	98.1	96.6	95.8	96.6
77.5°	76.6	76.8	75.4	75.3	75.1	75.3	74.5
80°	61.3	62.1	61.3	60.5	59.8	60.5	59.8
82.5°	48.4	47.4	47.2	47.1	46.9	46.4	46.3
85°	27.6	28.4	27.6	26.8	26.8	26.8	27.6
87.5°	14.9	15.1	15.2	15.3	15.4	15.5	15.0
90°	22.3	23.4	24.1	24.5	24.9	25.4	25.8
92.5°	23.8	24.4	24.8	25.0	25.3	25.5	25.8
95°	40.5	41.5	41.9	41.7	41.5	41.3	41.1
97.5°	52.4	53.3	53.8	54.1	54.3	54.6	54.8
100°	59.6	61.3	62.3	62.7	63.2	63.6	64.0
102.5°	62.6	64.8	66.2	66.8	67.4	68.0	68.6
105°	65.3	67.6	69.2	70.1	70.9	71.8	72.6
107.5°	74.5	72.1	71.3	72.2	73.0	73.9	74.7
110°	103.5	82.3	72.1	72.9	73.8	74.6	75.5



TEST NUMBER: P331853

CATALOG NUMBER: S122RDIW-S1005D970U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	189.4	111.9	73.5	74.2	74.9	75.6	76.3
115°	294.6	196.3	139.5	124.2	108.9	93.6	78.4
117.5°	581.7	557.9	520.9	470.6	420.4	370.2	319.9
120°	708.0	710.6	697.5	668.9	640.2	611.5	582.9
122.5°	750.1	751.6	749.6	744.0	738.5	732.9	727.4
125°	811.9	813.4	814.4	815.1	815.7	816.3	817.0
127.5°	869.7	871.9	873.0	873.2	873.3	873.4	873.5
130°	906.2	908.5	909.6	909.3	909.1	908.9	908.7
132.5°	941.1	943.1	944.0	943.7	943.5	943.3	943.1
135°	991.5	993.6	994.5	994.1	993.6	993.2	992.8
137.5°	1038.2	1040.3	1041.0	1040.3	1039.5	1038.8	1038.1
140°	1068.3	1070.2	1070.6	1069.6	1068.5	1067.4	1066.4
142.5°	1096.1	1097.8	1098.1	1097.1	1096.0	1095.0	1093.9
145°	1134.9	1136.3	1136.6	1135.5	1134.4	1133.4	1132.3
147.5°	1168.5	1169.6	1169.7	1168.8	1167.9	1167.0	1166.1
150°	1189.6	1190.9	1191.0	1190.0	1188.9	1187.8	1186.8
152.5°	1208.7	1210.0	1210.0	1208.6	1207.2	1205.8	1204.4
155°	1234.5	1235.8	1235.6	1233.9	1232.2	1230.5	1228.8
157.5°	1256.5	1257.9	1257.8	1256.1	1254.5	1252.8	1251.2
160°	1268.9	1270.2	1270.1	1268.6	1267.1	1265.7	1264.2
162.5°	1280.9	1282.4	1282.2	1280.3	1278.5	1276.7	1274.9
165°	1295.4	1296.9	1296.9	1295.4	1293.9	1292.4	1290.9
167.5°	1307.4	1308.9	1308.7	1306.8	1304.9	1303.0	1301.1
170°	1313.5	1315.0	1314.8	1312.9	1311.0	1309.1	1307.2
172.5°	1318.1	1319.6	1319.4	1317.5	1315.6	1313.7	1311.8
175°	1323.1	1324.6	1324.3	1322.1	1320.0	1317.9	1315.8
177.5°	1323.3	1324.5	1324.4	1322.8	1321.3	1319.8	1318.3
180°	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5	1320.5

(END OF REPORT)