

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: NEO-RAY

Report Number: P331783

Luminaire Tested: **S122RDIW-S290D1440U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331783  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIW-S290D1440U835-4F0-1E-UDD-F  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1440 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6797.3 lumens  
Efficiency: N/A  
Efficacy: 127.3 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 53.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331783

CATALOG NUMBER: S122RDIW-S290D1440U835-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

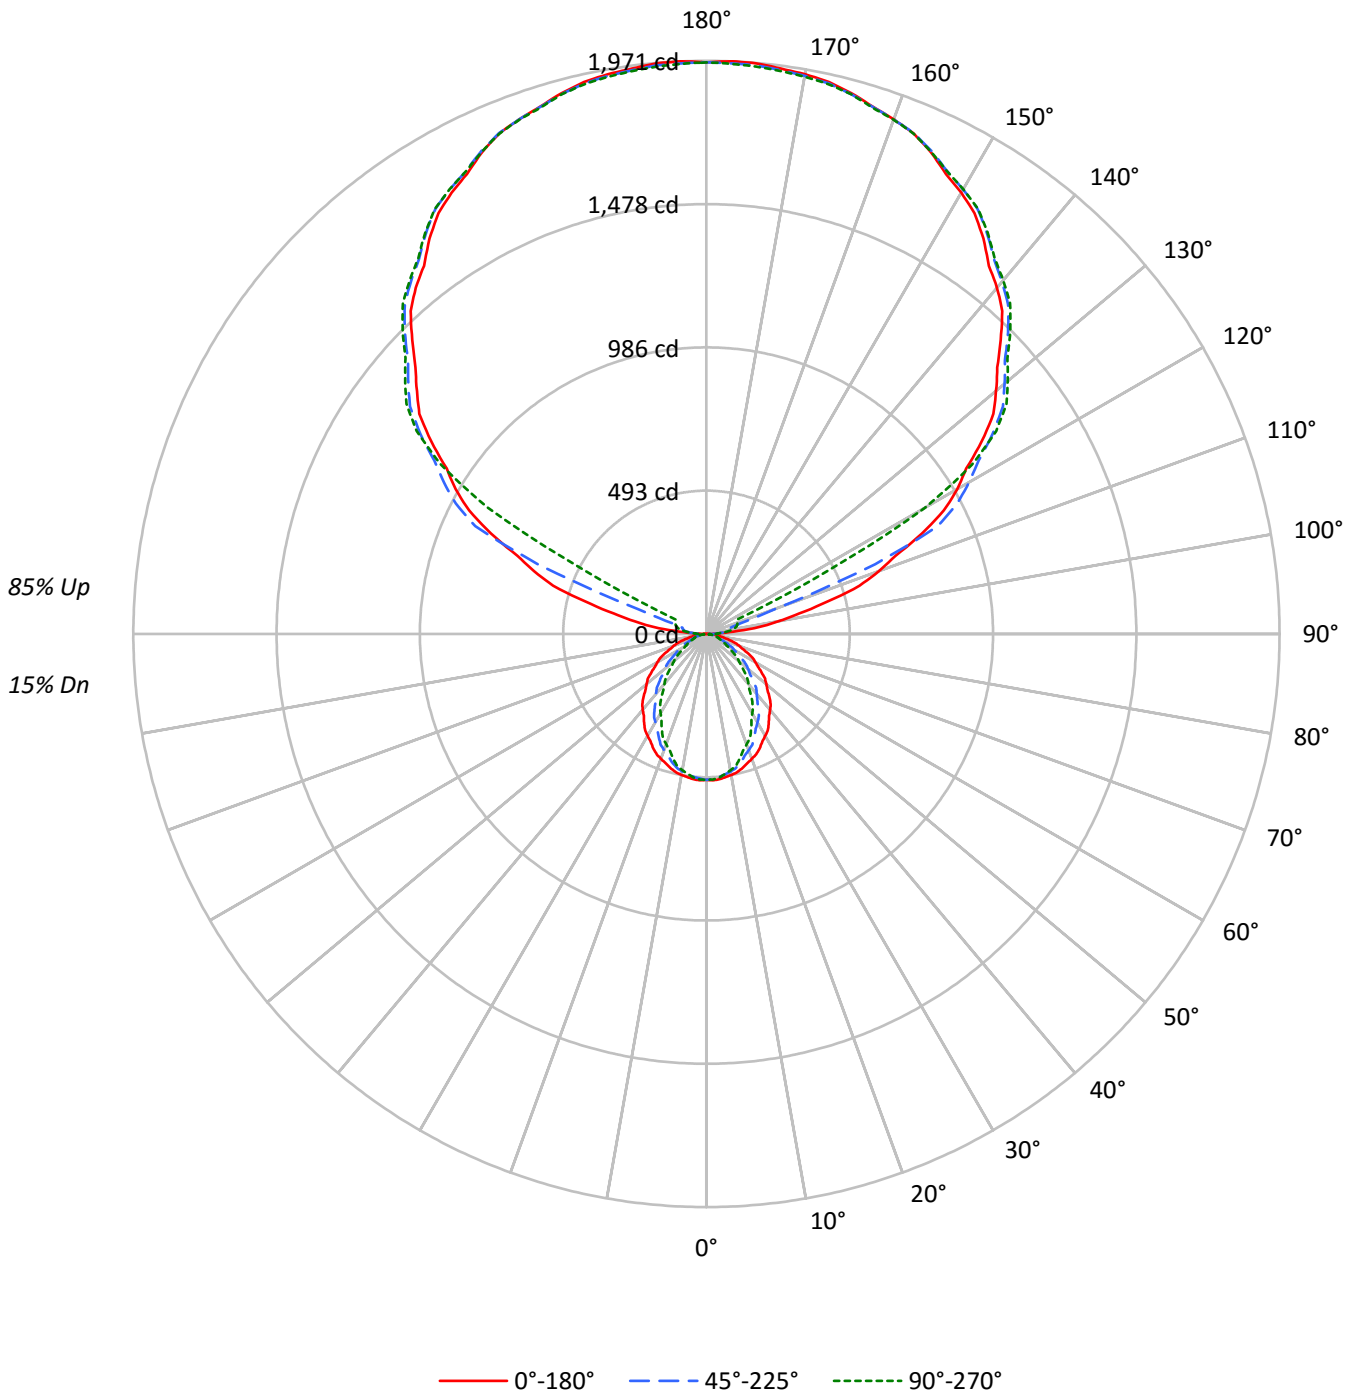



TEST NUMBER: P331783

CATALOG NUMBER: S122RDIW-S290D1440U835-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	99	99	99	99	87	87	87	87	64	64	64	43	43	43	24	24	24	15																				
1	90	86	82	79	79	76	73	70	56	54	52	38	37	36	22	21	21	13																				
2	82	75	70	65	72	66	62	58	49	46	44	34	32	30	19	18	18	11																				
3	75	66	59	54	65	58	53	48	43	40	37	30	28	26	17	16	15	10																				
4	68	58	51	46	60	52	45	41	39	34	31	27	24	22	15	14	13	8																				
5	63	52	44	39	55	46	40	35	34	30	27	24	21	19	14	12	11	7																				
6	58	46	39	33	50	41	35	30	31	27	23	21	19	17	13	11	10	7																				
7	53	42	34	29	47	37	31	26	28	24	20	19	17	15	11	10	9	6																				
8	49	38	30	25	43	33	27	23	25	21	18	18	15	13	10	9	8	5																				
9	46	34	27	22	40	30	24	20	23	19	16	16	13	12	10	8	7	5																				
10	42	31	24	20	37	28	22	18	21	17	14	15	12	10	9	8	7	4																				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	8105	8105	8105
5°	8136	8003	8047
10°	8073	7873	7806
15°	7980	7639	7418
20°	7852	7306	6940
25°	7721	6928	6474
30°	7538	6538	5878
35°	7360	6116	5355
40°	7181	5678	4749
45°	6971	5186	4201
50°	6754	4690	3662
55°	6533	4155	3147
60°	6278	3594	2612
65°	5987	3018	2376
70°	5641	2488	2186
75°	5215	2264	2040
80°	4603	2027	1860
85°	3612	1593	1593



TEST NUMBER: P331783

CATALOG NUMBER: S122RDIW-S290D1440U835-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	47.0	0.7
10°-20°	129.0	1.9
20°-30°	181.2	2.7
30°-40°	197.6	2.9
40°-50°	181.6	2.7
50°-60°	142.7	2.1
60°-70°	93.0	1.4
70°-80°	48.0	0.7
80°-90°	17.3	0.3
90°-100°	65.6	1.0
100°-110°	240.4	3.5
110°-120°	642.7	9.5
120°-130°	1060.9	15.6
130°-140°	1128.3	16.6
140°-150°	1048.7	15.4
150°-160°	843.1	12.4
160°-170°	543.3	8.0
170°-180°	187.0	2.8
0°-30°	357.2	5.3
0°-40°	554.7	8.2
0°-60°	879.0	12.9
0°-90°	1037.3	15.3
90°-120°	948.7	14.0
90°-150°	4186.6	61.6
90°-180°	5760.0	84.7
0°-180°	6797.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	502	502	502	502	502	
5°	502	500	494	498	496	48
15°	477	472	457	449	444	134
25°	433	418	389	371	363	199
35°	373	349	310	283	272	234
45°	305	274	227	196	184	236
55°	232	196	148	121	112	207
65°	157	120	79	64	62	155
75°	84	53	36	33	33	88
85°	20	10	9	9	9	23
90°	1	17	28	35	38	5
95°	92	49	56	62	61	113
105°	432	451	87	102	108	462
115°	818	843	878	250	117	805
125°	1156	1175	1202	1211	1216	1031
135°	1431	1453	1466	1480	1478	1105
145°	1660	1660	1682	1692	1685	1038
155°	1828	1816	1832	1839	1829	842
165°	1926	1918	1921	1930	1921	544
175°	1970	1961	1963	1971	1958	187
180°	1966	1966	1966	1966	1966	



TEST NUMBER: P331783

CATALOG NUMBER: S122RDIW-S290D1440U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	502.0	502.0	502.0	502.0	502.0	502.0	502.0	502.0	502.0	502.0	502.0
2.5°	503.8	503.4	503.0	502.6	502.2	501.5	500.6	499.8	498.9	498.0	498.8
5°	502.0	501.5	501.0	500.5	500.0	499.0	497.7	496.4	495.1	493.8	494.7
7.5°	496.8	496.2	495.5	494.9	494.3	493.2	491.7	490.1	488.6	487.1	487.3
10°	492.4	491.7	491.0	490.3	489.6	488.2	486.2	484.2	482.2	480.2	479.9
12.5°	487.0	486.1	485.2	484.4	483.5	481.8	479.2	476.6	474.0	471.4	470.9
15°	477.4	476.3	475.2	474.1	473.0	470.7	467.3	463.9	460.4	457.0	455.1
17.5°	465.7	464.0	462.3	460.6	458.9	455.9	451.5	447.1	442.7	438.3	436.0
20°	457.0	455.0	453.0	450.9	448.9	445.4	440.3	435.3	430.3	425.2	422.7
22.5°	447.6	445.3	443.0	440.8	438.5	434.5	428.8	423.1	417.5	411.8	408.5
25°	433.4	430.1	426.9	423.7	420.5	415.5	408.8	402.2	395.5	388.9	384.7
27.5°	416.3	412.8	409.3	405.8	402.2	396.7	389.2	381.7	374.2	366.7	361.9
30°	404.3	400.5	396.6	392.8	389.0	383.0	374.9	366.9	358.8	350.7	345.6
32.5°	392.7	388.2	383.7	379.2	374.7	368.4	360.2	351.9	343.7	335.4	329.6
35°	373.4	368.3	363.1	358.0	352.8	345.8	336.9	328.0	319.2	310.3	303.9
37.5°	354.2	348.5	342.8	337.2	331.5	324.0	314.5	305.0	295.6	286.1	279.1
40°	340.7	334.7	328.6	322.5	316.5	308.6	298.8	289.0	279.2	269.4	262.2
42.5°	326.9	320.5	314.1	307.8	301.4	293.1	283.0	272.9	262.8	252.7	245.3
45°	305.3	298.5	291.7	285.0	278.2	269.5	258.9	248.3	237.7	227.1	220.0
47.5°	284.2	277.0	269.9	262.7	255.5	246.5	235.5	224.6	213.6	202.7	195.6
50°	268.9	261.8	254.6	247.4	240.3	231.1	220.0	208.9	197.8	186.7	179.7
52.5°	254.0	246.5	239.1	231.6	224.1	214.9	204.0	193.2	182.3	171.4	164.7
55°	232.1	224.3	216.4	208.5	200.6	191.3	180.3	169.4	158.5	147.6	141.6
57.5°	209.7	201.6	193.5	185.5	177.4	168.1	157.6	147.2	136.7	126.2	120.6
60°	194.4	186.4	178.3	170.2	162.1	152.9	142.5	132.1	121.7	111.3	106.1
62.5°	179.5	171.5	163.4	155.3	147.2	138.2	128.3	118.4	108.5	98.6	93.7
65°	156.7	148.5	140.4	132.2	124.0	115.4	106.3	97.2	88.1	79.0	75.6
67.5°	134.7	126.6	118.5	110.4	102.3	94.1	85.9	77.8	69.6	61.4	59.8
70°	119.5	111.6	103.7	95.9	88.0	80.6	73.6	66.6	59.7	52.7	51.7
72.5°	104.9	97.4	89.8	82.3	74.7	68.2	62.6	57.0	51.4	45.8	44.9
75°	83.6	76.5	69.5	62.4	55.3	50.1	46.6	43.2	39.8	36.3	35.6
77.5°	62.6	56.4	50.2	44.0	37.8	33.9	32.2	30.6	28.9	27.3	26.9
80°	49.5	44.4	39.2	34.1	28.9	25.8	24.8	23.8	22.8	21.8	21.4
82.5°	37.5	33.5	29.5	25.5	21.5	19.1	18.4	17.7	17.0	16.4	16.1
85°	19.5	17.4	15.3	13.2	11.1	9.8	9.5	9.2	8.9	8.6	8.6
87.5°	6.1	6.1	6.2	6.2	6.3	6.6	7.1	7.6	8.1	8.6	8.8
90°	1.4	4.9	8.4	11.9	15.3	18.3	20.9	23.4	25.9	28.4	30.0
92.5°	28.7	28.4	28.1	27.8	27.5	27.9	29.2	30.5	31.7	33.0	33.8
95°	92.4	82.0	71.6	61.2	50.7	46.6	48.8	51.0	53.3	55.5	57.0
97.5°	183.5	154.1	124.7	95.3	65.9	53.8	58.9	64.0	69.1	74.2	75.5
100°	251.7	208.4	165.1	121.8	78.5	59.6	64.9	70.3	75.7	81.1	83.6
102.5°	326.8	317.7	308.5	299.3	290.2	263.1	218.2	173.2	128.3	83.3	86.6
105°	432.4	441.8	451.3	460.8	470.3	431.9	345.6	259.3	173.0	86.8	90.2
107.5°	552.7	560.3	568.0	575.6	583.3	535.4	431.9	328.4	224.9	121.5	117.9
110°	630.1	636.7	643.3	650.0	656.6	614.2	522.9	431.6	340.2	248.9	217.3



TEST NUMBER: P331783

CATALOG NUMBER: S122RDIW-S290D1440U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	702.9	708.7	714.6	720.5	726.4	718.0	695.5	672.9	650.3	627.8	512.5
115°	817.8	823.2	828.5	833.9	839.3	845.9	853.8	861.7	869.6	877.5	731.2
117.5°	920.5	926.5	932.5	938.5	944.5	950.2	955.6	961.1	966.5	972.0	936.6
120°	995.6	1000.3	1005.0	1009.8	1014.5	1019.7	1025.4	1031.1	1036.8	1042.5	1046.3
122.5°	1059.3	1064.3	1069.3	1074.3	1079.3	1084.9	1091.0	1097.2	1103.4	1109.6	1111.9
125°	1156.3	1160.4	1164.5	1168.6	1172.7	1177.8	1183.8	1189.8	1195.8	1201.8	1204.0
127.5°	1244.2	1248.7	1253.3	1257.8	1262.4	1266.9	1271.4	1275.9	1280.4	1284.9	1288.1
130°	1299.9	1305.0	1310.0	1315.1	1320.2	1324.4	1327.9	1331.4	1334.8	1338.3	1341.8
132.5°	1356.8	1361.1	1365.4	1369.7	1374.0	1377.9	1381.4	1384.8	1388.3	1391.8	1394.8
135°	1430.8	1435.8	1440.9	1445.9	1451.0	1454.9	1457.8	1460.6	1463.5	1466.3	1469.5
137.5°	1505.6	1509.1	1512.7	1516.2	1519.7	1523.1	1526.3	1529.6	1532.8	1536.0	1539.1
140°	1554.5	1557.0	1559.6	1562.1	1564.6	1567.6	1571.1	1574.6	1578.1	1581.5	1584.4
142.5°	1595.5	1597.7	1600.0	1602.3	1604.6	1607.7	1611.7	1615.7	1619.6	1623.6	1626.2
145°	1659.8	1659.4	1659.1	1658.8	1658.5	1661.0	1666.4	1671.8	1677.1	1682.5	1684.7
147.5°	1715.8	1714.6	1713.4	1712.2	1711.0	1713.0	1718.3	1723.7	1729.0	1734.3	1735.9
150°	1752.2	1750.0	1747.8	1745.6	1743.3	1744.8	1749.8	1754.9	1759.9	1765.0	1766.9
152.5°	1782.9	1780.5	1778.0	1775.5	1773.1	1774.2	1779.0	1783.8	1788.6	1793.4	1795.3
155°	1827.6	1824.7	1821.9	1819.0	1816.2	1816.7	1820.5	1824.3	1828.1	1831.8	1833.7
157.5°	1862.6	1860.2	1857.8	1855.4	1853.0	1853.1	1855.7	1858.4	1861.0	1863.7	1865.9
160°	1883.0	1881.1	1879.3	1877.4	1875.5	1875.5	1877.4	1879.3	1881.1	1883.0	1884.9
162.5°	1901.2	1899.4	1897.5	1895.6	1893.7	1893.5	1895.2	1896.8	1898.5	1900.1	1902.3
165°	1925.7	1923.8	1921.9	1920.0	1918.1	1917.7	1918.6	1919.5	1920.5	1921.4	1923.7
167.5°	1943.9	1942.0	1940.1	1938.2	1936.3	1935.8	1936.7	1937.6	1938.5	1939.4	1941.6
170°	1954.2	1952.3	1950.4	1948.5	1946.6	1945.9	1946.6	1947.2	1947.8	1948.5	1950.7
172.5°	1961.0	1959.1	1957.2	1955.3	1953.4	1952.8	1953.4	1954.0	1954.7	1955.3	1957.5
175°	1969.8	1967.6	1965.4	1963.2	1961.0	1960.2	1960.8	1961.4	1962.1	1962.7	1964.9
177.5°	1971.2	1969.5	1967.7	1965.9	1964.1	1963.4	1963.6	1963.9	1964.1	1964.4	1966.2
180°	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5



TEST NUMBER: P331783

CATALOG NUMBER: S122RDIW-S290D1440U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	502.0	502.0	502.0	502.0	502.0	502.0	502.0	502.0
2.5°	499.6	500.4	501.2	501.5	501.4	501.2	501.0	500.9
5°	495.6	496.5	497.4	497.7	497.4	497.1	496.8	496.5
7.5°	487.6	487.9	488.1	488.0	487.5	486.9	486.4	485.9
10°	479.6	479.3	479.0	478.5	477.9	477.3	476.7	476.1
12.5°	470.4	469.8	469.3	468.5	467.5	466.5	465.5	464.5
15°	453.2	451.2	449.3	447.9	446.9	445.8	444.8	443.8
17.5°	433.7	431.4	429.2	427.2	425.4	423.7	421.9	420.2
20°	420.2	417.6	415.1	412.7	410.5	408.3	406.1	403.9
22.5°	405.3	402.0	398.8	396.3	394.6	393.0	391.3	389.7
25°	380.6	376.4	372.3	369.5	368.0	366.4	364.9	363.4
27.5°	357.0	352.2	347.4	343.8	341.4	339.0	336.6	334.2
30°	340.4	335.3	330.1	326.2	323.4	320.7	318.0	315.3
32.5°	323.7	317.8	311.9	307.7	305.2	302.6	300.0	297.5
35°	297.6	291.2	284.8	280.5	278.3	276.1	273.9	271.7
37.5°	272.1	265.1	258.1	253.3	250.8	248.2	245.7	243.1
40°	255.1	247.9	240.7	235.8	233.2	230.6	227.9	225.3
42.5°	237.8	230.4	223.0	218.1	215.5	213.0	210.4	207.9
45°	212.8	205.6	198.5	193.7	191.3	188.8	186.4	184.0
47.5°	188.4	181.3	174.2	169.5	167.3	165.1	162.9	160.7
50°	172.8	165.8	158.8	154.3	152.2	150.1	147.9	145.8
52.5°	158.0	151.3	144.6	140.2	138.3	136.3	134.3	132.4
55°	135.5	129.5	123.4	119.4	117.5	115.6	113.7	111.8
57.5°	115.1	109.5	104.0	100.4	98.8	97.2	95.6	93.9
60°	101.0	95.9	90.7	87.3	85.7	84.1	82.5	80.9
62.5°	88.8	83.9	79.0	76.0	75.0	74.1	73.1	72.1
65°	72.2	68.7	65.3	63.4	63.1	62.8	62.5	62.2
67.5°	58.3	56.7	55.1	54.2	53.8	53.5	53.2	52.9
70°	50.7	49.7	48.7	48.0	47.5	47.1	46.7	46.3
72.5°	44.1	43.2	42.4	41.9	41.6	41.4	41.1	40.9
75°	34.9	34.2	33.5	33.1	33.0	32.9	32.8	32.7
77.5°	26.4	26.0	25.6	25.4	25.2	25.0	24.9	24.7
80°	21.0	20.6	20.2	20.0	20.0	20.0	20.0	20.0
82.5°	15.9	15.6	15.4	15.3	15.3	15.3	15.3	15.3
85°	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6
87.5°	9.1	9.3	9.5	9.7	9.8	10.0	10.1	10.2
90°	31.6	33.2	34.8	35.9	36.5	37.1	37.8	38.4
92.5°	34.6	35.5	36.3	36.9	37.3	37.6	38.0	38.4
95°	58.6	60.2	61.8	62.4	62.1	61.8	61.5	61.2
97.5°	76.8	78.0	79.3	80.1	80.5	80.9	81.3	81.6
100°	86.1	88.7	91.2	92.8	93.4	94.0	94.7	95.3
102.5°	89.9	93.2	96.5	98.6	99.5	100.3	101.2	102.1
105°	93.7	97.2	100.7	103.0	104.3	105.6	106.8	108.1
107.5°	114.4	110.8	107.3	106.2	107.4	108.7	110.0	111.2
110°	185.7	154.1	122.5	107.3	108.6	109.8	111.1	112.4





TEST NUMBER: P331783

CATALOG NUMBER: S122RDIW-S290D1440U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	397.2	281.9	166.6	109.4	110.5	111.5	112.5	113.5
115°	584.9	438.5	292.2	207.6	184.9	162.1	139.4	116.6
117.5°	901.2	865.8	830.4	775.3	700.5	625.7	550.9	476.2
120°	1050.1	1053.9	1057.7	1038.2	995.6	952.9	910.2	867.6
122.5°	1114.2	1116.5	1118.7	1115.7	1107.4	1099.2	1090.9	1082.6
125°	1206.2	1208.4	1210.6	1212.2	1213.2	1214.1	1215.1	1216.0
127.5°	1291.3	1294.5	1297.7	1299.5	1299.6	1299.8	1300.0	1300.2
130°	1345.3	1348.8	1352.2	1353.8	1353.5	1353.2	1352.9	1352.5
132.5°	1397.7	1400.7	1403.7	1405.0	1404.7	1404.4	1404.1	1403.7
135°	1472.6	1475.8	1479.0	1480.2	1479.6	1479.0	1478.3	1477.7
137.5°	1542.2	1545.3	1548.4	1549.4	1548.3	1547.3	1546.2	1545.1
140°	1587.2	1590.1	1592.9	1593.5	1592.0	1590.4	1588.8	1587.2
142.5°	1628.8	1631.4	1634.0	1634.5	1632.9	1631.3	1629.8	1628.2
145°	1686.9	1689.1	1691.4	1691.7	1690.1	1688.5	1686.9	1685.4
147.5°	1737.6	1739.2	1740.9	1741.0	1739.7	1738.4	1737.0	1735.7
150°	1768.8	1770.7	1772.6	1772.7	1771.2	1769.6	1768.0	1766.4
152.5°	1797.2	1799.1	1801.0	1800.9	1798.8	1796.8	1794.7	1792.6
155°	1835.6	1837.5	1839.4	1839.1	1836.6	1834.1	1831.5	1829.0
157.5°	1868.0	1870.1	1872.3	1872.1	1869.7	1867.2	1864.7	1862.3
160°	1886.8	1888.7	1890.6	1890.5	1888.3	1886.0	1883.8	1881.6
162.5°	1904.4	1906.6	1908.7	1908.4	1905.7	1903.0	1900.3	1897.6
165°	1925.9	1928.1	1930.3	1930.3	1928.1	1925.9	1923.7	1921.4
167.5°	1943.8	1946.0	1948.2	1947.9	1945.1	1942.2	1939.4	1936.5
170°	1952.9	1955.1	1957.3	1957.0	1954.2	1951.3	1948.5	1945.6
172.5°	1959.7	1961.9	1964.1	1963.8	1961.0	1958.1	1955.3	1952.4
175°	1967.1	1969.3	1971.5	1971.1	1967.9	1964.7	1961.6	1958.4
177.5°	1967.9	1969.7	1971.5	1971.2	1968.9	1966.7	1964.4	1962.1
180°	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5	1965.5

(END OF REPORT)