

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: NEO-RAY

Report Number: P331776

Luminaire Tested: **S122RDIW-S290D970U835-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331776  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIW-S290D970U835-4F0-1E-UDD-F1  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 970 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4393.3 lumens  
Efficiency: N/A  
Efficacy: 115.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 38  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331776

CATALOG NUMBER: S122RDIW-S290D970U835-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

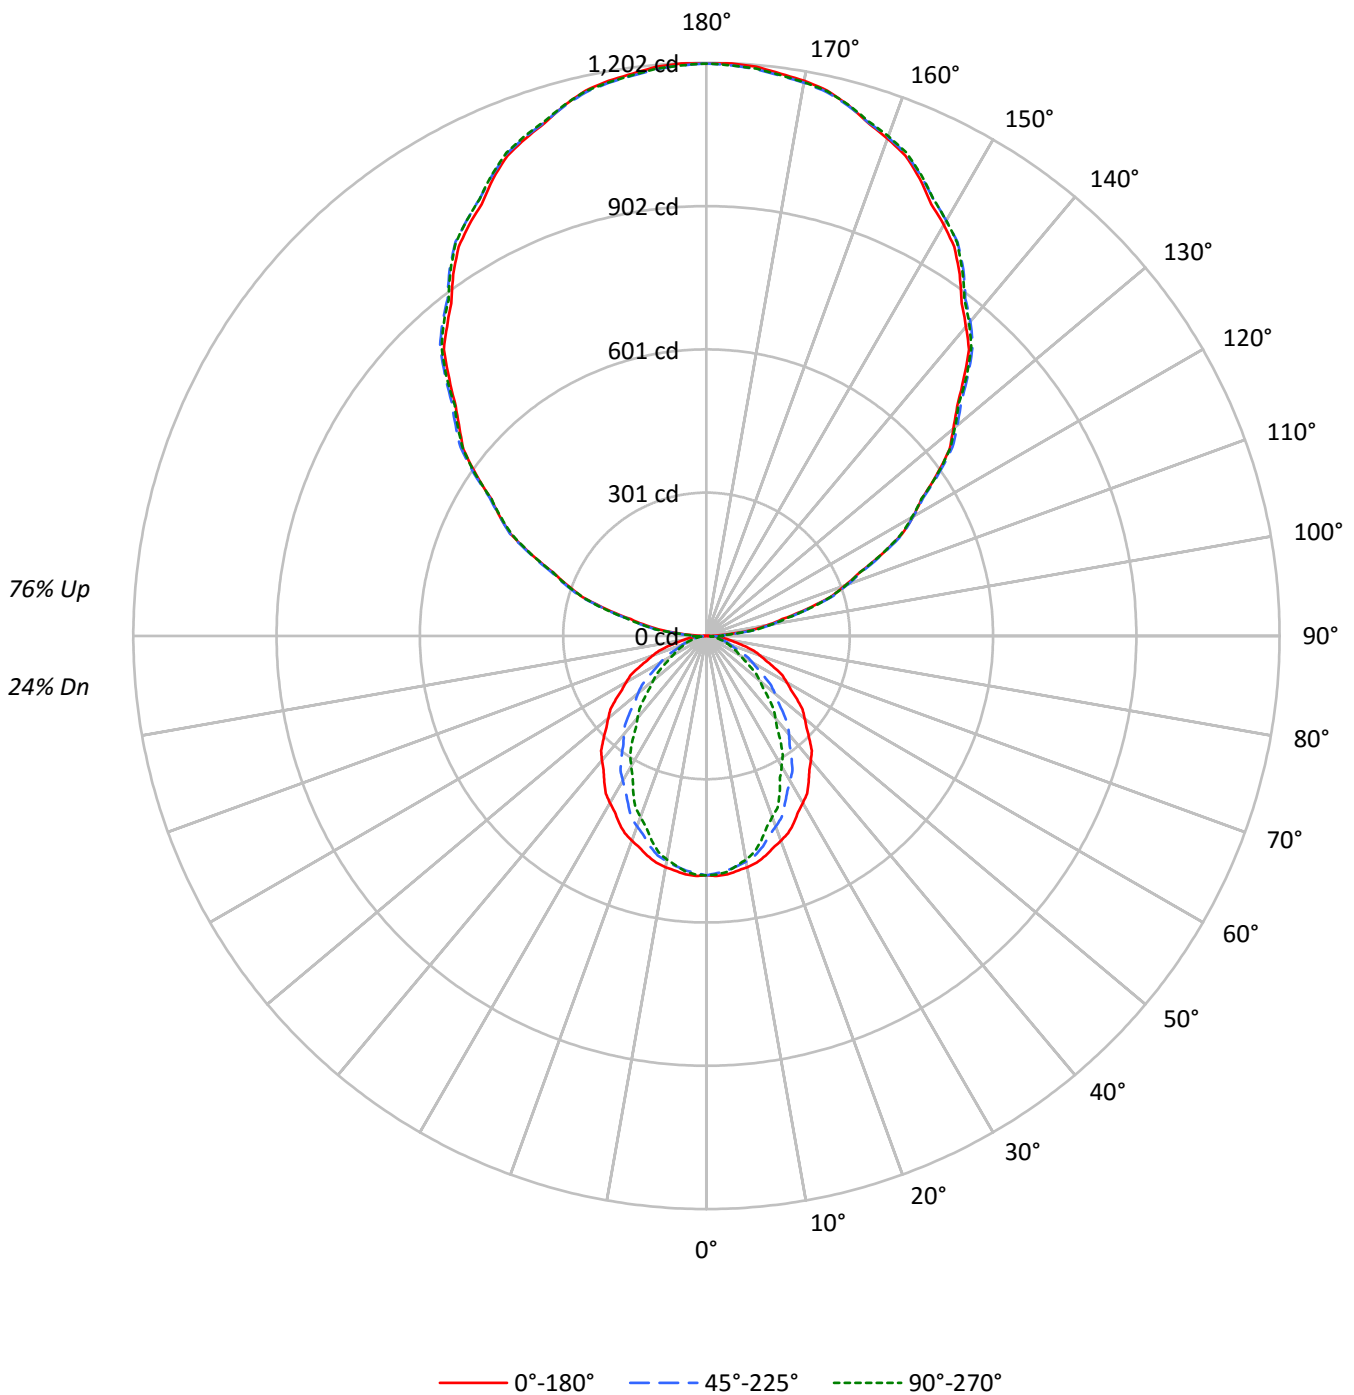



TEST NUMBER: P331776

CATALOG NUMBER: S122RDIW-S290D970U835-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	49	49	49	32	32	32	24
1	92	88	84	81	82	78	75	73	60	58	57	44	43	41	28	28	27	20
2	84	77	71	66	74	69	64	60	53	50	47	39	37	35	25	24	23	17
3	77	68	61	56	68	61	55	50	47	43	40	34	32	30	23	21	20	15
4	70	60	53	47	62	54	47	43	42	37	34	31	28	26	20	19	17	13
5	64	53	46	40	57	48	41	36	37	33	29	28	25	22	18	17	15	11
6	59	48	40	35	52	43	36	32	34	29	25	25	22	19	17	15	14	10
7	55	43	36	30	48	39	32	28	30	26	22	23	19	17	15	13	12	9
8	51	39	32	27	45	35	29	24	28	23	20	21	18	15	14	12	11	8
9	47	35	28	24	42	32	26	22	25	21	18	19	16	14	13	11	10	7
10	44	32	26	21	39	29	23	19	23	19	16	17	14	12	12	10	9	7

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	8105	8105	8105
5°	8136	8003	8047
10°	8073	7873	7806
15°	7980	7639	7418
20°	7852	7306	6940
25°	7721	6928	6474
30°	7538	6538	5878
35°	7360	6116	5355
40°	7181	5678	4749
45°	6971	5186	4201
50°	6754	4690	3662
55°	6533	4155	3147
60°	6278	3594	2612
65°	5987	3018	2376
70°	5641	2488	2186
75°	5215	2264	2040
80°	4603	2027	1860
85°	3612	1593	1593



TEST NUMBER: P331776

CATALOG NUMBER: S122RDIW-S290D970U835-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	47.0	1.1
10°-20°	129.0	2.9
20°-30°	181.2	4.1
30°-40°	197.6	4.5
40°-50°	181.6	4.1
50°-60°	142.7	3.2
60°-70°	93.0	2.1
70°-80°	48.0	1.1
80°-90°	17.2	0.4
90°-100°	76.0	1.7
100°-110°	236.2	5.4
110°-120°	403.8	9.2
120°-130°	531.0	12.1
130°-140°	595.9	13.6
140°-150°	584.3	13.3
150°-160°	490.1	11.2
160°-170°	325.1	7.4
170°-180°	113.6	2.6
0°-30°	357.2	8.1
0°-40°	554.7	12.6
0°-60°	879.0	20.0
0°-90°	1037.2	23.6
90°-120°	716.0	16.3
90°-150°	2427.3	55.2
90°-180°	3356.0	76.4
0°-180°	4393.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	502	502	502	502	502	
5°	502	500	494	498	496	48
15°	477	472	457	449	444	134
25°	433	418	389	371	363	199
35°	373	349	310	283	272	234
45°	305	274	227	196	184	236
55°	232	196	148	121	112	207
65°	157	120	79	64	62	155
75°	84	53	36	33	33	88
85°	20	10	9	9	9	23
90°	1	14	35	34	34	4
95°	53	62	65	65	63	60
105°	218	221	223	225	225	230
115°	405	411	409	408	405	401
125°	590	598	596	593	592	527
135°	763	773	776	775	772	589
145°	926	933	939	940	936	578
155°	1058	1061	1064	1069	1066	487
165°	1152	1151	1151	1157	1153	325
175°	1198	1195	1193	1200	1194	114
180°	1200	1200	1200	1200	1200	



TEST NUMBER: P331776

CATALOG NUMBER: S122RDIW-S290D970U835-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	502.0	502.0	502.0	502.0	502.0	502.0	502.0	502.0	502.0	502.0	502.0
2.5°	503.8	503.4	503.0	502.6	502.2	501.5	500.6	499.8	498.9	498.0	498.8
5°	502.0	501.5	501.0	500.5	500.0	499.0	497.7	496.4	495.1	493.8	494.7
7.5°	496.8	496.2	495.5	494.9	494.3	493.2	491.7	490.1	488.6	487.1	487.3
10°	492.4	491.7	491.0	490.3	489.6	488.2	486.2	484.2	482.2	480.2	479.9
12.5°	487.0	486.1	485.2	484.4	483.5	481.8	479.2	476.6	474.0	471.4	470.9
15°	477.4	476.3	475.2	474.1	473.0	470.7	467.3	463.9	460.4	457.0	455.1
17.5°	465.7	464.0	462.3	460.6	458.9	455.9	451.5	447.1	442.7	438.3	436.0
20°	457.0	455.0	453.0	450.9	448.9	445.4	440.3	435.3	430.3	425.2	422.7
22.5°	447.6	445.3	443.0	440.8	438.5	434.5	428.8	423.1	417.5	411.8	408.5
25°	433.4	430.1	426.9	423.7	420.5	415.5	408.8	402.2	395.5	388.9	384.7
27.5°	416.3	412.8	409.3	405.8	402.2	396.7	389.2	381.7	374.2	366.7	361.9
30°	404.3	400.5	396.6	392.8	389.0	383.0	374.9	366.9	358.8	350.7	345.6
32.5°	392.7	388.2	383.7	379.2	374.7	368.4	360.2	351.9	343.7	335.4	329.6
35°	373.4	368.3	363.1	358.0	352.8	345.8	336.9	328.0	319.2	310.3	303.9
37.5°	354.2	348.5	342.8	337.2	331.5	324.0	314.5	305.0	295.6	286.1	279.1
40°	340.7	334.7	328.6	322.5	316.5	308.6	298.8	289.0	279.2	269.4	262.2
42.5°	326.9	320.5	314.1	307.8	301.4	293.1	283.0	272.9	262.8	252.7	245.3
45°	305.3	298.5	291.7	285.0	278.2	269.5	258.9	248.3	237.7	227.1	220.0
47.5°	284.2	277.0	269.9	262.7	255.5	246.5	235.5	224.6	213.6	202.7	195.6
50°	268.9	261.8	254.6	247.4	240.3	231.1	220.0	208.9	197.8	186.7	179.7
52.5°	254.0	246.5	239.1	231.6	224.1	214.9	204.0	193.2	182.3	171.4	164.7
55°	232.1	224.3	216.4	208.5	200.6	191.3	180.3	169.4	158.5	147.6	141.6
57.5°	209.7	201.6	193.5	185.5	177.4	168.1	157.6	147.2	136.7	126.2	120.6
60°	194.4	186.4	178.3	170.2	162.1	152.9	142.5	132.1	121.7	111.3	106.1
62.5°	179.5	171.5	163.4	155.3	147.2	138.2	128.3	118.4	108.5	98.6	93.7
65°	156.7	148.5	140.4	132.2	124.0	115.4	106.3	97.2	88.1	79.0	75.6
67.5°	134.7	126.6	118.5	110.4	102.3	94.1	85.9	77.8	69.6	61.4	59.8
70°	119.5	111.6	103.7	95.9	88.0	80.6	73.6	66.6	59.7	52.7	51.7
72.5°	104.9	97.4	89.8	82.3	74.7	68.2	62.6	57.0	51.4	45.8	44.9
75°	83.6	76.5	69.5	62.4	55.3	50.1	46.6	43.2	39.8	36.3	35.6
77.5°	62.6	56.4	50.2	44.0	37.8	33.9	32.2	30.6	28.9	27.3	26.9
80°	49.5	44.4	39.2	34.1	28.9	25.8	24.8	23.8	22.8	21.8	21.4
82.5°	37.5	33.5	29.5	25.5	21.5	19.1	18.4	17.7	17.0	16.4	16.1
85°	19.5	17.4	15.3	13.2	11.1	9.8	9.5	9.2	8.9	8.6	8.6
87.5°	6.0	5.9	5.8	5.7	5.6	6.0	7.0	8.0	9.0	10.0	9.8
90°	1.0	3.7	6.4	9.1	11.8	15.6	20.6	25.5	30.5	35.4	35.0
92.5°	18.0	20.0	22.0	24.0	26.0	27.5	28.7	29.9	31.0	32.2	32.3
95°	52.7	54.9	57.2	59.4	61.7	63.0	63.5	63.9	64.4	64.8	64.8
97.5°	96.2	98.2	100.2	102.2	104.1	105.6	106.4	107.3	108.1	109.0	109.0
100°	128.6	130.4	132.2	134.0	135.8	137.1	137.7	138.4	139.1	139.8	139.8
102.5°	162.7	164.1	165.5	167.0	168.4	169.6	170.4	171.3	172.1	173.0	173.2
105°	217.8	218.4	219.1	219.8	220.5	221.0	221.5	221.9	222.4	222.8	223.3
107.5°	273.3	274.3	275.2	276.2	277.2	277.7	277.7	277.7	277.7	277.7	277.9
110°	308.9	310.3	311.6	313.0	314.3	315.0	315.0	315.0	315.0	315.0	315.0



TEST NUMBER: P331776

CATALOG NUMBER: S122RDIW-S290D970U835-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	347.8	349.2	350.5	351.9	353.2	353.8	353.6	353.4	353.3	353.1	352.5
115°	405.1	406.5	407.8	409.2	410.5	411.0	410.5	410.1	409.6	409.2	409.0
117.5°	462.3	464.1	465.9	467.7	469.5	469.7	468.5	467.2	466.0	464.7	464.2
120°	500.4	502.2	504.0	505.8	507.6	507.6	505.8	504.0	502.2	500.4	500.4
122.5°	535.2	537.4	539.5	541.7	543.8	544.3	543.0	541.8	540.5	539.2	538.7
125°	589.5	591.5	593.5	595.6	597.6	598.3	597.6	596.9	596.2	595.6	594.9
127.5°	642.4	644.9	647.5	650.1	652.6	653.5	652.7	651.9	651.1	650.3	649.4
130°	675.6	678.5	681.4	684.4	687.3	688.5	688.1	687.6	687.2	686.7	686.3
132.5°	712.8	715.2	717.6	720.0	722.4	723.6	723.7	723.8	723.9	724.0	723.0
135°	762.7	765.2	767.6	770.1	772.6	774.0	774.5	774.9	775.4	775.8	775.6
137.5°	815.1	817.2	819.2	821.2	823.2	824.6	825.1	825.7	826.3	826.9	826.7
140°	846.7	848.8	850.8	852.8	854.8	856.4	857.6	858.7	859.8	860.9	860.9
142.5°	879.2	881.2	883.2	885.2	887.3	888.7	889.4	890.2	891.0	891.7	891.9
145°	925.7	927.3	928.9	930.5	932.1	933.5	934.9	936.2	937.6	938.9	939.1
147.5°	967.3	969.2	971.1	972.9	974.8	976.2	977.1	978.0	978.9	979.8	980.3
150°	995.6	997.0	998.3	999.7	1001.0	1002.2	1003.1	1004.0	1004.9	1005.8	1006.4
152.5°	1020.8	1022.1	1023.5	1024.8	1026.2	1027.4	1028.5	1029.5	1030.6	1031.7	1032.5
155°	1058.4	1059.1	1059.8	1060.5	1061.1	1061.8	1062.5	1063.2	1063.8	1064.5	1065.6
157.5°	1090.6	1091.1	1091.5	1092.0	1092.4	1092.9	1093.3	1093.7	1094.1	1094.5	1096.0
160°	1110.1	1110.5	1111.0	1111.4	1111.9	1112.2	1112.5	1112.7	1112.9	1113.1	1114.5
162.5°	1127.9	1128.0	1128.1	1128.2	1128.3	1128.4	1128.7	1128.9	1129.1	1129.3	1130.9
165°	1151.6	1151.4	1151.2	1150.9	1150.7	1150.6	1150.6	1150.6	1150.6	1150.6	1152.2
167.5°	1171.5	1170.8	1170.1	1169.4	1168.8	1168.4	1168.4	1168.3	1168.3	1168.2	1169.8
170°	1182.0	1181.3	1180.7	1180.0	1179.3	1178.9	1178.6	1178.4	1178.2	1178.0	1179.5
172.5°	1189.3	1188.6	1187.9	1187.3	1186.6	1186.1	1185.9	1185.7	1185.5	1185.2	1186.8
175°	1198.2	1197.5	1196.9	1196.2	1195.5	1194.9	1194.5	1194.0	1193.6	1193.1	1194.7
177.5°	1201.9	1201.3	1200.8	1200.2	1199.7	1199.2	1198.9	1198.5	1198.2	1197.8	1198.9
180°	1200.2	1200.2	1200.2	1200.2	1200.2	1200.2	1200.2	1200.2	1200.2	1200.2	1200.2



TEST NUMBER: P331776

CATALOG NUMBER: S122RDIW-S290D970U835-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	502.0	502.0	502.0	502.0	502.0	502.0	502.0	502.0
2.5°	499.6	500.4	501.2	501.5	501.4	501.2	501.0	500.9
5°	495.6	496.5	497.4	497.7	497.4	497.1	496.8	496.5
7.5°	487.6	487.9	488.1	488.0	487.5	486.9	486.4	485.9
10°	479.6	479.3	479.0	478.5	477.9	477.3	476.7	476.1
12.5°	470.4	469.8	469.3	468.5	467.5	466.5	465.5	464.5
15°	453.2	451.2	449.3	447.9	446.9	445.8	444.8	443.8
17.5°	433.7	431.4	429.2	427.2	425.4	423.7	421.9	420.2
20°	420.2	417.6	415.1	412.7	410.5	408.3	406.1	403.9
22.5°	405.3	402.0	398.8	396.3	394.6	393.0	391.3	389.7
25°	380.6	376.4	372.3	369.5	368.0	366.4	364.9	363.4
27.5°	357.0	352.2	347.4	343.8	341.4	339.0	336.6	334.2
30°	340.4	335.3	330.1	326.2	323.4	320.7	318.0	315.3
32.5°	323.7	317.8	311.9	307.7	305.2	302.6	300.0	297.5
35°	297.6	291.2	284.8	280.5	278.3	276.1	273.9	271.7
37.5°	272.1	265.1	258.1	253.3	250.8	248.2	245.7	243.1
40°	255.1	247.9	240.7	235.8	233.2	230.6	227.9	225.3
42.5°	237.8	230.4	223.0	218.1	215.5	213.0	210.4	207.9
45°	212.8	205.6	198.5	193.7	191.3	188.8	186.4	184.0
47.5°	188.4	181.3	174.2	169.5	167.3	165.1	162.9	160.7
50°	172.8	165.8	158.8	154.3	152.2	150.1	147.9	145.8
52.5°	158.0	151.3	144.6	140.2	138.3	136.3	134.3	132.4
55°	135.5	129.5	123.4	119.4	117.5	115.6	113.7	111.8
57.5°	115.1	109.5	104.0	100.4	98.8	97.2	95.6	93.9
60°	101.0	95.9	90.7	87.3	85.7	84.1	82.5	80.9
62.5°	88.8	83.9	79.0	76.0	75.0	74.1	73.1	72.1
65°	72.2	68.7	65.3	63.4	63.1	62.8	62.5	62.2
67.5°	58.3	56.7	55.1	54.2	53.8	53.5	53.2	52.9
70°	50.7	49.7	48.7	48.0	47.5	47.1	46.7	46.3
72.5°	44.1	43.2	42.4	41.9	41.6	41.4	41.1	40.9
75°	34.9	34.2	33.5	33.1	33.0	32.9	32.8	32.7
77.5°	26.4	26.0	25.6	25.4	25.2	25.0	24.9	24.7
80°	21.0	20.6	20.2	20.0	20.0	20.0	20.0	20.0
82.5°	15.9	15.6	15.4	15.3	15.3	15.3	15.3	15.3
85°	8.6	8.6	8.6	8.6	8.6	8.6	8.6	8.6
87.5°	9.7	9.5	9.3	9.3	9.3	9.3	9.4	9.4
90°	34.5	34.1	33.6	33.5	33.8	34.0	34.2	34.4
92.5°	32.4	32.5	32.6	32.6	32.7	32.7	32.8	32.8
95°	64.8	64.8	64.8	64.6	64.1	63.7	63.2	62.8
97.5°	109.0	109.0	109.0	109.0	108.9	108.9	108.8	108.8
100°	139.8	139.8	139.8	139.7	139.4	139.2	139.0	138.8
102.5°	173.4	173.5	173.7	173.7	173.5	173.2	173.0	172.8
105°	223.7	224.2	224.6	224.9	224.9	224.9	224.9	224.9
107.5°	278.1	278.3	278.4	278.0	277.0	275.9	274.9	273.9
110°	315.0	315.0	315.0	314.7	314.0	313.3	312.6	312.0





TEST NUMBER: P331776

CATALOG NUMBER: S122RDIW-S290D970U835-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	352.0	351.5	350.9	350.4	349.9	349.4	348.9	348.4
115°	408.7	408.5	408.3	407.8	407.2	406.5	405.8	405.1
117.5°	463.6	463.1	462.5	461.9	461.3	460.6	459.9	459.2
120°	500.4	500.4	500.4	500.0	499.3	498.7	498.0	497.3
122.5°	538.2	537.6	537.1	536.6	536.1	535.6	535.1	534.6
125°	594.2	593.5	592.9	592.4	592.2	592.0	591.7	591.5
127.5°	648.6	647.8	647.0	646.2	645.5	644.8	644.1	643.4
130°	685.8	685.4	684.9	684.2	683.3	682.4	681.5	680.6
132.5°	722.0	721.0	720.0	719.2	718.5	717.7	717.0	716.3
135°	775.4	775.2	774.9	774.5	773.8	773.1	772.5	771.8
137.5°	826.5	826.4	826.2	825.6	824.7	823.8	822.9	822.0
140°	860.9	860.9	860.9	860.5	859.6	858.7	857.8	856.9
142.5°	892.1	892.3	892.4	892.1	891.2	890.3	889.4	888.5
145°	939.4	939.6	939.8	939.5	938.6	937.7	936.8	935.9
147.5°	980.8	981.3	981.8	981.6	980.8	979.9	979.1	978.2
150°	1007.1	1007.8	1008.5	1008.5	1007.8	1007.1	1006.4	1005.8
152.5°	1033.4	1034.3	1035.1	1035.1	1034.3	1033.4	1032.5	1031.7
155°	1066.8	1067.9	1069.0	1069.2	1068.6	1067.9	1067.2	1066.5
157.5°	1097.6	1099.1	1100.6	1100.8	1099.8	1098.7	1097.6	1096.5
160°	1115.8	1117.2	1118.5	1118.8	1117.9	1117.0	1116.1	1115.2
162.5°	1132.4	1133.9	1135.5	1135.7	1134.6	1133.5	1132.4	1131.4
165°	1153.8	1155.3	1156.9	1157.1	1156.0	1154.9	1153.8	1152.6
167.5°	1171.4	1173.0	1174.5	1174.7	1173.6	1172.4	1171.2	1170.1
170°	1181.1	1182.7	1184.3	1184.4	1183.0	1181.7	1180.3	1179.0
172.5°	1188.4	1190.0	1191.5	1191.7	1190.3	1189.0	1187.6	1186.3
175°	1196.3	1197.9	1199.4	1199.6	1198.2	1196.9	1195.5	1194.2
177.5°	1200.0	1201.0	1202.1	1202.1	1201.0	1200.0	1198.9	1197.8
180°	1200.2	1200.2	1200.2	1200.2	1200.2	1200.2	1200.2	1200.2

(END OF REPORT)