

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331788

Luminaire Tested: **S122RDIW-S485D435U835-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331788
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S485D435U835-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 435 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3200.7 lumens
Efficiency: N/A
Efficacy: 106.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 30.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331788

CATALOG NUMBER: S122RDIW-S485D435U835-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

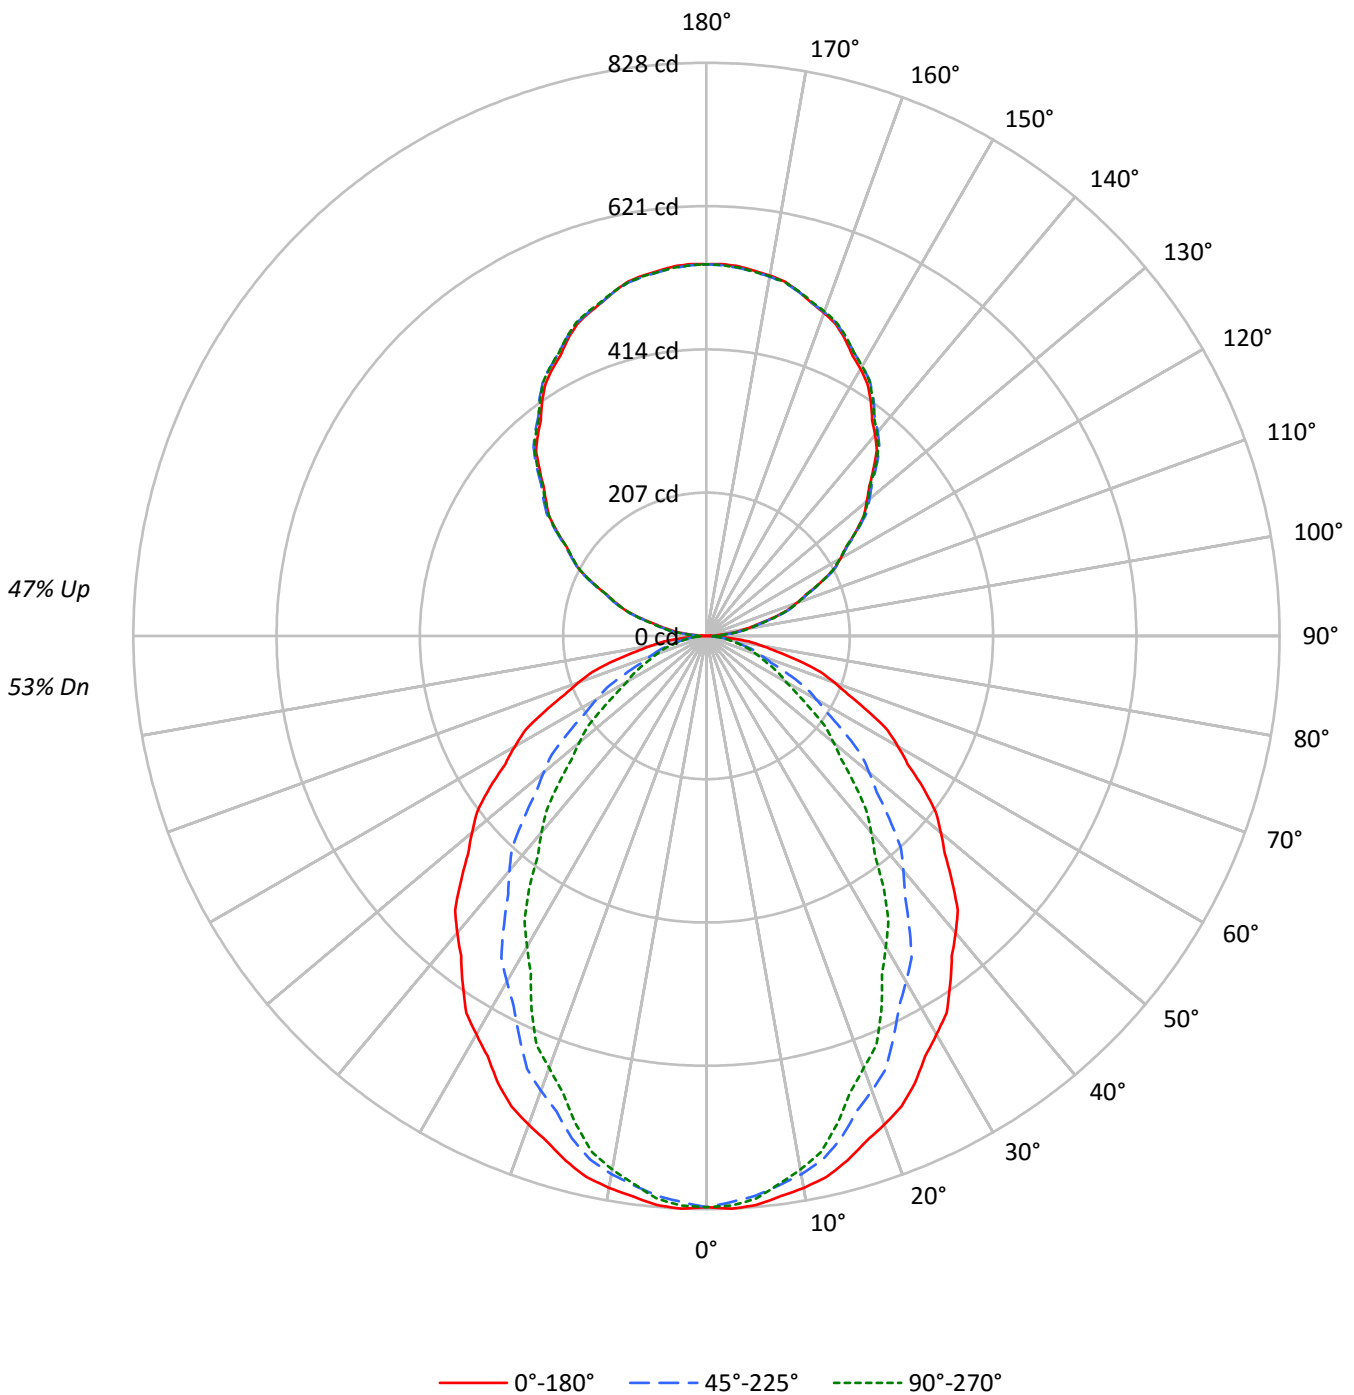



TEST NUMBER: P331788

CATALOG NUMBER: S122RDIW-S485D435U835-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	53
1	99	95	91	88	92	88	85	82	75	73	71	64	62	61	53	52	51	46
2	91	83	77	72	84	78	72	68	67	63	59	56	54	51	47	45	44	39
3	83	74	67	61	77	69	62	57	59	55	51	50	47	44	42	40	38	34
4	76	66	58	52	70	61	54	49	53	48	44	45	41	38	38	35	33	29
5	70	59	51	45	65	55	48	43	48	42	38	41	37	33	35	31	29	26
6	65	53	45	39	60	50	42	37	43	38	33	37	33	30	32	28	26	23
7	60	48	40	35	56	45	38	33	39	34	30	34	30	26	29	26	23	21
8	56	44	36	31	52	41	34	29	36	30	27	31	27	24	27	23	21	19
9	52	40	33	28	48	38	31	26	33	28	24	29	25	21	25	21	19	17
10	49	37	30	25	45	35	28	24	31	25	22	27	22	19	23	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13324	13324	13324
5°	13374	13157	13230
10°	13273	12942	12832
15°	13120	12558	12197
20°	12909	12010	11407
25°	12693	11389	10644
30°	12392	10750	9663
35°	12100	10054	8803
40°	11805	9335	7807
45°	11460	8526	6907
50°	11105	7709	6021
55°	10742	6832	5171
60°	10320	5909	4292
65°	9845	4963	3908
70°	9272	4088	3597
75°	8571	3724	3356
80°	7569	3329	3059
85°	5947	2631	2631



TEST NUMBER: P331788

CATALOG NUMBER: S122RDIW-S485D435U835-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.2	2.4
10°-20°	212.1	6.6
20°-30°	297.8	9.3
30°-40°	324.8	10.1
40°-50°	298.6	9.3
50°-60°	234.5	7.3
60°-70°	152.9	4.8
70°-80°	78.8	2.5
80°-90°	22.6	0.7
90°-100°	34.0	1.1
100°-110°	105.7	3.3
110°-120°	180.6	5.6
120°-130°	237.5	7.4
130°-140°	266.6	8.3
140°-150°	261.4	8.2
150°-160°	219.2	6.8
160°-170°	145.4	4.5
170°-180°	50.8	1.6
0°-30°	587.2	18.3
0°-40°	912.0	28.5
0°-60°	1445.1	45.2
0°-90°	1699.5	53.1
90°-120°	320.3	10.0
90°-150°	1085.7	33.9
90°-180°	1501.0	46.9
0°-180°	3200.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	825	825	825	825	825	
5°	825	821	812	818	816	78
15°	785	776	751	738	730	221
25°	712	687	639	610	598	327
35°	614	574	510	465	447	384
45°	502	450	373	322	302	387
55°	382	322	243	200	184	341
65°	258	197	130	106	102	255
75°	137	87	60	55	54	145
85°	32	17	14	14	14	38
90°	0	6	16	15	15	3
95°	24	28	29	29	28	27
105°	97	99	100	101	101	103
115°	181	184	183	182	181	179
125°	264	267	266	265	265	236
135°	341	346	347	346	345	263
145°	414	417	420	420	419	259
155°	473	475	476	478	477	218
165°	515	515	515	518	516	145
175°	536	535	534	537	534	51
180°	537	537	537	537	537	



TEST NUMBER: P331788

CATALOG NUMBER: S122RDIW-S485D435U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2
2.5°	828.2	827.6	826.9	826.2	825.6	824.5	823.1	821.6	820.1	818.7	820.0
5°	825.2	824.4	823.6	822.8	821.9	820.4	818.3	816.1	814.0	811.8	813.3
7.5°	816.7	815.7	814.7	813.6	812.6	810.8	808.3	805.8	803.3	800.8	801.2
10°	809.6	808.4	807.2	806.1	804.9	802.7	799.4	796.0	792.7	789.4	788.9
12.5°	800.6	799.2	797.7	796.3	794.9	792.1	787.8	783.6	779.3	775.1	774.2
15°	784.9	783.1	781.3	779.4	777.6	773.9	768.2	762.6	757.0	751.3	748.2
17.5°	765.7	762.9	760.1	757.3	754.5	749.5	742.3	735.0	727.8	720.5	716.8
20°	751.3	748.0	744.7	741.4	738.0	732.2	723.9	715.6	707.3	699.0	694.9
22.5°	735.8	732.1	728.3	724.6	720.9	714.4	705.0	695.6	686.3	676.9	671.6
25°	712.5	707.2	701.9	696.5	691.2	683.1	672.1	661.2	650.2	639.3	632.5
27.5°	684.4	678.6	672.8	667.1	661.3	652.2	639.9	627.5	615.2	602.8	594.9
30°	664.7	658.4	652.1	645.8	639.5	629.7	616.4	603.1	589.8	576.6	568.1
32.5°	645.6	638.2	630.8	623.5	616.1	605.6	592.1	578.5	565.0	551.5	541.8
35°	613.9	605.4	597.0	588.5	580.0	568.5	553.9	539.3	524.7	510.1	499.6
37.5°	582.2	572.9	563.6	554.3	545.1	532.6	517.1	501.5	485.9	470.4	458.8
40°	560.1	550.2	540.2	530.3	520.3	507.3	491.2	475.1	459.0	442.9	431.1
42.5°	537.4	526.9	516.4	506.0	495.5	481.9	465.3	448.6	432.0	415.4	403.2
45°	501.9	490.8	479.6	468.5	457.4	443.1	425.7	408.3	390.8	373.4	361.6
47.5°	467.2	455.4	443.7	431.9	420.1	405.2	387.2	369.2	351.2	333.2	321.5
50°	442.1	430.3	418.6	406.8	395.0	380.0	361.7	343.5	325.2	306.9	295.5
52.5°	417.6	405.3	393.0	380.7	368.4	353.3	335.4	317.6	299.7	281.9	270.8
55°	381.6	368.7	355.7	342.8	329.9	314.4	296.5	278.6	260.6	242.7	232.8
57.5°	344.7	331.5	318.2	304.9	291.6	276.4	259.2	241.9	224.7	207.5	198.3
60°	319.6	306.4	293.1	279.8	266.5	251.4	234.3	217.2	200.1	183.0	174.5
62.5°	295.1	281.9	268.6	255.3	242.0	227.3	211.0	194.7	178.4	162.1	154.0
65°	257.7	244.2	230.8	217.3	203.9	189.7	174.8	159.8	144.9	129.9	124.3
67.5°	221.5	208.2	194.8	181.5	168.1	154.7	141.3	127.9	114.4	101.0	98.4
70°	196.4	183.5	170.5	157.6	144.6	132.4	121.0	109.5	98.1	86.6	85.0
72.5°	172.5	160.1	147.7	135.3	122.9	112.1	102.9	93.7	84.5	75.3	73.9
75°	137.4	125.8	114.2	102.6	90.9	82.3	76.7	71.0	65.4	59.7	58.6
77.5°	102.9	92.7	82.5	72.3	62.2	55.7	53.0	50.3	47.5	44.8	44.1
80°	81.4	72.9	64.5	56.0	47.5	42.5	40.8	39.2	37.5	35.8	35.2
82.5°	61.7	55.1	48.5	41.9	35.3	31.4	30.3	29.1	28.0	26.9	26.5
85°	32.1	28.6	25.1	21.7	18.2	16.2	15.7	15.2	14.7	14.2	14.2
87.5°	9.7	8.8	8.0	7.2	6.4	6.2	6.6	7.1	7.5	8.0	7.8
90°	0.5	1.7	2.9	4.1	5.3	7.0	9.2	11.4	13.6	15.9	15.7
92.5°	8.1	9.0	9.8	10.7	11.6	12.3	12.8	13.4	13.9	14.4	14.4
95°	23.6	24.6	25.6	26.6	27.6	28.2	28.4	28.6	28.8	29.0	29.0
97.5°	43.0	43.9	44.8	45.7	46.6	47.2	47.6	48.0	48.4	48.7	48.7
100°	57.5	58.3	59.1	60.0	60.8	61.3	61.6	61.9	62.2	62.5	62.5
102.5°	72.8	73.4	74.0	74.7	75.3	75.9	76.2	76.6	77.0	77.4	77.5
105°	97.4	97.7	98.0	98.3	98.6	98.9	99.1	99.3	99.5	99.7	99.9
107.5°	122.2	122.7	123.1	123.6	124.0	124.2	124.2	124.2	124.2	124.2	124.3
110°	138.2	138.8	139.4	140.0	140.6	140.9	140.9	140.9	140.9	140.9	140.9



TEST NUMBER: P331788

CATALOG NUMBER: S122RDIW-S485D435U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	155.6	156.2	156.8	157.4	158.0	158.3	158.2	158.1	158.0	157.9	157.7
115°	181.2	181.8	182.4	183.0	183.6	183.8	183.6	183.4	183.2	183.0	182.9
117.5°	206.8	207.6	208.4	209.2	210.0	210.1	209.6	209.0	208.4	207.9	207.6
120°	223.8	224.6	225.4	226.2	227.0	227.0	226.2	225.4	224.6	223.8	223.8
122.5°	239.4	240.4	241.3	242.3	243.3	243.5	242.9	242.3	241.8	241.2	241.0
125°	263.7	264.6	265.5	266.4	267.3	267.6	267.3	267.0	266.7	266.4	266.1
127.5°	287.3	288.5	289.6	290.8	291.9	292.3	292.0	291.6	291.2	290.9	290.5
130°	302.2	303.5	304.8	306.1	307.4	308.0	307.8	307.6	307.4	307.2	307.0
132.5°	318.9	319.9	321.0	322.1	323.1	323.7	323.7	323.8	323.8	323.8	323.4
135°	341.2	342.3	343.4	344.5	345.6	346.2	346.4	346.6	346.8	347.0	346.9
137.5°	364.6	365.5	366.4	367.3	368.2	368.8	369.1	369.4	369.6	369.9	369.8
140°	378.8	379.7	380.6	381.5	382.4	383.1	383.6	384.1	384.6	385.1	385.1
142.5°	393.3	394.2	395.1	396.0	396.9	397.5	397.8	398.2	398.5	398.9	399.0
145°	414.1	414.8	415.5	416.2	416.9	417.6	418.2	418.8	419.4	420.0	420.1
147.5°	432.7	433.5	434.4	435.2	436.1	436.7	437.1	437.5	437.9	438.3	438.5
150°	445.4	446.0	446.6	447.2	447.8	448.3	448.7	449.1	449.5	449.9	450.2
152.5°	456.6	457.2	457.8	458.4	459.0	459.6	460.0	460.5	461.0	461.5	461.9
155°	473.4	473.7	474.0	474.4	474.7	475.0	475.3	475.6	475.9	476.2	476.7
157.5°	487.9	488.1	488.3	488.5	488.7	488.8	489.0	489.2	489.4	489.6	490.3
160°	496.6	496.8	497.0	497.2	497.4	497.5	497.6	497.7	497.8	497.9	498.5
162.5°	504.5	504.6	504.6	504.6	504.7	504.8	504.9	505.0	505.1	505.2	505.8
165°	515.1	515.0	514.9	514.8	514.7	514.7	514.7	514.7	514.7	514.7	515.4
167.5°	524.0	523.7	523.4	523.1	522.8	522.6	522.6	522.6	522.6	522.6	523.3
170°	528.7	528.4	528.1	527.8	527.5	527.3	527.2	527.1	527.0	526.9	527.6
172.5°	532.0	531.7	531.4	531.1	530.8	530.6	530.5	530.4	530.3	530.2	530.9
175°	536.0	535.7	535.4	535.1	534.8	534.5	534.3	534.1	533.9	533.7	534.4
177.5°	537.6	537.4	537.1	536.9	536.6	536.4	536.3	536.1	535.9	535.8	536.3
180°	536.9	536.9	536.9	536.9	536.9	536.9	536.9	536.9	536.9	536.9	536.9



TEST NUMBER: P331788

CATALOG NUMBER: S122RDIW-S485D435U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	825.2	825.2	825.2	825.2	825.2	825.2	825.2	825.2
2.5°	821.3	822.7	824.0	824.5	824.3	824.0	823.7	823.5
5°	814.8	816.3	817.8	818.3	817.8	817.3	816.8	816.3
7.5°	801.6	802.0	802.5	802.3	801.4	800.5	799.7	798.8
10°	788.4	787.9	787.4	786.7	785.7	784.7	783.7	782.7
12.5°	773.3	772.4	771.5	770.2	768.5	766.9	765.2	763.6
15°	745.0	741.9	738.7	736.3	734.6	733.0	731.3	729.7
17.5°	713.0	709.3	705.5	702.2	699.4	696.5	693.7	690.8
20°	690.7	686.6	682.4	678.5	674.9	671.2	667.6	663.9
22.5°	666.2	660.9	655.6	651.5	648.8	646.1	643.4	640.6
25°	625.7	618.9	612.1	607.4	604.9	602.4	600.0	597.5
27.5°	587.0	579.0	571.1	565.2	561.2	557.3	553.3	549.4
30°	559.6	551.2	542.7	536.2	531.7	527.3	522.8	518.3
32.5°	532.1	522.5	512.8	505.9	501.7	497.5	493.2	489.0
35°	489.2	478.7	468.3	461.2	457.6	453.9	450.3	446.6
37.5°	447.3	435.8	424.3	416.4	412.3	408.1	403.9	399.7
40°	419.3	407.5	395.7	387.7	383.4	379.1	374.7	370.4
42.5°	391.0	378.8	366.7	358.5	354.3	350.1	345.9	341.7
45°	349.8	338.1	326.3	318.4	314.4	310.4	306.4	302.5
47.5°	309.8	298.1	286.4	278.7	275.1	271.5	267.8	264.2
50°	284.0	272.6	261.1	253.7	250.2	246.7	243.2	239.7
52.5°	259.7	248.7	237.6	230.5	227.3	224.1	220.8	217.6
55°	222.8	212.8	202.9	196.3	193.2	190.0	186.9	183.7
57.5°	189.2	180.1	171.0	165.1	162.4	159.8	157.1	154.4
60°	166.0	157.6	149.1	143.6	140.9	138.2	135.6	132.9
62.5°	145.9	137.9	129.8	125.0	123.4	121.8	120.2	118.6
65°	118.7	113.0	107.4	104.3	103.8	103.3	102.8	102.3
67.5°	95.8	93.2	90.6	89.1	88.5	88.0	87.5	86.9
70°	83.3	81.7	80.0	78.8	78.2	77.5	76.8	76.2
72.5°	72.5	71.1	69.7	68.8	68.4	68.0	67.6	67.2
75°	57.4	56.3	55.1	54.4	54.3	54.1	53.9	53.8
77.5°	43.5	42.8	42.2	41.7	41.4	41.2	40.9	40.6
80°	34.5	33.9	33.2	32.9	32.9	32.9	32.9	32.9
82.5°	26.1	25.7	25.3	25.1	25.1	25.1	25.1	25.1
85°	14.2	14.2	14.2	14.2	14.2	14.2	14.2	14.2
87.5°	7.6	7.4	7.3	7.2	7.2	7.2	7.2	7.3
90°	15.5	15.3	15.1	15.0	15.1	15.2	15.3	15.4
92.5°	14.5	14.5	14.6	14.6	14.6	14.6	14.7	14.7
95°	29.0	29.0	29.0	28.9	28.7	28.5	28.3	28.1
97.5°	48.7	48.7	48.7	48.7	48.7	48.7	48.7	48.7
100°	62.5	62.5	62.5	62.5	62.4	62.3	62.2	62.1
102.5°	77.5	77.6	77.7	77.7	77.6	77.5	77.4	77.3
105°	100.1	100.3	100.5	100.6	100.6	100.6	100.6	100.6
107.5°	124.4	124.5	124.6	124.4	123.9	123.4	123.0	122.5
110°	140.9	140.9	140.9	140.7	140.4	140.1	139.8	139.5



TEST NUMBER: P331788

CATALOG NUMBER: S122RDIW-S485D435U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	157.5	157.2	157.0	156.7	156.5	156.3	156.1	155.9
115°	182.8	182.7	182.6	182.4	182.1	181.8	181.5	181.2
117.5°	207.4	207.1	206.9	206.6	206.3	206.0	205.7	205.4
120°	223.8	223.8	223.8	223.7	223.4	223.1	222.8	222.5
122.5°	240.7	240.5	240.2	240.0	239.8	239.6	239.3	239.1
125°	265.8	265.5	265.2	265.0	264.9	264.8	264.7	264.6
127.5°	290.1	289.8	289.4	289.1	288.7	288.4	288.1	287.8
130°	306.8	306.6	306.4	306.1	305.7	305.3	304.9	304.5
132.5°	323.0	322.5	322.1	321.7	321.4	321.0	320.7	320.4
135°	346.8	346.7	346.6	346.4	346.1	345.8	345.5	345.2
137.5°	369.7	369.6	369.6	369.3	368.9	368.5	368.1	367.7
140°	385.1	385.1	385.1	384.9	384.5	384.1	383.7	383.3
142.5°	399.0	399.1	399.2	399.0	398.6	398.2	397.8	397.4
145°	420.2	420.3	420.4	420.2	419.8	419.4	419.0	418.6
147.5°	438.7	439.0	439.2	439.1	438.7	438.3	437.9	437.6
150°	450.5	450.8	451.1	451.1	450.8	450.5	450.2	449.9
152.5°	462.2	462.6	463.0	463.0	462.6	462.2	461.9	461.5
155°	477.2	477.7	478.2	478.3	478.0	477.7	477.4	477.1
157.5°	490.9	491.6	492.3	492.4	491.9	491.4	491.0	490.5
160°	499.1	499.7	500.3	500.4	500.0	499.6	499.2	498.8
162.5°	506.5	507.2	507.9	508.0	507.5	507.0	506.5	506.1
165°	516.1	516.8	517.5	517.6	517.1	516.6	516.1	515.6
167.5°	524.0	524.7	525.4	525.5	524.9	524.4	523.9	523.4
170°	528.3	529.0	529.7	529.8	529.2	528.6	528.0	527.4
172.5°	531.6	532.3	533.0	533.0	532.4	531.8	531.2	530.6
175°	535.1	535.8	536.5	536.6	536.0	535.4	534.8	534.2
177.5°	536.8	537.2	537.7	537.7	537.2	536.8	536.3	535.8
180°	536.9	536.9	536.9	536.9	536.9	536.9	536.9	536.9

(END OF REPORT)