

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331608-935

Luminaire Tested: **S122DIW-S1005D1240U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331608-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S1005D1240U935-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1240 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7195.8 lumens
Efficiency: N/A
Efficacy: 94.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 76.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331608-935

CATALOG NUMBER: S122DIW-S1005D1240U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

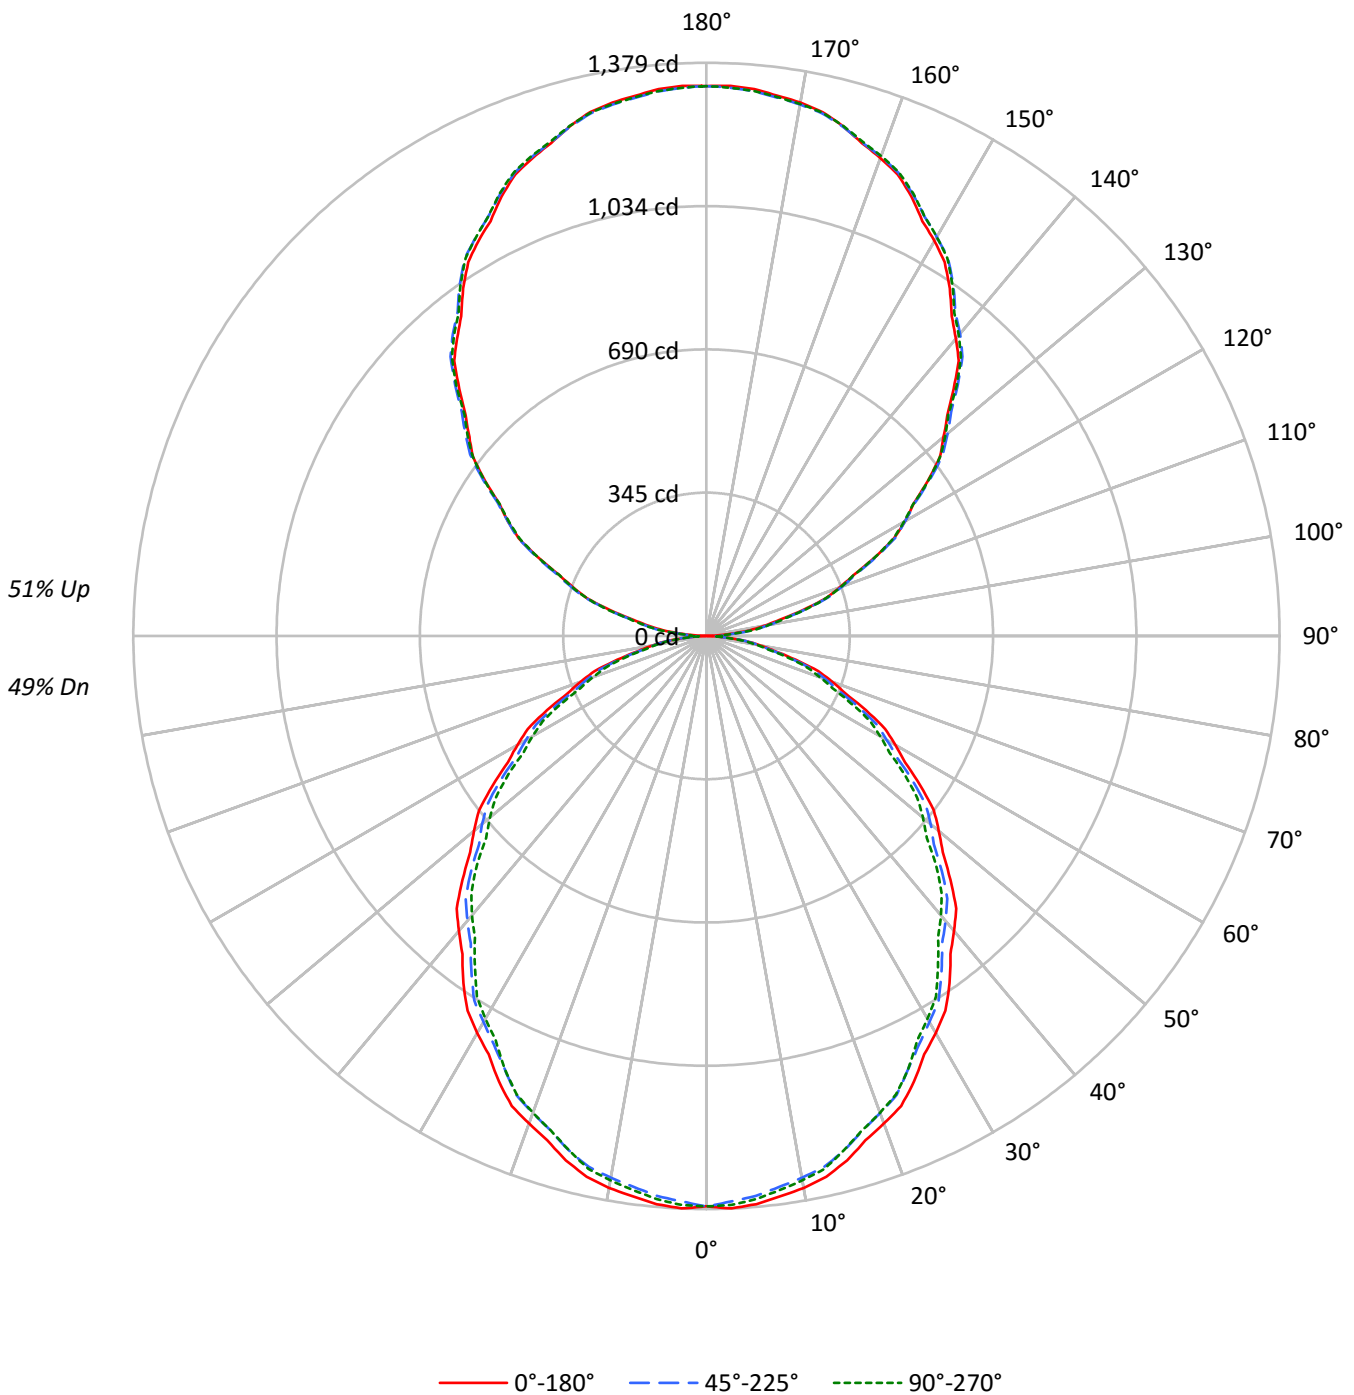



TEST NUMBER: P331608-935

CATALOG NUMBER: S122DIW-S1005D1240U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20			20			20			20
RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	83	83	83	68	68	68	55	55	55	49
1	97	93	89	86	90	86	83	80	72	70	68	60	58	57	48	47	46	41
2	89	81	75	70	81	75	70	65	63	59	56	53	50	47	43	41	39	34
3	81	71	64	58	74	66	60	55	56	51	47	47	43	40	38	35	33	29
4	74	63	55	49	68	59	52	46	50	44	40	41	37	34	34	31	29	25
5	68	56	48	42	62	52	45	40	44	39	35	37	33	30	30	27	25	22
6	63	51	42	37	57	47	40	34	40	34	30	34	29	26	28	24	22	19
7	58	46	38	32	53	42	35	30	36	31	27	31	26	23	25	22	20	17
8	54	41	34	28	49	39	32	27	33	28	24	28	24	21	23	20	17	15
9	50	38	30	25	46	35	28	24	30	25	21	26	21	18	21	18	16	14
10	47	35	27	23	43	32	26	21	28	23	19	24	20	17	20	17	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	22157	22157	22157
5°	22242	21921	22049
10°	22109	21697	21807
15°	21835	21417	21396
20°	21448	20993	20972
25°	21063	20475	20475
30°	20566	19999	19827
35°	20103	19429	19141
40°	19524	18858	18493
45°	18952	18287	17838
50°	18329	17698	17071
55°	17681	17011	16380
60°	16956	16191	15594
65°	16180	15373	14670
70°	15196	14389	13704
75°	13830	13250	12926
80°	12273	11901	11288
85°	10022	9541	8540



TEST NUMBER: P331608-935

CATALOG NUMBER: S122DIW-S1005D1240U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	129.0	1.8
10°-20°	363.1	5.0
20°-30°	533.7	7.4
30°-40°	619.9	8.6
40°-50°	619.3	8.6
50°-60°	540.0	7.5
60°-70°	399.3	5.5
70°-80°	226.2	3.1
80°-90°	66.1	0.9
90°-100°	83.8	1.2
100°-110°	260.4	3.6
110°-120°	445.0	6.2
120°-130°	585.3	8.1
130°-140°	656.9	9.1
140°-150°	644.1	9.0
150°-160°	540.2	7.5
160°-170°	358.3	5.0
170°-180°	125.2	1.7
0°-30°	1025.8	14.3
0°-40°	1645.7	22.9
0°-60°	2805.0	39.0
0°-90°	3496.6	48.6
90°-120°	789.2	11.0
90°-150°	2675.4	37.2
90°-180°	3699.0	51.4
0°-180°	7195.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1372	1372	1372	1372	1372	
5°	1372	1366	1352	1362	1360	130
15°	1306	1298	1281	1286	1280	368
25°	1182	1171	1149	1152	1149	544
35°	1020	1006	986	978	971	637
45°	830	820	801	787	781	640
55°	628	620	604	589	582	561
65°	424	415	402	391	384	419
75°	222	219	212	205	207	237
85°	54	53	52	48	46	62
90°	1	15	39	37	38	6
95°	58	69	72	71	69	67
105°	240	243	246	248	248	253
115°	447	453	451	450	447	442
125°	650	659	656	653	652	580
135°	841	852	855	854	851	649
145°	1020	1028	1035	1036	1032	637
155°	1167	1170	1173	1178	1176	537
165°	1269	1268	1268	1275	1270	358
175°	1321	1318	1315	1322	1316	125
180°	1323	1323	1323	1323	1323	



TEST NUMBER: P331608-935

CATALOG NUMBER: S122DIW-S1005D1240U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1372.3	1372.3	1372.3	1372.3	1372.3	1372.3	1372.3	1372.3	1372.3	1372.3	1372.3
2.5°	1378.6	1377.4	1376.3	1375.1	1373.9	1372.1	1369.5	1366.9	1364.3	1361.8	1364.1
5°	1372.3	1371.1	1369.9	1368.7	1367.6	1365.4	1362.2	1358.9	1355.7	1352.5	1354.9
7.5°	1360.1	1358.3	1356.5	1354.7	1352.9	1350.3	1347.0	1343.8	1340.5	1337.2	1339.5
10°	1348.5	1346.5	1344.5	1342.4	1340.3	1337.6	1334.0	1330.5	1327.0	1323.4	1325.9
12.5°	1332.7	1330.8	1329.0	1327.2	1325.4	1322.8	1319.2	1315.7	1312.3	1308.7	1310.4
15°	1306.3	1304.6	1302.8	1301.1	1299.2	1296.5	1292.7	1288.8	1285.0	1281.3	1282.5
17.5°	1272.6	1270.7	1269.0	1267.2	1265.5	1262.7	1258.8	1254.9	1251.0	1247.2	1248.5
20°	1248.3	1246.5	1244.7	1242.9	1241.2	1238.3	1234.2	1230.1	1226.0	1221.8	1222.7
22.5°	1224.0	1221.5	1219.1	1216.6	1214.1	1211.0	1207.1	1203.2	1199.4	1195.5	1195.7
25°	1182.3	1179.9	1177.6	1175.3	1172.9	1169.2	1164.2	1159.3	1154.3	1149.3	1149.9
27.5°	1134.8	1132.6	1130.6	1128.4	1126.4	1123.3	1119.4	1115.4	1111.6	1107.6	1106.7
30°	1103.1	1100.8	1098.4	1096.1	1093.7	1090.4	1086.0	1081.6	1077.2	1072.7	1071.9
32.5°	1069.4	1067.5	1065.6	1063.7	1061.8	1058.6	1054.0	1049.3	1044.7	1040.0	1038.5
35°	1019.9	1017.0	1014.1	1011.2	1008.2	1004.4	999.7	995.1	990.4	985.7	984.0
37.5°	964.3	961.7	959.2	956.6	954.0	950.4	945.6	941.0	936.3	931.6	929.4
40°	926.3	923.9	921.6	919.3	916.9	913.4	908.7	904.0	899.3	894.7	892.0
42.5°	889.3	887.0	884.7	882.4	879.9	876.4	871.8	867.0	862.4	857.6	854.8
45°	830.0	827.9	825.9	823.8	821.7	818.6	814.2	809.8	805.4	800.9	797.7
47.5°	770.9	769.0	767.0	765.1	763.1	759.8	755.3	750.7	746.1	741.6	738.1
50°	729.7	728.2	726.8	725.3	723.8	721.0	717.0	712.8	708.7	704.6	700.5
52.5°	689.6	687.7	685.7	683.8	681.8	678.9	675.0	671.1	667.4	663.5	660.0
55°	628.1	626.3	624.6	622.8	621.0	618.4	614.9	611.4	607.9	604.3	600.8
57.5°	566.4	564.9	563.5	562.1	560.7	558.1	554.2	550.4	546.5	542.6	539.2
60°	525.1	524.0	522.8	521.7	520.5	517.8	513.8	509.6	505.5	501.4	498.2
62.5°	485.1	483.2	481.3	479.4	477.5	475.0	471.8	468.7	465.5	462.4	459.3
65°	423.5	421.8	420.1	418.3	416.6	414.1	411.2	408.3	405.4	402.4	399.8
67.5°	361.0	359.6	358.2	356.8	355.4	353.4	350.7	348.1	345.4	342.9	340.8
70°	321.9	320.8	319.6	318.5	317.3	315.4	312.7	310.0	307.5	304.8	302.7
72.5°	281.8	280.7	279.5	278.4	277.2	275.7	274.1	272.3	270.6	268.9	266.8
75°	221.7	221.1	220.5	219.9	219.3	218.3	216.8	215.3	213.9	212.4	210.7
77.5°	167.8	166.9	165.8	164.9	163.8	163.1	162.5	161.9	161.3	160.7	159.8
80°	132.0	131.6	131.4	131.0	130.8	130.4	129.8	129.2	128.5	128.0	127.1
82.5°	98.2	98.2	98.1	98.0	97.9	97.7	97.4	97.0	96.7	96.3	95.2
85°	54.1	53.8	53.6	53.2	53.0	52.6	52.3	52.0	51.7	51.5	50.5
87.5°	19.2	19.4	19.5	19.6	19.7	20.1	20.8	21.4	22.0	22.6	21.8
90°	1.1	4.1	7.1	10.1	13.0	17.2	22.7	28.2	33.6	39.1	38.6
92.5°	19.9	22.0	24.3	26.4	28.6	30.3	31.6	32.9	34.2	35.5	35.6
95°	58.0	60.5	63.0	65.5	68.0	69.5	70.0	70.4	70.9	71.5	71.5
97.5°	106.1	108.2	110.5	112.6	114.8	116.3	117.3	118.2	119.2	120.1	120.1
100°	141.8	143.8	145.8	147.7	149.7	151.1	151.8	152.6	153.3	154.0	154.0
102.5°	179.3	180.9	182.4	184.1	185.6	186.9	187.9	188.8	189.8	190.7	190.9
105°	240.0	240.7	241.5	242.3	243.0	243.7	244.1	244.6	245.1	245.6	246.1
107.5°	301.2	302.3	303.4	304.4	305.6	306.1	306.1	306.1	306.1	306.1	306.3
110°	340.5	342.0	343.5	345.0	346.5	347.2	347.2	347.2	347.2	347.2	347.2



TEST NUMBER: P331608-935

CATALOG NUMBER: S122DIW-S1005D1240U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	383.4	384.9	386.3	387.9	389.3	389.9	389.8	389.6	389.3	389.2	388.6
115°	446.6	448.1	449.5	451.0	452.5	453.0	452.5	452.0	451.5	451.0	450.8
117.5°	509.5	511.5	513.5	515.5	517.5	517.8	516.3	515.0	513.6	512.2	511.6
120°	551.5	553.5	555.5	557.5	559.5	559.5	557.5	555.5	553.5	551.5	551.5
122.5°	589.9	592.3	594.7	597.0	599.4	599.9	598.6	597.2	595.7	594.3	593.7
125°	649.7	651.9	654.2	656.4	658.7	659.4	658.7	658.0	657.2	656.4	655.7
127.5°	708.0	710.8	713.7	716.5	719.4	720.3	719.5	718.5	717.6	716.7	715.8
130°	744.7	747.9	751.1	754.3	757.5	758.9	758.5	757.9	757.4	756.9	756.4
132.5°	785.7	788.3	791.0	793.6	796.3	797.6	797.7	797.8	797.9	798.0	796.9
135°	840.7	843.3	846.1	848.9	851.6	853.2	853.7	854.2	854.7	855.1	854.9
137.5°	898.5	900.7	902.9	905.2	907.4	908.9	909.5	910.2	910.8	911.5	911.3
140°	933.3	935.6	937.8	940.0	942.3	944.0	945.2	946.5	947.7	948.9	948.9
142.5°	969.1	971.3	973.5	975.8	978.0	979.5	980.3	981.2	982.1	982.9	983.1
145°	1020.4	1022.2	1023.9	1025.6	1027.3	1029.0	1030.4	1031.9	1033.5	1034.9	1035.2
147.5°	1066.2	1068.2	1070.3	1072.5	1074.5	1076.1	1077.0	1078.1	1079.0	1080.0	1080.6
150°	1097.4	1098.9	1100.4	1101.9	1103.4	1104.7	1105.6	1106.6	1107.6	1108.6	1109.3
152.5°	1125.2	1126.6	1128.1	1129.5	1131.1	1132.4	1133.6	1134.8	1136.0	1137.2	1138.2
155°	1166.7	1167.4	1168.1	1168.9	1169.7	1170.4	1171.1	1171.8	1172.6	1173.4	1174.6
157.5°	1202.1	1202.6	1203.2	1203.7	1204.1	1204.6	1205.1	1205.5	1205.9	1206.4	1208.1
160°	1223.6	1224.1	1224.6	1225.1	1225.5	1226.0	1226.2	1226.4	1226.7	1226.9	1228.4
162.5°	1243.2	1243.4	1243.5	1243.5	1243.6	1243.8	1244.1	1244.3	1244.6	1244.8	1246.5
165°	1269.4	1269.1	1268.9	1268.6	1268.3	1268.3	1268.3	1268.3	1268.3	1268.3	1270.0
167.5°	1291.2	1290.5	1289.8	1289.0	1288.2	1287.9	1287.8	1287.8	1287.7	1287.6	1289.4
170°	1302.9	1302.1	1301.4	1300.6	1299.9	1299.4	1299.2	1298.9	1298.6	1298.4	1300.1
172.5°	1310.9	1310.2	1309.4	1308.6	1307.9	1307.4	1307.2	1306.9	1306.7	1306.4	1308.2
175°	1320.7	1320.0	1319.2	1318.4	1317.8	1317.2	1316.6	1316.1	1315.6	1315.1	1316.9
177.5°	1324.7	1324.1	1323.5	1322.9	1322.3	1321.9	1321.5	1321.0	1320.7	1320.3	1321.5
180°	1322.9	1322.9	1322.9	1322.9	1322.9	1322.9	1322.9	1322.9	1322.9	1322.9	1322.9



TEST NUMBER: P331608-935

CATALOG NUMBER: S122DIW-S1005D1240U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1372.3	1372.3	1372.3	1372.3	1372.3	1372.3	1372.3	1372.3
2.5°	1366.4	1368.7	1371.1	1372.1	1371.6	1371.1	1370.6	1370.2
5°	1357.2	1359.5	1361.8	1362.8	1362.2	1361.6	1361.0	1360.4
7.5°	1341.9	1344.2	1346.6	1347.5	1346.8	1346.2	1345.5	1344.9
10°	1328.2	1330.5	1332.8	1333.6	1332.7	1331.8	1330.9	1330.1
12.5°	1312.0	1313.6	1315.3	1315.8	1315.1	1314.5	1313.8	1313.2
15°	1283.6	1284.8	1285.9	1285.8	1284.4	1282.9	1281.4	1280.0
17.5°	1249.9	1251.3	1252.6	1252.6	1251.1	1249.7	1248.4	1246.9
20°	1223.7	1224.5	1225.4	1225.2	1224.1	1222.9	1221.8	1220.6
22.5°	1195.8	1196.0	1196.2	1195.9	1195.2	1194.6	1193.8	1193.1
25°	1150.5	1151.1	1151.7	1151.7	1151.1	1150.5	1149.9	1149.3
27.5°	1105.9	1104.9	1104.1	1102.9	1101.6	1100.1	1098.7	1097.3
30°	1071.0	1070.1	1069.3	1068.2	1067.0	1065.8	1064.7	1063.5
32.5°	1036.9	1035.3	1033.7	1032.3	1031.1	1030.0	1028.8	1027.6
35°	982.1	980.4	978.6	977.1	975.6	974.1	972.6	971.1
37.5°	927.2	925.1	922.9	921.1	919.7	918.3	916.9	915.5
40°	889.3	886.7	884.1	882.2	881.0	879.9	878.7	877.4
42.5°	852.0	849.0	846.2	844.0	842.3	840.7	839.0	837.3
45°	794.5	791.3	788.1	785.8	784.6	783.5	782.3	781.2
47.5°	734.8	731.3	728.0	725.4	723.7	722.0	720.3	718.6
50°	696.4	692.3	688.2	685.4	684.0	682.5	681.1	679.6
52.5°	656.7	653.2	649.9	647.2	645.2	643.3	641.4	639.5
55°	597.3	593.7	590.3	587.8	586.3	584.9	583.4	581.9
57.5°	535.6	532.2	528.7	526.4	525.4	524.3	523.1	522.0
60°	495.0	491.7	488.5	486.5	485.6	484.7	483.8	482.9
62.5°	456.4	453.4	450.4	448.3	447.2	446.1	445.0	443.8
65°	397.2	394.5	391.9	389.9	388.4	386.9	385.5	384.0
67.5°	338.7	336.7	334.6	332.9	331.8	330.6	329.5	328.3
70°	300.7	298.7	296.6	295.0	293.8	292.7	291.4	290.3
72.5°	264.8	262.8	260.7	259.2	258.3	257.4	256.4	255.5
75°	209.0	207.2	205.4	204.8	205.4	206.0	206.6	207.2
77.5°	158.9	158.1	157.2	156.4	155.5	154.7	153.9	153.1
80°	126.2	125.4	124.5	123.7	123.1	122.6	122.0	121.4
82.5°	94.1	93.0	91.9	91.3	91.1	91.0	90.9	90.7
85°	49.7	48.8	48.0	47.4	47.1	46.8	46.5	46.1
87.5°	21.0	20.1	19.4	18.9	18.7	18.5	18.3	18.2
90°	38.1	37.6	37.1	36.9	37.2	37.5	37.7	38.0
92.5°	35.7	35.8	35.9	36.0	36.0	36.1	36.2	36.2
95°	71.5	71.5	71.5	71.2	70.7	70.2	69.7	69.2
97.5°	120.1	120.1	120.1	120.1	120.0	120.0	119.9	119.9
100°	154.0	154.0	154.0	153.9	153.7	153.4	153.2	152.9
102.5°	191.1	191.3	191.5	191.5	191.2	191.0	190.7	190.5
105°	246.6	247.1	247.6	247.9	247.9	247.9	247.9	247.9
107.5°	306.5	306.7	306.9	306.4	305.3	304.2	303.0	301.9
110°	347.2	347.2	347.2	346.8	346.1	345.3	344.6	343.9



TEST NUMBER: P331608-935

CATALOG NUMBER: S122DIW-S1005D1240U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	388.0	387.4	386.8	386.2	385.6	385.1	384.6	384.0
115°	450.6	450.3	450.0	449.5	448.8	448.1	447.3	446.6
117.5°	511.0	510.4	509.8	509.2	508.4	507.6	507.0	506.2
120°	551.5	551.5	551.5	551.1	550.4	549.7	548.9	548.2
122.5°	593.2	592.6	592.0	591.4	590.9	590.3	589.8	589.3
125°	655.0	654.2	653.5	653.0	652.7	652.5	652.2	651.9
127.5°	715.0	714.0	713.2	712.3	711.5	710.8	710.0	709.1
130°	756.0	755.4	754.9	754.2	753.2	752.3	751.2	750.2
132.5°	795.8	794.7	793.7	792.7	791.9	791.1	790.3	789.5
135°	854.7	854.5	854.2	853.7	852.9	852.2	851.4	850.7
137.5°	911.0	910.9	910.7	910.1	909.0	908.1	907.1	906.1
140°	948.9	948.9	948.9	948.5	947.4	946.5	945.5	944.5
142.5°	983.3	983.5	983.7	983.3	982.3	981.3	980.3	979.3
145°	1035.4	1035.7	1035.9	1035.5	1034.6	1033.5	1032.6	1031.6
147.5°	1081.1	1081.7	1082.2	1082.0	1081.1	1080.1	1079.2	1078.2
150°	1110.1	1110.9	1111.6	1111.6	1110.9	1110.1	1109.3	1108.6
152.5°	1139.1	1140.0	1140.9	1140.9	1140.0	1139.1	1138.2	1137.2
155°	1175.9	1177.1	1178.3	1178.5	1177.8	1177.1	1176.3	1175.6
157.5°	1209.8	1211.4	1213.1	1213.4	1212.2	1211.0	1209.8	1208.6
160°	1229.9	1231.4	1232.9	1233.1	1232.2	1231.1	1230.2	1229.2
162.5°	1248.2	1249.8	1251.5	1251.8	1250.6	1249.4	1248.2	1247.1
165°	1271.7	1273.4	1275.2	1275.4	1274.2	1273.0	1271.7	1270.5
167.5°	1291.2	1292.9	1294.6	1294.9	1293.6	1292.3	1291.0	1289.7
170°	1301.8	1303.6	1305.4	1305.4	1304.0	1302.5	1301.0	1299.5
172.5°	1309.9	1311.6	1313.4	1313.5	1312.0	1310.5	1309.1	1307.5
175°	1318.6	1320.3	1322.1	1322.2	1320.7	1319.2	1317.8	1316.2
177.5°	1322.7	1323.9	1325.0	1325.0	1323.9	1322.7	1321.5	1320.3
180°	1322.9	1322.9	1322.9	1322.9	1322.9	1322.9	1322.9	1322.9

(END OF REPORT)