

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331494-935

Luminaire Tested: **S122DIW-S290D1440U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331494-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S290D1440U935-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1440 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5341.9 lumens
Efficiency: N/A
Efficacy: 100.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 53.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331494-935

CATALOG NUMBER: S122DIW-S290D1440U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

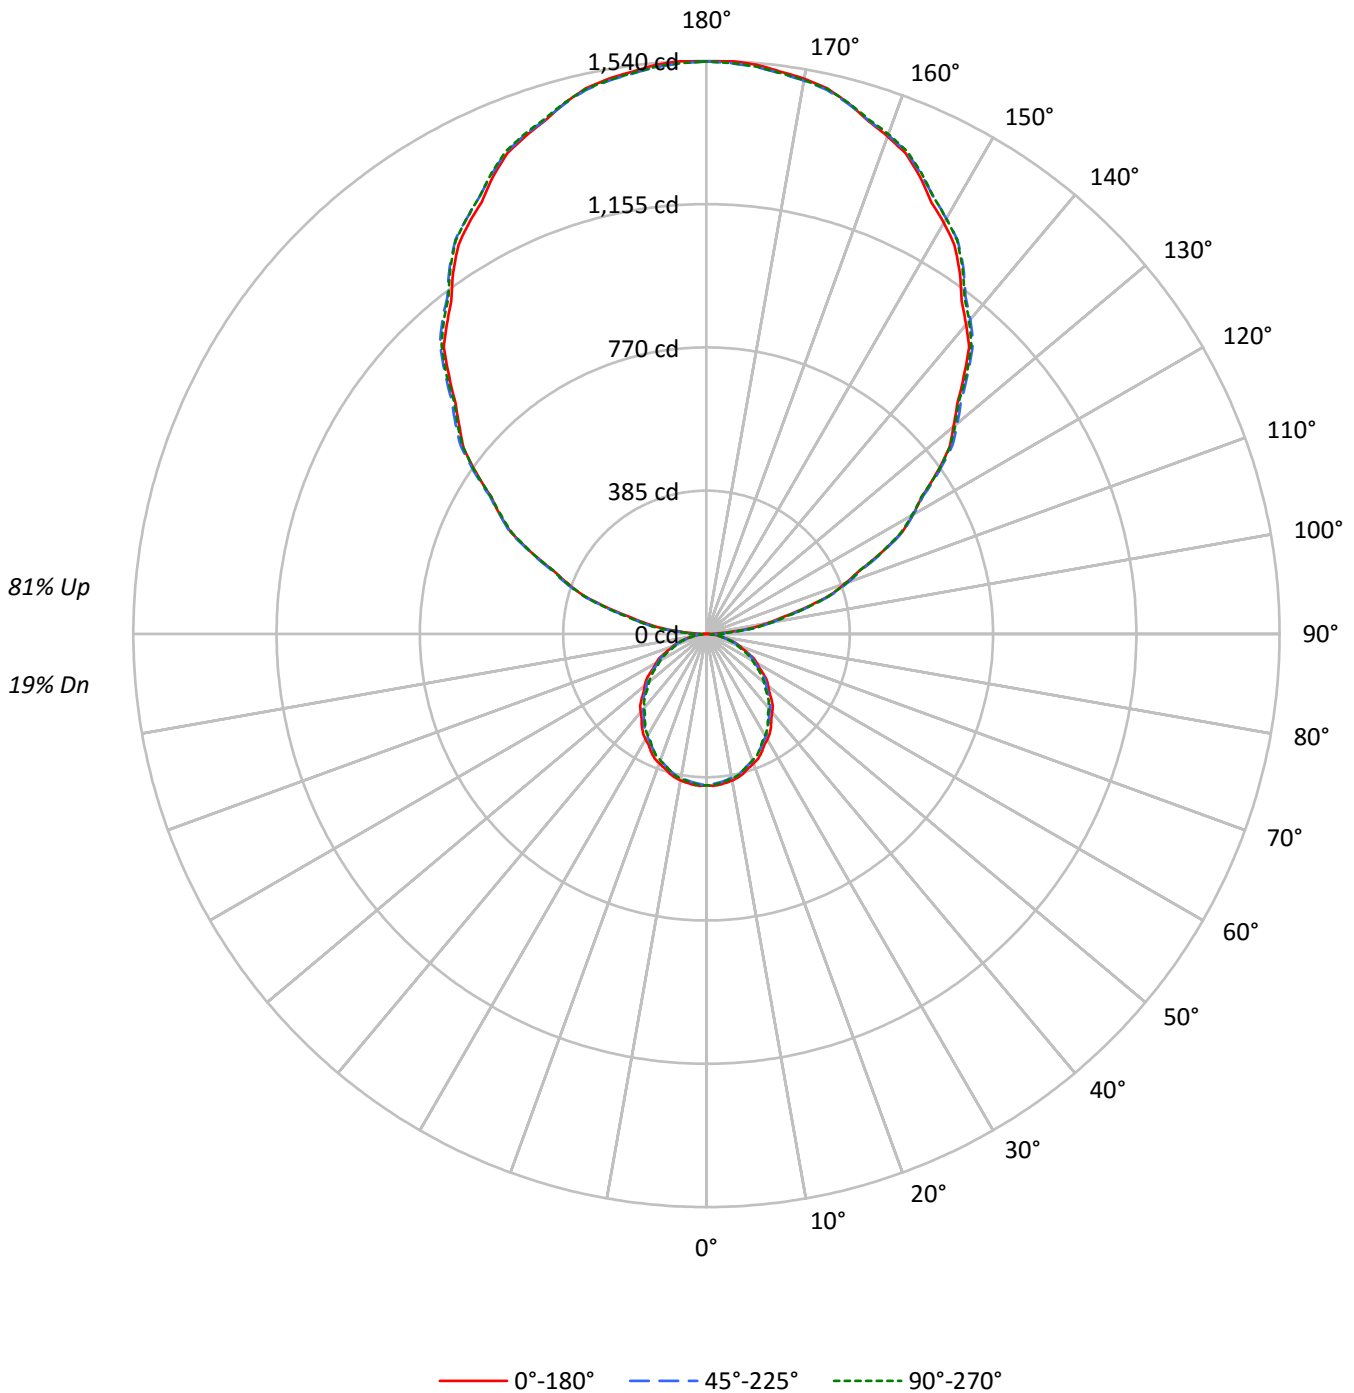



TEST NUMBER: P331494-935

CATALOG NUMBER: S122DIW-S290D1440U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	100	100	100	100	88	88	88	88	66	66	66	46	46	46	28	28	28	19
1	91	87	83	80	80	77	74	71	58	56	54	41	39	38	25	24	24	16
2	83	76	70	65	73	67	62	58	51	47	45	36	34	32	22	21	20	14
3	75	66	60	54	66	59	53	48	45	41	38	31	29	27	19	18	17	12
4	69	59	51	45	61	52	46	41	40	35	32	28	25	23	17	16	14	10
5	63	52	44	39	55	46	40	35	35	31	27	25	22	20	15	14	13	9
6	58	46	39	33	51	41	35	30	32	27	24	22	20	17	14	12	11	8
7	53	42	34	29	47	37	31	26	28	24	21	20	17	15	13	11	10	7
8	49	38	30	25	43	34	27	23	26	21	18	19	16	13	12	10	9	6
9	46	34	27	22	40	31	24	20	24	19	16	17	14	12	11	9	8	5
10	43	31	24	20	38	28	22	18	22	17	14	16	13	11	10	8	7	5

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6567	6567	6567
5°	6592	6498	6536
10°	6555	6432	6465
15°	6472	6349	6342
20°	6357	6223	6216
25°	6242	6070	6070
30°	6096	5929	5876
35°	5960	5757	5673
40°	5788	5590	5482
45°	5617	5421	5286
50°	5433	5247	5061
55°	5239	5044	4856
60°	5028	4799	4624
65°	4795	4558	4348
70°	4504	4263	4060
75°	4099	3924	3830
80°	3636	3533	3347
85°	2964	2816	2538



TEST NUMBER: P331494-935

CATALOG NUMBER: S122DIW-S290D1440U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	38.3	0.7
10°-20°	107.6	2.0
20°-30°	158.2	3.0
30°-40°	183.8	3.4
40°-50°	183.6	3.4
50°-60°	160.1	3.0
60°-70°	118.4	2.2
70°-80°	67.0	1.3
80°-90°	24.2	0.5
90°-100°	97.5	1.8
100°-110°	302.7	5.7
110°-120°	517.4	9.7
120°-130°	680.4	12.7
130°-140°	763.7	14.3
140°-150°	748.8	14.0
150°-160°	628.1	11.8
160°-170°	416.6	7.8
170°-180°	145.6	2.7
0°-30°	304.1	5.7
0°-40°	487.8	9.1
0°-60°	831.5	15.6
0°-90°	1041.0	19.5
90°-120°	917.6	17.2
90°-150°	3110.6	58.2
90°-180°	4301.0	80.5
0°-180°	5341.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	407	407	407	407	407	
5°	407	405	401	404	403	39
15°	387	385	380	381	379	109
25°	350	347	341	341	341	161
35°	302	298	292	290	288	189
45°	246	243	237	233	232	190
55°	186	184	179	175	172	166
65°	126	123	119	116	114	124
75°	66	65	63	61	61	70
85°	16	16	15	14	14	18
90°	1	18	46	43	44	4
95°	68	80	83	83	80	77
105°	279	283	286	288	288	295
115°	519	526	524	523	519	513
125°	755	766	763	759	758	675
135°	977	991	994	993	989	755
145°	1186	1195	1203	1204	1199	741
155°	1356	1360	1364	1370	1367	624
165°	1476	1475	1474	1483	1477	416
175°	1536	1532	1529	1537	1530	146
180°	1538	1538	1538	1538	1538	



TEST NUMBER: P331494-935

CATALOG NUMBER: S122DIW-S290D1440U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7
2.5°	408.6	408.3	407.9	407.6	407.3	406.7	406.0	405.2	404.4	403.6	404.3
5°	406.7	406.4	406.0	405.7	405.4	404.8	403.8	402.9	401.8	400.9	401.6
7.5°	403.2	402.6	402.1	401.6	401.1	400.3	399.3	398.3	397.4	396.4	397.1
10°	399.8	399.2	398.6	398.0	397.3	396.5	395.5	394.4	393.4	392.3	393.0
12.5°	395.0	394.5	394.0	393.4	392.9	392.1	391.1	390.0	389.0	388.0	388.4
15°	387.2	386.7	386.2	385.6	385.1	384.4	383.1	382.0	380.9	379.8	380.1
17.5°	377.2	376.7	376.2	375.7	375.1	374.3	373.2	372.0	370.8	369.7	370.1
20°	370.0	369.5	368.9	368.4	367.9	367.0	365.8	364.6	363.4	362.2	362.5
22.5°	362.8	362.1	361.4	360.6	359.9	359.0	357.8	356.6	355.5	354.4	354.4
25°	350.4	349.7	349.0	348.4	347.7	346.6	345.1	343.6	342.2	340.7	340.9
27.5°	336.4	335.8	335.1	334.5	333.9	332.9	331.8	330.6	329.5	328.3	328.0
30°	327.0	326.3	325.6	324.9	324.2	323.2	321.9	320.6	319.3	318.0	317.7
32.5°	316.9	316.4	315.9	315.3	314.8	313.7	312.4	311.1	309.7	308.3	307.8
35°	302.4	301.4	300.6	299.7	298.9	297.7	296.4	295.0	293.6	292.1	291.6
37.5°	285.9	285.1	284.3	283.5	282.8	281.7	280.3	279.0	277.5	276.1	275.5
40°	274.6	273.9	273.2	272.5	271.8	270.8	269.3	267.9	266.6	265.2	264.4
42.5°	263.6	262.9	262.3	261.6	260.9	259.8	258.4	257.0	255.6	254.3	253.4
45°	246.0	245.4	244.8	244.2	243.6	242.6	241.3	240.0	238.8	237.4	236.4
47.5°	228.5	227.9	227.4	226.8	226.2	225.2	223.9	222.6	221.2	219.8	218.8
50°	216.3	215.9	215.4	215.0	214.6	213.7	212.5	211.3	210.1	208.9	207.7
52.5°	204.4	203.8	203.3	202.7	202.1	201.2	200.1	199.0	197.8	196.7	195.6
55°	186.1	185.6	185.1	184.6	184.1	183.3	182.3	181.2	180.2	179.2	178.1
57.5°	167.9	167.5	167.0	166.6	166.2	165.4	164.3	163.2	162.0	160.8	159.8
60°	155.7	155.3	155.0	154.6	154.3	153.5	152.3	151.1	149.8	148.6	147.7
62.5°	143.8	143.2	142.7	142.2	141.5	140.8	139.8	139.0	138.0	137.1	136.1
65°	125.5	125.0	124.5	124.0	123.5	122.8	121.9	121.1	120.2	119.3	118.5
67.5°	107.0	106.6	106.2	105.7	105.4	104.8	103.9	103.1	102.4	101.6	101.0
70°	95.4	95.1	94.7	94.4	94.0	93.5	92.7	92.0	91.1	90.3	89.7
72.5°	83.5	83.2	82.8	82.5	82.1	81.7	81.2	80.8	80.2	79.7	79.1
75°	65.7	65.5	65.3	65.2	65.0	64.7	64.3	63.8	63.4	62.9	62.4
77.5°	49.8	49.4	49.2	48.9	48.6	48.3	48.1	48.0	47.8	47.6	47.4
80°	39.1	39.0	38.9	38.8	38.7	38.7	38.5	38.3	38.1	38.0	37.7
82.5°	29.1	29.1	29.1	29.0	29.0	28.9	28.8	28.8	28.7	28.6	28.2
85°	16.0	15.9	15.8	15.8	15.7	15.6	15.5	15.4	15.3	15.2	15.0
87.5°	5.9	6.5	7.0	7.6	8.1	9.0	10.1	11.2	12.3	13.4	13.2
90°	1.3	4.7	8.2	11.7	15.2	20.1	26.4	32.7	39.1	45.5	44.9
92.5°	23.1	25.7	28.2	30.7	33.2	35.3	36.8	38.3	39.8	41.2	41.4
95°	67.5	70.3	73.3	76.1	79.0	80.8	81.4	81.9	82.5	83.1	83.1
97.5°	123.3	125.9	128.4	131.0	133.5	135.3	136.4	137.5	138.5	139.7	139.7
100°	164.9	167.1	169.4	171.8	174.1	175.6	176.5	177.4	178.2	179.1	179.1
102.5°	208.4	210.3	212.2	214.0	215.9	217.3	218.4	219.5	220.6	221.7	222.0
105°	279.1	279.9	280.8	281.6	282.5	283.3	283.9	284.4	285.0	285.6	286.1
107.5°	350.2	351.5	352.8	354.0	355.2	355.9	355.9	355.9	355.9	355.9	356.1
110°	395.9	397.6	399.3	401.1	402.8	403.7	403.7	403.7	403.7	403.7	403.7



TEST NUMBER: P331494-935

CATALOG NUMBER: S122DIW-S290D1440U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	445.7	447.5	449.2	450.9	452.6	453.4	453.1	453.0	452.7	452.5	451.8
115°	519.2	520.9	522.6	524.4	526.2	526.7	526.2	525.6	525.0	524.4	524.1
117.5°	592.5	594.7	597.0	599.3	601.7	602.0	600.4	598.7	597.1	595.6	594.9
120°	641.2	643.5	645.8	648.2	650.5	650.5	648.2	645.8	643.5	641.2	641.2
122.5°	685.9	688.6	691.4	694.1	697.0	697.5	695.9	694.3	692.7	691.0	690.3
125°	755.4	758.0	760.6	763.2	765.9	766.7	765.9	765.0	764.1	763.2	762.3
127.5°	823.2	826.5	829.7	833.1	836.4	837.5	836.5	835.4	834.4	833.4	832.2
130°	865.7	869.5	873.3	877.0	880.8	882.4	881.8	881.2	880.6	880.0	879.5
132.5°	913.5	916.6	919.6	922.7	925.7	927.4	927.5	927.6	927.7	927.8	926.5
135°	977.4	980.6	983.8	986.9	990.1	992.0	992.6	993.2	993.7	994.3	994.0
137.5°	1044.7	1047.2	1049.8	1052.4	1055.0	1056.7	1057.5	1058.2	1058.9	1059.7	1059.5
140°	1085.1	1087.7	1090.4	1093.0	1095.5	1097.5	1099.0	1100.4	1101.9	1103.3	1103.3
142.5°	1126.7	1129.3	1131.9	1134.5	1137.0	1138.8	1139.8	1140.8	1141.8	1142.8	1143.0
145°	1186.4	1188.4	1190.4	1192.4	1194.5	1196.4	1198.1	1199.8	1201.5	1203.2	1203.5
147.5°	1239.6	1242.0	1244.4	1246.9	1249.3	1251.1	1252.2	1253.4	1254.6	1255.7	1256.4
150°	1275.9	1277.6	1279.4	1281.2	1282.9	1284.3	1285.5	1286.6	1287.8	1288.9	1289.8
152.5°	1308.1	1309.8	1311.6	1313.3	1315.1	1316.6	1318.0	1319.4	1320.8	1322.2	1323.3
155°	1356.4	1357.3	1358.1	1359.0	1359.9	1360.7	1361.6	1362.4	1363.3	1364.2	1365.6
157.5°	1397.7	1398.3	1398.9	1399.5	1400.0	1400.6	1401.1	1401.6	1402.1	1402.7	1404.5
160°	1422.6	1423.2	1423.7	1424.4	1425.0	1425.4	1425.6	1425.9	1426.2	1426.5	1428.2
162.5°	1445.4	1445.6	1445.7	1445.8	1446.0	1446.1	1446.4	1446.7	1447.0	1447.3	1449.2
165°	1475.8	1475.6	1475.2	1475.0	1474.7	1474.5	1474.5	1474.5	1474.5	1474.5	1476.5
167.5°	1501.2	1500.4	1499.5	1498.7	1497.8	1497.4	1497.3	1497.3	1497.2	1497.1	1499.2
170°	1514.8	1513.9	1513.0	1512.2	1511.3	1510.7	1510.5	1510.2	1509.8	1509.6	1511.6
172.5°	1524.1	1523.3	1522.4	1521.6	1520.7	1520.1	1519.8	1519.5	1519.2	1518.9	1521.0
175°	1535.5	1534.6	1533.8	1532.9	1532.1	1531.4	1530.8	1530.2	1529.7	1529.0	1531.1
177.5°	1540.2	1539.6	1538.9	1538.2	1537.5	1536.9	1536.4	1535.9	1535.5	1535.0	1536.4
180°	1538.2	1538.2	1538.2	1538.2	1538.2	1538.2	1538.2	1538.2	1538.2	1538.2	1538.2



TEST NUMBER: P331494-935

CATALOG NUMBER: S122DIW-S290D1440U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7
2.5°	405.0	405.7	406.4	406.7	406.6	406.4	406.3	406.1
5°	402.3	403.0	403.7	404.0	403.8	403.6	403.5	403.3
7.5°	397.8	398.5	399.2	399.4	399.2	399.0	398.8	398.6
10°	393.7	394.4	395.1	395.3	395.0	394.8	394.5	394.3
12.5°	388.9	389.3	389.9	390.0	389.9	389.6	389.4	389.3
15°	380.5	380.8	381.2	381.2	380.7	380.3	379.9	379.4
17.5°	370.5	370.9	371.3	371.3	370.8	370.5	370.1	369.6
20°	362.7	363.0	363.3	363.2	362.8	362.5	362.1	361.8
22.5°	354.5	354.6	354.6	354.5	354.3	354.0	353.9	353.7
25°	341.0	341.2	341.4	341.4	341.2	341.0	340.9	340.7
27.5°	327.8	327.5	327.3	326.9	326.5	326.1	325.7	325.3
30°	317.5	317.2	316.9	316.7	316.3	316.0	315.6	315.2
32.5°	307.4	306.9	306.4	306.0	305.7	305.3	305.0	304.6
35°	291.1	290.6	290.1	289.6	289.2	288.8	288.3	287.8
37.5°	274.8	274.2	273.5	273.0	272.6	272.2	271.8	271.4
40°	263.6	262.9	262.1	261.5	261.1	260.8	260.5	260.1
42.5°	252.5	251.7	250.8	250.1	249.7	249.2	248.7	248.2
45°	235.5	234.5	233.6	232.9	232.6	232.2	231.9	231.5
47.5°	217.8	216.8	215.8	215.0	214.6	214.0	213.5	213.0
50°	206.5	205.2	204.0	203.2	202.8	202.3	201.9	201.5
52.5°	194.7	193.6	192.6	191.8	191.2	190.7	190.1	189.5
55°	177.0	176.0	175.0	174.3	173.8	173.3	172.9	172.5
57.5°	158.8	157.7	156.7	156.0	155.8	155.4	155.1	154.7
60°	146.7	145.8	144.8	144.2	144.0	143.7	143.4	143.2
62.5°	135.3	134.4	133.5	132.9	132.6	132.2	131.9	131.6
65°	117.7	116.9	116.1	115.5	115.1	114.7	114.3	113.8
67.5°	100.4	99.8	99.2	98.7	98.3	98.0	97.6	97.3
70°	89.1	88.5	87.9	87.5	87.1	86.7	86.4	86.0
72.5°	78.5	77.9	77.3	76.8	76.5	76.3	76.0	75.7
75°	61.9	61.4	60.9	60.7	60.9	61.0	61.2	61.4
77.5°	47.1	46.8	46.6	46.3	46.1	45.9	45.6	45.4
80°	37.5	37.2	36.9	36.7	36.5	36.3	36.2	36.0
82.5°	27.9	27.6	27.2	27.0	27.0	26.9	26.9	26.9
85°	14.7	14.5	14.2	14.0	13.9	13.9	13.8	13.7
87.5°	12.8	12.5	12.1	12.0	12.0	12.0	12.0	12.0
90°	44.3	43.7	43.1	43.0	43.3	43.6	43.8	44.2
92.5°	41.5	41.6	41.8	41.8	41.8	41.9	42.0	42.0
95°	83.1	83.1	83.1	82.7	82.2	81.6	81.0	80.5
97.5°	139.7	139.7	139.7	139.7	139.6	139.5	139.5	139.4
100°	179.1	179.1	179.1	179.0	178.7	178.4	178.1	177.8
102.5°	222.1	222.4	222.7	222.6	222.3	222.1	221.7	221.4
105°	286.7	287.3	287.8	288.2	288.2	288.2	288.2	288.2
107.5°	356.4	356.6	356.8	356.3	355.0	353.6	352.3	350.9
110°	403.7	403.7	403.7	403.2	402.3	401.5	400.6	399.8



TEST NUMBER: P331494-935

CATALOG NUMBER: S122DIW-S290D1440U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	451.1	450.4	449.7	449.0	448.4	447.8	447.1	446.5
115°	523.8	523.5	523.2	522.6	521.8	520.9	520.0	519.2
117.5°	594.2	593.5	592.8	591.9	591.1	590.2	589.4	588.5
120°	641.2	641.2	641.2	640.8	639.9	639.0	638.2	637.3
122.5°	689.7	689.0	688.3	687.6	687.0	686.4	685.7	685.1
125°	761.5	760.6	759.7	759.2	758.9	758.6	758.4	758.0
127.5°	831.2	830.2	829.1	828.2	827.2	826.3	825.4	824.5
130°	878.9	878.3	877.7	876.8	875.7	874.6	873.4	872.3
132.5°	925.3	924.0	922.7	921.6	920.8	919.8	918.9	917.9
135°	993.7	993.4	993.2	992.6	991.7	990.8	990.0	989.1
137.5°	1059.2	1059.0	1058.8	1058.1	1057.0	1055.8	1054.6	1053.4
140°	1103.3	1103.3	1103.3	1102.8	1101.6	1100.4	1099.2	1098.1
142.5°	1143.2	1143.5	1143.7	1143.2	1142.1	1140.9	1139.8	1138.6
145°	1203.9	1204.1	1204.4	1203.9	1202.8	1201.7	1200.5	1199.4
147.5°	1257.0	1257.6	1258.3	1258.0	1256.9	1255.8	1254.7	1253.6
150°	1290.6	1291.5	1292.4	1292.4	1291.5	1290.6	1289.8	1288.9
152.5°	1324.3	1325.4	1326.5	1326.5	1325.4	1324.3	1323.3	1322.2
155°	1367.1	1368.6	1369.9	1370.3	1369.4	1368.6	1367.7	1366.8
157.5°	1406.5	1408.5	1410.5	1410.7	1409.4	1408.0	1406.6	1405.2
160°	1429.9	1431.7	1433.4	1433.7	1432.5	1431.4	1430.3	1429.1
162.5°	1451.2	1453.2	1455.1	1455.4	1454.1	1452.7	1451.3	1449.8
165°	1478.6	1480.6	1482.6	1482.9	1481.4	1480.1	1478.6	1477.1
167.5°	1501.2	1503.2	1505.2	1505.5	1504.0	1502.4	1501.0	1499.4
170°	1513.6	1515.6	1517.7	1517.8	1516.0	1514.3	1512.6	1510.9
172.5°	1522.9	1525.0	1527.0	1527.2	1525.4	1523.7	1522.0	1520.3
175°	1533.1	1535.1	1537.1	1537.3	1535.5	1533.8	1532.1	1530.3
177.5°	1537.8	1539.2	1540.6	1540.6	1539.2	1537.8	1536.4	1535.0
180°	1538.2	1538.2	1538.2	1538.2	1538.2	1538.2	1538.2	1538.2

(END OF REPORT)