

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331523-935

Luminaire Tested: **S122DIW-S485D1440U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331523-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S485D1440U935-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1440 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6665.0 lumens
Efficiency: N/A
Efficacy: 110.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 60.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331523-935

CATALOG NUMBER: S122DIW-S485D1440U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

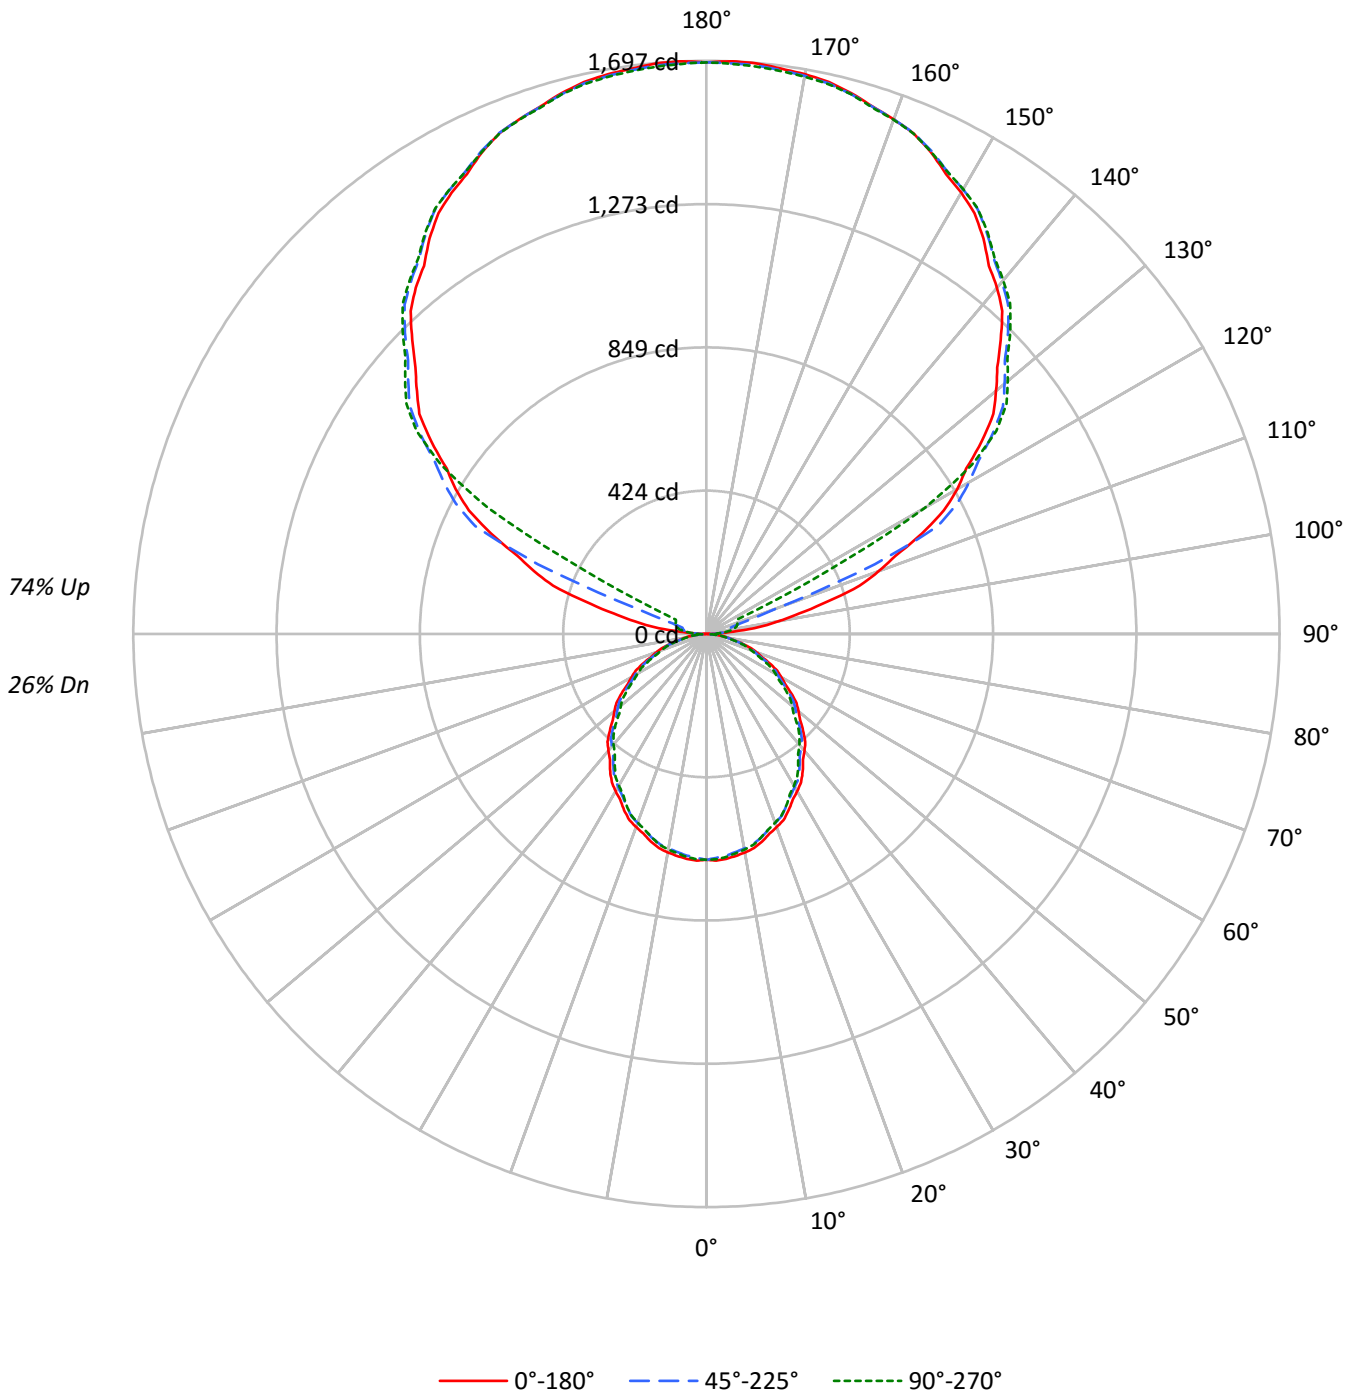



TEST NUMBER: P331523-935

CATALOG NUMBER: S122DIW-S485D1440U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	70	70	70	51	51	51	34	34	34	26
1	92	88	84	81	82	79	76	73	61	59	57	45	43	42	30	29	28	22
2	84	77	71	66	75	69	64	60	53	50	47	39	37	35	26	25	24	18
3	77	68	61	55	68	60	54	50	47	43	40	35	32	30	23	22	20	15
4	70	60	52	46	62	53	47	42	42	37	34	31	28	25	21	19	17	13
5	64	53	45	39	57	48	41	36	37	32	29	28	24	22	19	17	15	11
6	59	47	40	34	52	43	36	31	33	29	25	25	22	19	17	15	13	10
7	54	43	35	30	48	38	32	27	30	25	22	23	19	17	15	13	12	9
8	50	38	31	26	45	35	28	24	27	23	19	21	17	15	14	12	11	8
9	47	35	28	23	42	32	25	21	25	20	17	19	16	13	13	11	9	7
10	44	32	25	20	39	29	23	19	23	18	15	17	14	12	12	10	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10797	10797	10797
5°	10838	10682	10746
10°	10775	10575	10627
15°	10641	10437	10425
20°	10452	10232	10220
25°	10265	9978	9978
30°	10023	9747	9661
35°	9798	9469	9329
40°	9514	9190	9012
45°	9236	8912	8690
50°	8932	8626	8317
55°	8617	8290	7983
60°	8263	7892	7598
65°	7885	7492	7148
70°	7407	7010	6680
75°	6744	6457	6301
80°	5979	5793	5504
85°	4872	4650	4168



TEST NUMBER: P331523-935

CATALOG NUMBER: S122DIW-S485D1440U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	62.9	0.9
10°-20°	176.9	2.7
20°-30°	260.1	3.9
30°-40°	302.1	4.5
40°-50°	301.8	4.5
50°-60°	263.2	3.9
60°-70°	194.6	2.9
70°-80°	110.2	1.7
80°-90°	33.8	0.5
90°-100°	56.5	0.8
100°-110°	207.0	3.1
110°-120°	553.4	8.3
120°-130°	913.5	13.7
130°-140°	971.4	14.6
140°-150°	902.9	13.5
150°-160°	726.0	10.9
160°-170°	467.8	7.0
170°-180°	161.0	2.4
0°-30°	499.9	7.5
0°-40°	802.0	12.0
0°-60°	1366.9	20.5
0°-90°	1705.6	25.6
90°-120°	816.8	12.3
90°-150°	3604.6	54.1
90°-180°	4959.0	74.4
0°-180°	6665.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	669	669	669	669	669	
5°	669	666	659	664	663	63
15°	637	632	624	627	624	179
25°	576	571	560	561	560	265
35°	497	490	480	476	473	310
45°	404	400	390	384	381	312
55°	306	302	294	287	284	274
65°	206	202	196	190	187	204
75°	108	107	104	100	101	115
85°	26	26	25	23	22	30
90°	1	14	24	30	33	5
95°	80	42	48	53	53	97
105°	372	388	75	88	93	398
115°	704	725	756	215	100	693
125°	996	1012	1035	1043	1047	887
135°	1232	1251	1262	1274	1272	951
145°	1429	1429	1449	1456	1451	893
155°	1574	1564	1577	1584	1575	725
165°	1658	1651	1654	1662	1654	468
175°	1696	1688	1690	1697	1686	161
180°	1692	1692	1692	1692	1692	



TEST NUMBER: P331523-935

CATALOG NUMBER: S122DIW-S485D1440U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7
2.5°	671.8	671.2	670.7	670.1	669.5	668.7	667.4	666.2	664.9	663.6	664.8
5°	668.7	668.1	667.6	667.0	666.5	665.4	663.8	662.3	660.6	659.1	660.2
7.5°	662.8	661.9	661.1	660.1	659.3	658.1	656.4	654.9	653.2	651.6	652.8
10°	657.2	656.2	655.1	654.2	653.2	651.8	650.1	648.4	646.7	645.0	646.1
12.5°	649.5	648.6	647.6	646.8	645.9	644.6	642.9	641.2	639.5	637.7	638.5
15°	636.6	635.8	634.9	634.0	633.2	631.8	629.9	628.1	626.2	624.4	624.9
17.5°	620.1	619.3	618.5	617.6	616.7	615.4	613.5	611.6	609.7	607.8	608.5
20°	608.3	607.4	606.6	605.7	604.9	603.5	601.4	599.4	597.4	595.5	595.9
22.5°	596.5	595.3	594.1	592.9	591.7	590.1	588.2	586.3	584.4	582.6	582.6
25°	576.2	575.0	573.9	572.7	571.6	569.8	567.4	564.9	562.5	560.1	560.3
27.5°	553.0	552.0	551.0	549.9	548.9	547.4	545.5	543.5	541.7	539.8	539.3
30°	537.6	536.4	535.3	534.2	533.0	531.3	529.2	527.1	525.0	522.8	522.4
32.5°	521.1	520.2	519.3	518.3	517.5	515.8	513.6	511.3	509.1	506.9	506.1
35°	497.1	495.6	494.2	492.8	491.4	489.5	487.2	484.9	482.6	480.4	479.5
37.5°	469.9	468.6	467.4	466.1	464.9	463.1	460.8	458.6	456.2	454.0	452.9
40°	451.4	450.2	449.1	448.0	446.9	445.1	442.8	440.6	438.2	436.0	434.7
42.5°	433.4	432.2	431.1	430.0	428.9	427.1	424.8	422.6	420.3	417.9	416.6
45°	404.5	403.5	402.4	401.5	400.5	398.9	396.7	394.6	392.4	390.3	388.7
47.5°	375.7	374.7	373.8	372.8	371.9	370.3	368.1	365.8	363.6	361.4	359.7
50°	355.6	354.9	354.1	353.4	352.8	351.4	349.4	347.4	345.3	343.4	341.4
52.5°	336.0	335.1	334.2	333.2	332.3	330.9	329.0	327.1	325.2	323.3	321.7
55°	306.1	305.2	304.4	303.5	302.6	301.4	299.6	297.9	296.2	294.5	292.8
57.5°	276.0	275.3	274.6	274.0	273.3	272.0	270.1	268.2	266.3	264.4	262.7
60°	255.9	255.4	254.8	254.2	253.7	252.4	250.4	248.3	246.3	244.4	242.8
62.5°	236.3	235.5	234.5	233.6	232.7	231.5	230.0	228.4	226.9	225.3	223.9
65°	206.4	205.5	204.7	203.8	203.0	201.8	200.4	199.0	197.5	196.1	194.8
67.5°	175.9	175.2	174.5	173.8	173.1	172.2	170.9	169.6	168.3	167.0	166.1
70°	156.9	156.4	155.8	155.2	154.6	153.7	152.4	151.1	149.8	148.5	147.6
72.5°	137.3	136.8	136.2	135.6	135.1	134.4	133.5	132.7	131.9	131.0	130.0
75°	108.1	107.7	107.5	107.2	106.9	106.4	105.6	105.0	104.3	103.5	102.6
77.5°	81.8	81.3	80.8	80.3	79.8	79.5	79.2	78.9	78.6	78.4	77.9
80°	64.3	64.1	64.1	63.9	63.7	63.5	63.2	62.9	62.7	62.3	61.9
82.5°	47.9	47.8	47.8	47.8	47.7	47.6	47.4	47.3	47.1	46.9	46.4
85°	26.3	26.3	26.1	25.9	25.8	25.7	25.5	25.4	25.2	25.1	24.6
87.5°	9.5	9.9	10.2	10.6	11.0	11.3	11.5	11.7	11.9	12.1	12.1
90°	1.2	4.2	7.2	10.2	13.2	15.8	18.0	20.1	22.3	24.5	25.8
92.5°	24.7	24.5	24.2	23.9	23.7	24.0	25.1	26.3	27.3	28.4	29.1
95°	79.6	70.6	61.6	52.7	43.7	40.1	42.0	43.9	45.9	47.8	49.1
97.5°	158.0	132.7	107.4	82.1	56.7	46.3	50.7	55.1	59.5	63.9	65.0
100°	216.7	179.4	142.2	104.9	67.6	51.3	55.9	60.5	65.2	69.8	72.0
102.5°	281.4	273.5	265.6	257.7	249.9	226.5	187.9	149.1	110.5	71.7	74.6
105°	372.3	380.4	388.6	396.7	404.9	371.9	297.6	223.3	149.0	74.7	77.7
107.5°	475.9	482.4	489.0	495.6	502.2	461.0	371.9	282.8	193.6	104.6	101.5
110°	542.5	548.2	553.9	559.6	565.3	528.8	450.2	371.6	292.9	214.3	187.1



TEST NUMBER: P331523-935

CATALOG NUMBER: S122DIW-S485D1440U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	605.2	610.2	615.3	620.4	625.4	618.2	598.8	579.4	559.9	540.5	441.3
115°	704.1	708.8	713.3	718.0	722.6	728.3	735.1	741.9	748.7	755.5	629.6
117.5°	792.6	797.7	802.9	808.0	813.2	818.1	822.8	827.5	832.2	836.9	806.4
120°	857.2	861.3	865.3	869.4	873.5	878.0	882.9	887.8	892.7	897.6	900.9
122.5°	912.1	916.4	920.7	925.0	929.3	934.1	939.4	944.7	950.0	955.4	957.3
125°	995.6	999.1	1002.6	1006.2	1009.7	1014.1	1019.3	1024.4	1029.6	1034.7	1036.6
127.5°	1071.3	1075.1	1079.1	1083.0	1086.9	1090.8	1094.7	1098.5	1102.4	1106.3	1109.1
130°	1119.2	1123.6	1127.9	1132.3	1136.7	1140.3	1143.3	1146.3	1149.3	1152.3	1155.3
132.5°	1168.2	1171.9	1175.6	1179.3	1183.0	1186.4	1189.4	1192.3	1195.3	1198.3	1200.9
135°	1231.9	1236.2	1240.6	1244.9	1249.3	1252.7	1255.2	1257.6	1260.1	1262.5	1265.2
137.5°	1296.3	1299.3	1302.4	1305.4	1308.5	1311.4	1314.1	1317.0	1319.7	1322.5	1325.2
140°	1338.4	1340.6	1342.8	1345.0	1347.1	1349.7	1352.7	1355.7	1358.7	1361.7	1364.2
142.5°	1373.7	1375.6	1377.6	1379.6	1381.6	1384.2	1387.7	1391.1	1394.5	1397.9	1400.2
145°	1429.1	1428.7	1428.5	1428.2	1428.0	1430.1	1434.8	1439.4	1444.0	1448.6	1450.5
147.5°	1477.3	1476.3	1475.2	1474.2	1473.2	1474.9	1479.5	1484.1	1488.7	1493.2	1494.6
150°	1508.6	1506.8	1504.9	1503.0	1501.0	1502.3	1506.6	1511.0	1515.3	1519.7	1521.3
152.5°	1535.1	1533.0	1530.9	1528.7	1526.6	1527.6	1531.7	1535.9	1540.0	1544.1	1545.8
155°	1573.6	1571.1	1568.7	1566.2	1563.7	1564.2	1567.5	1570.7	1574.0	1577.2	1578.8
157.5°	1603.7	1601.6	1599.6	1597.5	1595.4	1595.5	1597.8	1600.1	1602.3	1604.6	1606.5
160°	1621.3	1619.6	1618.1	1616.4	1614.8	1614.8	1616.4	1618.1	1619.6	1621.3	1622.9
162.5°	1636.9	1635.4	1633.7	1632.1	1630.5	1630.3	1631.8	1633.1	1634.6	1636.0	1637.9
165°	1658.0	1656.4	1654.8	1653.1	1651.5	1651.1	1651.9	1652.7	1653.6	1654.3	1656.3
167.5°	1673.7	1672.1	1670.4	1668.8	1667.2	1666.7	1667.5	1668.3	1669.0	1669.8	1671.7
170°	1682.6	1680.9	1679.3	1677.7	1676.0	1675.4	1676.0	1676.5	1677.1	1677.7	1679.6
172.5°	1688.4	1686.8	1685.1	1683.5	1681.9	1681.4	1681.9	1682.4	1683.0	1683.5	1685.4
175°	1696.0	1694.1	1692.2	1690.3	1688.4	1687.7	1688.2	1688.8	1689.4	1689.9	1691.8
177.5°	1697.2	1695.7	1694.2	1692.6	1691.1	1690.5	1690.7	1690.9	1691.1	1691.3	1692.9
180°	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3



TEST NUMBER: P331523-935

CATALOG NUMBER: S122DIW-S485D1440U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	668.7	668.7	668.7	668.7	668.7	668.7	668.7	668.7
2.5°	665.9	667.0	668.1	668.7	668.4	668.1	668.0	667.7
5°	661.4	662.5	663.7	664.1	663.8	663.5	663.2	663.0
7.5°	653.9	655.0	656.3	656.6	656.3	656.0	655.7	655.4
10°	647.2	648.4	649.5	649.9	649.5	649.0	648.6	648.2
12.5°	639.4	640.2	640.9	641.2	640.8	640.6	640.2	639.9
15°	625.5	626.1	626.6	626.5	625.9	625.2	624.5	623.7
17.5°	609.1	609.8	610.4	610.4	609.7	609.1	608.4	607.7
20°	596.3	596.8	597.2	597.1	596.5	595.9	595.4	594.8
22.5°	582.7	582.8	582.9	582.8	582.5	582.1	581.8	581.4
25°	560.7	560.9	561.2	561.2	560.9	560.7	560.3	560.1
27.5°	538.9	538.5	538.0	537.5	536.8	536.1	535.5	534.8
30°	521.9	521.5	521.1	520.6	520.0	519.4	518.8	518.2
32.5°	505.3	504.5	503.8	503.1	502.5	502.0	501.4	500.8
35°	478.6	477.8	476.9	476.1	475.4	474.7	474.0	473.3
37.5°	451.9	450.8	449.8	448.8	448.2	447.5	446.8	446.2
40°	433.4	432.1	430.8	429.9	429.3	428.8	428.2	427.6
42.5°	415.2	413.8	412.3	411.3	410.4	409.7	408.9	408.0
45°	387.2	385.6	384.0	383.0	382.4	381.9	381.3	380.6
47.5°	358.1	356.4	354.7	353.5	352.7	351.9	351.0	350.2
50°	339.4	337.3	335.4	334.0	333.3	332.6	331.8	331.1
52.5°	320.0	318.3	316.7	315.4	314.4	313.5	312.5	311.6
55°	291.1	289.4	287.7	286.5	285.7	285.0	284.3	283.6
57.5°	261.1	259.3	257.7	256.6	256.0	255.5	254.9	254.3
60°	241.2	239.6	238.1	237.0	236.6	236.2	235.7	235.3
62.5°	222.4	220.9	219.5	218.5	217.9	217.4	216.9	216.3
65°	193.6	192.3	191.0	189.9	189.2	188.6	187.9	187.1
67.5°	165.1	164.0	163.1	162.3	161.7	161.1	160.6	160.0
70°	146.5	145.5	144.6	143.8	143.2	142.6	142.1	141.5
72.5°	129.1	128.0	127.1	126.3	125.9	125.4	124.9	124.5
75°	101.8	101.0	100.1	99.8	100.1	100.4	100.7	101.0
77.5°	77.5	77.1	76.6	76.2	75.8	75.4	75.0	74.6
80°	61.5	61.0	60.7	60.3	60.0	59.8	59.4	59.2
82.5°	45.9	45.3	44.8	44.4	44.4	44.3	44.3	44.3
85°	24.2	23.8	23.3	23.1	22.9	22.8	22.6	22.5
87.5°	12.0	11.9	11.8	11.8	11.8	11.8	11.8	11.8
90°	27.2	28.6	30.0	30.9	31.4	31.9	32.5	33.1
92.5°	29.8	30.6	31.3	31.8	32.1	32.4	32.7	33.1
95°	50.5	51.8	53.2	53.7	53.5	53.2	53.0	52.7
97.5°	66.1	67.2	68.3	69.0	69.3	69.7	70.0	70.3
100°	74.1	76.4	78.5	79.9	80.4	80.9	81.5	82.1
102.5°	77.4	80.2	83.1	84.9	85.7	86.4	87.1	87.9
105°	80.7	83.7	86.7	88.7	89.8	90.9	92.0	93.1
107.5°	98.5	95.4	92.4	91.4	92.5	93.6	94.7	95.7
110°	159.9	132.7	105.5	92.4	93.5	94.5	95.7	96.8



TEST NUMBER: P331523-935

CATALOG NUMBER: S122DIW-S485D1440U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	342.0	242.7	143.4	94.2	95.1	96.0	96.9	97.7
115°	503.6	377.5	251.6	178.7	159.2	139.6	120.0	100.4
117.5°	775.9	745.5	715.0	667.5	603.1	538.7	474.3	410.0
120°	904.1	907.4	910.7	893.9	857.2	820.4	783.7	747.0
122.5°	959.3	961.3	963.2	960.6	953.5	946.4	939.3	932.1
125°	1038.5	1040.4	1042.3	1043.7	1044.6	1045.3	1046.2	1047.0
127.5°	1111.8	1114.6	1117.3	1118.9	1119.0	1119.1	1119.3	1119.5
130°	1158.3	1161.3	1164.2	1165.6	1165.4	1165.1	1164.8	1164.5
132.5°	1203.4	1206.0	1208.6	1209.7	1209.4	1209.2	1208.9	1208.6
135°	1267.9	1270.7	1273.4	1274.5	1273.9	1273.4	1272.8	1272.3
137.5°	1327.8	1330.5	1333.2	1334.0	1333.1	1332.2	1331.3	1330.3
140°	1366.6	1369.1	1371.5	1372.0	1370.7	1369.3	1368.0	1366.6
142.5°	1402.4	1404.6	1406.9	1407.3	1405.9	1404.5	1403.3	1401.9
145°	1452.4	1454.3	1456.3	1456.6	1455.2	1453.8	1452.4	1451.1
147.5°	1496.1	1497.5	1498.9	1499.0	1497.9	1496.8	1495.6	1494.4
150°	1522.9	1524.6	1526.2	1526.3	1525.0	1523.6	1522.2	1520.9
152.5°	1547.4	1549.0	1550.7	1550.6	1548.8	1547.0	1545.2	1543.4
155°	1580.5	1582.1	1583.7	1583.5	1581.3	1579.2	1576.9	1574.8
157.5°	1608.3	1610.2	1612.1	1611.9	1609.8	1607.7	1605.5	1603.4
160°	1624.5	1626.2	1627.8	1627.7	1625.8	1623.8	1622.0	1620.1
162.5°	1639.7	1641.6	1643.4	1643.1	1640.8	1638.5	1636.2	1633.8
165°	1658.2	1660.1	1662.0	1662.0	1660.1	1658.2	1656.3	1654.3
167.5°	1673.6	1675.5	1677.4	1677.1	1674.7	1672.2	1669.8	1667.3
170°	1681.4	1683.3	1685.2	1685.0	1682.6	1680.1	1677.7	1675.2
172.5°	1687.3	1689.2	1691.1	1690.8	1688.4	1685.9	1683.5	1681.0
175°	1693.7	1695.6	1697.5	1697.1	1694.4	1691.6	1688.9	1686.2
177.5°	1694.4	1695.9	1697.5	1697.2	1695.2	1693.3	1691.3	1689.4
180°	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3

(END OF REPORT)