

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331547-935

Luminaire Tested: **S122DIW-S675D1240U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331547-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIW-S675D1240U935-4F0-1E-UDD-F  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1240 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6594.8 lumens  
Efficiency: N/A  
Efficacy: 107.4 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 61.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331547-935

CATALOG NUMBER: S122DIW-S675D1240U935-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

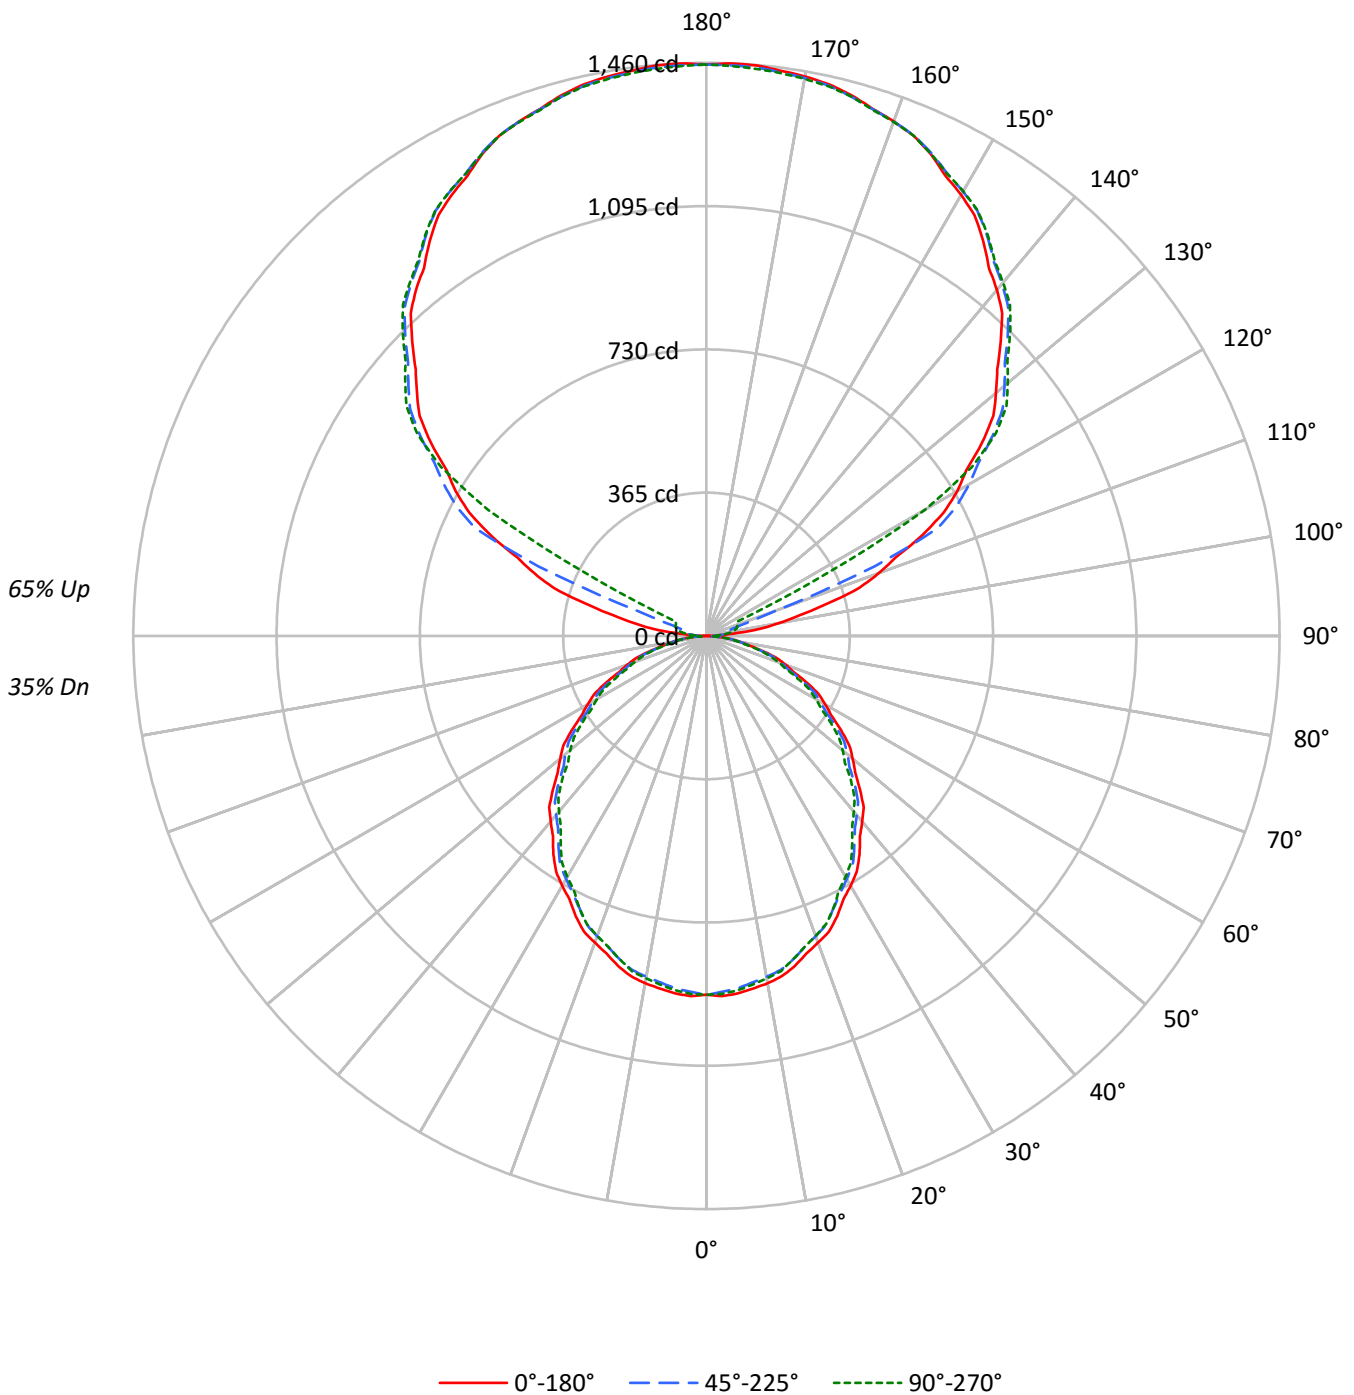



TEST NUMBER: P331547-935

CATALOG NUMBER: S122DIW-S675D1240U935-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	43	43	43	35
1	94	90	86	83	85	82	79	76	66	64	62	51	50	48	38	37	36	30
2	86	79	73	68	78	71	66	62	58	54	51	45	42	40	33	32	30	25
3	78	69	62	56	71	63	57	52	51	46	43	40	37	34	29	27	26	21
4	72	61	53	48	65	56	49	44	45	40	36	35	32	29	26	24	22	18
5	66	54	46	41	59	50	43	37	40	35	31	32	28	25	24	21	19	16
6	60	49	41	35	54	44	37	32	36	31	27	29	25	22	21	19	17	14
7	56	44	36	31	50	40	33	28	33	28	24	26	22	19	20	17	15	12
8	52	40	32	27	47	36	30	25	30	25	21	24	20	17	18	15	13	11
9	48	36	29	24	43	33	27	22	27	22	19	22	18	15	17	14	12	10
10	45	33	26	21	41	30	24	20	25	20	17	20	16	14	15	13	11	9

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	14759	14759	14759
5°	14815	14603	14687
10°	14728	14454	14526
15°	14544	14265	14252
20°	14287	13984	13969
25°	14031	13639	13639
30°	13699	13323	13207
35°	13391	12942	12751
40°	13004	12560	12319
45°	12622	12184	11880
50°	12208	11788	11369
55°	11778	11333	10911
60°	11296	10785	10388
65°	10777	10243	9773
70°	10126	9583	9130
75°	9214	8827	8609
80°	8173	7922	7513
85°	6688	6354	5687



TEST NUMBER: P331547-935

CATALOG NUMBER: S122DIW-S675D1240U935-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	86.0	1.3
10°-20°	241.9	3.7
20°-30°	355.5	5.4
30°-40°	412.9	6.3
40°-50°	412.5	6.3
50°-60°	359.7	5.5
60°-70°	266.0	4.0
70°-80°	150.6	2.3
80°-90°	44.1	0.7
90°-100°	48.6	0.7
100°-110°	178.1	2.7
110°-120°	476.0	7.2
120°-130°	785.7	11.9
130°-140°	835.5	12.7
140°-150°	776.6	11.8
150°-160°	624.4	9.5
160°-170°	402.3	6.1
170°-180°	138.5	2.1
0°-30°	683.3	10.4
0°-40°	1096.3	16.6
0°-60°	1868.5	28.3
0°-90°	2329.2	35.3
90°-120°	702.6	10.7
90°-150°	3100.4	47.0
90°-180°	4266.0	64.7
0°-180°	6594.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	914	914	914	914	914	
5°	914	910	901	907	906	87
15°	870	865	853	857	853	245
25°	788	780	766	767	766	362
35°	679	670	657	651	647	424
45°	553	546	534	524	520	426
55°	418	413	403	392	388	374
65°	282	277	268	260	256	279
75°	148	146	142	137	138	158
85°	36	35	34	32	31	41
90°	1	12	21	26	28	5
95°	68	36	41	46	45	84
105°	320	334	64	75	80	342
115°	606	624	650	185	86	596
125°	856	870	890	897	900	763
135°	1060	1076	1086	1096	1094	818
145°	1229	1229	1246	1253	1248	768
155°	1353	1345	1357	1362	1354	623
165°	1426	1420	1423	1429	1423	403
175°	1459	1452	1454	1460	1450	139
180°	1456	1456	1456	1456	1456	



TEST NUMBER: P331547-935

CATALOG NUMBER: S122DIW-S675D1240U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	914.1	914.1	914.1	914.1	914.1	914.1	914.1	914.1	914.1	914.1	914.1
2.5°	918.3	917.6	916.8	916.0	915.2	914.0	912.2	910.5	908.8	907.1	908.6
5°	914.1	913.3	912.6	911.8	911.0	909.6	907.4	905.3	903.1	901.0	902.5
7.5°	906.0	904.8	903.6	902.4	901.2	899.5	897.3	895.1	892.9	890.7	892.3
10°	898.3	896.9	895.5	894.1	892.9	891.0	888.6	886.3	883.9	881.6	883.1
12.5°	887.8	886.6	885.3	884.1	882.9	881.1	878.7	876.4	874.1	871.8	872.9
15°	870.1	869.0	867.8	866.7	865.5	863.6	861.1	858.5	856.0	853.4	854.3
17.5°	847.7	846.4	845.3	844.1	843.0	841.1	838.5	835.9	833.4	830.8	831.7
20°	831.5	830.3	829.1	827.9	826.8	824.8	822.1	819.4	816.7	813.9	814.5
22.5°	815.3	813.6	812.0	810.4	808.7	806.7	804.1	801.5	798.9	796.3	796.4
25°	787.6	786.0	784.5	782.8	781.3	778.9	775.5	772.2	768.9	765.6	765.9
27.5°	755.9	754.5	753.1	751.7	750.3	748.3	745.6	743.0	740.4	737.8	737.2
30°	734.8	733.2	731.7	730.1	728.6	726.3	723.4	720.5	717.6	714.6	714.0
32.5°	712.3	711.0	709.8	708.5	707.3	705.2	702.1	699.0	695.9	692.8	691.7
35°	679.4	677.5	675.5	673.6	671.6	669.1	666.0	662.8	659.7	656.6	655.4
37.5°	642.3	640.6	638.9	637.1	635.5	633.0	629.9	626.8	623.7	620.5	619.1
40°	617.0	615.4	613.9	612.3	610.8	608.5	605.3	602.2	599.1	595.9	594.2
42.5°	592.5	590.8	589.3	587.7	586.2	583.8	580.7	577.6	574.5	571.4	569.4
45°	552.8	551.5	550.1	548.8	547.4	545.3	542.3	539.4	536.5	533.6	531.4
47.5°	513.5	512.2	510.9	509.6	508.3	506.2	503.1	500.1	497.1	494.0	491.7
50°	486.0	485.1	484.1	483.1	482.2	480.3	477.6	474.8	472.1	469.3	466.7
52.5°	459.3	458.1	456.8	455.5	454.2	452.3	449.7	447.1	444.5	442.0	439.7
55°	418.4	417.2	416.0	414.8	413.7	411.9	409.6	407.3	404.9	402.6	400.2
57.5°	377.2	376.3	375.4	374.4	373.5	371.8	369.2	366.6	364.0	361.4	359.1
60°	349.8	349.0	348.3	347.5	346.7	344.9	342.2	339.5	336.7	334.0	331.8
62.5°	323.1	321.8	320.6	319.3	318.1	316.4	314.4	312.2	310.1	308.0	306.0
65°	282.1	280.9	279.8	278.6	277.4	275.9	274.0	272.0	270.0	268.1	266.3
67.5°	240.5	239.5	238.6	237.6	236.7	235.4	233.6	231.9	230.1	228.3	227.0
70°	214.5	213.7	212.9	212.2	211.4	210.1	208.3	206.6	204.8	203.0	201.6
72.5°	187.8	186.9	186.1	185.4	184.6	183.7	182.5	181.4	180.3	179.1	177.8
75°	147.7	147.2	146.9	146.5	146.1	145.4	144.5	143.4	142.5	141.5	140.3
77.5°	111.8	111.2	110.5	109.8	109.2	108.7	108.2	107.8	107.5	107.0	106.5
80°	87.9	87.7	87.5	87.3	87.1	86.8	86.4	86.0	85.7	85.2	84.6
82.5°	65.4	65.3	65.3	65.3	65.3	65.1	64.8	64.7	64.4	64.1	63.5
85°	36.1	35.8	35.6	35.5	35.2	35.0	34.9	34.7	34.4	34.3	33.7
87.5°	12.8	13.1	13.3	13.5	13.7	13.8	13.9	13.9	14.0	14.0	13.9
90°	1.0	3.6	6.2	8.8	11.4	13.6	15.4	17.3	19.2	21.1	22.2
92.5°	21.3	21.0	20.8	20.6	20.3	20.7	21.6	22.6	23.5	24.5	25.1
95°	68.4	60.7	53.0	45.3	37.5	34.5	36.2	37.8	39.4	41.1	42.3
97.5°	135.9	114.1	92.3	70.6	48.8	39.8	43.6	47.4	51.2	55.0	55.9
100°	186.4	154.4	122.3	90.2	58.2	44.1	48.1	52.1	56.1	60.0	61.9
102.5°	242.0	235.2	228.4	221.7	214.9	194.8	161.5	128.3	95.0	61.7	64.1
105°	320.2	327.2	334.2	341.2	348.3	319.9	256.0	192.0	128.1	64.2	66.8
107.5°	409.3	414.9	420.6	426.3	432.0	396.5	319.9	243.2	166.6	90.0	87.3
110°	466.6	471.5	476.4	481.3	486.2	454.9	387.3	319.6	251.9	184.3	160.9



TEST NUMBER: P331547-935

CATALOG NUMBER: S122DIW-S675D1240U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	520.5	524.9	529.2	533.6	538.0	531.8	515.1	498.3	481.6	464.9	379.5
115°	605.6	609.6	613.5	617.5	621.6	626.5	632.3	638.2	644.0	649.9	541.5
117.5°	681.7	686.1	690.5	695.0	699.5	703.7	707.7	711.7	715.7	719.8	693.5
120°	737.3	740.8	744.2	747.8	751.3	755.2	759.4	763.6	767.8	772.0	774.8
122.5°	784.5	788.2	791.9	795.6	799.3	803.4	808.0	812.5	817.2	821.7	823.4
125°	856.3	859.3	862.4	865.4	868.4	872.2	876.7	881.1	885.5	890.0	891.7
127.5°	921.4	924.7	928.1	931.5	934.9	938.2	941.5	944.9	948.1	951.5	953.9
130°	962.7	966.4	970.2	973.9	977.7	980.8	983.3	985.9	988.5	991.1	993.7
132.5°	1004.8	1008.0	1011.2	1014.3	1017.5	1020.4	1023.0	1025.5	1028.1	1030.7	1032.9
135°	1059.5	1063.2	1067.0	1070.7	1074.5	1077.5	1079.5	1081.7	1083.7	1085.9	1088.2
137.5°	1114.9	1117.6	1120.2	1122.8	1125.4	1127.9	1130.3	1132.7	1135.1	1137.5	1139.8
140°	1151.2	1153.1	1154.9	1156.8	1158.6	1160.9	1163.5	1166.1	1168.6	1171.2	1173.3
142.5°	1181.6	1183.2	1184.9	1186.5	1188.3	1190.6	1193.5	1196.4	1199.4	1202.4	1204.3
145°	1229.1	1228.9	1228.6	1228.4	1228.2	1230.0	1234.1	1238.0	1242.0	1246.0	1247.6
147.5°	1270.6	1269.7	1268.9	1267.9	1267.0	1268.6	1272.5	1276.4	1280.4	1284.3	1285.6
150°	1297.6	1296.0	1294.3	1292.6	1291.0	1292.1	1295.8	1299.6	1303.3	1307.1	1308.5
152.5°	1320.3	1318.5	1316.6	1314.8	1313.0	1313.9	1317.4	1321.0	1324.6	1328.1	1329.6
155°	1353.4	1351.3	1349.2	1347.0	1345.0	1345.3	1348.2	1350.9	1353.8	1356.6	1358.0
157.5°	1379.3	1377.5	1375.7	1374.0	1372.2	1372.3	1374.2	1376.2	1378.2	1380.2	1381.7
160°	1394.5	1393.1	1391.6	1390.3	1388.9	1388.9	1390.3	1391.6	1393.1	1394.5	1395.9
162.5°	1408.0	1406.5	1405.2	1403.8	1402.3	1402.2	1403.4	1404.6	1405.9	1407.1	1408.7
165°	1426.1	1424.7	1423.2	1421.9	1420.5	1420.1	1420.8	1421.5	1422.2	1422.9	1424.5
167.5°	1439.6	1438.1	1436.8	1435.4	1433.9	1433.6	1434.3	1434.9	1435.5	1436.1	1437.8
170°	1447.2	1445.7	1444.3	1442.9	1441.5	1441.1	1441.5	1442.0	1442.4	1442.9	1444.6
172.5°	1452.2	1450.8	1449.4	1447.9	1446.6	1446.1	1446.6	1447.0	1447.5	1447.9	1449.6
175°	1458.7	1457.1	1455.4	1453.8	1452.2	1451.6	1452.1	1452.5	1453.0	1453.5	1455.1
177.5°	1459.7	1458.4	1457.2	1455.9	1454.5	1454.0	1454.1	1454.3	1454.5	1454.7	1456.0
180°	1455.5	1455.5	1455.5	1455.5	1455.5	1455.5	1455.5	1455.5	1455.5	1455.5	1455.5



TEST NUMBER: P331547-935

CATALOG NUMBER: S122DIW-S675D1240U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	914.1	914.1	914.1	914.1	914.1	914.1	914.1	914.1
2.5°	910.2	911.8	913.3	914.0	913.6	913.3	913.0	912.7
5°	904.0	905.6	907.1	907.8	907.4	907.0	906.6	906.2
7.5°	893.9	895.4	897.0	897.5	897.1	896.7	896.3	895.9
10°	884.7	886.3	887.9	888.3	887.8	887.2	886.6	886.0
12.5°	873.9	875.0	876.2	876.4	876.0	875.6	875.2	874.8
15°	855.1	855.8	856.6	856.5	855.5	854.5	853.6	852.6
17.5°	832.6	833.4	834.4	834.4	833.4	832.5	831.6	830.6
20°	815.1	815.7	816.2	816.1	815.4	814.6	813.8	813.0
22.5°	796.6	796.7	796.8	796.6	796.2	795.7	795.2	794.8
25°	766.4	766.7	767.2	767.2	766.7	766.4	765.9	765.6
27.5°	736.6	736.1	735.5	734.7	733.7	732.8	731.8	730.9
30°	713.4	712.8	712.2	711.5	710.8	710.0	709.2	708.4
32.5°	690.7	689.7	688.5	687.7	686.9	686.1	685.3	684.5
35°	654.3	653.1	651.9	650.8	649.9	648.8	647.9	646.9
37.5°	617.7	616.2	614.8	613.5	612.6	611.7	610.8	609.8
40°	592.5	590.6	588.9	587.6	586.9	586.1	585.3	584.5
42.5°	567.5	565.6	563.7	562.1	561.0	560.0	558.9	557.8
45°	529.3	527.1	525.0	523.5	522.7	521.9	521.2	520.3
47.5°	489.5	487.2	484.9	483.2	482.1	481.0	479.8	478.7
50°	463.9	461.2	458.4	456.6	455.6	454.6	453.7	452.6
52.5°	437.4	435.1	432.9	431.1	429.8	428.5	427.2	425.9
55°	397.9	395.5	393.2	391.5	390.5	389.6	388.6	387.6
57.5°	356.8	354.5	352.2	350.7	349.9	349.2	348.4	347.7
60°	329.7	327.5	325.4	324.1	323.5	322.9	322.3	321.7
62.5°	304.0	302.0	300.1	298.7	297.9	297.1	296.4	295.7
65°	264.6	262.8	261.1	259.7	258.7	257.7	256.8	255.8
67.5°	225.6	224.3	222.9	221.8	221.0	220.2	219.5	218.7
70°	200.3	199.0	197.6	196.5	195.7	194.9	194.2	193.4
72.5°	176.4	175.0	173.7	172.6	172.0	171.4	170.8	170.1
75°	139.1	138.0	136.8	136.5	136.8	137.2	137.6	138.0
77.5°	105.9	105.3	104.7	104.2	103.6	103.1	102.5	101.9
80°	84.1	83.5	82.9	82.4	82.1	81.6	81.3	80.8
82.5°	62.7	61.9	61.2	60.8	60.7	60.6	60.5	60.4
85°	33.1	32.5	31.9	31.5	31.3	31.2	31.0	30.7
87.5°	13.6	13.3	13.1	13.0	12.9	12.8	12.7	12.7
90°	23.4	24.5	25.7	26.6	27.0	27.5	28.0	28.4
92.5°	25.7	26.3	26.9	27.3	27.6	27.9	28.2	28.4
95°	43.4	44.6	45.7	46.2	46.0	45.7	45.5	45.3
97.5°	56.8	57.8	58.7	59.3	59.6	59.9	60.2	60.4
100°	63.8	65.6	67.5	68.7	69.1	69.7	70.1	70.6
102.5°	66.6	69.1	71.5	73.0	73.6	74.3	75.0	75.6
105°	69.4	72.0	74.6	76.3	77.2	78.2	79.1	80.1
107.5°	84.7	82.1	79.5	78.6	79.6	80.5	81.5	82.4
110°	137.5	114.1	90.7	79.5	80.4	81.4	82.3	83.2





TEST NUMBER: P331547-935

CATALOG NUMBER: S122DIW-S675D1240U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	294.1	208.8	123.4	81.0	81.8	82.6	83.3	84.0
115°	433.1	324.8	216.4	153.8	136.9	120.1	103.2	86.4
117.5°	667.4	641.1	614.9	574.1	518.8	463.4	408.0	352.6
120°	777.7	780.4	783.3	768.9	737.3	705.7	674.1	642.5
122.5°	825.1	826.8	828.5	826.2	820.1	814.0	807.9	801.7
125°	893.3	894.9	896.6	897.7	898.4	899.1	899.8	900.5
127.5°	956.2	958.6	961.0	962.3	962.4	962.6	962.7	962.9
130°	996.3	998.8	1001.3	1002.5	1002.3	1002.1	1001.9	1001.6
132.5°	1035.1	1037.2	1039.5	1040.4	1040.3	1040.0	1039.7	1039.6
135°	1090.5	1092.9	1095.3	1096.1	1095.7	1095.3	1094.8	1094.3
137.5°	1142.0	1144.4	1146.7	1147.4	1146.6	1145.8	1145.0	1144.2
140°	1175.4	1177.5	1179.7	1180.1	1178.9	1177.8	1176.6	1175.4
142.5°	1206.2	1208.2	1210.0	1210.4	1209.3	1208.1	1206.9	1205.7
145°	1249.2	1250.9	1252.5	1252.8	1251.5	1250.4	1249.2	1248.1
147.5°	1286.8	1288.0	1289.2	1289.3	1288.3	1287.3	1286.3	1285.4
150°	1309.8	1311.3	1312.7	1312.8	1311.6	1310.4	1309.2	1308.1
152.5°	1330.9	1332.3	1333.8	1333.7	1332.1	1330.6	1329.0	1327.5
155°	1359.3	1360.8	1362.2	1361.9	1360.0	1358.2	1356.3	1354.4
157.5°	1383.4	1384.9	1386.6	1386.4	1384.6	1382.8	1381.0	1379.1
160°	1397.3	1398.7	1400.1	1400.0	1398.4	1396.7	1395.1	1393.4
162.5°	1410.3	1411.9	1413.5	1413.2	1411.3	1409.2	1407.2	1405.2
165°	1426.2	1427.8	1429.4	1429.4	1427.8	1426.2	1424.5	1422.9
167.5°	1439.4	1441.1	1442.7	1442.5	1440.4	1438.3	1436.1	1434.1
170°	1446.2	1447.9	1449.5	1449.2	1447.2	1445.0	1442.9	1440.8
172.5°	1451.2	1452.9	1454.5	1454.3	1452.2	1450.1	1447.9	1445.9
175°	1456.7	1458.4	1460.0	1459.7	1457.3	1455.0	1452.6	1450.3
177.5°	1457.3	1458.6	1460.0	1459.7	1458.1	1456.4	1454.7	1453.0
180°	1455.5	1455.5	1455.5	1455.5	1455.5	1455.5	1455.5	1455.5

(END OF REPORT)