

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331541-935

Luminaire Tested: **S122DIW-S675D970U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331541-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S675D970U935-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 970 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5660.4 lumens
Efficiency: N/A
Efficacy: 107.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 52.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331541-935

CATALOG NUMBER: S122DIW-S675D970U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

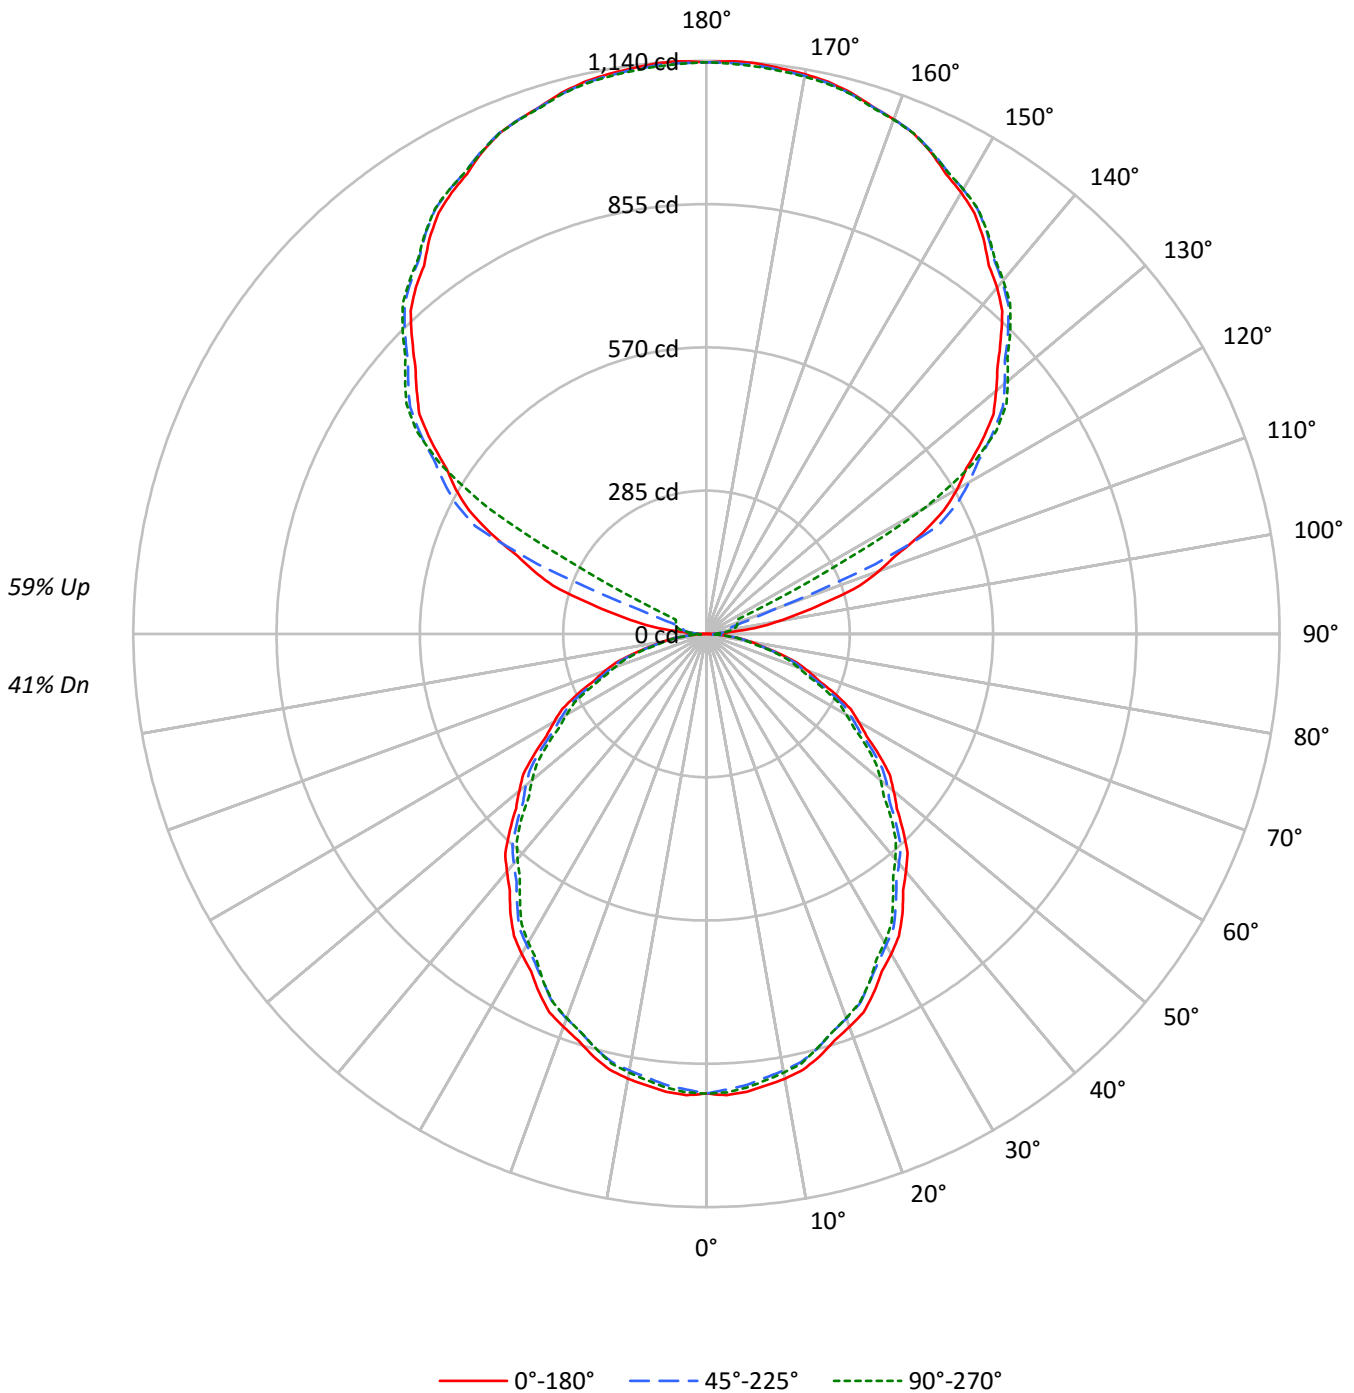



TEST NUMBER: P331541-935

CATALOG NUMBER: S122DIW-S675D970U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	78	78	78	63	63	63	48	48	48	41
1	96	92	88	84	87	84	80	77	69	66	64	55	53	52	42	41	40	35
2	87	80	74	69	79	73	68	63	60	56	53	48	46	43	37	36	34	29
3	80	70	63	57	72	64	58	53	53	48	45	43	39	37	33	31	29	25
4	73	62	54	48	66	57	50	45	47	42	38	38	34	31	30	27	25	21
5	67	55	47	41	61	51	44	38	42	37	33	34	30	27	27	24	22	18
6	61	50	42	36	56	45	38	33	38	33	29	31	27	24	24	21	19	16
7	57	45	37	31	52	41	34	29	34	29	25	28	24	21	22	19	17	14
8	53	40	33	28	48	37	31	26	31	26	22	26	22	19	20	17	15	13
9	49	37	30	25	45	34	27	23	29	23	20	23	20	17	19	16	14	12
10	46	34	27	22	42	31	25	21	26	21	18	22	18	15	17	15	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14759	14759	14759
5°	14815	14603	14687
10°	14728	14454	14526
15°	14544	14265	14252
20°	14287	13984	13969
25°	14031	13639	13639
30°	13699	13323	13207
35°	13391	12942	12751
40°	13004	12560	12319
45°	12622	12184	11880
50°	12208	11788	11369
55°	11778	11333	10911
60°	11296	10785	10388
65°	10777	10243	9773
70°	10126	9583	9130
75°	9214	8827	8609
80°	8173	7922	7513
85°	6688	6354	5687



TEST NUMBER: P331541-935

CATALOG NUMBER: S122DIW-S675D970U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	86.0	1.5
10°-20°	241.9	4.3
20°-30°	355.5	6.3
30°-40°	412.9	7.3
40°-50°	412.5	7.3
50°-60°	359.7	6.4
60°-70°	266.0	4.7
70°-80°	150.6	2.7
80°-90°	43.3	0.8
90°-100°	37.9	0.7
100°-110°	139.1	2.5
110°-120°	371.8	6.6
120°-130°	613.7	10.8
130°-140°	652.7	11.5
140°-150°	606.6	10.7
150°-160°	487.7	8.6
160°-170°	314.3	5.6
170°-180°	108.2	1.9
0°-30°	683.3	12.1
0°-40°	1096.3	19.4
0°-60°	1868.5	33.0
0°-90°	2328.4	41.1
90°-120°	548.8	9.7
90°-150°	2421.8	42.8
90°-180°	3332.0	58.9
0°-180°	5660.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	914	914	914	914	914	
5°	914	910	901	907	906	87
15°	870	865	853	857	853	245
25°	788	780	766	767	766	362
35°	679	670	657	651	647	424
45°	553	546	534	524	520	426
55°	418	413	403	392	388	374
65°	282	277	268	260	256	279
75°	148	146	142	137	138	158
85°	36	35	34	32	31	41
90°	1	10	16	20	22	4
95°	54	28	32	36	35	65
105°	250	261	50	59	62	267
115°	473	487	508	145	68	466
125°	669	680	695	701	703	596
135°	828	840	848	856	855	639
145°	960	960	973	978	975	600
155°	1057	1051	1060	1064	1058	487
165°	1114	1109	1112	1117	1112	315
175°	1139	1134	1135	1140	1133	108
180°	1137	1137	1137	1137	1137	



TEST NUMBER: P331541-935

CATALOG NUMBER: S122DIW-S675D970U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	914.1	914.1	914.1	914.1	914.1	914.1	914.1	914.1	914.1	914.1	914.1
2.5°	918.3	917.6	916.8	916.0	915.2	914.0	912.2	910.5	908.8	907.1	908.6
5°	914.1	913.3	912.6	911.8	911.0	909.6	907.4	905.3	903.1	901.0	902.5
7.5°	906.0	904.8	903.6	902.4	901.2	899.5	897.3	895.1	892.9	890.7	892.3
10°	898.3	896.9	895.5	894.1	892.9	891.0	888.6	886.3	883.9	881.6	883.1
12.5°	887.8	886.6	885.3	884.1	882.9	881.1	878.7	876.4	874.1	871.8	872.9
15°	870.1	869.0	867.8	866.7	865.5	863.6	861.1	858.5	856.0	853.4	854.3
17.5°	847.7	846.4	845.3	844.1	843.0	841.1	838.5	835.9	833.4	830.8	831.7
20°	831.5	830.3	829.1	827.9	826.8	824.8	822.1	819.4	816.7	813.9	814.5
22.5°	815.3	813.6	812.0	810.4	808.7	806.7	804.1	801.5	798.9	796.3	796.4
25°	787.6	786.0	784.5	782.8	781.3	778.9	775.5	772.2	768.9	765.6	765.9
27.5°	755.9	754.5	753.1	751.7	750.3	748.3	745.6	743.0	740.4	737.8	737.2
30°	734.8	733.2	731.7	730.1	728.6	726.3	723.4	720.5	717.6	714.6	714.0
32.5°	712.3	711.0	709.8	708.5	707.3	705.2	702.1	699.0	695.9	692.8	691.7
35°	679.4	677.5	675.5	673.6	671.6	669.1	666.0	662.8	659.7	656.6	655.4
37.5°	642.3	640.6	638.9	637.1	635.5	633.0	629.9	626.8	623.7	620.5	619.1
40°	617.0	615.4	613.9	612.3	610.8	608.5	605.3	602.2	599.1	595.9	594.2
42.5°	592.5	590.8	589.3	587.7	586.2	583.8	580.7	577.6	574.5	571.4	569.4
45°	552.8	551.5	550.1	548.8	547.4	545.3	542.3	539.4	536.5	533.6	531.4
47.5°	513.5	512.2	510.9	509.6	508.3	506.2	503.1	500.1	497.1	494.0	491.7
50°	486.0	485.1	484.1	483.1	482.2	480.3	477.6	474.8	472.1	469.3	466.7
52.5°	459.3	458.1	456.8	455.5	454.2	452.3	449.7	447.1	444.5	442.0	439.7
55°	418.4	417.2	416.0	414.8	413.7	411.9	409.6	407.3	404.9	402.6	400.2
57.5°	377.2	376.3	375.4	374.4	373.5	371.8	369.2	366.6	364.0	361.4	359.1
60°	349.8	349.0	348.3	347.5	346.7	344.9	342.2	339.5	336.7	334.0	331.8
62.5°	323.1	321.8	320.6	319.3	318.1	316.4	314.4	312.2	310.1	308.0	306.0
65°	282.1	280.9	279.8	278.6	277.4	275.9	274.0	272.0	270.0	268.1	266.3
67.5°	240.5	239.5	238.6	237.6	236.7	235.4	233.6	231.9	230.1	228.3	227.0
70°	214.5	213.7	212.9	212.2	211.4	210.1	208.3	206.6	204.8	203.0	201.6
72.5°	187.8	186.9	186.1	185.4	184.6	183.7	182.5	181.4	180.3	179.1	177.8
75°	147.7	147.2	146.9	146.5	146.1	145.4	144.5	143.4	142.5	141.5	140.3
77.5°	111.8	111.2	110.5	109.8	109.2	108.7	108.2	107.8	107.5	107.0	106.5
80°	87.9	87.7	87.5	87.3	87.1	86.8	86.4	86.0	85.7	85.2	84.6
82.5°	65.4	65.3	65.3	65.3	65.3	65.1	64.8	64.7	64.4	64.1	63.5
85°	36.1	35.8	35.6	35.5	35.2	35.0	34.9	34.7	34.4	34.3	33.7
87.5°	12.8	12.9	13.0	13.1	13.2	13.2	13.2	13.2	13.2	13.2	12.8
90°	0.9	2.8	4.8	6.9	8.9	10.6	12.1	13.5	15.0	16.4	17.4
92.5°	16.6	16.4	16.3	16.1	15.9	16.2	16.9	17.7	18.3	19.1	19.5
95°	53.5	47.4	41.4	35.4	29.4	26.9	28.2	29.5	30.8	32.1	33.0
97.5°	106.2	89.1	72.2	55.1	38.1	31.1	34.1	37.0	40.0	43.0	43.7
100°	145.6	120.5	95.5	70.5	45.5	34.4	37.5	40.6	43.8	46.9	48.4
102.5°	189.1	183.7	178.5	173.1	167.8	152.2	126.2	100.2	74.2	48.2	50.1
105°	250.1	255.6	261.1	266.6	272.1	249.9	199.9	150.0	100.1	50.2	52.2
107.5°	319.7	324.2	328.6	332.9	337.4	309.7	249.9	189.9	130.1	70.3	68.2
110°	364.5	368.3	372.1	376.0	379.8	355.3	302.5	249.7	196.8	144.0	125.7



TEST NUMBER: P331541-935

CATALOG NUMBER: S122DIW-S675D970U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	406.6	410.0	413.4	416.8	420.2	415.3	402.3	389.3	376.2	363.2	296.4
115°	473.0	476.1	479.3	482.4	485.5	489.3	493.9	498.4	503.1	507.6	422.9
117.5°	532.4	536.0	539.4	542.9	546.4	549.7	552.8	555.9	559.1	562.2	541.7
120°	575.9	578.7	581.3	584.1	586.9	589.9	593.1	596.5	599.8	603.0	605.3
122.5°	612.8	615.6	618.5	621.4	624.3	627.6	631.1	634.7	638.3	641.9	643.2
125°	668.8	671.2	673.6	676.0	678.4	681.3	684.8	688.3	691.7	695.2	696.5
127.5°	719.7	722.4	725.0	727.6	730.2	732.9	735.5	738.0	740.6	743.2	745.1
130°	752.0	754.9	757.9	760.7	763.6	766.1	768.1	770.2	772.1	774.2	776.2
132.5°	784.9	787.4	789.9	792.3	794.8	797.0	799.1	801.1	803.1	805.1	806.8
135°	827.7	830.6	833.5	836.5	839.4	841.6	843.3	844.9	846.5	848.3	850.1
137.5°	870.9	873.0	875.0	877.1	879.1	881.1	883.0	884.8	886.7	888.6	890.4
140°	899.2	900.7	902.2	903.6	905.1	906.8	908.8	910.9	912.8	914.9	916.5
142.5°	922.9	924.2	925.6	926.9	928.2	930.0	932.3	934.6	936.9	939.2	940.7
145°	960.1	959.9	959.8	959.6	959.4	960.9	964.0	967.1	970.2	973.3	974.6
147.5°	992.6	991.8	991.1	990.4	989.7	990.9	994.0	997.0	1000.1	1003.2	1004.2
150°	1013.6	1012.3	1011.0	1009.8	1008.5	1009.3	1012.2	1015.1	1018.0	1021.0	1022.1
152.5°	1031.4	1029.9	1028.5	1027.1	1025.6	1026.3	1029.1	1031.9	1034.7	1037.4	1038.5
155°	1057.2	1055.5	1053.9	1052.2	1050.6	1050.9	1053.1	1055.2	1057.5	1059.6	1060.8
157.5°	1077.5	1076.1	1074.6	1073.2	1071.9	1071.9	1073.5	1075.0	1076.5	1078.1	1079.3
160°	1089.3	1088.2	1087.1	1086.0	1084.9	1084.9	1086.0	1087.1	1088.2	1089.3	1090.4
162.5°	1099.8	1098.7	1097.6	1096.5	1095.5	1095.4	1096.3	1097.3	1098.2	1099.2	1100.4
165°	1114.0	1112.8	1111.7	1110.7	1109.6	1109.3	1109.8	1110.3	1110.9	1111.5	1112.8
167.5°	1124.5	1123.3	1122.3	1121.2	1120.1	1119.8	1120.3	1120.8	1121.4	1121.9	1123.1
170°	1130.4	1129.3	1128.3	1127.1	1126.0	1125.7	1126.0	1126.4	1126.8	1127.1	1128.4
172.5°	1134.4	1133.2	1132.1	1131.1	1130.0	1129.6	1130.0	1130.3	1130.7	1131.1	1132.4
175°	1139.4	1138.2	1136.9	1135.7	1134.4	1133.9	1134.3	1134.6	1135.0	1135.3	1136.6
177.5°	1140.3	1139.3	1138.2	1137.2	1136.2	1135.7	1135.9	1136.0	1136.2	1136.3	1137.4
180°	1137.0	1137.0	1137.0	1137.0	1137.0	1137.0	1137.0	1137.0	1137.0	1137.0	1137.0



TEST NUMBER: P331541-935

CATALOG NUMBER: S122DIW-S675D970U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	914.1	914.1	914.1	914.1	914.1	914.1	914.1	914.1
2.5°	910.2	911.8	913.3	914.0	913.6	913.3	913.0	912.7
5°	904.0	905.6	907.1	907.8	907.4	907.0	906.6	906.2
7.5°	893.9	895.4	897.0	897.5	897.1	896.7	896.3	895.9
10°	884.7	886.3	887.9	888.3	887.8	887.2	886.6	886.0
12.5°	873.9	875.0	876.2	876.4	876.0	875.6	875.2	874.8
15°	855.1	855.8	856.6	856.5	855.5	854.5	853.6	852.6
17.5°	832.6	833.4	834.4	834.4	833.4	832.5	831.6	830.6
20°	815.1	815.7	816.2	816.1	815.4	814.6	813.8	813.0
22.5°	796.6	796.7	796.8	796.6	796.2	795.7	795.2	794.8
25°	766.4	766.7	767.2	767.2	766.7	766.4	765.9	765.6
27.5°	736.6	736.1	735.5	734.7	733.7	732.8	731.8	730.9
30°	713.4	712.8	712.2	711.5	710.8	710.0	709.2	708.4
32.5°	690.7	689.7	688.5	687.7	686.9	686.1	685.3	684.5
35°	654.3	653.1	651.9	650.8	649.9	648.8	647.9	646.9
37.5°	617.7	616.2	614.8	613.5	612.6	611.7	610.8	609.8
40°	592.5	590.6	588.9	587.6	586.9	586.1	585.3	584.5
42.5°	567.5	565.6	563.7	562.1	561.0	560.0	558.9	557.8
45°	529.3	527.1	525.0	523.5	522.7	521.9	521.2	520.3
47.5°	489.5	487.2	484.9	483.2	482.1	481.0	479.8	478.7
50°	463.9	461.2	458.4	456.6	455.6	454.6	453.7	452.6
52.5°	437.4	435.1	432.9	431.1	429.8	428.5	427.2	425.9
55°	397.9	395.5	393.2	391.5	390.5	389.6	388.6	387.6
57.5°	356.8	354.5	352.2	350.7	349.9	349.2	348.4	347.7
60°	329.7	327.5	325.4	324.1	323.5	322.9	322.3	321.7
62.5°	304.0	302.0	300.1	298.7	297.9	297.1	296.4	295.7
65°	264.6	262.8	261.1	259.7	258.7	257.7	256.8	255.8
67.5°	225.6	224.3	222.9	221.8	221.0	220.2	219.5	218.7
70°	200.3	199.0	197.6	196.5	195.7	194.9	194.2	193.4
72.5°	176.4	175.0	173.7	172.6	172.0	171.4	170.8	170.1
75°	139.1	138.0	136.8	136.5	136.8	137.2	137.6	138.0
77.5°	105.9	105.3	104.7	104.2	103.6	103.1	102.5	101.9
80°	84.1	83.5	82.9	82.4	82.1	81.6	81.3	80.8
82.5°	62.7	61.9	61.2	60.8	60.7	60.6	60.5	60.4
85°	33.1	32.5	31.9	31.5	31.3	31.2	31.0	30.7
87.5°	12.6	12.3	12.0	11.8	11.7	11.6	11.5	11.5
90°	18.3	19.2	20.1	20.8	21.1	21.4	21.9	22.2
92.5°	20.1	20.5	21.0	21.4	21.5	21.8	22.0	22.2
95°	33.9	34.9	35.7	36.1	35.9	35.7	35.6	35.4
97.5°	44.4	45.1	45.9	46.3	46.6	46.8	47.0	47.2
100°	49.9	51.3	52.8	53.6	54.0	54.4	54.8	55.1
102.5°	52.0	53.9	55.8	57.0	57.5	58.0	58.5	59.1
105°	54.2	56.2	58.2	59.6	60.4	61.0	61.8	62.5
107.5°	66.1	64.1	62.1	61.4	62.2	62.9	63.6	64.3
110°	107.4	89.1	70.9	62.1	62.8	63.5	64.2	65.0



TEST NUMBER: P331541-935

CATALOG NUMBER: S122DIW-S675D970U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	229.7	163.1	96.3	63.3	63.9	64.5	65.1	65.7
115°	338.3	253.7	169.0	120.1	106.9	93.8	80.6	67.5
117.5°	521.2	500.8	480.4	448.5	405.2	362.0	318.7	275.4
120°	607.4	609.6	611.8	600.5	575.9	551.2	526.5	501.9
122.5°	644.5	645.8	647.1	645.4	640.6	635.8	631.0	626.3
125°	697.8	699.0	700.3	701.2	701.8	702.3	702.8	703.4
127.5°	747.0	748.8	750.7	751.7	751.8	751.9	752.0	752.1
130°	778.2	780.2	782.2	783.2	782.9	782.7	782.6	782.4
132.5°	808.6	810.3	812.0	812.8	812.5	812.4	812.2	812.0
135°	851.9	853.7	855.5	856.3	855.9	855.5	855.1	854.8
137.5°	892.1	893.9	895.7	896.3	895.7	895.0	894.4	893.8
140°	918.2	919.8	921.4	921.8	920.9	920.0	919.0	918.2
142.5°	942.2	943.7	945.2	945.5	944.6	943.7	942.8	941.8
145°	975.9	977.1	978.4	978.6	977.7	976.7	975.9	974.9
147.5°	1005.1	1006.1	1007.0	1007.1	1006.3	1005.6	1004.8	1004.0
150°	1023.2	1024.2	1025.4	1025.5	1024.6	1023.6	1022.7	1021.8
152.5°	1039.7	1040.7	1041.8	1041.8	1040.6	1039.4	1038.2	1037.0
155°	1061.9	1062.9	1064.0	1063.9	1062.4	1060.9	1059.5	1058.0
157.5°	1080.6	1081.8	1083.1	1083.0	1081.5	1080.1	1078.7	1077.3
160°	1091.5	1092.5	1093.6	1093.6	1092.3	1091.0	1089.8	1088.5
162.5°	1101.6	1102.9	1104.1	1104.0	1102.3	1100.8	1099.2	1097.7
165°	1114.0	1115.3	1116.6	1116.6	1115.3	1114.0	1112.8	1111.5
167.5°	1124.4	1125.7	1127.0	1126.8	1125.2	1123.5	1121.9	1120.2
170°	1129.7	1130.9	1132.2	1132.0	1130.4	1128.8	1127.1	1125.5
172.5°	1133.6	1134.9	1136.2	1136.0	1134.4	1132.7	1131.1	1129.5
175°	1137.9	1139.2	1140.5	1140.2	1138.3	1136.5	1134.7	1132.9
177.5°	1138.4	1139.4	1140.4	1140.3	1138.9	1137.6	1136.3	1135.1
180°	1137.0	1137.0	1137.0	1137.0	1137.0	1137.0	1137.0	1137.0

(END OF REPORT)