

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331559-935

Luminaire Tested: **S122DIW-S865D435U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331559-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S865D435U935-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 435 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4514.6 lumens
Efficiency: N/A
Efficacy: 97.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 46.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331559-935

CATALOG NUMBER: S122DIW-S865D435U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

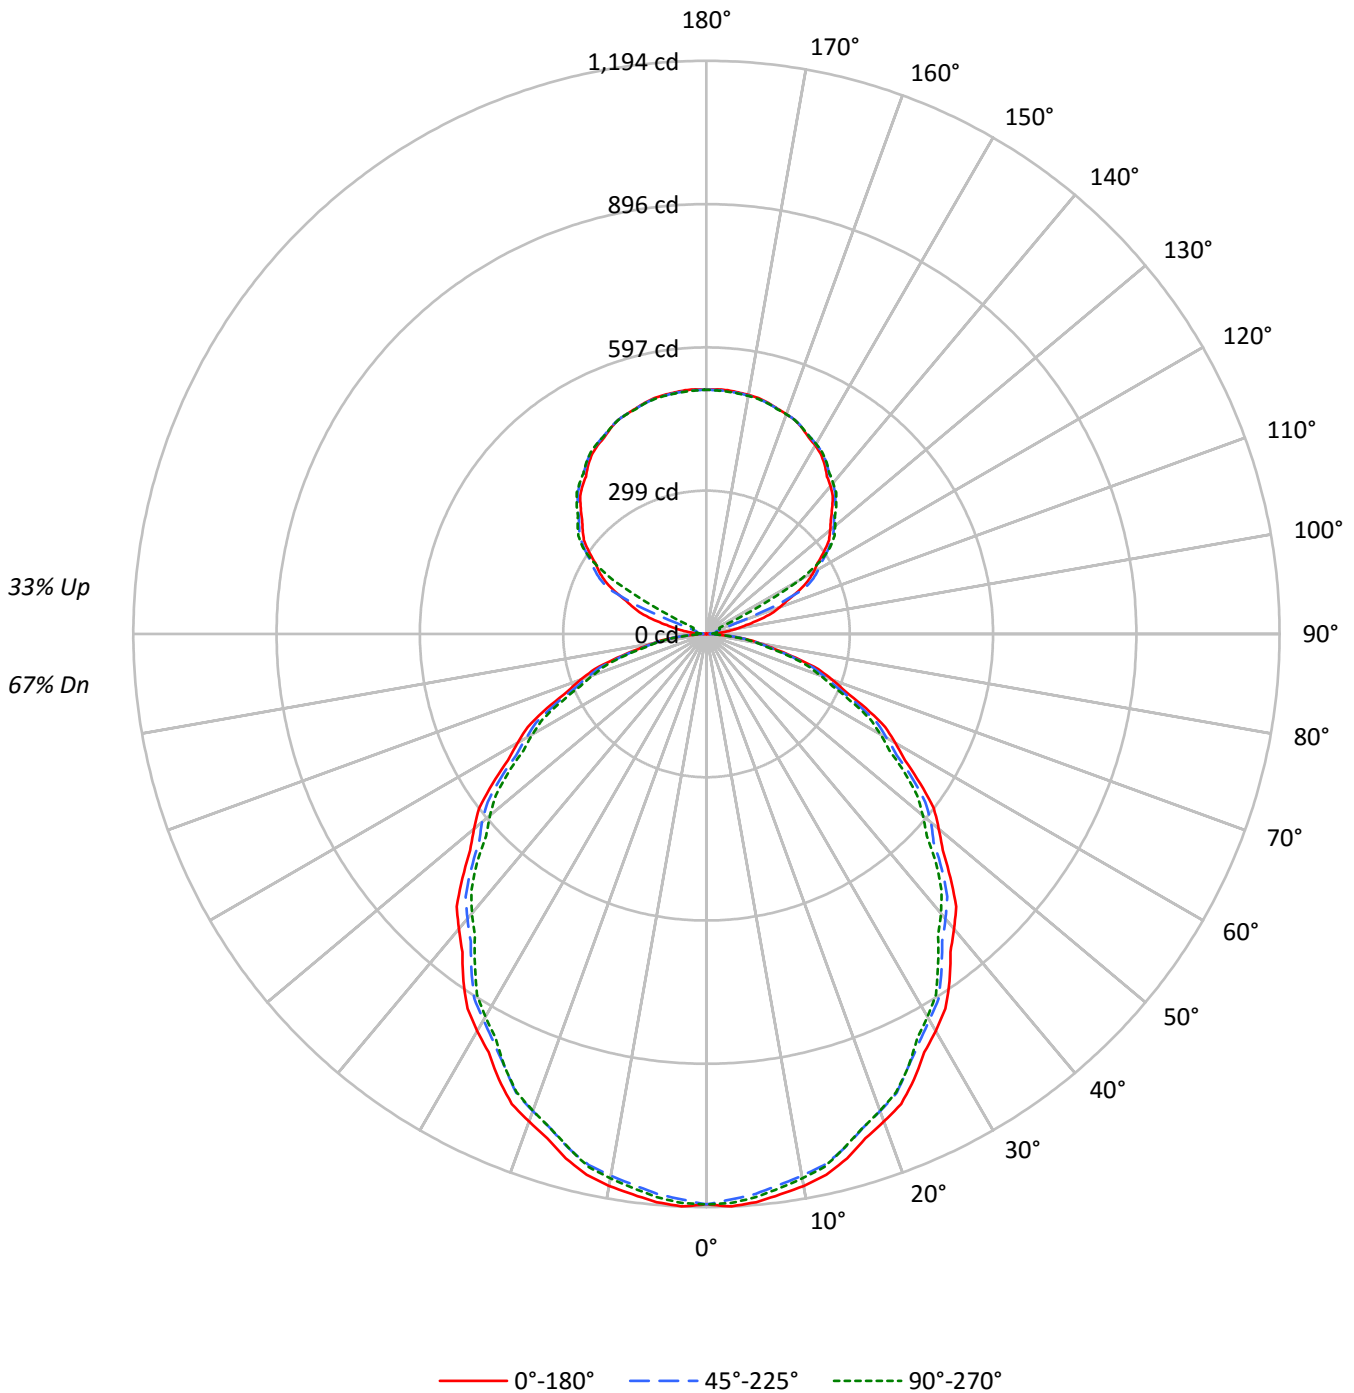



TEST NUMBER: P331559-935

CATALOG NUMBER: S122DIW-S865D435U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	72	72	72	67
1	102	97	93	90	96	92	88	85	81	79	76	72	70	68	63	62	61	56
2	93	85	79	73	87	80	75	70	71	67	63	63	60	57	56	53	51	47
3	84	75	67	61	79	71	64	58	63	58	53	56	52	48	49	46	43	40
4	77	66	58	52	73	63	55	50	56	50	45	50	45	41	44	41	37	34
5	71	59	51	45	67	56	48	43	50	44	39	45	40	36	40	36	33	30
6	66	53	45	39	62	50	43	37	45	39	34	41	36	32	36	32	29	26
7	61	48	40	34	57	46	38	33	41	35	30	37	32	28	33	29	26	23
8	56	44	36	30	53	42	34	29	38	32	27	34	29	25	30	26	23	21
9	53	40	32	27	50	38	31	26	35	29	24	31	26	23	28	24	21	19
10	49	37	29	24	46	35	28	24	32	26	22	29	24	21	26	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	19184	19184	19184
5°	19258	18979	19091
10°	19143	18787	18882
15°	18907	18544	18524
20°	18570	18179	18158
25°	18235	17728	17728
30°	17807	17316	17167
35°	17406	16821	16575
40°	16904	16326	16012
45°	16408	15835	15445
50°	15870	15325	14780
55°	15308	14728	14184
60°	14683	14018	13504
65°	14013	13310	12699
70°	13161	12458	11863
75°	11971	11472	11185
80°	10628	10302	9772
85°	8670	8262	7410



TEST NUMBER: P331559-935

CATALOG NUMBER: S122DIW-S865D435U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	111.7	2.5
10°-20°	314.4	7.0
20°-30°	462.1	10.2
30°-40°	536.8	11.9
40°-50°	536.2	11.9
50°-60°	467.6	10.4
60°-70°	345.7	7.7
70°-80°	195.8	4.3
80°-90°	53.9	1.2
90°-100°	17.0	0.4
100°-110°	62.2	1.4
110°-120°	166.3	3.7
120°-130°	274.5	6.1
130°-140°	291.9	6.5
140°-150°	271.3	6.0
150°-160°	218.2	4.8
160°-170°	140.6	3.1
170°-180°	48.4	1.1
0°-30°	888.2	19.7
0°-40°	1425.0	31.6
0°-60°	2428.7	53.8
0°-90°	3024.2	67.0
90°-120°	245.5	5.4
90°-150°	1083.3	24.0
90°-180°	1490.0	33.0
0°-180°	4514.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1188	1188	1188	1188	1188	
5°	1188	1183	1171	1180	1178	113
15°	1131	1124	1109	1113	1108	318
25°	1024	1014	995	997	995	471
35°	883	871	853	847	841	551
45°	719	710	694	681	676	554
55°	544	537	523	510	504	486
65°	367	360	348	338	332	363
75°	192	189	184	178	179	205
85°	47	46	45	41	40	54
90°	0	4	7	9	10	3
95°	24	13	14	16	16	29
105°	112	117	22	26	28	120
115°	212	218	227	65	30	208
125°	299	304	311	313	315	267
135°	370	376	379	383	382	286
145°	430	429	435	438	436	269
155°	473	470	474	476	473	218
165°	498	496	497	500	497	141
175°	510	507	508	510	507	48
180°	509	509	509	509	509	



TEST NUMBER: P331559-935

CATALOG NUMBER: S122DIW-S865D435U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2
2.5°	1193.7	1192.7	1191.6	1190.7	1189.6	1188.0	1185.8	1183.5	1181.3	1179.1	1181.1
5°	1188.2	1187.1	1186.2	1185.2	1184.1	1182.2	1179.5	1176.6	1173.9	1171.0	1173.1
7.5°	1177.7	1176.1	1174.6	1172.9	1171.4	1169.2	1166.3	1163.5	1160.6	1157.8	1159.9
10°	1167.6	1165.9	1164.1	1162.3	1160.5	1158.1	1155.0	1152.0	1149.0	1145.9	1148.0
12.5°	1153.9	1152.4	1150.8	1149.2	1147.6	1145.3	1142.3	1139.2	1136.2	1133.2	1134.5
15°	1131.1	1129.5	1128.0	1126.5	1125.0	1122.6	1119.3	1115.9	1112.7	1109.4	1110.3
17.5°	1101.8	1100.3	1098.8	1097.3	1095.7	1093.3	1089.9	1086.6	1083.2	1079.9	1081.1
20°	1080.8	1079.3	1077.8	1076.2	1074.7	1072.2	1068.6	1065.1	1061.5	1058.0	1058.7
22.5°	1059.8	1057.7	1055.5	1053.3	1051.3	1048.5	1045.2	1041.8	1038.5	1035.1	1035.3
25°	1023.6	1021.7	1019.6	1017.6	1015.5	1012.4	1008.1	1003.8	999.4	995.1	995.7
27.5°	982.6	980.8	978.9	977.1	975.3	972.6	969.2	965.8	962.4	959.0	958.3
30°	955.1	953.1	951.1	949.1	947.0	944.1	940.3	936.5	932.6	928.8	928.1
32.5°	925.9	924.3	922.6	921.0	919.4	916.5	912.6	908.5	904.6	900.5	899.1
35°	883.1	880.6	878.0	875.6	873.0	869.7	865.6	861.6	857.5	853.4	852.0
37.5°	834.9	832.7	830.4	828.2	826.0	822.9	818.8	814.8	810.6	806.6	804.7
40°	802.0	800.0	798.0	795.9	793.9	790.8	786.8	782.7	778.7	774.6	772.3
42.5°	770.1	768.0	765.9	764.0	761.9	758.9	754.8	750.8	746.7	742.6	740.1
45°	718.6	716.9	715.1	713.3	711.5	708.7	704.9	701.1	697.3	693.5	690.7
47.5°	667.4	665.8	664.1	662.5	660.7	657.9	653.9	650.0	646.0	642.0	639.1
50°	631.8	630.5	629.3	628.0	626.7	624.3	620.8	617.2	613.6	610.1	606.6
52.5°	597.1	595.4	593.7	592.0	590.4	587.9	584.5	581.2	577.8	574.5	571.5
55°	543.8	542.3	540.8	539.2	537.7	535.5	532.4	529.3	526.3	523.2	520.2
57.5°	490.3	489.1	487.9	486.7	485.5	483.2	479.8	476.5	473.1	469.8	466.8
60°	454.7	453.7	452.7	451.7	450.6	448.4	444.8	441.3	437.7	434.1	431.4
62.5°	420.0	418.4	416.7	415.1	413.5	411.3	408.5	405.8	403.0	400.4	397.8
65°	366.8	365.2	363.7	362.1	360.7	358.6	356.1	353.5	351.0	348.4	346.2
67.5°	312.6	311.3	310.1	308.9	307.7	306.0	303.7	301.4	299.1	296.8	295.1
70°	278.8	277.8	276.7	275.7	274.7	273.0	270.8	268.5	266.2	263.9	262.2
72.5°	244.0	243.1	242.0	241.0	240.0	238.8	237.3	235.8	234.3	232.8	231.1
75°	191.9	191.4	190.9	190.5	189.9	189.0	187.8	186.5	185.2	183.9	182.4
77.5°	145.3	144.5	143.6	142.8	141.9	141.2	140.7	140.2	139.7	139.1	138.4
80°	114.3	114.0	113.7	113.5	113.2	112.9	112.4	111.8	111.3	110.8	110.0
82.5°	85.0	85.0	84.9	84.8	84.8	84.6	84.3	84.0	83.7	83.4	82.4
85°	46.8	46.6	46.3	46.1	45.8	45.5	45.3	45.0	44.8	44.6	43.8
87.5°	16.5	16.3	16.1	15.8	15.6	15.4	15.1	14.8	14.6	14.3	13.8
90°	0.3	1.3	2.2	3.1	4.0	4.7	5.4	6.0	6.7	7.3	7.7
92.5°	7.4	7.3	7.2	7.1	7.1	7.2	7.6	7.9	8.2	8.5	8.8
95°	23.9	21.2	18.5	15.8	13.1	12.1	12.7	13.2	13.8	14.4	14.7
97.5°	47.4	39.9	32.3	24.6	17.0	13.9	15.2	16.5	17.9	19.2	19.5
100°	65.2	53.9	42.7	31.5	20.3	15.4	16.8	18.2	19.5	21.0	21.6
102.5°	84.6	82.2	79.8	77.5	75.1	68.1	56.5	44.9	33.2	21.5	22.4
105°	111.8	114.3	116.8	119.2	121.7	111.8	89.5	67.1	44.8	22.5	23.3
107.5°	143.0	145.0	147.0	149.0	150.9	138.5	111.8	85.0	58.2	31.4	30.5
110°	163.0	164.7	166.4	168.2	169.9	158.9	135.3	111.7	88.0	64.4	56.2



TEST NUMBER: P331559-935

CATALOG NUMBER: S122DIW-S865D435U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	181.8	183.4	184.9	186.4	188.0	185.8	179.9	174.1	168.2	162.5	132.6
115°	211.6	213.0	214.4	215.8	217.1	218.9	220.9	223.0	225.0	227.0	189.2
117.5°	238.2	239.7	241.3	242.8	244.4	245.9	247.3	248.7	250.1	251.5	242.4
120°	257.6	258.8	260.0	261.3	262.5	263.9	265.4	266.8	268.3	269.8	270.7
122.5°	274.1	275.3	276.6	277.9	279.2	280.7	282.3	283.9	285.5	287.1	287.7
125°	299.2	300.2	301.4	302.4	303.4	304.7	306.3	307.9	309.4	311.0	311.5
127.5°	321.9	323.1	324.3	325.5	326.7	327.8	329.0	330.1	331.3	332.4	333.3
130°	336.4	337.7	339.0	340.3	341.6	342.7	343.6	344.5	345.4	346.3	347.2
132.5°	351.1	352.1	353.3	354.4	355.5	356.5	357.4	358.3	359.2	360.2	360.9
135°	370.2	371.5	372.8	374.1	375.5	376.4	377.2	378.0	378.7	379.4	380.2
137.5°	389.6	390.5	391.4	392.4	393.2	394.1	394.9	395.8	396.6	397.4	398.2
140°	402.3	402.9	403.6	404.2	404.8	405.6	406.6	407.4	408.3	409.2	409.9
142.5°	412.8	413.5	414.0	414.6	415.2	416.0	417.0	418.0	419.0	420.1	420.8
145°	429.5	429.4	429.3	429.2	429.1	429.8	431.2	432.6	433.9	435.3	435.9
147.5°	443.9	443.7	443.3	443.1	442.7	443.2	444.6	446.0	447.4	448.8	449.2
150°	453.4	452.8	452.2	451.7	451.1	451.4	452.8	454.1	455.4	456.7	457.2
152.5°	461.3	460.7	460.0	459.4	458.7	459.1	460.3	461.6	462.8	464.1	464.5
155°	472.9	472.2	471.4	470.7	469.9	470.1	471.1	472.0	473.0	474.0	474.5
157.5°	481.9	481.3	480.7	480.1	479.5	479.5	480.2	480.9	481.6	482.2	482.8
160°	487.2	486.7	486.3	485.8	485.3	485.3	485.8	486.3	486.7	487.2	487.8
162.5°	492.0	491.5	490.9	490.5	490.0	490.0	490.3	490.8	491.2	491.6	492.2
165°	498.3	497.8	497.3	496.8	496.3	496.2	496.5	496.7	497.0	497.1	497.7
167.5°	503.0	502.5	502.0	501.5	501.0	500.9	501.1	501.4	501.6	501.8	502.4
170°	505.7	505.1	504.6	504.2	503.7	503.5	503.7	503.9	504.0	504.2	504.7
172.5°	507.4	507.0	506.4	505.9	505.4	505.3	505.4	505.6	505.8	505.9	506.5
175°	509.7	509.1	508.5	508.0	507.4	507.2	507.4	507.6	507.6	507.8	508.4
177.5°	510.1	509.6	509.1	508.7	508.2	508.0	508.1	508.2	508.2	508.2	508.8
180°	508.6	508.6	508.6	508.6	508.6	508.6	508.6	508.6	508.6	508.6	508.6



TEST NUMBER: P331559-935

CATALOG NUMBER: S122DIW-S865D435U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2
2.5°	1183.1	1185.2	1187.1	1188.0	1187.6	1187.1	1186.8	1186.4
5°	1175.1	1177.2	1179.2	1179.9	1179.5	1179.0	1178.5	1177.9
7.5°	1161.8	1163.9	1166.0	1166.7	1166.1	1165.5	1165.0	1164.4
10°	1150.0	1152.0	1154.1	1154.7	1153.9	1153.1	1152.4	1151.7
12.5°	1136.0	1137.4	1138.8	1139.3	1138.7	1138.2	1137.6	1137.0
15°	1111.4	1112.4	1113.4	1113.3	1112.1	1110.8	1109.5	1108.2
17.5°	1082.2	1083.4	1084.6	1084.5	1083.3	1082.1	1080.9	1079.7
20°	1059.5	1060.2	1061.0	1060.8	1059.9	1058.9	1057.8	1056.8
22.5°	1035.4	1035.5	1035.7	1035.5	1034.8	1034.2	1033.6	1033.0
25°	996.2	996.6	997.1	997.1	996.6	996.2	995.7	995.1
27.5°	957.5	956.7	956.0	955.0	953.7	952.5	951.3	950.1
30°	927.3	926.6	925.8	924.9	923.9	922.9	921.9	920.8
32.5°	897.8	896.4	895.0	893.8	892.9	891.8	890.8	889.8
35°	850.4	848.9	847.4	845.9	844.7	843.4	842.1	840.9
37.5°	802.9	801.0	799.1	797.5	796.3	795.1	793.9	792.6
40°	770.1	767.8	765.5	763.8	762.8	761.8	760.8	759.7
42.5°	737.6	735.1	732.7	730.7	729.3	727.9	726.4	725.0
45°	687.9	685.1	682.3	680.4	679.4	678.4	677.3	676.4
47.5°	636.2	633.3	630.3	628.1	626.6	625.2	623.7	622.2
50°	603.0	599.4	595.9	593.5	592.2	590.9	589.7	588.4
52.5°	568.5	565.6	562.7	560.3	558.7	557.0	555.3	553.6
55°	517.2	514.1	511.1	508.9	507.6	506.4	505.1	503.9
57.5°	463.8	460.8	457.8	455.8	454.9	453.9	453.0	451.9
60°	428.6	425.8	423.0	421.2	420.4	419.7	418.9	418.2
62.5°	395.1	392.5	389.9	388.2	387.2	386.2	385.3	384.4
65°	343.9	341.6	339.3	337.5	336.3	335.0	333.7	332.4
67.5°	293.3	291.4	289.7	288.3	287.3	286.3	285.2	284.2
70°	260.4	258.6	256.8	255.4	254.4	253.4	252.4	251.3
72.5°	229.3	227.5	225.8	224.5	223.6	222.8	222.0	221.2
75°	180.9	179.3	177.9	177.4	177.9	178.4	178.8	179.3
77.5°	137.7	136.9	136.1	135.3	134.7	134.0	133.3	132.5
80°	109.3	108.6	107.8	107.1	106.6	106.2	105.6	105.1
82.5°	81.5	80.5	79.6	79.0	78.9	78.8	78.7	78.6
85°	43.0	42.3	41.5	41.0	40.7	40.5	40.2	40.0
87.5°	13.2	12.7	12.1	11.8	11.6	11.5	11.3	11.1
90°	8.2	8.6	9.0	9.3	9.5	9.6	9.8	9.9
92.5°	9.0	9.2	9.4	9.6	9.6	9.7	9.8	9.9
95°	15.2	15.6	16.0	16.2	16.1	16.0	15.9	15.8
97.5°	19.9	20.2	20.5	20.8	20.8	20.9	21.0	21.1
100°	22.3	22.9	23.6	24.0	24.2	24.4	24.5	24.6
102.5°	23.2	24.1	25.0	25.5	25.7	26.0	26.2	26.4
105°	24.3	25.1	26.1	26.7	26.9	27.3	27.6	28.0
107.5°	29.6	28.7	27.7	27.5	27.8	28.2	28.4	28.8
110°	48.0	39.9	31.7	27.7	28.1	28.4	28.8	29.1



TEST NUMBER: P331559-935

CATALOG NUMBER: S122DIW-S865D435U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	102.8	72.9	43.1	28.3	28.6	28.8	29.1	29.4
115°	151.4	113.5	75.6	53.7	47.9	41.9	36.1	30.1
117.5°	233.2	224.0	214.8	200.6	181.2	161.9	142.6	123.2
120°	271.7	272.7	273.7	268.6	257.6	246.6	235.5	224.5
122.5°	288.3	288.9	289.5	288.7	286.5	284.4	282.2	280.1
125°	312.1	312.7	313.2	313.7	313.9	314.2	314.4	314.6
127.5°	334.2	334.9	335.8	336.2	336.3	336.3	336.4	336.4
130°	348.1	349.0	349.9	350.3	350.3	350.2	350.1	350.0
132.5°	361.7	362.4	363.2	363.5	363.4	363.3	363.3	363.3
135°	381.1	381.9	382.7	383.0	382.9	382.7	382.5	382.4
137.5°	399.1	399.8	400.6	400.9	400.6	400.4	400.1	399.8
140°	410.7	411.5	412.2	412.3	411.9	411.5	411.1	410.7
142.5°	421.5	422.1	422.8	422.9	422.5	422.1	421.7	421.3
145°	436.5	437.0	437.6	437.7	437.3	436.9	436.5	436.1
147.5°	449.6	450.0	450.5	450.5	450.1	449.8	449.4	449.1
150°	457.7	458.1	458.7	458.7	458.3	457.9	457.4	457.1
152.5°	465.0	465.5	466.1	466.0	465.5	464.9	464.3	463.8
155°	475.0	475.4	476.0	475.9	475.2	474.6	473.9	473.3
157.5°	483.4	483.9	484.5	484.4	483.8	483.1	482.5	481.9
160°	488.2	488.7	489.2	489.1	488.6	488.0	487.4	486.9
162.5°	492.8	493.4	493.9	493.8	493.1	492.4	491.7	491.0
165°	498.3	498.9	499.5	499.5	498.9	498.3	497.7	497.1
167.5°	503.0	503.5	504.1	504.0	503.3	502.6	501.8	501.1
170°	505.3	505.9	506.4	506.4	505.7	504.9	504.2	503.4
172.5°	507.0	507.6	508.2	508.2	507.4	506.7	505.9	505.2
175°	509.0	509.5	510.1	510.1	509.2	508.4	507.6	506.8
177.5°	509.2	509.6	510.1	510.1	509.5	508.9	508.2	507.7
180°	508.6	508.6	508.6	508.6	508.6	508.6	508.6	508.6

(END OF REPORT)