

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331571-935

Luminaire Tested: **S122DIW-S865D970U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331571-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S865D970U935-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 970 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6357.7 lumens
Efficiency: N/A
Efficacy: 103.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 61.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331571-935

CATALOG NUMBER: S122DIW-S865D970U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

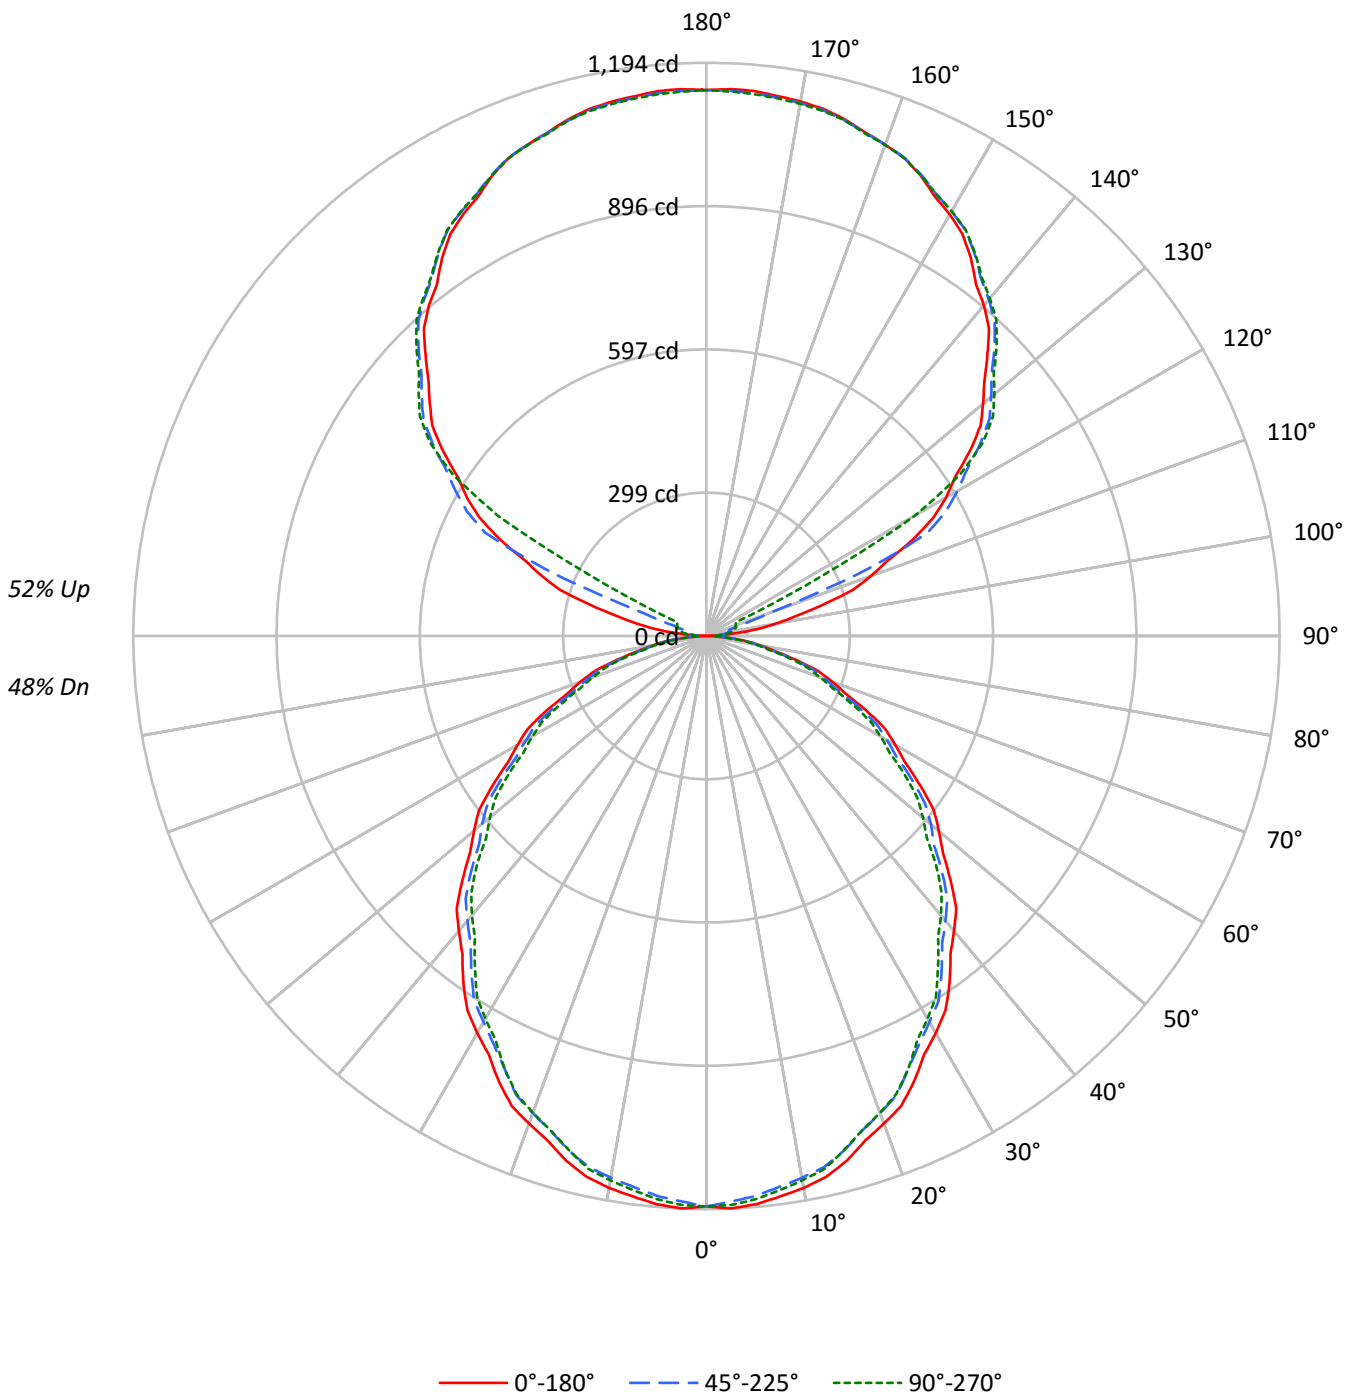



TEST NUMBER: P331571-935

CATALOG NUMBER: S122DIW-S865D970U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	107	107	107	107	98	98	98	98	82	82	82	67	67	67	54	54	54	48					48			
1	97	93	89	86	89	86	82	79	72	69	67	59	58	56	48	47	46					40				
2	89	81	75	70	81	75	70	65	63	59	56	52	49	47	42	40	38					34				
3	81	71	64	58	74	66	59	54	56	51	47	46	43	40	37	35	33					28				
4	74	63	55	49	68	58	51	46	49	44	40	41	37	34	33	30	28					24				
5	68	56	48	42	62	52	45	40	44	39	34	37	33	29	30	27	24					21				
6	62	50	42	37	57	47	40	34	40	34	30	33	29	26	27	24	22					19				
7	58	45	38	32	53	42	35	30	36	30	26	30	26	23	25	22	19					17				
8	54	41	34	28	49	38	31	27	33	27	23	28	23	20	23	20	17					15				
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	16					13				
10	47	35	27	23	43	32	26	21	28	23	19	23	19	16	20	16	14					12				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	19184	19184	19184
5°	19258	18979	19091
10°	19143	18787	18882
15°	18907	18544	18524
20°	18570	18179	18158
25°	18235	17728	17728
30°	17807	17316	17167
35°	17406	16821	16575
40°	16904	16326	16012
45°	16408	15835	15445
50°	15870	15325	14780
55°	15308	14728	14184
60°	14683	14018	13504
65°	14013	13310	12699
70°	13161	12458	11863
75°	11971	11472	11185
80°	10628	10302	9772
85°	8670	8262	7410



TEST NUMBER: P331571-935

CATALOG NUMBER: S122DIW-S865D970U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	111.7	1.8
10°-20°	314.4	4.9
20°-30°	462.1	7.3
30°-40°	536.8	8.4
40°-50°	536.2	8.4
50°-60°	467.6	7.4
60°-70°	345.7	5.4
70°-80°	195.8	3.1
80°-90°	55.5	0.9
90°-100°	37.9	0.6
100°-110°	139.1	2.2
110°-120°	371.8	5.8
120°-130°	613.7	9.7
130°-140°	652.7	10.3
140°-150°	606.6	9.5
150°-160°	487.7	7.7
160°-170°	314.3	4.9
170°-180°	108.2	1.7
0°-30°	888.2	14.0
0°-40°	1425.0	22.4
0°-60°	2428.7	38.2
0°-90°	3025.7	47.6
90°-120°	548.8	8.6
90°-150°	2421.8	38.1
90°-180°	3332.0	52.4
0°-180°	6357.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1188	1188	1188	1188	1188	
5°	1188	1183	1171	1180	1178	113
15°	1131	1124	1109	1113	1108	318
25°	1024	1014	995	997	995	471
35°	883	871	853	847	841	551
45°	719	710	694	681	676	554
55°	544	537	523	510	504	486
65°	367	360	348	338	332	363
75°	192	189	184	178	179	205
85°	47	46	45	41	40	54
90°	1	10	16	20	22	5
95°	54	28	32	36	35	65
105°	250	261	50	59	62	267
115°	473	487	508	145	68	466
125°	669	680	695	701	703	596
135°	828	840	848	856	855	639
145°	960	960	973	978	975	600
155°	1057	1051	1060	1064	1058	487
165°	1114	1109	1112	1117	1112	315
175°	1139	1134	1135	1140	1133	108
180°	1137	1137	1137	1137	1137	



TEST NUMBER: P331571-935

CATALOG NUMBER: S122DIW-S865D970U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2
2.5°	1193.7	1192.7	1191.6	1190.7	1189.6	1188.0	1185.8	1183.5	1181.3	1179.1	1181.1
5°	1188.2	1187.1	1186.2	1185.2	1184.1	1182.2	1179.5	1176.6	1173.9	1171.0	1173.1
7.5°	1177.7	1176.1	1174.6	1172.9	1171.4	1169.2	1166.3	1163.5	1160.6	1157.8	1159.9
10°	1167.6	1165.9	1164.1	1162.3	1160.5	1158.1	1155.0	1152.0	1149.0	1145.9	1148.0
12.5°	1153.9	1152.4	1150.8	1149.2	1147.6	1145.3	1142.3	1139.2	1136.2	1133.2	1134.5
15°	1131.1	1129.5	1128.0	1126.5	1125.0	1122.6	1119.3	1115.9	1112.7	1109.4	1110.3
17.5°	1101.8	1100.3	1098.8	1097.3	1095.7	1093.3	1089.9	1086.6	1083.2	1079.9	1081.1
20°	1080.8	1079.3	1077.8	1076.2	1074.7	1072.2	1068.6	1065.1	1061.5	1058.0	1058.7
22.5°	1059.8	1057.7	1055.5	1053.3	1051.3	1048.5	1045.2	1041.8	1038.5	1035.1	1035.3
25°	1023.6	1021.7	1019.6	1017.6	1015.5	1012.4	1008.1	1003.8	999.4	995.1	995.7
27.5°	982.6	980.8	978.9	977.1	975.3	972.6	969.2	965.8	962.4	959.0	958.3
30°	955.1	953.1	951.1	949.1	947.0	944.1	940.3	936.5	932.6	928.8	928.1
32.5°	925.9	924.3	922.6	921.0	919.4	916.5	912.6	908.5	904.6	900.5	899.1
35°	883.1	880.6	878.0	875.6	873.0	869.7	865.6	861.6	857.5	853.4	852.0
37.5°	834.9	832.7	830.4	828.2	826.0	822.9	818.8	814.8	810.6	806.6	804.7
40°	802.0	800.0	798.0	795.9	793.9	790.8	786.8	782.7	778.7	774.6	772.3
42.5°	770.1	768.0	765.9	764.0	761.9	758.9	754.8	750.8	746.7	742.6	740.1
45°	718.6	716.9	715.1	713.3	711.5	708.7	704.9	701.1	697.3	693.5	690.7
47.5°	667.4	665.8	664.1	662.5	660.7	657.9	653.9	650.0	646.0	642.0	639.1
50°	631.8	630.5	629.3	628.0	626.7	624.3	620.8	617.2	613.6	610.1	606.6
52.5°	597.1	595.4	593.7	592.0	590.4	587.9	584.5	581.2	577.8	574.5	571.5
55°	543.8	542.3	540.8	539.2	537.7	535.5	532.4	529.3	526.3	523.2	520.2
57.5°	490.3	489.1	487.9	486.7	485.5	483.2	479.8	476.5	473.1	469.8	466.8
60°	454.7	453.7	452.7	451.7	450.6	448.4	444.8	441.3	437.7	434.1	431.4
62.5°	420.0	418.4	416.7	415.1	413.5	411.3	408.5	405.8	403.0	400.4	397.8
65°	366.8	365.2	363.7	362.1	360.7	358.6	356.1	353.5	351.0	348.4	346.2
67.5°	312.6	311.3	310.1	308.9	307.7	306.0	303.7	301.4	299.1	296.8	295.1
70°	278.8	277.8	276.7	275.7	274.7	273.0	270.8	268.5	266.2	263.9	262.2
72.5°	244.0	243.1	242.0	241.0	240.0	238.8	237.3	235.8	234.3	232.8	231.1
75°	191.9	191.4	190.9	190.5	189.9	189.0	187.8	186.5	185.2	183.9	182.4
77.5°	145.3	144.5	143.6	142.8	141.9	141.2	140.7	140.2	139.7	139.1	138.4
80°	114.3	114.0	113.7	113.5	113.2	112.9	112.4	111.8	111.3	110.8	110.0
82.5°	85.0	85.0	84.9	84.8	84.8	84.6	84.3	84.0	83.7	83.4	82.4
85°	46.8	46.6	46.3	46.1	45.8	45.5	45.3	45.0	44.8	44.6	43.8
87.5°	16.6	16.6	16.6	16.6	16.6	16.5	16.4	16.3	16.2	16.1	15.7
90°	0.9	2.8	4.8	6.9	8.9	10.6	12.1	13.5	15.0	16.4	17.4
92.5°	16.6	16.4	16.3	16.1	15.9	16.2	16.9	17.7	18.3	19.1	19.5
95°	53.5	47.4	41.4	35.4	29.4	26.9	28.2	29.5	30.8	32.1	33.0
97.5°	106.2	89.1	72.2	55.1	38.1	31.1	34.1	37.0	40.0	43.0	43.7
100°	145.6	120.5	95.5	70.5	45.5	34.4	37.5	40.6	43.8	46.9	48.4
102.5°	189.1	183.7	178.5	173.1	167.8	152.2	126.2	100.2	74.2	48.2	50.1
105°	250.1	255.6	261.1	266.6	272.1	249.9	199.9	150.0	100.1	50.2	52.2
107.5°	319.7	324.2	328.6	332.9	337.4	309.7	249.9	189.9	130.1	70.3	68.2
110°	364.5	368.3	372.1	376.0	379.8	355.3	302.5	249.7	196.8	144.0	125.7



TEST NUMBER: P331571-935

CATALOG NUMBER: S122DIW-S865D970U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	406.6	410.0	413.4	416.8	420.2	415.3	402.3	389.3	376.2	363.2	296.4
115°	473.0	476.1	479.3	482.4	485.5	489.3	493.9	498.4	503.1	507.6	422.9
117.5°	532.4	536.0	539.4	542.9	546.4	549.7	552.8	555.9	559.1	562.2	541.7
120°	575.9	578.7	581.3	584.1	586.9	589.9	593.1	596.5	599.8	603.0	605.3
122.5°	612.8	615.6	618.5	621.4	624.3	627.6	631.1	634.7	638.3	641.9	643.2
125°	668.8	671.2	673.6	676.0	678.4	681.3	684.8	688.3	691.7	695.2	696.5
127.5°	719.7	722.4	725.0	727.6	730.2	732.9	735.5	738.0	740.6	743.2	745.1
130°	752.0	754.9	757.9	760.7	763.6	766.1	768.1	770.2	772.1	774.2	776.2
132.5°	784.9	787.4	789.9	792.3	794.8	797.0	799.1	801.1	803.1	805.1	806.8
135°	827.7	830.6	833.5	836.5	839.4	841.6	843.3	844.9	846.5	848.3	850.1
137.5°	870.9	873.0	875.0	877.1	879.1	881.1	883.0	884.8	886.7	888.6	890.4
140°	899.2	900.7	902.2	903.6	905.1	906.8	908.8	910.9	912.8	914.9	916.5
142.5°	922.9	924.2	925.6	926.9	928.2	930.0	932.3	934.6	936.9	939.2	940.7
145°	960.1	959.9	959.8	959.6	959.4	960.9	964.0	967.1	970.2	973.3	974.6
147.5°	992.6	991.8	991.1	990.4	989.7	990.9	994.0	997.0	1000.1	1003.2	1004.2
150°	1013.6	1012.3	1011.0	1009.8	1008.5	1009.3	1012.2	1015.1	1018.0	1021.0	1022.1
152.5°	1031.4	1029.9	1028.5	1027.1	1025.6	1026.3	1029.1	1031.9	1034.7	1037.4	1038.5
155°	1057.2	1055.5	1053.9	1052.2	1050.6	1050.9	1053.1	1055.2	1057.5	1059.6	1060.8
157.5°	1077.5	1076.1	1074.6	1073.2	1071.9	1071.9	1073.5	1075.0	1076.5	1078.1	1079.3
160°	1089.3	1088.2	1087.1	1086.0	1084.9	1084.9	1086.0	1087.1	1088.2	1089.3	1090.4
162.5°	1099.8	1098.7	1097.6	1096.5	1095.5	1095.4	1096.3	1097.3	1098.2	1099.2	1100.4
165°	1114.0	1112.8	1111.7	1110.7	1109.6	1109.3	1109.8	1110.3	1110.9	1111.5	1112.8
167.5°	1124.5	1123.3	1122.3	1121.2	1120.1	1119.8	1120.3	1120.8	1121.4	1121.9	1123.1
170°	1130.4	1129.3	1128.3	1127.1	1126.0	1125.7	1126.0	1126.4	1126.8	1127.1	1128.4
172.5°	1134.4	1133.2	1132.1	1131.1	1130.0	1129.6	1130.0	1130.3	1130.7	1131.1	1132.4
175°	1139.4	1138.2	1136.9	1135.7	1134.4	1133.9	1134.3	1134.6	1135.0	1135.3	1136.6
177.5°	1140.3	1139.3	1138.2	1137.2	1136.2	1135.7	1135.9	1136.0	1136.2	1136.3	1137.4
180°	1137.0	1137.0	1137.0	1137.0	1137.0	1137.0	1137.0	1137.0	1137.0	1137.0	1137.0



TEST NUMBER: P331571-935

CATALOG NUMBER: S122DIW-S865D970U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2	1188.2
2.5°	1183.1	1185.2	1187.1	1188.0	1187.6	1187.1	1186.8	1186.4
5°	1175.1	1177.2	1179.2	1179.9	1179.5	1179.0	1178.5	1177.9
7.5°	1161.8	1163.9	1166.0	1166.7	1166.1	1165.5	1165.0	1164.4
10°	1150.0	1152.0	1154.1	1154.7	1153.9	1153.1	1152.4	1151.7
12.5°	1136.0	1137.4	1138.8	1139.3	1138.7	1138.2	1137.6	1137.0
15°	1111.4	1112.4	1113.4	1113.3	1112.1	1110.8	1109.5	1108.2
17.5°	1082.2	1083.4	1084.6	1084.5	1083.3	1082.1	1080.9	1079.7
20°	1059.5	1060.2	1061.0	1060.8	1059.9	1058.9	1057.8	1056.8
22.5°	1035.4	1035.5	1035.7	1035.5	1034.8	1034.2	1033.6	1033.0
25°	996.2	996.6	997.1	997.1	996.6	996.2	995.7	995.1
27.5°	957.5	956.7	956.0	955.0	953.7	952.5	951.3	950.1
30°	927.3	926.6	925.8	924.9	923.9	922.9	921.9	920.8
32.5°	897.8	896.4	895.0	893.8	892.9	891.8	890.8	889.8
35°	850.4	848.9	847.4	845.9	844.7	843.4	842.1	840.9
37.5°	802.9	801.0	799.1	797.5	796.3	795.1	793.9	792.6
40°	770.1	767.8	765.5	763.8	762.8	761.8	760.8	759.7
42.5°	737.6	735.1	732.7	730.7	729.3	727.9	726.4	725.0
45°	687.9	685.1	682.3	680.4	679.4	678.4	677.3	676.4
47.5°	636.2	633.3	630.3	628.1	626.6	625.2	623.7	622.2
50°	603.0	599.4	595.9	593.5	592.2	590.9	589.7	588.4
52.5°	568.5	565.6	562.7	560.3	558.7	557.0	555.3	553.6
55°	517.2	514.1	511.1	508.9	507.6	506.4	505.1	503.9
57.5°	463.8	460.8	457.8	455.8	454.9	453.9	453.0	451.9
60°	428.6	425.8	423.0	421.2	420.4	419.7	418.9	418.2
62.5°	395.1	392.5	389.9	388.2	387.2	386.2	385.3	384.4
65°	343.9	341.6	339.3	337.5	336.3	335.0	333.7	332.4
67.5°	293.3	291.4	289.7	288.3	287.3	286.3	285.2	284.2
70°	260.4	258.6	256.8	255.4	254.4	253.4	252.4	251.3
72.5°	229.3	227.5	225.8	224.5	223.6	222.8	222.0	221.2
75°	180.9	179.3	177.9	177.4	177.9	178.4	178.8	179.3
77.5°	137.7	136.9	136.1	135.3	134.7	134.0	133.3	132.5
80°	109.3	108.6	107.8	107.1	106.6	106.2	105.6	105.1
82.5°	81.5	80.5	79.6	79.0	78.9	78.8	78.7	78.6
85°	43.0	42.3	41.5	41.0	40.7	40.5	40.2	40.0
87.5°	15.2	14.8	14.4	14.1	13.9	13.9	13.7	13.6
90°	18.3	19.2	20.1	20.8	21.1	21.4	21.9	22.2
92.5°	20.1	20.5	21.0	21.4	21.5	21.8	22.0	22.2
95°	33.9	34.9	35.7	36.1	35.9	35.7	35.6	35.4
97.5°	44.4	45.1	45.9	46.3	46.6	46.8	47.0	47.2
100°	49.9	51.3	52.8	53.6	54.0	54.4	54.8	55.1
102.5°	52.0	53.9	55.8	57.0	57.5	58.0	58.5	59.1
105°	54.2	56.2	58.2	59.6	60.4	61.0	61.8	62.5
107.5°	66.1	64.1	62.1	61.4	62.2	62.9	63.6	64.3
110°	107.4	89.1	70.9	62.1	62.8	63.5	64.2	65.0



TEST NUMBER: P331571-935

CATALOG NUMBER: S122DIW-S865D970U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	229.7	163.1	96.3	63.3	63.9	64.5	65.1	65.7
115°	338.3	253.7	169.0	120.1	106.9	93.8	80.6	67.5
117.5°	521.2	500.8	480.4	448.5	405.2	362.0	318.7	275.4
120°	607.4	609.6	611.8	600.5	575.9	551.2	526.5	501.9
122.5°	644.5	645.8	647.1	645.4	640.6	635.8	631.0	626.3
125°	697.8	699.0	700.3	701.2	701.8	702.3	702.8	703.4
127.5°	747.0	748.8	750.7	751.7	751.8	751.9	752.0	752.1
130°	778.2	780.2	782.2	783.2	782.9	782.7	782.6	782.4
132.5°	808.6	810.3	812.0	812.8	812.5	812.4	812.2	812.0
135°	851.9	853.7	855.5	856.3	855.9	855.5	855.1	854.8
137.5°	892.1	893.9	895.7	896.3	895.7	895.0	894.4	893.8
140°	918.2	919.8	921.4	921.8	920.9	920.0	919.0	918.2
142.5°	942.2	943.7	945.2	945.5	944.6	943.7	942.8	941.8
145°	975.9	977.1	978.4	978.6	977.7	976.7	975.9	974.9
147.5°	1005.1	1006.1	1007.0	1007.1	1006.3	1005.6	1004.8	1004.0
150°	1023.2	1024.2	1025.4	1025.5	1024.6	1023.6	1022.7	1021.8
152.5°	1039.7	1040.7	1041.8	1041.8	1040.6	1039.4	1038.2	1037.0
155°	1061.9	1062.9	1064.0	1063.9	1062.4	1060.9	1059.5	1058.0
157.5°	1080.6	1081.8	1083.1	1083.0	1081.5	1080.1	1078.7	1077.3
160°	1091.5	1092.5	1093.6	1093.6	1092.3	1091.0	1089.8	1088.5
162.5°	1101.6	1102.9	1104.1	1104.0	1102.3	1100.8	1099.2	1097.7
165°	1114.0	1115.3	1116.6	1116.6	1115.3	1114.0	1112.8	1111.5
167.5°	1124.4	1125.7	1127.0	1126.8	1125.2	1123.5	1121.9	1120.2
170°	1129.7	1130.9	1132.2	1132.0	1130.4	1128.8	1127.1	1125.5
172.5°	1133.6	1134.9	1136.2	1136.0	1134.4	1132.7	1131.1	1129.5
175°	1137.9	1139.2	1140.5	1140.2	1138.3	1136.5	1134.7	1132.9
177.5°	1138.4	1139.4	1140.4	1140.3	1138.9	1137.6	1136.3	1135.1
180°	1137.0	1137.0	1137.0	1137.0	1137.0	1137.0	1137.0	1137.0

(END OF REPORT)