

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331864-935

Luminaire Tested: **S122RDIW-S1005D1440U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331864-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S1005D1440U935-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1440 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7305.9 lumens
Efficiency: N/A
Efficacy: 88.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 82.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331864-935

CATALOG NUMBER: S122RDIW-S1005D1440U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

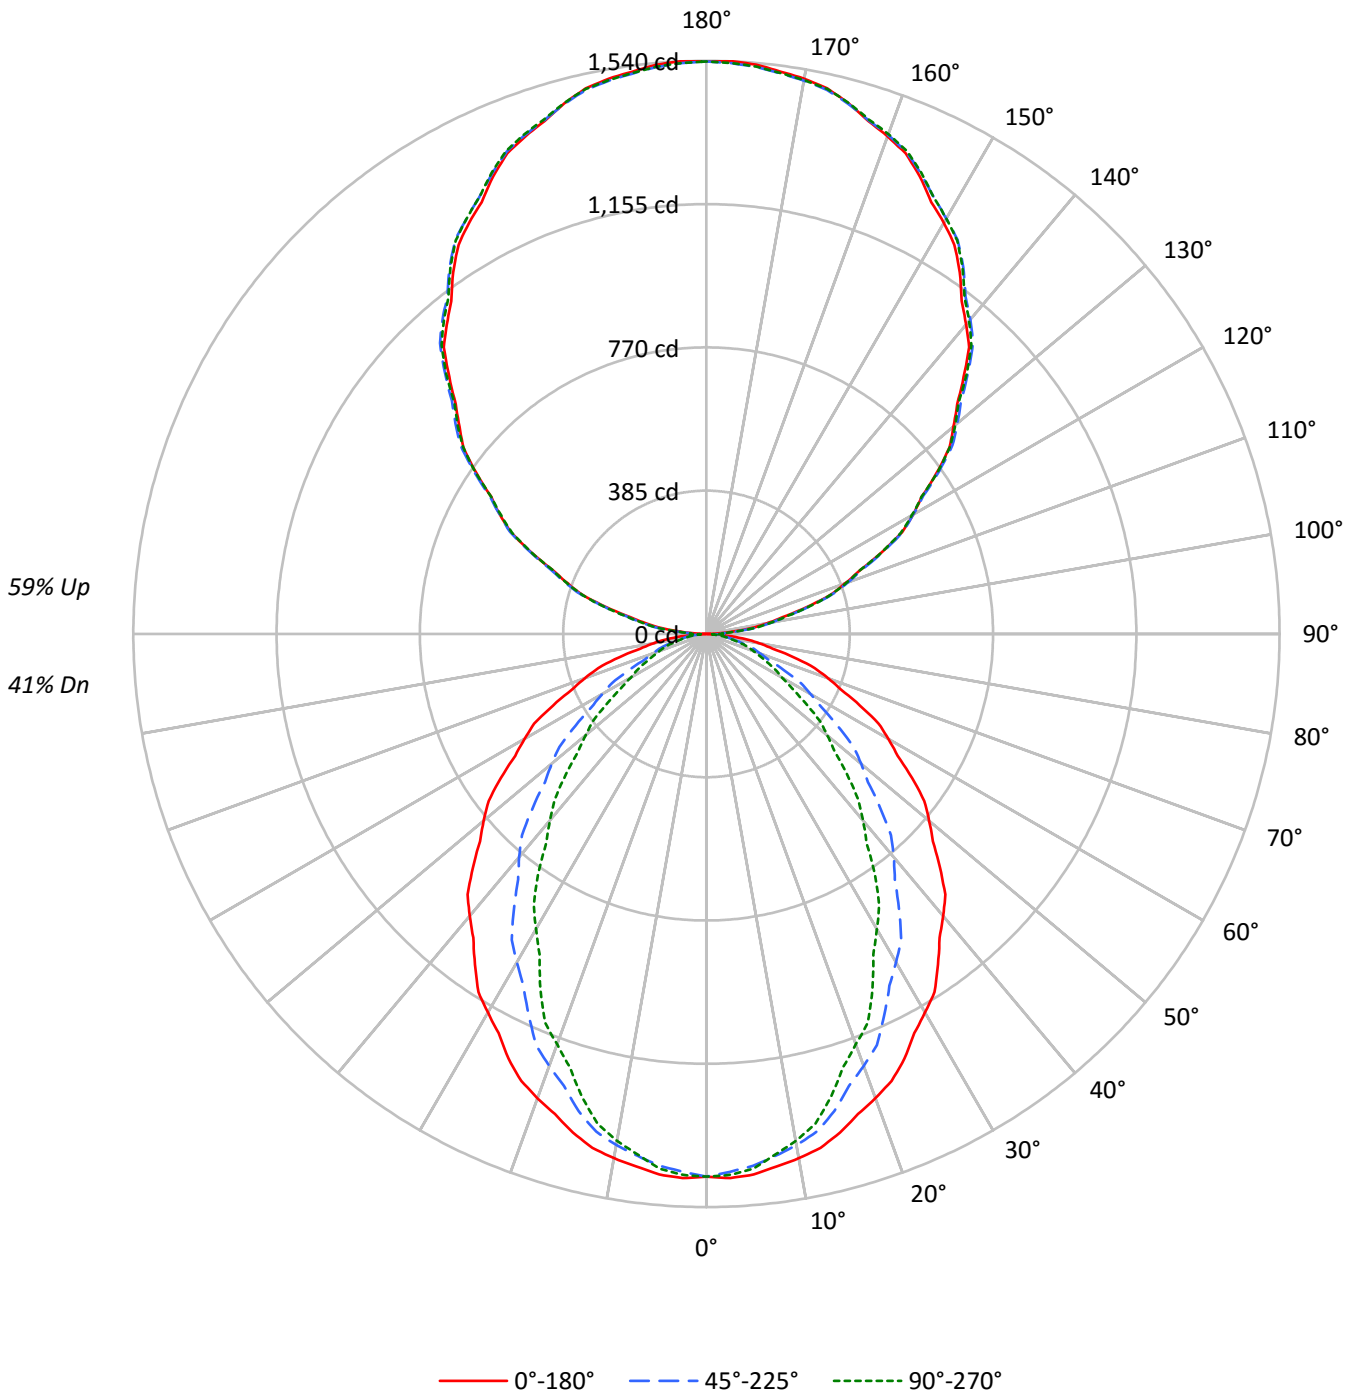



TEST NUMBER: P331864-935

CATALOG NUMBER: S122RDIW-S1005D1440U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	78	78	78	63	63	63	48	48	48	41
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	43	42	41	35
2	88	81	75	70	80	74	69	65	61	58	54	49	47	45	38	37	35	30
3	80	71	64	59	73	65	59	55	54	50	46	44	41	38	34	32	30	26
4	74	63	56	50	67	58	52	47	48	44	40	39	36	33	31	29	27	23
5	68	57	49	43	62	52	45	40	43	38	34	35	32	29	28	25	23	20
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	26	23	21	18
7	58	46	38	33	53	42	36	31	36	30	27	29	25	23	23	21	19	16
8	54	42	34	29	49	39	32	27	33	27	24	27	23	20	22	19	17	14
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	20	17	15	13
10	47	35	28	23	43	32	26	22	28	23	19	23	19	17	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	23541	23541	23541
5°	23631	23246	23376
10°	23451	22866	22673
15°	23181	22188	21549
20°	22807	21220	20155
25°	22425	20122	18805
30°	21895	18990	17074
35°	21378	17763	15554
40°	20858	16493	13793
45°	20247	15066	12202
50°	19623	13622	10638
55°	18978	12073	9137
60°	18235	10440	7585
65°	17391	8772	6907
70°	16386	7227	6354
75°	15147	6588	5926
80°	13371	5895	5393
85°	10504	4650	4650



TEST NUMBER: P331864-935

CATALOG NUMBER: S122RDIW-S1005D1440U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	136.5	1.9
10°-20°	374.7	5.1
20°-30°	526.2	7.2
30°-40°	573.8	7.9
40°-50°	527.6	7.2
50°-60°	414.4	5.7
60°-70°	270.2	3.7
70°-80°	139.3	1.9
80°-90°	42.3	0.6
90°-100°	97.5	1.3
100°-110°	302.7	4.1
110°-120°	517.4	7.1
120°-130°	680.4	9.3
130°-140°	763.7	10.5
140°-150°	748.8	10.2
150°-160°	628.1	8.6
160°-170°	416.6	5.7
170°-180°	145.6	2.0
0°-30°	1037.4	14.2
0°-40°	1611.3	22.1
0°-60°	2553.2	34.9
0°-90°	3005.0	41.1
90°-120°	917.6	12.6
90°-150°	3110.6	42.6
90°-180°	4301.0	58.9
0°-180°	7305.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1458	1458	1458	1458	1458	
5°	1458	1451	1434	1445	1442	138
15°	1387	1371	1327	1303	1289	390
25°	1259	1214	1130	1077	1056	579
35°	1085	1015	901	821	789	678
45°	887	796	660	570	534	684
55°	674	569	429	353	325	602
65°	455	348	230	187	181	451
75°	243	153	106	97	95	257
85°	57	30	25	25	25	67
90°	1	18	46	43	44	6
95°	68	80	83	83	80	77
105°	279	283	286	288	288	295
115°	519	526	524	523	519	513
125°	755	766	763	759	758	675
135°	977	991	994	993	989	755
145°	1186	1195	1203	1204	1199	741
155°	1356	1360	1364	1370	1367	624
165°	1476	1475	1474	1483	1477	416
175°	1536	1532	1529	1537	1530	146
180°	1538	1538	1538	1538	1538	



TEST NUMBER: P331864-935

CATALOG NUMBER: S122RDIW-S1005D1440U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0
2.5°	1463.4	1462.2	1460.9	1459.8	1458.6	1456.7	1454.1	1451.6	1449.1	1446.5	1448.8
5°	1458.0	1456.6	1455.1	1453.6	1452.2	1449.6	1445.7	1441.9	1438.1	1434.3	1436.9
7.5°	1443.0	1441.2	1439.4	1437.5	1435.7	1432.6	1428.1	1423.7	1419.3	1414.8	1415.6
10°	1430.4	1428.3	1426.2	1424.2	1422.1	1418.2	1412.3	1406.4	1400.6	1394.7	1393.9
12.5°	1414.5	1412.0	1409.5	1407.0	1404.5	1399.4	1391.9	1384.4	1376.9	1369.4	1367.8
15°	1386.8	1383.5	1380.4	1377.1	1373.9	1367.3	1357.4	1347.4	1337.4	1327.4	1321.9
17.5°	1352.7	1347.8	1342.9	1338.0	1333.1	1324.2	1311.4	1298.6	1285.8	1273.1	1266.4
20°	1327.4	1321.5	1315.7	1309.8	1304.0	1293.7	1279.0	1264.4	1249.7	1235.0	1227.7
22.5°	1299.9	1293.4	1286.9	1280.3	1273.7	1262.1	1245.6	1229.1	1212.5	1196.0	1186.5
25°	1258.8	1249.4	1240.0	1230.6	1221.2	1206.9	1187.6	1168.2	1148.8	1129.5	1117.5
27.5°	1209.2	1199.0	1188.8	1178.6	1168.4	1152.4	1130.6	1108.7	1086.9	1065.1	1051.1
30°	1174.4	1163.2	1152.1	1140.9	1129.8	1112.5	1089.0	1065.6	1042.2	1018.6	1003.7
32.5°	1140.6	1127.6	1114.6	1101.6	1088.5	1070.1	1046.1	1022.2	998.2	974.3	957.3
35°	1084.6	1069.7	1054.7	1039.7	1024.8	1004.4	978.6	952.9	927.0	901.2	882.8
37.5°	1028.7	1012.3	995.8	979.4	963.0	941.1	913.5	886.1	858.5	831.0	810.7
40°	989.6	972.1	954.4	936.9	919.3	896.2	867.8	839.4	810.9	782.5	761.6
42.5°	949.5	931.0	912.5	893.9	875.4	851.4	822.1	792.6	763.3	733.9	712.4
45°	886.7	867.0	847.4	827.8	808.1	782.9	752.1	721.3	690.5	659.8	638.9
47.5°	825.4	804.7	783.9	763.0	742.2	715.9	684.2	652.3	620.5	588.8	568.1
50°	781.2	760.3	739.5	718.7	697.8	671.3	639.1	606.8	574.5	542.3	522.1
52.5°	737.9	716.1	694.4	672.6	650.8	624.2	592.6	561.1	529.5	498.0	478.5
55°	674.2	651.4	628.5	605.6	582.8	555.5	523.8	492.1	460.5	428.9	411.2
57.5°	609.1	585.7	562.1	538.7	515.2	488.3	457.9	427.4	397.0	366.5	350.4
60°	564.7	541.3	517.8	494.4	470.9	444.1	413.9	383.7	353.4	323.3	308.3
62.5°	521.5	498.0	474.6	451.1	427.7	401.5	372.7	343.9	315.1	286.4	272.1
65°	455.2	431.4	407.8	384.0	360.2	335.2	308.8	282.4	256.0	229.6	219.6
67.5°	391.3	367.8	344.2	320.6	297.0	273.4	249.7	225.9	202.2	178.4	173.8
70°	347.1	324.2	301.3	278.4	255.5	234.0	213.8	193.6	173.3	153.1	150.2
72.5°	304.8	282.8	261.0	239.0	217.1	197.9	181.8	165.5	149.2	133.0	130.5
75°	242.8	222.2	201.7	181.2	160.7	145.4	135.4	125.5	115.5	105.6	103.5
77.5°	181.8	163.8	145.9	127.9	109.8	98.4	93.6	88.8	83.9	79.2	78.0
80°	143.8	128.9	113.9	98.9	84.0	75.1	72.2	69.2	66.3	63.4	62.2
82.5°	109.0	97.3	85.7	74.0	62.3	55.4	53.5	51.5	49.5	47.5	46.8
85°	56.7	50.5	44.4	38.2	32.1	28.6	27.7	26.9	25.9	25.1	25.1
87.5°	17.1	15.9	14.8	13.6	12.4	12.5	13.7	15.0	16.3	17.6	17.2
90°	1.3	4.7	8.2	11.7	15.2	20.1	26.4	32.7	39.1	45.5	44.9
92.5°	23.1	25.7	28.2	30.7	33.2	35.3	36.8	38.3	39.8	41.2	41.4
95°	67.5	70.3	73.3	76.1	79.0	80.8	81.4	81.9	82.5	83.1	83.1
97.5°	123.3	125.9	128.4	131.0	133.5	135.3	136.4	137.5	138.5	139.7	139.7
100°	164.9	167.1	169.4	171.8	174.1	175.6	176.5	177.4	178.2	179.1	179.1
102.5°	208.4	210.3	212.2	214.0	215.9	217.3	218.4	219.5	220.6	221.7	222.0
105°	279.1	279.9	280.8	281.6	282.5	283.3	283.9	284.4	285.0	285.6	286.1
107.5°	350.2	351.5	352.8	354.0	355.2	355.9	355.9	355.9	355.9	355.9	356.1
110°	395.9	397.6	399.3	401.1	402.8	403.7	403.7	403.7	403.7	403.7	403.7



TEST NUMBER: P331864-935

CATALOG NUMBER: S122RDIW-S1005D1440U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	445.7	447.5	449.2	450.9	452.6	453.4	453.1	453.0	452.7	452.5	451.8
115°	519.2	520.9	522.6	524.4	526.2	526.7	526.2	525.6	525.0	524.4	524.1
117.5°	592.5	594.7	597.0	599.3	601.7	602.0	600.4	598.7	597.1	595.6	594.9
120°	641.2	643.5	645.8	648.2	650.5	650.5	648.2	645.8	643.5	641.2	641.2
122.5°	685.9	688.6	691.4	694.1	697.0	697.5	695.9	694.3	692.7	691.0	690.3
125°	755.4	758.0	760.6	763.2	765.9	766.7	765.9	765.0	764.1	763.2	762.3
127.5°	823.2	826.5	829.7	833.1	836.4	837.5	836.5	835.4	834.4	833.4	832.2
130°	865.7	869.5	873.3	877.0	880.8	882.4	881.8	881.2	880.6	880.0	879.5
132.5°	913.5	916.6	919.6	922.7	925.7	927.4	927.5	927.6	927.7	927.8	926.5
135°	977.4	980.6	983.8	986.9	990.1	992.0	992.6	993.2	993.7	994.3	994.0
137.5°	1044.7	1047.2	1049.8	1052.4	1055.0	1056.7	1057.5	1058.2	1058.9	1059.7	1059.5
140°	1085.1	1087.7	1090.4	1093.0	1095.5	1097.5	1099.0	1100.4	1101.9	1103.3	1103.3
142.5°	1126.7	1129.3	1131.9	1134.5	1137.0	1138.8	1139.8	1140.8	1141.8	1142.8	1143.0
145°	1186.4	1188.4	1190.4	1192.4	1194.5	1196.4	1198.1	1199.8	1201.5	1203.2	1203.5
147.5°	1239.6	1242.0	1244.4	1246.9	1249.3	1251.1	1252.2	1253.4	1254.6	1255.7	1256.4
150°	1275.9	1277.6	1279.4	1281.2	1282.9	1284.3	1285.5	1286.6	1287.8	1288.9	1289.8
152.5°	1308.1	1309.8	1311.6	1313.3	1315.1	1316.6	1318.0	1319.4	1320.8	1322.2	1323.3
155°	1356.4	1357.3	1358.1	1359.0	1359.9	1360.7	1361.6	1362.4	1363.3	1364.2	1365.6
157.5°	1397.7	1398.3	1398.9	1399.5	1400.0	1400.6	1401.1	1401.6	1402.1	1402.7	1404.5
160°	1422.6	1423.2	1423.7	1424.4	1425.0	1425.4	1425.6	1425.9	1426.2	1426.5	1428.2
162.5°	1445.4	1445.6	1445.7	1445.8	1446.0	1446.1	1446.4	1446.7	1447.0	1447.3	1449.2
165°	1475.8	1475.6	1475.2	1475.0	1474.7	1474.5	1474.5	1474.5	1474.5	1474.5	1476.5
167.5°	1501.2	1500.4	1499.5	1498.7	1497.8	1497.4	1497.3	1497.3	1497.2	1497.1	1499.2
170°	1514.8	1513.9	1513.0	1512.2	1511.3	1510.7	1510.5	1510.2	1509.8	1509.6	1511.6
172.5°	1524.1	1523.3	1522.4	1521.6	1520.7	1520.1	1519.8	1519.5	1519.2	1518.9	1521.0
175°	1535.5	1534.6	1533.8	1532.9	1532.1	1531.4	1530.8	1530.2	1529.7	1529.0	1531.1
177.5°	1540.2	1539.6	1538.9	1538.2	1537.5	1536.9	1536.4	1535.9	1535.5	1535.0	1536.4
180°	1538.2	1538.2	1538.2	1538.2	1538.2	1538.2	1538.2	1538.2	1538.2	1538.2	1538.2



TEST NUMBER: P331864-935

CATALOG NUMBER: S122RDIW-S1005D1440U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0	1458.0
2.5°	1451.1	1453.5	1455.9	1456.7	1456.3	1455.9	1455.3	1454.9
5°	1439.6	1442.3	1444.8	1445.7	1444.8	1444.0	1443.1	1442.3
7.5°	1416.3	1417.0	1417.8	1417.5	1415.9	1414.4	1412.9	1411.4
10°	1392.9	1392.1	1391.2	1389.9	1388.1	1386.4	1384.6	1382.9
12.5°	1366.2	1364.6	1363.0	1360.8	1357.9	1355.0	1352.0	1349.1
15°	1316.3	1310.7	1305.1	1300.9	1298.0	1295.0	1292.1	1289.2
17.5°	1259.8	1253.2	1246.6	1240.7	1235.7	1230.6	1225.5	1220.6
20°	1220.4	1213.1	1205.7	1198.9	1192.4	1185.9	1179.5	1173.0
22.5°	1177.2	1167.7	1158.2	1151.1	1146.3	1141.5	1136.7	1131.9
25°	1105.4	1093.5	1081.4	1073.2	1068.8	1064.4	1060.0	1055.6
27.5°	1037.1	1023.0	1009.0	998.5	991.5	984.6	977.6	970.6
30°	988.8	973.8	958.8	947.4	939.5	931.6	923.7	915.8
32.5°	940.2	923.2	906.0	893.8	886.4	878.9	871.4	864.0
35°	864.3	845.8	827.3	814.9	808.4	801.9	795.5	789.1
37.5°	790.3	770.0	749.6	735.7	728.4	721.0	713.6	706.2
40°	740.8	720.0	699.2	685.0	677.3	669.7	662.1	654.4
42.5°	690.9	669.3	647.8	633.4	625.9	618.5	611.2	603.8
45°	618.1	597.3	576.4	562.6	555.5	548.5	541.4	534.4
47.5°	547.3	526.7	505.9	492.4	486.0	479.7	473.2	466.8
50°	501.9	481.6	461.4	448.2	442.0	435.8	429.7	423.5
52.5°	458.9	439.4	419.9	407.3	401.6	395.9	390.2	384.5
55°	393.6	376.1	358.4	346.9	341.3	335.7	330.2	324.6
57.5°	334.3	318.1	302.0	291.6	287.0	282.2	277.6	272.9
60°	293.3	278.4	263.5	253.7	248.9	244.3	239.5	234.9
62.5°	257.9	243.6	229.4	220.8	218.0	215.2	212.3	209.6
65°	209.7	199.7	189.7	184.3	183.4	182.5	181.7	180.8
67.5°	169.3	164.7	160.1	157.3	156.4	155.5	154.5	153.6
70°	147.2	144.3	141.4	139.3	138.1	136.9	135.8	134.6
72.5°	128.1	125.6	123.1	121.6	120.9	120.2	119.4	118.7
75°	101.4	99.4	97.4	96.2	95.9	95.6	95.3	95.0
77.5°	76.8	75.7	74.5	73.6	73.2	72.8	72.2	71.8
80°	61.0	59.8	58.6	58.0	58.0	58.0	58.0	58.0
82.5°	46.1	45.4	44.7	44.3	44.3	44.3	44.3	44.3
85°	25.1	25.1	25.1	25.1	25.1	25.1	25.1	25.1
87.5°	16.8	16.4	16.1	16.0	16.0	16.1	16.2	16.2
90°	44.3	43.7	43.1	43.0	43.3	43.6	43.8	44.2
92.5°	41.5	41.6	41.8	41.8	41.8	41.9	42.0	42.0
95°	83.1	83.1	83.1	82.7	82.2	81.6	81.0	80.5
97.5°	139.7	139.7	139.7	139.7	139.6	139.5	139.5	139.4
100°	179.1	179.1	179.1	179.0	178.7	178.4	178.1	177.8
102.5°	222.1	222.4	222.7	222.6	222.3	222.1	221.7	221.4
105°	286.7	287.3	287.8	288.2	288.2	288.2	288.2	288.2
107.5°	356.4	356.6	356.8	356.3	355.0	353.6	352.3	350.9
110°	403.7	403.7	403.7	403.2	402.3	401.5	400.6	399.8



TEST NUMBER: P331864-935

CATALOG NUMBER: S122RDIW-S1005D1440U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	451.1	450.4	449.7	449.0	448.4	447.8	447.1	446.5
115°	523.8	523.5	523.2	522.6	521.8	520.9	520.0	519.2
117.5°	594.2	593.5	592.8	591.9	591.1	590.2	589.4	588.5
120°	641.2	641.2	641.2	640.8	639.9	639.0	638.2	637.3
122.5°	689.7	689.0	688.3	687.6	687.0	686.4	685.7	685.1
125°	761.5	760.6	759.7	759.2	758.9	758.6	758.4	758.0
127.5°	831.2	830.2	829.1	828.2	827.2	826.3	825.4	824.5
130°	878.9	878.3	877.7	876.8	875.7	874.6	873.4	872.3
132.5°	925.3	924.0	922.7	921.6	920.8	919.8	918.9	917.9
135°	993.7	993.4	993.2	992.6	991.7	990.8	990.0	989.1
137.5°	1059.2	1059.0	1058.8	1058.1	1057.0	1055.8	1054.6	1053.4
140°	1103.3	1103.3	1103.3	1102.8	1101.6	1100.4	1099.2	1098.1
142.5°	1143.2	1143.5	1143.7	1143.2	1142.1	1140.9	1139.8	1138.6
145°	1203.9	1204.1	1204.4	1203.9	1202.8	1201.7	1200.5	1199.4
147.5°	1257.0	1257.6	1258.3	1258.0	1256.9	1255.8	1254.7	1253.6
150°	1290.6	1291.5	1292.4	1292.4	1291.5	1290.6	1289.8	1288.9
152.5°	1324.3	1325.4	1326.5	1326.5	1325.4	1324.3	1323.3	1322.2
155°	1367.1	1368.6	1369.9	1370.3	1369.4	1368.6	1367.7	1366.8
157.5°	1406.5	1408.5	1410.5	1410.7	1409.4	1408.0	1406.6	1405.2
160°	1429.9	1431.7	1433.4	1433.7	1432.5	1431.4	1430.3	1429.1
162.5°	1451.2	1453.2	1455.1	1455.4	1454.1	1452.7	1451.3	1449.8
165°	1478.6	1480.6	1482.6	1482.9	1481.4	1480.1	1478.6	1477.1
167.5°	1501.2	1503.2	1505.2	1505.5	1504.0	1502.4	1501.0	1499.4
170°	1513.6	1515.6	1517.7	1517.8	1516.0	1514.3	1512.6	1510.9
172.5°	1522.9	1525.0	1527.0	1527.2	1525.4	1523.7	1522.0	1520.3
175°	1533.1	1535.1	1537.1	1537.3	1535.5	1533.8	1532.1	1530.3
177.5°	1537.8	1539.2	1540.6	1540.6	1539.2	1537.8	1536.4	1535.0
180°	1538.2	1538.2	1538.2	1538.2	1538.2	1538.2	1538.2	1538.2

(END OF REPORT)