

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331801-935

Luminaire Tested: **S122RDIW-S485D1440U935-4F0-1E-UDD-A**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331801-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIW-S485D1440U935-4F0-1E-UDD-A  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 485 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 1440 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6562.8 lumens  
Efficiency: N/A  
Efficacy: 108.3 lumens/watt  
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02  
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 60.6  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331801-935

CATALOG NUMBER: S122RDIW-S485D1440U935-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

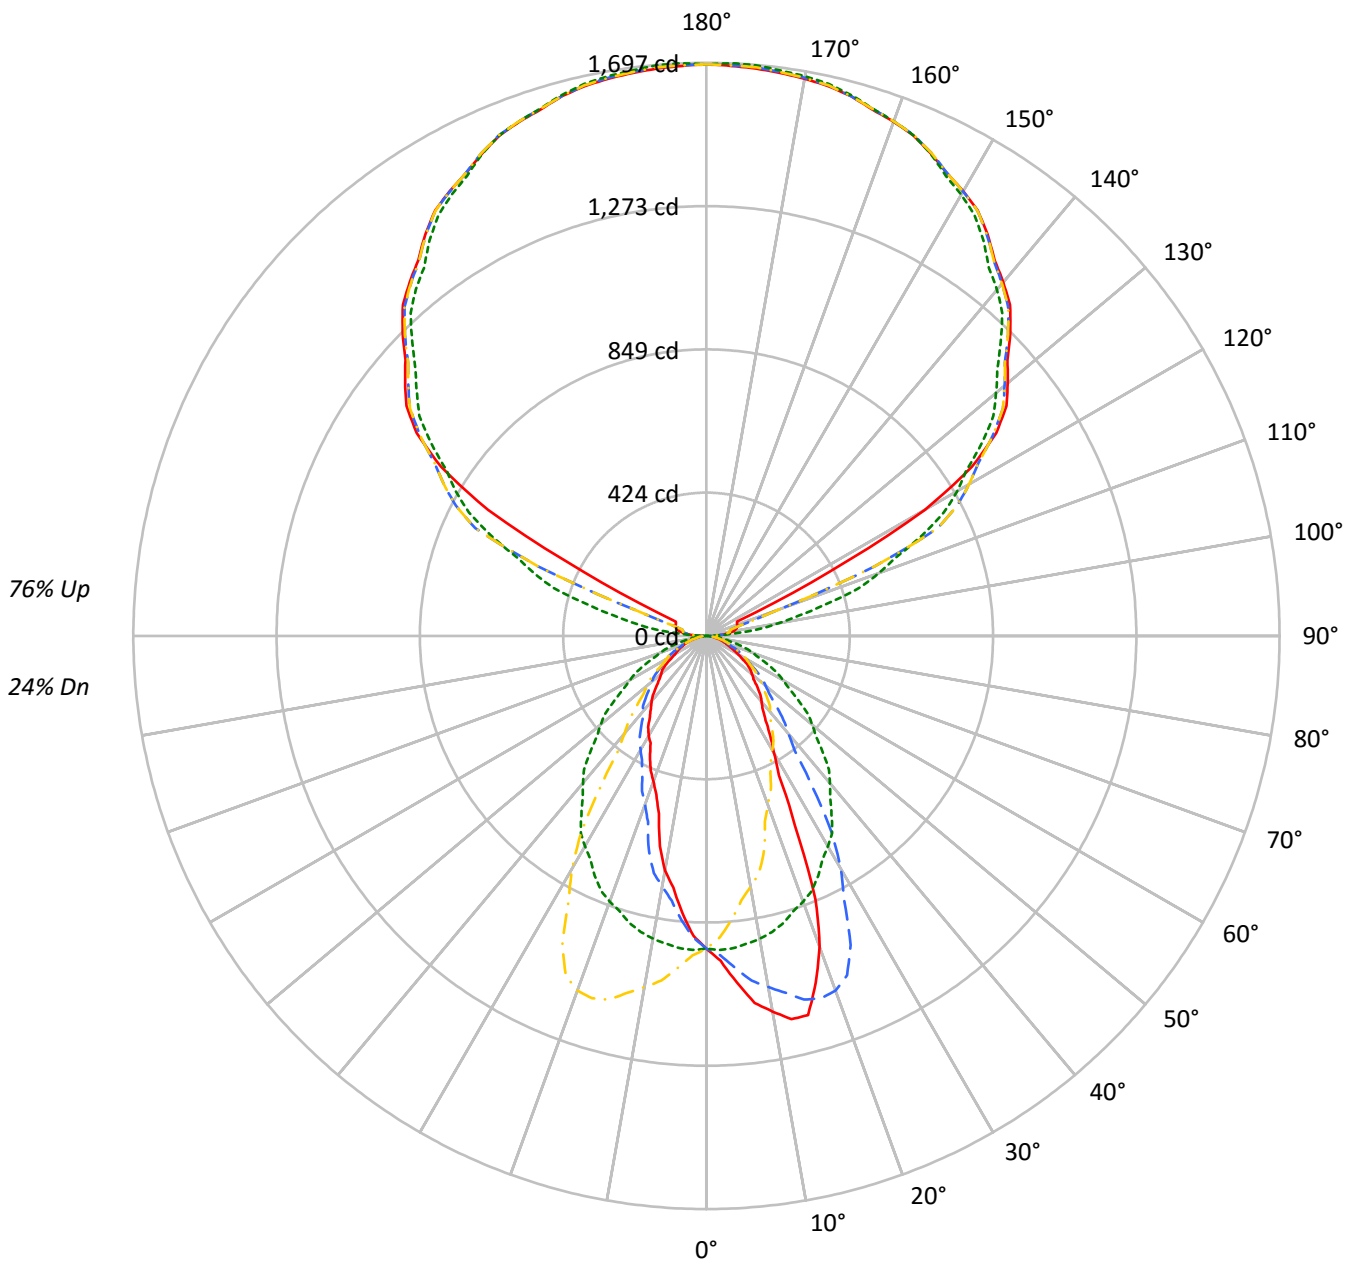

— 0°-180°    - - 45°-225°    - - - 90°-270°    - - - 135°-315°



TEST NUMBER: P331801-935

CATALOG NUMBER: S122RDIW-S485D1440U935-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	33	33	33	24
1	92	88	85	82	82	79	76	73	61	59	57	44	43	42	29	29	28	21
2	84	78	72	67	75	69	65	61	54	51	48	40	38	36	26	25	24	18
3	77	68	62	56	69	61	56	51	48	44	41	35	33	31	24	22	21	16
4	71	61	53	48	63	55	48	44	43	38	35	32	29	27	21	20	19	14
5	65	54	47	41	58	49	42	37	38	34	30	29	26	23	19	18	16	13
6	60	49	41	36	53	44	37	33	35	30	27	26	23	21	18	16	15	11
7	55	44	37	31	49	40	33	29	31	27	23	24	21	18	16	15	13	10
8	51	40	33	28	46	36	30	25	29	24	21	22	19	16	15	13	12	9
9	48	36	29	25	43	33	27	23	26	22	19	20	17	15	14	12	11	9
10	45	33	27	22	40	30	24	20	24	20	17	18	15	13	13	11	10	8

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	14941	14941	14941	14941
5°	16686	15034	13331	15034
10°	18513	14929	11555	14929
15°	19423	14710	9105	14710
20°	16838	14385	7878	14385
25°	11043	13942	7035	13942
30°	7433	13403	6367	13403
35°	6022	12727	5742	12727
40°	5354	11989	5313	11989
45°	4845	11125	4743	11125
50°	4411	10263	4393	10263
55°	4144	9315	4090	9315
60°	3468	8441	3426	8441
65°	2923	7664	3316	7664
70°	2705	6845	3125	6845
75°	2533	5958	2888	5958
80°	2334	4900	2566	4900
85°	2130	3872	2260	3872



TEST NUMBER: P331801-935

CATALOG NUMBER: S122RDIW-S485D1440U935-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	87.7	1.3
10°-20°	244.4	3.7
20°-30°	315.0	4.8
30°-40°	299.3	4.6
40°-50°	256.4	3.9
50°-60°	195.3	3.0
60°-70°	123.4	1.9
70°-80°	61.6	0.9
80°-90°	20.2	0.3
90°-100°	56.5	0.9
100°-110°	207.0	3.2
110°-120°	553.4	8.4
120°-130°	913.5	13.9
130°-140°	971.4	14.8
140°-150°	902.9	13.8
150°-160°	726.0	11.1
160°-170°	467.8	7.1
170°-180°	161.0	2.5
0°-30°	647.1	9.9
0°-40°	946.4	14.4
0°-60°	1398.1	21.3
0°-90°	1603.4	24.4
90°-120°	816.8	12.4
90°-150°	3604.6	54.9
90°-180°	4959.0	75.6
0°-180°	6562.8	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	925	925	925	925	925	
5°	1030	928	822	928	1030	102
15°	1162	880	545	880	1162	313
25°	620	783	395	783	620	294
35°	306	646	291	646	306	195
45°	212	487	208	487	212	164
55°	147	331	145	331	147	129
65°	76	201	87	201	76	78
75°	41	96	46	96	41	43
85°	12	21	12	21	12	13
90°	33	1	33	1	33	15
95°	53	80	53	80	53	49
105°	93	372	93	372	93	97
115°	100	704	100	704	100	251
125°	1047	996	1047	996	1047	906
135°	1272	1232	1272	1232	1272	981
145°	1451	1429	1451	1429	1451	907
155°	1575	1574	1575	1574	1575	727
165°	1654	1658	1654	1658	1654	467
175°	1686	1696	1686	1696	1686	161
180°	1692	1692	1692	1692	1692	



TEST NUMBER: P331801-935

CATALOG NUMBER: S122RDIW-S485D1440U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4
2.5°	962.9	963.7	964.5	962.7	962.7	961.1	957.8	955.2	948.0	946.9	946.9
5°	1029.5	1028.9	1030.2	1026.0	1020.2	1018.9	1012.8	1004.8	996.4	987.1	985.2
7.5°	1095.8	1094.8	1092.3	1091.5	1087.1	1077.4	1067.6	1057.0	1043.2	1029.6	1022.8
10°	1129.2	1139.8	1133.4	1122.1	1124.4	1109.3	1101.2	1087.4	1075.8	1055.6	1051.1
12.5°	1162.1	1166.3	1164.2	1157.9	1155.0	1144.5	1133.7	1121.6	1100.3	1082.1	1066.3
15°	1162.0	1168.1	1169.8	1167.8	1169.4	1168.7	1163.0	1153.0	1134.4	1114.4	1097.1
17.5°	1076.2	1080.5	1091.0	1098.1	1107.2	1126.2	1135.6	1139.3	1136.4	1125.1	1112.8
20°	980.0	972.9	1002.5	1017.6	1030.5	1062.6	1090.3	1100.9	1117.9	1117.7	1114.4
22.5°	843.7	845.3	873.4	891.3	928.9	961.0	992.6	1032.5	1065.5	1087.3	1100.0
25°	619.9	632.1	660.1	684.5	726.3	786.2	840.5	903.5	962.9	1010.0	1054.6
27.5°	465.5	466.5	488.6	511.3	536.1	585.0	653.5	728.8	813.6	883.5	964.0
30°	398.7	396.7	406.1	419.9	441.2	479.1	530.5	604.5	689.1	794.5	888.4
32.5°	351.4	351.5	358.5	368.8	386.3	411.9	447.2	507.2	587.2	690.9	800.9
35°	305.5	305.1	310.3	317.7	325.0	341.5	365.6	397.1	452.1	548.9	661.4
37.5°	272.5	274.0	276.5	281.1	289.2	298.3	312.9	334.0	373.2	430.4	525.0
40°	254.0	254.7	258.2	262.1	266.9	274.0	285.9	302.9	331.5	377.1	446.3
42.5°	237.0	237.6	240.2	243.7	247.5	254.7	264.5	279.2	302.5	338.0	395.1
45°	212.2	212.2	214.5	216.0	220.2	226.7	234.7	246.9	263.0	289.4	327.4
47.5°	188.9	189.0	190.5	193.2	195.9	200.9	208.8	218.8	230.5	250.9	283.3
50°	175.6	175.9	176.8	179.1	180.7	185.2	191.3	200.0	212.2	228.0	254.9
52.5°	164.7	164.5	165.7	166.8	167.8	171.1	175.6	183.3	194.2	207.9	230.3
55°	147.2	145.9	147.9	149.5	150.5	151.8	154.3	159.2	168.5	180.0	196.7
57.5°	125.4	124.8	126.2	127.7	130.7	134.2	136.4	139.5	144.3	152.6	169.2
60°	107.4	107.4	110.3	111.2	114.8	119.2	123.8	126.4	131.2	136.6	148.9
62.5°	91.4	91.7	93.1	94.0	96.0	101.5	107.9	113.5	118.0	123.3	131.4
65°	76.5	77.1	77.1	77.8	79.1	80.4	82.9	87.5	95.5	102.9	109.0
67.5°	64.9	65.2	65.3	66.0	66.3	67.7	68.7	70.8	72.6	79.6	87.2
70°	57.3	58.2	57.9	58.5	58.8	59.5	60.8	61.7	64.7	66.2	70.8
72.5°	50.0	50.7	50.7	51.1	51.9	52.0	53.0	54.0	55.9	57.3	59.7
75°	40.6	40.2	40.6	41.2	41.5	41.8	41.8	43.0	44.1	45.4	46.9
77.5°	31.3	31.6	31.5	31.6	31.6	32.2	32.1	32.7	33.7	34.4	35.1
80°	25.1	25.4	25.1	25.4	25.7	26.0	25.7	26.0	27.0	27.6	27.6
82.5°	19.5	19.5	19.7	19.7	19.8	19.9	20.3	20.4	21.1	20.9	21.2
85°	11.5	11.3	11.3	11.3	11.5	11.9	11.5	11.5	11.9	11.9	11.9
87.5°	10.8	10.8	10.8	10.7	10.6	10.3	10.1	10.1	9.6	9.6	8.9
90°	33.1	32.5	31.9	31.4	30.9	30.0	28.6	27.2	25.8	24.5	22.3
92.5°	33.1	32.7	32.4	32.1	31.8	31.3	30.6	29.8	29.1	28.4	27.3
95°	52.7	53.0	53.2	53.5	53.7	53.2	51.8	50.5	49.1	47.8	45.9
97.5°	70.3	70.0	69.7	69.3	69.0	68.3	67.2	66.1	65.0	63.9	59.5
100°	82.1	81.5	80.9	80.4	79.9	78.5	76.4	74.1	72.0	69.8	65.2
102.5°	87.9	87.1	86.4	85.7	84.9	83.1	80.2	77.4	74.6	71.7	110.5
105°	93.1	92.0	90.9	89.8	88.7	86.7	83.7	80.7	77.7	74.7	149.0
107.5°	95.7	94.7	93.6	92.5	91.4	92.4	95.4	98.5	101.5	104.6	193.6
110°	96.8	95.7	94.5	93.5	92.4	105.5	132.7	159.9	187.1	214.3	292.9



TEST NUMBER: P331801-935

CATALOG NUMBER: S122RDIW-S485D1440U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	97.7	96.9	96.0	95.1	94.2	143.4	242.7	342.0	441.3	540.5	559.9
115°	100.4	120.0	139.6	159.2	178.7	251.6	377.5	503.6	629.6	755.5	748.7
117.5°	410.0	474.3	538.7	603.1	667.5	715.0	745.5	775.9	806.4	836.9	832.2
120°	747.0	783.7	820.4	857.2	893.9	910.7	907.4	904.1	900.9	897.6	892.7
122.5°	932.1	939.3	946.4	953.5	960.6	963.2	961.3	959.3	957.3	955.4	950.0
125°	1047.0	1046.2	1045.3	1044.6	1043.7	1042.3	1040.4	1038.5	1036.6	1034.7	1029.6
127.5°	1119.5	1119.3	1119.1	1119.0	1118.9	1117.3	1114.6	1111.8	1109.1	1106.3	1102.4
130°	1164.5	1164.8	1165.1	1165.4	1165.6	1164.2	1161.3	1158.3	1155.3	1152.3	1149.3
132.5°	1208.6	1208.9	1209.2	1209.4	1209.7	1208.6	1206.0	1203.4	1200.9	1198.3	1195.3
135°	1272.3	1272.8	1273.4	1273.9	1274.5	1273.4	1270.7	1267.9	1265.2	1262.5	1260.1
137.5°	1330.3	1331.3	1332.2	1333.1	1334.0	1333.2	1330.5	1327.8	1325.2	1322.5	1319.7
140°	1366.6	1368.0	1369.3	1370.7	1372.0	1371.5	1369.1	1366.6	1364.2	1361.7	1358.7
142.5°	1401.9	1403.3	1404.5	1405.9	1407.3	1406.9	1404.6	1402.4	1400.2	1397.9	1394.5
145°	1451.1	1452.4	1453.8	1455.2	1456.6	1456.3	1454.3	1452.4	1450.5	1448.6	1444.0
147.5°	1494.4	1495.6	1496.8	1497.9	1499.0	1498.9	1497.5	1496.1	1494.6	1493.2	1488.7
150°	1520.9	1522.2	1523.6	1525.0	1526.3	1526.2	1524.6	1522.9	1521.3	1519.7	1515.3
152.5°	1543.4	1545.2	1547.0	1548.8	1550.6	1550.7	1549.0	1547.4	1545.8	1544.1	1540.0
155°	1574.8	1576.9	1579.2	1581.3	1583.5	1583.7	1582.1	1580.5	1578.8	1577.2	1574.0
157.5°	1603.4	1605.5	1607.7	1609.8	1611.9	1612.1	1610.2	1608.3	1606.5	1604.6	1602.3
160°	1620.1	1622.0	1623.8	1625.8	1627.7	1627.8	1626.2	1624.5	1622.9	1621.3	1619.6
162.5°	1633.8	1636.2	1638.5	1640.8	1643.1	1643.4	1641.6	1639.7	1637.9	1636.0	1634.6
165°	1654.3	1656.3	1658.2	1660.1	1662.0	1662.0	1660.1	1658.2	1656.3	1654.3	1653.6
167.5°	1667.3	1669.8	1672.2	1674.7	1677.1	1677.4	1675.5	1673.6	1671.7	1669.8	1669.0
170°	1675.2	1677.7	1680.1	1682.6	1685.0	1685.2	1683.3	1681.4	1679.6	1677.7	1677.1
172.5°	1681.0	1683.5	1685.9	1688.4	1690.8	1691.1	1689.2	1687.3	1685.4	1683.5	1683.0
175°	1686.2	1688.9	1691.6	1694.4	1697.1	1697.5	1695.6	1693.7	1691.8	1689.9	1689.4
177.5°	1689.4	1691.3	1693.3	1695.2	1697.2	1697.5	1695.9	1694.4	1692.9	1691.3	1691.1
180°	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3



TEST NUMBER: P331801-935

CATALOG NUMBER: S122RDIW-S485D1440U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4
2.5°	947.4	945.5	943.7	939.0	936.7	931.5	930.7	930.5	923.9	917.4	915.6
5°	980.0	974.9	967.2	958.1	948.8	939.2	932.7	927.6	914.7	902.5	895.4
7.5°	1012.8	1001.8	988.4	971.4	957.2	941.2	929.4	918.8	900.5	883.0	871.2
10°	1037.2	1019.3	1001.6	978.1	959.8	941.8	925.1	910.6	890.0	866.9	850.4
12.5°	1052.4	1032.6	1008.2	985.3	961.6	938.7	916.3	897.7	873.6	849.6	830.1
15°	1073.0	1051.7	1022.2	989.4	958.8	928.9	903.2	880.0	848.5	819.9	796.1
17.5°	1089.8	1060.5	1028.7	990.8	955.5	917.5	884.3	854.7	819.7	785.1	757.2
20°	1095.1	1066.2	1029.5	991.6	949.8	905.1	869.4	837.2	799.6	762.0	729.9
22.5°	1091.7	1069.3	1028.5	983.1	940.3	893.5	853.3	815.9	774.2	735.8	698.5
25°	1069.1	1061.4	1022.8	973.3	924.4	870.0	823.5	782.6	735.0	693.9	653.3
27.5°	1016.2	1032.9	1008.9	956.1	901.8	843.5	791.2	744.7	695.3	648.9	608.6
30°	965.3	1003.5	993.2	944.3	883.6	826.3	767.5	718.9	666.2	618.6	578.8
32.5°	895.5	958.7	968.8	927.9	865.0	802.1	740.5	692.2	637.1	586.9	548.1
35°	784.5	879.1	922.5	896.4	833.4	765.6	701.9	645.7	590.3	540.8	502.2
37.5°	652.1	780.8	853.3	855.1	797.2	726.7	657.4	601.5	544.8	496.3	454.5
40°	566.2	705.8	800.0	820.9	772.0	695.8	625.7	568.8	513.5	465.9	418.0
42.5°	489.0	628.1	743.9	780.2	741.4	665.7	595.4	535.9	482.1	437.0	388.1
45°	395.5	517.0	644.6	709.6	688.1	617.9	543.7	487.2	436.6	397.7	350.8
47.5°	333.6	419.3	542.8	630.7	630.3	566.3	493.3	439.0	392.2	355.8	317.7
50°	298.3	373.0	477.5	577.1	585.5	531.8	462.4	408.6	365.0	326.7	296.1
52.5°	266.7	328.2	422.1	517.7	541.5	495.0	427.7	378.1	335.6	300.4	274.2
55°	225.4	272.9	344.4	433.8	469.8	437.0	377.1	330.9	296.4	266.9	244.4
57.5°	190.6	226.4	283.6	355.6	397.5	376.9	327.6	290.0	260.5	233.8	216.0
60°	168.8	198.0	246.6	306.8	353.0	338.5	296.4	261.4	236.3	213.2	196.5
62.5°	148.3	173.4	215.0	263.8	306.3	300.2	265.9	236.4	214.5	193.4	179.3
65°	119.2	137.6	170.0	208.4	242.5	245.3	220.6	200.6	181.0	164.3	151.8
67.5°	95.0	106.9	129.8	162.0	187.6	196.7	181.6	166.3	150.8	137.8	127.0
70°	80.1	89.7	106.4	132.5	155.9	165.6	156.9	145.0	131.5	120.9	111.6
72.5°	64.9	74.3	86.6	105.7	125.9	136.3	133.3	124.7	113.7	105.0	96.2
75°	48.9	51.7	60.1	73.0	88.8	97.7	100.0	95.5	86.8	80.1	74.9
77.5°	36.2	37.9	41.8	48.6	58.9	66.9	70.3	69.7	63.7	59.8	55.0
80°	28.9	29.9	31.9	34.7	42.4	50.5	52.7	52.7	48.6	46.9	42.1
82.5°	22.0	22.7	23.8	25.5	29.1	36.1	38.6	39.1	36.4	34.4	30.6
85°	12.6	12.2	12.8	13.9	14.5	16.4	20.2	20.9	20.2	17.7	16.7
87.5°	8.4	8.2	7.7	7.0	6.6	6.4	7.0	7.7	7.2	7.1	7.1
90°	20.1	18.0	15.8	13.2	10.2	7.2	4.2	1.2	4.2	7.2	10.2
92.5°	26.3	25.1	24.0	23.7	23.9	24.2	24.5	24.7	24.5	24.2	23.9
95°	43.9	42.0	40.1	43.7	52.7	61.6	70.6	79.6	70.6	61.6	52.7
97.5°	55.1	50.7	46.3	56.7	82.1	107.4	132.7	158.0	132.7	107.4	82.1
100°	60.5	55.9	51.3	67.6	104.9	142.2	179.4	216.7	179.4	142.2	104.9
102.5°	149.1	187.9	226.5	249.9	257.7	265.6	273.5	281.4	273.5	265.6	257.7
105°	223.3	297.6	371.9	404.9	396.7	388.6	380.4	372.3	380.4	388.6	396.7
107.5°	282.8	371.9	461.0	502.2	495.6	489.0	482.4	475.9	482.4	489.0	495.6
110°	371.6	450.2	528.8	565.3	559.6	553.9	548.2	542.5	548.2	553.9	559.6





TEST NUMBER: P331801-935

CATALOG NUMBER: S122RDIW-S485D1440U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	579.4	598.8	618.2	625.4	620.4	615.3	610.2	605.2	610.2	615.3	620.4
115°	741.9	735.1	728.3	722.6	718.0	713.3	708.8	704.1	708.8	713.3	718.0
117.5°	827.5	822.8	818.1	813.2	808.0	802.9	797.7	792.6	797.7	802.9	808.0
120°	887.8	882.9	878.0	873.5	869.4	865.3	861.3	857.2	861.3	865.3	869.4
122.5°	944.7	939.4	934.1	929.3	925.0	920.7	916.4	912.1	916.4	920.7	925.0
125°	1024.4	1019.3	1014.1	1009.7	1006.2	1002.6	999.1	995.6	999.1	1002.6	1006.2
127.5°	1098.5	1094.7	1090.8	1086.9	1083.0	1079.1	1075.1	1071.3	1075.1	1079.1	1083.0
130°	1146.3	1143.3	1140.3	1136.7	1132.3	1127.9	1123.6	1119.2	1123.6	1127.9	1132.3
132.5°	1192.3	1189.4	1186.4	1183.0	1179.3	1175.6	1171.9	1168.2	1171.9	1175.6	1179.3
135°	1257.6	1255.2	1252.7	1249.3	1244.9	1240.6	1236.2	1231.9	1236.2	1240.6	1244.9
137.5°	1317.0	1314.1	1311.4	1308.5	1305.4	1302.4	1299.3	1296.3	1299.3	1302.4	1305.4
140°	1355.7	1352.7	1349.7	1347.1	1345.0	1342.8	1340.6	1338.4	1340.6	1342.8	1345.0
142.5°	1391.1	1387.7	1384.2	1381.6	1379.6	1377.6	1375.6	1373.7	1375.6	1377.6	1379.6
145°	1439.4	1434.8	1430.1	1428.0	1428.2	1428.5	1428.7	1429.1	1428.7	1428.5	1428.2
147.5°	1484.1	1479.5	1474.9	1473.2	1474.2	1475.2	1476.3	1477.3	1476.3	1475.2	1474.2
150°	1511.0	1506.6	1502.3	1501.0	1503.0	1504.9	1506.8	1508.6	1506.8	1504.9	1503.0
152.5°	1535.9	1531.7	1527.6	1526.6	1528.7	1530.9	1533.0	1535.1	1533.0	1530.9	1528.7
155°	1570.7	1567.5	1564.2	1563.7	1566.2	1568.7	1571.1	1573.6	1571.1	1568.7	1566.2
157.5°	1600.1	1597.8	1595.5	1595.4	1597.5	1599.6	1601.6	1603.7	1601.6	1599.6	1597.5
160°	1618.1	1616.4	1614.8	1614.8	1616.4	1618.1	1619.6	1621.3	1619.6	1618.1	1616.4
162.5°	1633.1	1631.8	1630.3	1630.5	1632.1	1633.7	1635.4	1636.9	1635.4	1633.7	1632.1
165°	1652.7	1651.9	1651.1	1651.5	1653.1	1654.8	1656.4	1658.0	1656.4	1654.8	1653.1
167.5°	1668.3	1667.5	1666.7	1667.2	1668.8	1670.4	1672.1	1673.7	1672.1	1670.4	1668.8
170°	1676.5	1676.0	1675.4	1676.0	1677.7	1679.3	1680.9	1682.6	1680.9	1679.3	1677.7
172.5°	1682.4	1681.9	1681.4	1681.9	1683.5	1685.1	1686.8	1688.4	1686.8	1685.1	1683.5
175°	1688.8	1688.2	1687.7	1688.4	1690.3	1692.2	1694.1	1696.0	1694.1	1692.2	1690.3
177.5°	1690.9	1690.7	1690.5	1691.1	1692.6	1694.2	1695.7	1697.2	1695.7	1694.2	1692.6
180°	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3



TEST NUMBER: P331801-935

CATALOG NUMBER: S122RDIW-S485D1440U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4
2.5°	912.2	910.4	907.1	902.0	898.9	893.5	889.8	891.9	892.4	891.9	891.4
5°	887.8	881.0	871.7	862.6	854.3	845.3	840.2	837.9	833.4	830.9	829.6
7.5°	858.1	846.4	833.3	817.6	804.3	790.3	783.2	779.6	770.4	765.4	761.0
10°	835.9	817.6	804.4	783.9	771.4	753.0	740.5	740.8	728.2	721.2	716.0
12.5°	811.6	791.4	769.5	751.0	733.6	718.8	703.7	697.6	684.2	677.4	663.6
15°	771.0	747.5	724.4	699.3	681.7	658.8	637.0	610.3	588.8	570.1	564.9
17.5°	726.8	697.8	674.5	645.1	614.8	576.4	551.0	535.5	522.5	512.7	505.4
20°	696.5	666.8	642.1	597.7	556.9	530.8	512.2	500.3	486.8	476.2	470.4
22.5°	664.5	633.7	599.9	550.4	518.6	497.7	481.0	467.4	458.2	450.0	444.7
25°	619.2	585.5	529.9	495.8	470.1	448.2	436.6	428.3	418.6	407.3	402.3
27.5°	571.4	517.7	477.8	452.5	427.9	413.7	403.3	390.8	382.2	377.1	371.8
30°	535.6	482.0	450.8	423.1	405.8	390.0	377.8	370.7	362.4	353.7	350.2
32.5°	495.8	452.9	423.0	400.0	382.4	368.9	359.3	347.8	341.8	336.5	329.1
35°	446.3	413.8	386.5	367.8	351.1	340.2	328.9	322.2	311.3	306.8	303.8
37.5°	404.3	376.2	355.8	336.1	322.9	310.8	303.9	293.2	288.4	282.1	276.0
40°	380.6	353.0	333.5	317.4	302.6	293.5	284.9	276.2	269.1	266.2	258.8
42.5°	356.5	334.0	314.4	296.8	286.9	277.3	266.4	260.0	252.6	248.0	243.4
45°	323.1	303.2	286.5	272.0	261.1	251.2	244.0	233.4	229.3	219.9	216.0
47.5°	293.8	275.3	259.3	245.6	234.9	228.4	218.1	209.7	203.1	197.3	192.4
50°	272.9	257.5	242.1	229.9	220.2	210.9	200.4	196.1	185.8	183.0	180.0
52.5°	253.9	239.3	225.2	213.2	203.5	194.5	185.1	179.7	172.7	169.8	167.7
55°	227.3	213.2	199.7	189.1	179.4	170.0	164.3	157.6	154.3	152.1	149.5
57.5°	200.5	187.9	177.5	166.8	157.0	149.6	142.9	138.9	135.5	132.6	129.5
60°	183.6	171.3	162.0	152.1	142.2	136.0	130.9	126.1	122.2	117.7	116.4
62.5°	165.6	154.9	146.4	136.6	127.9	122.3	117.5	113.0	108.3	101.8	100.0
65°	140.9	132.5	123.5	115.5	107.7	102.3	95.1	90.1	88.1	87.5	87.1
67.5°	118.5	110.6	102.8	94.6	87.6	82.5	78.9	78.1	76.8	76.4	75.5
70°	103.5	96.2	88.4	80.7	74.0	73.0	71.7	70.4	68.8	68.2	67.5
72.5°	90.1	82.5	74.8	68.6	65.7	64.5	63.2	61.9	60.9	60.2	59.8
75°	69.1	62.1	56.9	54.7	53.0	52.1	50.2	49.2	48.6	47.6	47.3
77.5°	49.8	45.8	43.4	42.0	40.3	39.3	38.2	37.2	36.5	36.3	35.8
80°	38.0	36.0	34.4	32.5	31.9	30.6	30.2	29.3	29.6	28.6	28.6
82.5°	29.4	27.0	25.7	24.8	24.1	23.1	22.7	22.3	22.4	21.7	21.7
85°	15.2	14.5	13.9	13.2	13.2	12.2	12.6	12.2	12.2	11.5	11.3
87.5°	7.5	7.7	7.7	8.2	8.6	8.8	9.0	9.0	9.3	9.6	9.6
90°	13.2	15.8	18.0	20.1	22.3	24.5	25.8	27.2	28.6	30.0	30.9
92.5°	23.7	24.0	25.1	26.3	27.3	28.4	29.1	29.8	30.6	31.3	31.8
95°	43.7	40.1	42.0	43.9	45.9	47.8	49.1	50.5	51.8	53.2	53.7
97.5°	56.7	46.3	50.7	55.1	59.5	63.9	65.0	66.1	67.2	68.3	69.0
100°	67.6	51.3	55.9	60.5	65.2	69.8	72.0	74.1	76.4	78.5	79.9
102.5°	249.9	226.5	187.9	149.1	110.5	71.7	74.6	77.4	80.2	83.1	84.9
105°	404.9	371.9	297.6	223.3	149.0	74.7	77.7	80.7	83.7	86.7	88.7
107.5°	502.2	461.0	371.9	282.8	193.6	104.6	101.5	98.5	95.4	92.4	91.4
110°	565.3	528.8	450.2	371.6	292.9	214.3	187.1	159.9	132.7	105.5	92.4



TEST NUMBER: P331801-935

CATALOG NUMBER: S122RDIW-S485D1440U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	625.4	618.2	598.8	579.4	559.9	540.5	441.3	342.0	242.7	143.4	94.2
115°	722.6	728.3	735.1	741.9	748.7	755.5	629.6	503.6	377.5	251.6	178.7
117.5°	813.2	818.1	822.8	827.5	832.2	836.9	806.4	775.9	745.5	715.0	667.5
120°	873.5	878.0	882.9	887.8	892.7	897.6	900.9	904.1	907.4	910.7	893.9
122.5°	929.3	934.1	939.4	944.7	950.0	955.4	957.3	959.3	961.3	963.2	960.6
125°	1009.7	1014.1	1019.3	1024.4	1029.6	1034.7	1036.6	1038.5	1040.4	1042.3	1043.7
127.5°	1086.9	1090.8	1094.7	1098.5	1102.4	1106.3	1109.1	1111.8	1114.6	1117.3	1118.9
130°	1136.7	1140.3	1143.3	1146.3	1149.3	1152.3	1155.3	1158.3	1161.3	1164.2	1165.6
132.5°	1183.0	1186.4	1189.4	1192.3	1195.3	1198.3	1200.9	1203.4	1206.0	1208.6	1209.7
135°	1249.3	1252.7	1255.2	1257.6	1260.1	1262.5	1265.2	1267.9	1270.7	1273.4	1274.5
137.5°	1308.5	1311.4	1314.1	1317.0	1319.7	1322.5	1325.2	1327.8	1330.5	1333.2	1334.0
140°	1347.1	1349.7	1352.7	1355.7	1358.7	1361.7	1364.2	1366.6	1369.1	1371.5	1372.0
142.5°	1381.6	1384.2	1387.7	1391.1	1394.5	1397.9	1400.2	1402.4	1404.6	1406.9	1407.3
145°	1428.0	1430.1	1434.8	1439.4	1444.0	1448.6	1450.5	1452.4	1454.3	1456.3	1456.6
147.5°	1473.2	1474.9	1479.5	1484.1	1488.7	1493.2	1494.6	1496.1	1497.5	1498.9	1499.0
150°	1501.0	1502.3	1506.6	1511.0	1515.3	1519.7	1521.3	1522.9	1524.6	1526.2	1526.3
152.5°	1526.6	1527.6	1531.7	1535.9	1540.0	1544.1	1545.8	1547.4	1549.0	1550.7	1550.6
155°	1563.7	1564.2	1567.5	1570.7	1574.0	1577.2	1578.8	1580.5	1582.1	1583.7	1583.5
157.5°	1595.4	1595.5	1597.8	1600.1	1602.3	1604.6	1606.5	1608.3	1610.2	1612.1	1611.9
160°	1614.8	1614.8	1616.4	1618.1	1619.6	1621.3	1622.9	1624.5	1626.2	1627.8	1627.7
162.5°	1630.5	1630.3	1631.8	1633.1	1634.6	1636.0	1637.9	1639.7	1641.6	1643.4	1643.1
165°	1651.5	1651.1	1651.9	1652.7	1653.6	1654.3	1656.3	1658.2	1660.1	1662.0	1662.0
167.5°	1667.2	1666.7	1667.5	1668.3	1669.0	1669.8	1671.7	1673.6	1675.5	1677.4	1677.1
170°	1676.0	1675.4	1676.0	1676.5	1677.1	1677.7	1679.6	1681.4	1683.3	1685.2	1685.0
172.5°	1681.9	1681.4	1681.9	1682.4	1683.0	1683.5	1685.4	1687.3	1689.2	1691.1	1690.8
175°	1688.4	1687.7	1688.2	1688.8	1689.4	1689.9	1691.8	1693.7	1695.6	1697.5	1697.1
177.5°	1691.1	1690.5	1690.7	1690.9	1691.1	1691.3	1692.9	1694.4	1695.9	1697.5	1697.2
180°	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3



TEST NUMBER: P331801-935

CATALOG NUMBER: S122RDIW-S485D1440U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4
2.5°	888.6	889.1	888.3	888.8	888.3	889.1	888.6	891.4	891.9	892.4	891.9
5°	827.9	824.1	823.5	822.5	823.5	824.1	827.9	829.6	830.9	833.4	837.9
7.5°	755.5	754.9	753.4	751.1	753.4	754.9	755.5	761.0	765.4	770.4	779.6
10°	708.9	707.4	707.1	704.8	707.1	707.4	708.9	716.0	721.2	728.2	740.8
12.5°	654.4	644.1	643.0	637.4	643.0	644.1	654.4	663.6	677.4	684.2	697.6
15°	557.2	555.3	548.9	544.7	548.9	555.3	557.2	564.9	570.1	588.8	610.3
17.5°	501.6	495.3	493.4	492.5	493.4	495.3	501.6	505.4	512.7	522.5	535.5
20°	465.9	460.1	459.2	458.5	459.2	460.1	465.9	470.4	476.2	486.8	500.3
22.5°	441.2	435.1	432.7	430.8	432.7	435.1	441.2	444.7	450.0	458.2	467.4
25°	399.0	396.7	395.5	394.9	395.5	396.7	399.0	402.3	407.3	418.6	428.3
27.5°	366.0	361.1	360.1	358.4	360.1	361.1	366.0	371.8	377.1	382.2	390.8
30°	347.2	345.6	343.4	341.5	343.4	345.6	347.2	350.2	353.7	362.4	370.7
32.5°	325.1	323.8	321.8	320.9	321.8	323.8	325.1	329.1	336.5	341.8	347.8
35°	300.7	296.1	294.2	291.3	294.2	296.1	300.7	303.8	306.8	311.3	322.2
37.5°	274.7	272.3	269.7	270.6	269.7	272.3	274.7	276.0	282.1	288.4	293.2
40°	254.7	253.0	252.4	252.1	252.4	253.0	254.7	258.8	266.2	269.1	276.2
42.5°	238.7	234.3	232.6	232.6	232.6	234.3	238.7	243.4	248.0	252.6	260.0
45°	214.5	210.3	207.4	207.7	207.4	210.3	214.5	216.0	219.9	229.3	233.4
47.5°	189.7	189.5	187.7	188.3	187.7	189.5	189.7	192.4	197.3	203.1	209.7
50°	177.8	175.9	174.6	174.9	174.6	175.9	177.8	180.0	183.0	185.8	196.1
52.5°	166.5	164.8	163.8	165.1	163.8	164.8	166.5	167.7	169.8	172.7	179.7
55°	147.9	145.9	145.7	145.3	145.7	145.9	147.9	149.5	152.1	154.3	157.6
57.5°	127.2	125.9	123.9	123.1	123.9	125.9	127.2	129.5	132.6	135.5	138.9
60°	112.2	109.6	106.4	106.1	106.4	109.6	112.2	116.4	117.7	122.2	126.1
62.5°	98.6	98.1	97.5	97.4	97.5	98.1	98.6	100.0	101.8	108.3	113.0
65°	86.5	86.2	86.5	86.8	86.5	86.2	86.5	87.1	87.5	88.1	90.1
67.5°	75.3	74.8	74.2	74.5	74.2	74.8	75.3	75.5	76.4	76.8	78.1
70°	66.9	66.6	66.2	66.2	66.2	66.6	66.9	67.5	68.2	68.8	70.4
72.5°	58.6	58.5	58.3	58.0	58.3	58.5	58.6	59.8	60.2	60.9	61.9
75°	46.9	46.3	46.3	46.3	46.3	46.3	46.9	47.3	47.6	48.6	49.2
77.5°	35.7	35.5	35.1	34.9	35.1	35.5	35.7	35.8	36.3	36.5	37.2
80°	28.3	28.0	27.6	27.6	27.6	28.0	28.3	28.6	28.6	29.6	29.3
82.5°	21.6	21.3	21.2	20.9	21.2	21.3	21.6	21.7	21.7	22.4	22.3
85°	11.5	11.9	11.5	12.2	11.5	11.9	11.5	11.3	11.5	12.2	12.2
87.5°	9.6	9.5	9.8	9.7	9.8	9.5	9.6	9.6	9.6	9.3	9.0
90°	31.4	31.9	32.5	33.1	32.5	31.9	31.4	30.9	30.0	28.6	27.2
92.5°	32.1	32.4	32.7	33.1	32.7	32.4	32.1	31.8	31.3	30.6	29.8
95°	53.5	53.2	53.0	52.7	53.0	53.2	53.5	53.7	53.2	51.8	50.5
97.5°	69.3	69.7	70.0	70.3	70.0	69.7	69.3	69.0	68.3	67.2	66.1
100°	80.4	80.9	81.5	82.1	81.5	80.9	80.4	79.9	78.5	76.4	74.1
102.5°	85.7	86.4	87.1	87.9	87.1	86.4	85.7	84.9	83.1	80.2	77.4
105°	89.8	90.9	92.0	93.1	92.0	90.9	89.8	88.7	86.7	83.7	80.7
107.5°	92.5	93.6	94.7	95.7	94.7	93.6	92.5	91.4	92.4	95.4	98.5
110°	93.5	94.5	95.7	96.8	95.7	94.5	93.5	92.4	105.5	132.7	159.9



TEST NUMBER: P331801-935

CATALOG NUMBER: S122RDIW-S485D1440U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	95.1	96.0	96.9	97.7	96.9	96.0	95.1	94.2	143.4	242.7	342.0
115°	159.2	139.6	120.0	100.4	120.0	139.6	159.2	178.7	251.6	377.5	503.6
117.5°	603.1	538.7	474.3	410.0	474.3	538.7	603.1	667.5	715.0	745.5	775.9
120°	857.2	820.4	783.7	747.0	783.7	820.4	857.2	893.9	910.7	907.4	904.1
122.5°	953.5	946.4	939.3	932.1	939.3	946.4	953.5	960.6	963.2	961.3	959.3
125°	1044.6	1045.3	1046.2	1047.0	1046.2	1045.3	1044.6	1043.7	1042.3	1040.4	1038.5
127.5°	1119.0	1119.1	1119.3	1119.5	1119.3	1119.1	1119.0	1118.9	1117.3	1114.6	1111.8
130°	1165.4	1165.1	1164.8	1164.5	1164.8	1165.1	1165.4	1165.6	1164.2	1161.3	1158.3
132.5°	1209.4	1209.2	1208.9	1208.6	1208.9	1209.2	1209.4	1209.7	1208.6	1206.0	1203.4
135°	1273.9	1273.4	1272.8	1272.3	1272.8	1273.4	1273.9	1274.5	1273.4	1270.7	1267.9
137.5°	1333.1	1332.2	1331.3	1330.3	1331.3	1332.2	1333.1	1334.0	1333.2	1330.5	1327.8
140°	1370.7	1369.3	1368.0	1366.6	1368.0	1369.3	1370.7	1372.0	1371.5	1369.1	1366.6
142.5°	1405.9	1404.5	1403.3	1401.9	1403.3	1404.5	1405.9	1407.3	1406.9	1404.6	1402.4
145°	1455.2	1453.8	1452.4	1451.1	1452.4	1453.8	1455.2	1456.6	1456.3	1454.3	1452.4
147.5°	1497.9	1496.8	1495.6	1494.4	1495.6	1496.8	1497.9	1499.0	1498.9	1497.5	1496.1
150°	1525.0	1523.6	1522.2	1520.9	1522.2	1523.6	1525.0	1526.3	1526.2	1524.6	1522.9
152.5°	1548.8	1547.0	1545.2	1543.4	1545.2	1547.0	1548.8	1550.6	1550.7	1549.0	1547.4
155°	1581.3	1579.2	1576.9	1574.8	1576.9	1579.2	1581.3	1583.5	1583.7	1582.1	1580.5
157.5°	1609.8	1607.7	1605.5	1603.4	1605.5	1607.7	1609.8	1611.9	1612.1	1610.2	1608.3
160°	1625.8	1623.8	1622.0	1620.1	1622.0	1623.8	1625.8	1627.7	1627.8	1626.2	1624.5
162.5°	1640.8	1638.5	1636.2	1633.8	1636.2	1638.5	1640.8	1643.1	1643.4	1641.6	1639.7
165°	1660.1	1658.2	1656.3	1654.3	1656.3	1658.2	1660.1	1662.0	1662.0	1660.1	1658.2
167.5°	1674.7	1672.2	1669.8	1667.3	1669.8	1672.2	1674.7	1677.1	1677.4	1675.5	1673.6
170°	1682.6	1680.1	1677.7	1675.2	1677.7	1680.1	1682.6	1685.0	1685.2	1683.3	1681.4
172.5°	1688.4	1685.9	1683.5	1681.0	1683.5	1685.9	1688.4	1690.8	1691.1	1689.2	1687.3
175°	1694.4	1691.6	1688.9	1686.2	1688.9	1691.6	1694.4	1697.1	1697.5	1695.6	1693.7
177.5°	1695.2	1693.3	1691.3	1689.4	1691.3	1693.3	1695.2	1697.2	1697.5	1695.9	1694.4
180°	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3



TEST NUMBER: P331801-935

CATALOG NUMBER: S122RDIW-S485D1440U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4
2.5°	889.8	893.5	898.9	902.0	907.1	910.4	912.2	915.6	917.4	923.9	930.5
5°	840.2	845.3	854.3	862.6	871.7	881.0	887.8	895.4	902.5	914.7	927.6
7.5°	783.2	790.3	804.3	817.6	833.3	846.4	858.1	871.2	883.0	900.5	918.8
10°	740.5	753.0	771.4	783.9	804.4	817.6	835.9	850.4	866.9	890.0	910.6
12.5°	703.7	718.8	733.6	751.0	769.5	791.4	811.6	830.1	849.6	873.6	897.7
15°	637.0	658.8	681.7	699.3	724.4	747.5	771.0	796.1	819.9	848.5	880.0
17.5°	551.0	576.4	614.8	645.1	674.5	697.8	726.8	757.2	785.1	819.7	854.7
20°	512.2	530.8	556.9	597.7	642.1	666.8	696.5	729.9	762.0	799.6	837.2
22.5°	481.0	497.7	518.6	550.4	599.9	633.7	664.5	698.5	735.8	774.2	815.9
25°	436.6	448.2	470.1	495.8	529.9	585.5	619.2	653.3	693.9	735.0	782.6
27.5°	403.3	413.7	427.9	452.5	477.8	517.7	571.4	608.6	648.9	695.3	744.7
30°	377.8	390.0	405.8	423.1	450.8	482.0	535.6	578.8	618.6	666.2	718.9
32.5°	359.3	368.9	382.4	400.0	423.0	452.9	495.8	548.1	586.9	637.1	692.2
35°	328.9	340.2	351.1	367.8	386.5	413.8	446.3	502.2	540.8	590.3	645.7
37.5°	303.9	310.8	322.9	336.1	355.8	376.2	404.3	454.5	496.3	544.8	601.5
40°	284.9	293.5	302.6	317.4	333.5	353.0	380.6	418.0	465.9	513.5	568.8
42.5°	266.4	277.3	286.9	296.8	314.4	334.0	356.5	388.1	437.0	482.1	535.9
45°	244.0	251.2	261.1	272.0	286.5	303.2	323.1	350.8	397.7	436.6	487.2
47.5°	218.1	228.4	234.9	245.6	259.3	275.3	293.8	317.7	355.8	392.2	439.0
50°	200.4	210.9	220.2	229.9	242.1	257.5	272.9	296.1	326.7	365.0	408.6
52.5°	185.1	194.5	203.5	213.2	225.2	239.3	253.9	274.2	300.4	335.6	378.1
55°	164.3	170.0	179.4	189.1	199.7	213.2	227.3	244.4	266.9	296.4	330.9
57.5°	142.9	149.6	157.0	166.8	177.5	187.9	200.5	216.0	233.8	260.5	290.0
60°	130.9	136.0	142.2	152.1	162.0	171.3	183.6	196.5	213.2	236.3	261.4
62.5°	117.5	122.3	127.9	136.6	146.4	154.9	165.6	179.3	193.4	214.5	236.4
65°	95.1	102.3	107.7	115.5	123.5	132.5	140.9	151.8	164.3	181.0	200.6
67.5°	78.9	82.5	87.6	94.6	102.8	110.6	118.5	127.0	137.8	150.8	166.3
70°	71.7	73.0	74.0	80.7	88.4	96.2	103.5	111.6	120.9	131.5	145.0
72.5°	63.2	64.5	65.7	68.6	74.8	82.5	90.1	96.2	105.0	113.7	124.7
75°	50.2	52.1	53.0	54.7	56.9	62.1	69.1	74.9	80.1	86.8	95.5
77.5°	38.2	39.3	40.3	42.0	43.4	45.8	49.8	55.0	59.8	63.7	69.7
80°	30.2	30.6	31.9	32.5	34.4	36.0	38.0	42.1	46.9	48.6	52.7
82.5°	22.7	23.1	24.1	24.8	25.7	27.0	29.4	30.6	34.4	36.4	39.1
85°	12.6	12.2	13.2	13.2	13.9	14.5	15.2	16.7	17.7	20.2	20.9
87.5°	9.0	8.8	8.6	8.2	7.7	7.7	7.5	7.1	7.1	7.2	7.7
90°	25.8	24.5	22.3	20.1	18.0	15.8	13.2	10.2	7.2	4.2	1.2
92.5°	29.1	28.4	27.3	26.3	25.1	24.0	23.7	23.9	24.2	24.5	24.7
95°	49.1	47.8	45.9	43.9	42.0	40.1	43.7	52.7	61.6	70.6	79.6
97.5°	65.0	63.9	59.5	55.1	50.7	46.3	56.7	82.1	107.4	132.7	158.0
100°	72.0	69.8	65.2	60.5	55.9	51.3	67.6	104.9	142.2	179.4	216.7
102.5°	74.6	71.7	110.5	149.1	187.9	226.5	249.9	257.7	265.6	273.5	281.4
105°	77.7	74.7	149.0	223.3	297.6	371.9	404.9	396.7	388.6	380.4	372.3
107.5°	101.5	104.6	193.6	282.8	371.9	461.0	502.2	495.6	489.0	482.4	475.9
110°	187.1	214.3	292.9	371.6	450.2	528.8	565.3	559.6	553.9	548.2	542.5



TEST NUMBER: P331801-935

CATALOG NUMBER: S122RDIW-S485D1440U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	441.3	540.5	559.9	579.4	598.8	618.2	625.4	620.4	615.3	610.2	605.2
115°	629.6	755.5	748.7	741.9	735.1	728.3	722.6	718.0	713.3	708.8	704.1
117.5°	806.4	836.9	832.2	827.5	822.8	818.1	813.2	808.0	802.9	797.7	792.6
120°	900.9	897.6	892.7	887.8	882.9	878.0	873.5	869.4	865.3	861.3	857.2
122.5°	957.3	955.4	950.0	944.7	939.4	934.1	929.3	925.0	920.7	916.4	912.1
125°	1036.6	1034.7	1029.6	1024.4	1019.3	1014.1	1009.7	1006.2	1002.6	999.1	995.6
127.5°	1109.1	1106.3	1102.4	1098.5	1094.7	1090.8	1086.9	1083.0	1079.1	1075.1	1071.3
130°	1155.3	1152.3	1149.3	1146.3	1143.3	1140.3	1136.7	1132.3	1127.9	1123.6	1119.2
132.5°	1200.9	1198.3	1195.3	1192.3	1189.4	1186.4	1183.0	1179.3	1175.6	1171.9	1168.2
135°	1265.2	1262.5	1260.1	1257.6	1255.2	1252.7	1249.3	1244.9	1240.6	1236.2	1231.9
137.5°	1325.2	1322.5	1319.7	1317.0	1314.1	1311.4	1308.5	1305.4	1302.4	1299.3	1296.3
140°	1364.2	1361.7	1358.7	1355.7	1352.7	1349.7	1347.1	1345.0	1342.8	1340.6	1338.4
142.5°	1400.2	1397.9	1394.5	1391.1	1387.7	1384.2	1381.6	1379.6	1377.6	1375.6	1373.7
145°	1450.5	1448.6	1444.0	1439.4	1434.8	1430.1	1428.0	1428.2	1428.5	1428.7	1429.1
147.5°	1494.6	1493.2	1488.7	1484.1	1479.5	1474.9	1473.2	1474.2	1475.2	1476.3	1477.3
150°	1521.3	1519.7	1515.3	1511.0	1506.6	1502.3	1501.0	1503.0	1504.9	1506.8	1508.6
152.5°	1545.8	1544.1	1540.0	1535.9	1531.7	1527.6	1526.6	1528.7	1530.9	1533.0	1535.1
155°	1578.8	1577.2	1574.0	1570.7	1567.5	1564.2	1563.7	1566.2	1568.7	1571.1	1573.6
157.5°	1606.5	1604.6	1602.3	1600.1	1597.8	1595.5	1595.4	1597.5	1599.6	1601.6	1603.7
160°	1622.9	1621.3	1619.6	1618.1	1616.4	1614.8	1614.8	1616.4	1618.1	1619.6	1621.3
162.5°	1637.9	1636.0	1634.6	1633.1	1631.8	1630.3	1630.5	1632.1	1633.7	1635.4	1636.9
165°	1656.3	1654.3	1653.6	1652.7	1651.9	1651.1	1651.5	1653.1	1654.8	1656.4	1658.0
167.5°	1671.7	1669.8	1669.0	1668.3	1667.5	1666.7	1667.2	1668.8	1670.4	1672.1	1673.7
170°	1679.6	1677.7	1677.1	1676.5	1676.0	1675.4	1676.0	1677.7	1679.3	1680.9	1682.6
172.5°	1685.4	1683.5	1683.0	1682.4	1681.9	1681.4	1681.9	1683.5	1685.1	1686.8	1688.4
175°	1691.8	1689.9	1689.4	1688.8	1688.2	1687.7	1688.4	1690.3	1692.2	1694.1	1696.0
177.5°	1692.9	1691.3	1691.1	1690.9	1690.7	1690.5	1691.1	1692.6	1694.2	1695.7	1697.2
180°	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3



TEST NUMBER: P331801-935

CATALOG NUMBER: S122RDIW-S485D1440U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4
2.5°	930.7	931.5	936.7	939.0	943.7	945.5	947.4	946.9	946.9	948.0	955.2
5°	932.7	939.2	948.8	958.1	967.2	974.9	980.0	985.2	987.1	996.4	1004.8
7.5°	929.4	941.2	957.2	971.4	988.4	1001.8	1012.8	1022.8	1029.6	1043.2	1057.0
10°	925.1	941.8	959.8	978.1	1001.6	1019.3	1037.2	1051.1	1055.6	1075.8	1087.4
12.5°	916.3	938.7	961.6	985.3	1008.2	1032.6	1052.4	1066.3	1082.1	1100.3	1121.6
15°	903.2	928.9	958.8	989.4	1022.2	1051.7	1073.0	1097.1	1114.4	1134.4	1153.0
17.5°	884.3	917.5	955.5	990.8	1028.7	1060.5	1089.8	1112.8	1125.1	1136.4	1139.3
20°	869.4	905.1	949.8	991.6	1029.5	1066.2	1095.1	1114.4	1117.7	1117.9	1100.9
22.5°	853.3	893.5	940.3	983.1	1028.5	1069.3	1091.7	1100.0	1087.3	1065.5	1032.5
25°	823.5	870.0	924.4	973.3	1022.8	1061.4	1069.1	1054.6	1010.0	962.9	903.5
27.5°	791.2	843.5	901.8	956.1	1008.9	1032.9	1016.2	964.0	883.5	813.6	728.8
30°	767.5	826.3	883.6	944.3	993.2	1003.5	965.3	888.4	794.5	689.1	604.5
32.5°	740.5	802.1	865.0	927.9	968.8	958.7	895.5	800.9	690.9	587.2	507.2
35°	701.9	765.6	833.4	896.4	922.5	879.1	784.5	661.4	548.9	452.1	397.1
37.5°	657.4	726.7	797.2	855.1	853.3	780.8	652.1	525.0	430.4	373.2	334.0
40°	625.7	695.8	772.0	820.9	800.0	705.8	566.2	446.3	377.1	331.5	302.9
42.5°	595.4	665.7	741.4	780.2	743.9	628.1	489.0	395.1	338.0	302.5	279.2
45°	543.7	617.9	688.1	709.6	644.6	517.0	395.5	327.4	289.4	263.0	246.9
47.5°	493.3	566.3	630.3	630.7	542.8	419.3	333.6	283.3	250.9	230.5	218.8
50°	462.4	531.8	585.5	577.1	477.5	373.0	298.3	254.9	228.0	212.2	200.0
52.5°	427.7	495.0	541.5	517.7	422.1	328.2	266.7	230.3	207.9	194.2	183.3
55°	377.1	437.0	469.8	433.8	344.4	272.9	225.4	196.7	180.0	168.5	159.2
57.5°	327.6	376.9	397.5	355.6	283.6	226.4	190.6	169.2	152.6	144.3	139.5
60°	296.4	338.5	353.0	306.8	246.6	198.0	168.8	148.9	136.6	131.2	126.4
62.5°	265.9	300.2	306.3	263.8	215.0	173.4	148.3	131.4	123.3	118.0	113.5
65°	220.6	245.3	242.5	208.4	170.0	137.6	119.2	109.0	102.9	95.5	87.5
67.5°	181.6	196.7	187.6	162.0	129.8	106.9	95.0	87.2	79.6	72.6	70.8
70°	156.9	165.6	155.9	132.5	106.4	89.7	80.1	70.8	66.2	64.7	61.7
72.5°	133.3	136.3	125.9	105.7	86.6	74.3	64.9	59.7	57.3	55.9	54.0
75°	100.0	97.7	88.8	73.0	60.1	51.7	48.9	46.9	45.4	44.1	43.0
77.5°	70.3	66.9	58.9	48.6	41.8	37.9	36.2	35.1	34.4	33.7	32.7
80°	52.7	50.5	42.4	34.7	31.9	29.9	28.9	27.6	27.6	27.0	26.0
82.5°	38.6	36.1	29.1	25.5	23.8	22.7	22.0	21.2	20.9	21.1	20.4
85°	20.2	16.4	14.5	13.9	12.8	12.2	12.6	11.9	11.9	11.9	11.5
87.5°	7.0	6.4	6.6	7.0	7.7	8.2	8.4	8.9	9.6	9.6	10.1
90°	4.2	7.2	10.2	13.2	15.8	18.0	20.1	22.3	24.5	25.8	27.2
92.5°	24.5	24.2	23.9	23.7	24.0	25.1	26.3	27.3	28.4	29.1	29.8
95°	70.6	61.6	52.7	43.7	40.1	42.0	43.9	45.9	47.8	49.1	50.5
97.5°	132.7	107.4	82.1	56.7	46.3	50.7	55.1	59.5	63.9	65.0	66.1
100°	179.4	142.2	104.9	67.6	51.3	55.9	60.5	65.2	69.8	72.0	74.1
102.5°	273.5	265.6	257.7	249.9	226.5	187.9	149.1	110.5	71.7	74.6	77.4
105°	380.4	388.6	396.7	404.9	371.9	297.6	223.3	149.0	74.7	77.7	80.7
107.5°	482.4	489.0	495.6	502.2	461.0	371.9	282.8	193.6	104.6	101.5	98.5
110°	548.2	553.9	559.6	565.3	528.8	450.2	371.6	292.9	214.3	187.1	159.9





TEST NUMBER: P331801-935

CATALOG NUMBER: S122RDIW-S485D1440U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	610.2	615.3	620.4	625.4	618.2	598.8	579.4	559.9	540.5	441.3	342.0
115°	708.8	713.3	718.0	722.6	728.3	735.1	741.9	748.7	755.5	629.6	503.6
117.5°	797.7	802.9	808.0	813.2	818.1	822.8	827.5	832.2	836.9	806.4	775.9
120°	861.3	865.3	869.4	873.5	878.0	882.9	887.8	892.7	897.6	900.9	904.1
122.5°	916.4	920.7	925.0	929.3	934.1	939.4	944.7	950.0	955.4	957.3	959.3
125°	999.1	1002.6	1006.2	1009.7	1014.1	1019.3	1024.4	1029.6	1034.7	1036.6	1038.5
127.5°	1075.1	1079.1	1083.0	1086.9	1090.8	1094.7	1098.5	1102.4	1106.3	1109.1	1111.8
130°	1123.6	1127.9	1132.3	1136.7	1140.3	1143.3	1146.3	1149.3	1152.3	1155.3	1158.3
132.5°	1171.9	1175.6	1179.3	1183.0	1186.4	1189.4	1192.3	1195.3	1198.3	1200.9	1203.4
135°	1236.2	1240.6	1244.9	1249.3	1252.7	1255.2	1257.6	1260.1	1262.5	1265.2	1267.9
137.5°	1299.3	1302.4	1305.4	1308.5	1311.4	1314.1	1317.0	1319.7	1322.5	1325.2	1327.8
140°	1340.6	1342.8	1345.0	1347.1	1349.7	1352.7	1355.7	1358.7	1361.7	1364.2	1366.6
142.5°	1375.6	1377.6	1379.6	1381.6	1384.2	1387.7	1391.1	1394.5	1397.9	1400.2	1402.4
145°	1428.7	1428.5	1428.2	1428.0	1430.1	1434.8	1439.4	1444.0	1448.6	1450.5	1452.4
147.5°	1476.3	1475.2	1474.2	1473.2	1474.9	1479.5	1484.1	1488.7	1493.2	1494.6	1496.1
150°	1506.8	1504.9	1503.0	1501.0	1502.3	1506.6	1511.0	1515.3	1519.7	1521.3	1522.9
152.5°	1533.0	1530.9	1528.7	1526.6	1527.6	1531.7	1535.9	1540.0	1544.1	1545.8	1547.4
155°	1571.1	1568.7	1566.2	1563.7	1564.2	1567.5	1570.7	1574.0	1577.2	1578.8	1580.5
157.5°	1601.6	1599.6	1597.5	1595.4	1595.5	1597.8	1600.1	1602.3	1604.6	1606.5	1608.3
160°	1619.6	1618.1	1616.4	1614.8	1614.8	1616.4	1618.1	1619.6	1621.3	1622.9	1624.5
162.5°	1635.4	1633.7	1632.1	1630.5	1630.3	1631.8	1633.1	1634.6	1636.0	1637.9	1639.7
165°	1656.4	1654.8	1653.1	1651.5	1651.1	1651.9	1652.7	1653.6	1654.3	1656.3	1658.2
167.5°	1672.1	1670.4	1668.8	1667.2	1666.7	1667.5	1668.3	1669.0	1669.8	1671.7	1673.6
170°	1680.9	1679.3	1677.7	1676.0	1675.4	1676.0	1676.5	1677.1	1677.7	1679.6	1681.4
172.5°	1686.8	1685.1	1683.5	1681.9	1681.4	1681.9	1682.4	1683.0	1683.5	1685.4	1687.3
175°	1694.1	1692.2	1690.3	1688.4	1687.7	1688.2	1688.8	1689.4	1689.9	1691.8	1693.7
177.5°	1695.7	1694.2	1692.6	1691.1	1690.5	1690.7	1690.9	1691.1	1691.3	1692.9	1694.4
180°	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3



TEST NUMBER: P331801-935

CATALOG NUMBER: S122RDIW-S485D1440U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	925.4	925.4	925.4	925.4	925.4	925.4	925.4
2.5°	957.8	961.1	962.7	962.7	964.5	963.7	962.9
5°	1012.8	1018.9	1020.2	1026.0	1030.2	1028.9	1029.5
7.5°	1067.6	1077.4	1087.1	1091.5	1092.3	1094.8	1095.8
10°	1101.2	1109.3	1124.4	1122.1	1133.4	1139.8	1129.2
12.5°	1133.7	1144.5	1155.0	1157.9	1164.2	1166.3	1162.1
15°	1163.0	1168.7	1169.4	1167.8	1169.8	1168.1	1162.0
17.5°	1135.6	1126.2	1107.2	1098.1	1091.0	1080.5	1076.2
20°	1090.3	1062.6	1030.5	1017.6	1002.5	972.9	980.0
22.5°	992.6	961.0	928.9	891.3	873.4	845.3	843.7
25°	840.5	786.2	726.3	684.5	660.1	632.1	619.9
27.5°	653.5	585.0	536.1	511.3	488.6	466.5	465.5
30°	530.5	479.1	441.2	419.9	406.1	396.7	398.7
32.5°	447.2	411.9	386.3	368.8	358.5	351.5	351.4
35°	365.6	341.5	325.0	317.7	310.3	305.1	305.5
37.5°	312.9	298.3	289.2	281.1	276.5	274.0	272.5
40°	285.9	274.0	266.9	262.1	258.2	254.7	254.0
42.5°	264.5	254.7	247.5	243.7	240.2	237.6	237.0
45°	234.7	226.7	220.2	216.0	214.5	212.2	212.2
47.5°	208.8	200.9	195.9	193.2	190.5	189.0	188.9
50°	191.3	185.2	180.7	179.1	176.8	175.9	175.6
52.5°	175.6	171.1	167.8	166.8	165.7	164.5	164.7
55°	154.3	151.8	150.5	149.5	147.9	145.9	147.2
57.5°	136.4	134.2	130.7	127.7	126.2	124.8	125.4
60°	123.8	119.2	114.8	111.2	110.3	107.4	107.4
62.5°	107.9	101.5	96.0	94.0	93.1	91.7	91.4
65°	82.9	80.4	79.1	77.8	77.1	77.1	76.5
67.5°	68.7	67.7	66.3	66.0	65.3	65.2	64.9
70°	60.8	59.5	58.8	58.5	57.9	58.2	57.3
72.5°	53.0	52.0	51.9	51.1	50.7	50.7	50.0
75°	41.8	41.8	41.5	41.2	40.6	40.2	40.6
77.5°	32.1	32.2	31.6	31.6	31.5	31.6	31.3
80°	25.7	26.0	25.7	25.4	25.1	25.4	25.1
82.5°	20.3	19.9	19.8	19.7	19.7	19.5	19.5
85°	11.5	11.9	11.5	11.3	11.3	11.3	11.5
87.5°	10.1	10.3	10.6	10.7	10.8	10.8	10.8
90°	28.6	30.0	30.9	31.4	31.9	32.5	33.1
92.5°	30.6	31.3	31.8	32.1	32.4	32.7	33.1
95°	51.8	53.2	53.7	53.5	53.2	53.0	52.7
97.5°	67.2	68.3	69.0	69.3	69.7	70.0	70.3
100°	76.4	78.5	79.9	80.4	80.9	81.5	82.1
102.5°	80.2	83.1	84.9	85.7	86.4	87.1	87.9
105°	83.7	86.7	88.7	89.8	90.9	92.0	93.1
107.5°	95.4	92.4	91.4	92.5	93.6	94.7	95.7
110°	132.7	105.5	92.4	93.5	94.5	95.7	96.8



TEST NUMBER: P331801-935

CATALOG NUMBER: S122RDIW-S485D1440U935-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	242.7	143.4	94.2	95.1	96.0	96.9	97.7
115°	377.5	251.6	178.7	159.2	139.6	120.0	100.4
117.5°	745.5	715.0	667.5	603.1	538.7	474.3	410.0
120°	907.4	910.7	893.9	857.2	820.4	783.7	747.0
122.5°	961.3	963.2	960.6	953.5	946.4	939.3	932.1
125°	1040.4	1042.3	1043.7	1044.6	1045.3	1046.2	1047.0
127.5°	1114.6	1117.3	1118.9	1119.0	1119.1	1119.3	1119.5
130°	1161.3	1164.2	1165.6	1165.4	1165.1	1164.8	1164.5
132.5°	1206.0	1208.6	1209.7	1209.4	1209.2	1208.9	1208.6
135°	1270.7	1273.4	1274.5	1273.9	1273.4	1272.8	1272.3
137.5°	1330.5	1333.2	1334.0	1333.1	1332.2	1331.3	1330.3
140°	1369.1	1371.5	1372.0	1370.7	1369.3	1368.0	1366.6
142.5°	1404.6	1406.9	1407.3	1405.9	1404.5	1403.3	1401.9
145°	1454.3	1456.3	1456.6	1455.2	1453.8	1452.4	1451.1
147.5°	1497.5	1498.9	1499.0	1497.9	1496.8	1495.6	1494.4
150°	1524.6	1526.2	1526.3	1525.0	1523.6	1522.2	1520.9
152.5°	1549.0	1550.7	1550.6	1548.8	1547.0	1545.2	1543.4
155°	1582.1	1583.7	1583.5	1581.3	1579.2	1576.9	1574.8
157.5°	1610.2	1612.1	1611.9	1609.8	1607.7	1605.5	1603.4
160°	1626.2	1627.8	1627.7	1625.8	1623.8	1622.0	1620.1
162.5°	1641.6	1643.4	1643.1	1640.8	1638.5	1636.2	1633.8
165°	1660.1	1662.0	1662.0	1660.1	1658.2	1656.3	1654.3
167.5°	1675.5	1677.4	1677.1	1674.7	1672.2	1669.8	1667.3
170°	1683.3	1685.2	1685.0	1682.6	1680.1	1677.7	1675.2
172.5°	1689.2	1691.1	1690.8	1688.4	1685.9	1683.5	1681.0
175°	1695.6	1697.5	1697.1	1694.4	1691.6	1688.9	1686.2
177.5°	1695.9	1697.5	1697.2	1695.2	1693.3	1691.3	1689.4
180°	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3	1692.3

(END OF REPORT)