

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331790-935

Luminaire Tested: **S122RDIW-S485D710U935-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331790-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S485D710U935-4F0-1E-UDD-A1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 710 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3719.2 lumens
Efficiency: N/A
Efficacy: 98.9 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 37.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331790-935

CATALOG NUMBER: S122RDIW-S485D710U935-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

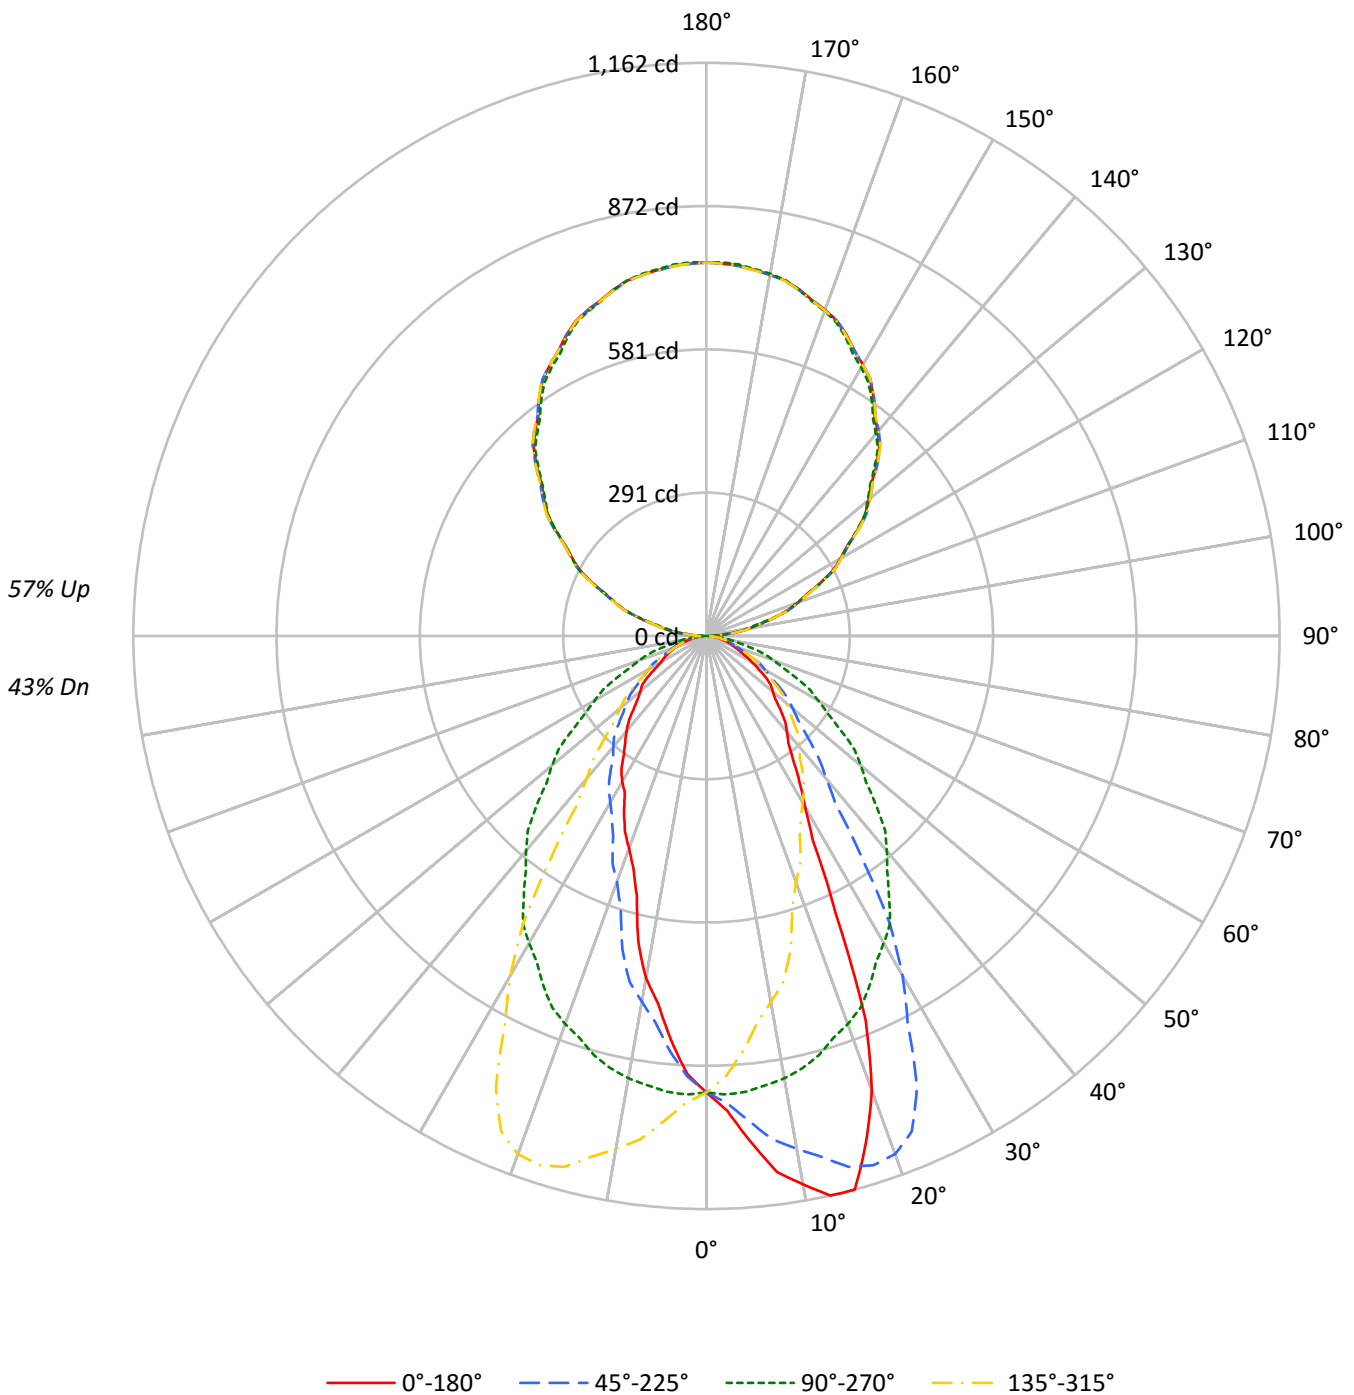



TEST NUMBER: P331790-935

CATALOG NUMBER: S122RDIW-S485D710U935-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	50	50	50	43
1	97	93	89	86	88	85	82	79	71	68	66	57	56	55	45	44	43	38
2	89	82	76	71	81	75	70	66	63	59	56	51	49	47	40	39	37	33
3	81	73	66	60	74	67	61	56	56	52	48	46	43	40	36	34	33	28
4	75	65	57	52	68	60	53	48	50	45	42	41	38	35	33	31	29	25
5	69	58	50	45	63	54	47	42	45	40	36	38	34	31	30	28	26	22
6	64	52	45	39	58	48	42	37	41	36	32	34	30	28	28	25	23	20
7	59	48	40	35	54	44	37	33	38	32	29	31	28	25	26	23	21	18
8	55	43	36	31	50	40	34	29	34	29	26	29	25	22	24	21	19	17
9	51	40	33	28	47	37	31	26	32	27	23	27	23	20	22	19	17	15
10	48	37	30	25	44	34	28	24	29	24	21	25	21	19	21	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	14941	14941	14941	14941
5°	16686	15034	13331	15034
10°	18513	14929	11555	14929
15°	19423	14710	9105	14710
20°	16838	14385	7878	14385
25°	11043	13942	7035	13942
30°	7433	13403	6367	13403
35°	6022	12727	5742	12727
40°	5354	11989	5313	11989
45°	4845	11125	4743	11125
50°	4411	10263	4393	10263
55°	4144	9315	4090	9315
60°	3468	8441	3426	8441
65°	2923	7664	3316	7664
70°	2705	6845	3125	6845
75°	2533	5958	2888	5958
80°	2334	4900	2566	4900
85°	2130	3872	2260	3872



TEST NUMBER: P331790-935

CATALOG NUMBER: S122RDIW-S485D710U935-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	87.7	2.4
10°-20°	244.4	6.6
20°-30°	315.0	8.5
30°-40°	299.3	8.0
40°-50°	256.4	6.9
50°-60°	195.3	5.2
60°-70°	123.4	3.3
70°-80°	61.6	1.7
80°-90°	19.1	0.5
90°-100°	48.0	1.3
100°-110°	149.0	4.0
110°-120°	254.7	6.8
120°-130°	334.9	9.0
130°-140°	375.9	10.1
140°-150°	368.6	9.9
150°-160°	309.2	8.3
160°-170°	205.1	5.5
170°-180°	71.7	1.9
0°-30°	647.1	17.4
0°-40°	946.4	25.4
0°-60°	1398.1	37.6
0°-90°	1602.3	43.1
90°-120°	451.7	12.1
90°-150°	1531.1	41.2
90°-180°	2117.0	56.9
0°-180°	3719.2	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	925	925	925	925	925	
5°	1030	928	822	928	1030	102
15°	1162	880	545	880	1162	313
25°	620	783	395	783	620	294
35°	306	646	291	646	306	195
45°	212	487	208	487	212	164
55°	147	331	145	331	147	129
65°	76	201	87	201	76	78
75°	41	96	46	96	41	43
85°	12	21	12	21	12	13
90°	22	1	22	1	22	10
95°	40	33	40	33	40	44
105°	142	137	142	137	142	149
115°	256	256	256	256	256	252
125°	373	372	373	372	373	333
135°	487	481	487	481	487	375
145°	590	584	590	584	590	369
155°	673	668	673	668	673	310
165°	727	726	727	726	727	205
175°	753	756	753	756	753	72
180°	757	757	757	757	757	



TEST NUMBER: P331790-935

CATALOG NUMBER: S122RDIW-S485D710U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4
2.5°	962.9	963.7	964.5	962.7	962.7	961.1	957.8	955.2	948.0	946.9	946.9
5°	1029.5	1028.9	1030.2	1026.0	1020.2	1018.9	1012.8	1004.8	996.4	987.1	985.2
7.5°	1095.8	1094.8	1092.3	1091.5	1087.1	1077.4	1067.6	1057.0	1043.2	1029.6	1022.8
10°	1129.2	1139.8	1133.4	1122.1	1124.4	1109.3	1101.2	1087.4	1075.8	1055.6	1051.1
12.5°	1162.1	1166.3	1164.2	1157.9	1155.0	1144.5	1133.7	1121.6	1100.3	1082.1	1066.3
15°	1162.0	1168.1	1169.8	1167.8	1169.4	1168.7	1163.0	1153.0	1134.4	1114.4	1097.1
17.5°	1076.2	1080.5	1091.0	1098.1	1107.2	1126.2	1135.6	1139.3	1136.4	1125.1	1112.8
20°	980.0	972.9	1002.5	1017.6	1030.5	1062.6	1090.3	1100.9	1117.9	1117.7	1114.4
22.5°	843.7	845.3	873.4	891.3	928.9	961.0	992.6	1032.5	1065.5	1087.3	1100.0
25°	619.9	632.1	660.1	684.5	726.3	786.2	840.5	903.5	962.9	1010.0	1054.6
27.5°	465.5	466.5	488.6	511.3	536.1	585.0	653.5	728.8	813.6	883.5	964.0
30°	398.7	396.7	406.1	419.9	441.2	479.1	530.5	604.5	689.1	794.5	888.4
32.5°	351.4	351.5	358.5	368.8	386.3	411.9	447.2	507.2	587.2	690.9	800.9
35°	305.5	305.1	310.3	317.7	325.0	341.5	365.6	397.1	452.1	548.9	661.4
37.5°	272.5	274.0	276.5	281.1	289.2	298.3	312.9	334.0	373.2	430.4	525.0
40°	254.0	254.7	258.2	262.1	266.9	274.0	285.9	302.9	331.5	377.1	446.3
42.5°	237.0	237.6	240.2	243.7	247.5	254.7	264.5	279.2	302.5	338.0	395.1
45°	212.2	212.2	214.5	216.0	220.2	226.7	234.7	246.9	263.0	289.4	327.4
47.5°	188.9	189.0	190.5	193.2	195.9	200.9	208.8	218.8	230.5	250.9	283.3
50°	175.6	175.9	176.8	179.1	180.7	185.2	191.3	200.0	212.2	228.0	254.9
52.5°	164.7	164.5	165.7	166.8	167.8	171.1	175.6	183.3	194.2	207.9	230.3
55°	147.2	145.9	147.9	149.5	150.5	151.8	154.3	159.2	168.5	180.0	196.7
57.5°	125.4	124.8	126.2	127.7	130.7	134.2	136.4	139.5	144.3	152.6	169.2
60°	107.4	107.4	110.3	111.2	114.8	119.2	123.8	126.4	131.2	136.6	148.9
62.5°	91.4	91.7	93.1	94.0	96.0	101.5	107.9	113.5	118.0	123.3	131.4
65°	76.5	77.1	77.1	77.8	79.1	80.4	82.9	87.5	95.5	102.9	109.0
67.5°	64.9	65.2	65.3	66.0	66.3	67.7	68.7	70.8	72.6	79.6	87.2
70°	57.3	58.2	57.9	58.5	58.8	59.5	60.8	61.7	64.7	66.2	70.8
72.5°	50.0	50.7	50.7	51.1	51.9	52.0	53.0	54.0	55.9	57.3	59.7
75°	40.6	40.2	40.6	41.2	41.5	41.8	41.8	43.0	44.1	45.4	46.9
77.5°	31.3	31.6	31.5	31.6	31.6	32.2	32.1	32.7	33.7	34.4	35.1
80°	25.1	25.4	25.1	25.4	25.7	26.0	25.7	26.0	27.0	27.6	27.6
82.5°	19.5	19.5	19.7	19.7	19.8	19.9	20.3	20.4	21.1	20.9	21.2
85°	11.5	11.3	11.3	11.3	11.5	11.9	11.5	11.5	11.9	11.9	11.9
87.5°	8.4	8.7	8.7	8.6	8.6	8.6	8.7	9.0	8.8	9.1	8.2
90°	21.7	21.6	21.4	21.3	21.2	21.3	21.5	21.8	22.0	22.4	19.2
92.5°	20.7	20.7	20.7	20.6	20.6	20.6	20.5	20.4	20.4	20.3	19.5
95°	39.6	39.9	40.2	40.5	40.7	40.9	40.9	40.9	40.9	40.9	40.6
97.5°	68.6	68.6	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.7	68.2
100°	87.6	87.6	87.8	88.0	88.1	88.2	88.2	88.2	88.2	88.2	87.7
102.5°	109.0	109.2	109.3	109.4	109.6	109.6	109.4	109.3	109.3	109.1	108.6
105°	141.8	141.8	141.8	141.8	141.8	141.7	141.4	141.1	140.9	140.6	140.3
107.5°	172.8	173.4	174.1	174.7	175.4	175.6	175.6	175.4	175.3	175.2	175.2
110°	196.8	197.2	197.6	198.0	198.5	198.7	198.7	198.7	198.7	198.7	198.7



TEST NUMBER: P331790-935

CATALOG NUMBER: S122RDIW-S485D710U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	219.8	220.1	220.4	220.8	221.0	221.4	221.7	222.1	222.4	222.7	222.8
115°	255.5	256.0	256.4	256.8	257.3	257.5	257.7	257.9	258.0	258.1	258.4
117.5°	289.6	290.1	290.5	290.9	291.4	291.8	292.1	292.5	292.8	293.2	293.9
120°	313.7	314.1	314.5	315.0	315.4	315.6	315.6	315.6	315.6	315.6	316.8
122.5°	337.3	337.5	337.9	338.1	338.5	338.8	339.1	339.5	339.8	340.2	341.0
125°	373.2	373.2	373.4	373.6	373.7	373.9	374.4	374.8	375.2	375.7	376.1
127.5°	405.9	406.3	406.7	407.2	407.7	408.1	408.6	409.1	409.7	410.2	410.7
130°	429.4	429.9	430.5	431.0	431.6	432.0	432.3	432.7	432.9	433.2	433.4
132.5°	451.9	452.3	452.7	453.2	453.7	454.2	454.8	455.5	456.1	456.7	456.7
135°	486.8	487.2	487.7	488.1	488.5	488.9	489.0	489.1	489.2	489.4	489.1
137.5°	518.5	519.1	519.7	520.2	520.8	521.2	521.2	521.3	521.5	521.6	521.2
140°	540.5	541.1	541.7	542.3	542.8	543.0	543.0	543.0	543.0	543.0	542.3
142.5°	560.4	561.0	561.5	562.1	562.7	562.9	562.8	562.7	562.6	562.5	562.0
145°	590.4	590.9	591.5	592.0	592.6	592.8	592.7	592.5	592.4	592.3	591.4
147.5°	617.1	617.6	618.1	618.7	619.2	619.3	619.0	618.7	618.4	618.1	617.5
150°	634.5	634.9	635.2	635.7	636.1	636.1	635.7	635.2	634.9	634.5	633.9
152.5°	650.8	651.3	651.9	652.4	653.0	653.0	652.4	651.9	651.3	650.8	650.1
155°	672.8	673.2	673.6	674.1	674.5	674.3	673.6	672.9	672.2	671.5	671.1
157.5°	691.6	692.3	693.0	693.7	694.4	694.2	693.3	692.3	691.4	690.4	690.2
160°	703.4	704.0	704.6	705.2	705.7	705.6	704.7	703.9	703.0	702.1	702.0
162.5°	713.7	714.4	715.1	715.7	716.4	716.3	715.3	714.3	713.3	712.4	712.2
165°	727.1	727.8	728.5	729.2	730.0	729.8	728.8	727.8	726.8	725.8	725.8
167.5°	738.0	738.8	739.5	740.3	741.0	740.9	739.9	738.9	737.9	736.9	736.9
170°	743.6	744.5	745.4	746.2	747.1	747.0	746.1	745.0	744.1	743.0	743.2
172.5°	748.3	749.2	750.0	750.9	751.7	751.7	750.6	749.7	748.6	747.6	747.8
175°	753.3	754.1	755.0	755.8	756.6	756.6	755.6	754.6	753.6	752.6	752.9
177.5°	755.5	756.2	756.9	757.6	758.3	758.3	757.6	756.9	756.2	755.5	755.8
180°	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1



TEST NUMBER: P331790-935

CATALOG NUMBER: S122RDIW-S485D710U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4
2.5°	947.4	945.5	943.7	939.0	936.7	931.5	930.7	930.5	923.9	917.4	915.6
5°	980.0	974.9	967.2	958.1	948.8	939.2	932.7	927.6	914.7	902.5	895.4
7.5°	1012.8	1001.8	988.4	971.4	957.2	941.2	929.4	918.8	900.5	883.0	871.2
10°	1037.2	1019.3	1001.6	978.1	959.8	941.8	925.1	910.6	890.0	866.9	850.4
12.5°	1052.4	1032.6	1008.2	985.3	961.6	938.7	916.3	897.7	873.6	849.6	830.1
15°	1073.0	1051.7	1022.2	989.4	958.8	928.9	903.2	880.0	848.5	819.9	796.1
17.5°	1089.8	1060.5	1028.7	990.8	955.5	917.5	884.3	854.7	819.7	785.1	757.2
20°	1095.1	1066.2	1029.5	991.6	949.8	905.1	869.4	837.2	799.6	762.0	729.9
22.5°	1091.7	1069.3	1028.5	983.1	940.3	893.5	853.3	815.9	774.2	735.8	698.5
25°	1069.1	1061.4	1022.8	973.3	924.4	870.0	823.5	782.6	735.0	693.9	653.3
27.5°	1016.2	1032.9	1008.9	956.1	901.8	843.5	791.2	744.7	695.3	648.9	608.6
30°	965.3	1003.5	993.2	944.3	883.6	826.3	767.5	718.9	666.2	618.6	578.8
32.5°	895.5	958.7	968.8	927.9	865.0	802.1	740.5	692.2	637.1	586.9	548.1
35°	784.5	879.1	922.5	896.4	833.4	765.6	701.9	645.7	590.3	540.8	502.2
37.5°	652.1	780.8	853.3	855.1	797.2	726.7	657.4	601.5	544.8	496.3	454.5
40°	566.2	705.8	800.0	820.9	772.0	695.8	625.7	568.8	513.5	465.9	418.0
42.5°	489.0	628.1	743.9	780.2	741.4	665.7	595.4	535.9	482.1	437.0	388.1
45°	395.5	517.0	644.6	709.6	688.1	617.9	543.7	487.2	436.6	397.7	350.8
47.5°	333.6	419.3	542.8	630.7	630.3	566.3	493.3	439.0	392.2	355.8	317.7
50°	298.3	373.0	477.5	577.1	585.5	531.8	462.4	408.6	365.0	326.7	296.1
52.5°	266.7	328.2	422.1	517.7	541.5	495.0	427.7	378.1	335.6	300.4	274.2
55°	225.4	272.9	344.4	433.8	469.8	437.0	377.1	330.9	296.4	266.9	244.4
57.5°	190.6	226.4	283.6	355.6	397.5	376.9	327.6	290.0	260.5	233.8	216.0
60°	168.8	198.0	246.6	306.8	353.0	338.5	296.4	261.4	236.3	213.2	196.5
62.5°	148.3	173.4	215.0	263.8	306.3	300.2	265.9	236.4	214.5	193.4	179.3
65°	119.2	137.6	170.0	208.4	242.5	245.3	220.6	200.6	181.0	164.3	151.8
67.5°	95.0	106.9	129.8	162.0	187.6	196.7	181.6	166.3	150.8	137.8	127.0
70°	80.1	89.7	106.4	132.5	155.9	165.6	156.9	145.0	131.5	120.9	111.6
72.5°	64.9	74.3	86.6	105.7	125.9	136.3	133.3	124.7	113.7	105.0	96.2
75°	48.9	51.7	60.1	73.0	88.8	97.7	100.0	95.5	86.8	80.1	74.9
77.5°	36.2	37.9	41.8	48.6	58.9	66.9	70.3	69.7	63.7	59.8	55.0
80°	28.9	29.9	31.9	34.7	42.4	50.5	52.7	52.7	48.6	46.9	42.1
82.5°	22.0	22.7	23.8	25.5	29.1	36.1	38.6	39.1	36.4	34.4	30.6
85°	12.6	12.2	12.8	13.9	14.5	16.4	20.2	20.9	20.2	17.7	16.7
87.5°	7.6	7.2	6.6	5.9	5.8	5.7	6.6	7.6	6.9	6.5	6.3
90°	16.1	13.0	9.9	7.5	5.8	4.0	2.3	0.6	2.3	4.0	5.8
92.5°	18.9	18.1	17.4	16.4	15.2	13.9	12.7	11.4	12.7	13.9	15.2
95°	40.3	40.0	39.8	38.9	37.5	36.1	34.6	33.2	34.6	36.1	37.5
97.5°	67.7	67.2	66.6	65.7	64.4	63.2	61.9	60.7	61.9	63.2	64.4
100°	87.3	86.9	86.4	85.7	84.6	83.4	82.3	81.1	82.3	83.4	84.6
102.5°	108.1	107.5	106.9	106.2	105.3	104.4	103.5	102.6	103.5	104.4	105.3
105°	140.0	139.7	139.4	139.1	138.6	138.2	137.8	137.3	137.8	138.2	138.6
107.5°	175.2	175.2	175.2	174.9	174.3	173.7	173.0	172.4	173.0	173.7	174.3
110°	198.7	198.7	198.7	198.3	197.4	196.6	195.7	194.8	195.7	196.6	197.4



TEST NUMBER: P331790-935

CATALOG NUMBER: S122RDIW-S485D710U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	222.9	223.1	223.2	222.8	222.0	221.1	220.2	219.4	220.2	221.1	222.0
115°	258.6	259.0	259.2	259.0	258.1	257.3	256.4	255.5	256.4	257.3	258.1
117.5°	294.7	295.5	296.3	296.1	295.0	293.9	292.7	291.6	292.7	293.9	295.0
120°	317.9	319.0	320.1	320.1	319.0	317.9	316.8	315.6	316.8	317.9	319.0
122.5°	341.7	342.5	343.4	343.0	341.6	340.4	339.0	337.6	339.0	340.4	341.6
125°	376.5	376.9	377.4	376.9	375.7	374.4	373.2	371.9	373.2	374.4	375.7
127.5°	411.2	411.7	412.2	411.6	410.0	408.5	406.8	405.2	406.8	408.5	410.0
130°	433.8	434.0	434.3	433.5	431.7	429.8	428.0	426.1	428.0	429.8	431.7
132.5°	456.6	456.5	456.5	455.6	454.2	452.7	451.2	449.7	451.2	452.7	454.2
135°	488.9	488.5	488.3	487.3	485.8	484.2	482.7	481.1	482.7	484.2	485.8
137.5°	520.9	520.5	520.1	519.3	518.1	516.8	515.5	514.2	515.5	516.8	518.1
140°	541.7	541.0	540.2	539.2	538.0	536.7	535.4	534.2	535.4	536.7	538.0
142.5°	561.5	561.0	560.6	559.6	558.4	557.2	555.9	554.6	555.9	557.2	558.4
145°	590.6	589.7	588.8	588.0	586.9	585.9	585.0	583.9	585.0	585.9	586.9
147.5°	616.9	616.4	615.8	614.9	613.7	612.5	611.3	610.2	611.3	612.5	613.7
150°	633.3	632.7	632.1	631.5	630.6	629.7	628.9	628.0	628.9	629.7	630.6
152.5°	649.5	648.8	648.1	647.3	646.4	645.6	644.7	643.9	644.7	645.6	646.4
155°	670.6	670.2	669.8	669.3	668.9	668.5	668.0	667.6	668.0	668.5	668.9
157.5°	689.9	689.7	689.4	689.1	688.8	688.5	688.3	687.9	688.3	688.5	688.8
160°	701.9	701.7	701.6	701.4	701.1	700.8	700.5	700.3	700.5	700.8	701.1
162.5°	712.1	712.0	711.8	711.7	711.6	711.6	711.5	711.4	711.5	711.6	711.6
165°	725.8	725.8	725.8	725.9	726.0	726.2	726.3	726.4	726.3	726.2	726.0
167.5°	736.9	737.0	737.0	737.3	737.7	738.1	738.6	739.0	738.6	738.1	737.7
170°	743.3	743.5	743.6	743.9	744.3	744.8	745.2	745.6	745.2	744.8	744.3
172.5°	748.0	748.0	748.2	748.5	748.9	749.3	749.8	750.2	749.8	749.3	748.9
175°	753.2	753.5	753.8	754.1	754.6	755.0	755.4	755.8	755.4	755.0	754.6
177.5°	756.0	756.2	756.5	756.7	757.1	757.4	757.8	758.1	757.8	757.4	757.1
180°	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1



TEST NUMBER: P331790-935

CATALOG NUMBER: S122RDIW-S485D710U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4
2.5°	912.2	910.4	907.1	902.0	898.9	893.5	889.8	891.9	892.4	891.9	891.4
5°	887.8	881.0	871.7	862.6	854.3	845.3	840.2	837.9	833.4	830.9	829.6
7.5°	858.1	846.4	833.3	817.6	804.3	790.3	783.2	779.6	770.4	765.4	761.0
10°	835.9	817.6	804.4	783.9	771.4	753.0	740.5	740.8	728.2	721.2	716.0
12.5°	811.6	791.4	769.5	751.0	733.6	718.8	703.7	697.6	684.2	677.4	663.6
15°	771.0	747.5	724.4	699.3	681.7	658.8	637.0	610.3	588.8	570.1	564.9
17.5°	726.8	697.8	674.5	645.1	614.8	576.4	551.0	535.5	522.5	512.7	505.4
20°	696.5	666.8	642.1	597.7	556.9	530.8	512.2	500.3	486.8	476.2	470.4
22.5°	664.5	633.7	599.9	550.4	518.6	497.7	481.0	467.4	458.2	450.0	444.7
25°	619.2	585.5	529.9	495.8	470.1	448.2	436.6	428.3	418.6	407.3	402.3
27.5°	571.4	517.7	477.8	452.5	427.9	413.7	403.3	390.8	382.2	377.1	371.8
30°	535.6	482.0	450.8	423.1	405.8	390.0	377.8	370.7	362.4	353.7	350.2
32.5°	495.8	452.9	423.0	400.0	382.4	368.9	359.3	347.8	341.8	336.5	329.1
35°	446.3	413.8	386.5	367.8	351.1	340.2	328.9	322.2	311.3	306.8	303.8
37.5°	404.3	376.2	355.8	336.1	322.9	310.8	303.9	293.2	288.4	282.1	276.0
40°	380.6	353.0	333.5	317.4	302.6	293.5	284.9	276.2	269.1	266.2	258.8
42.5°	356.5	334.0	314.4	296.8	286.9	277.3	266.4	260.0	252.6	248.0	243.4
45°	323.1	303.2	286.5	272.0	261.1	251.2	244.0	233.4	229.3	219.9	216.0
47.5°	293.8	275.3	259.3	245.6	234.9	228.4	218.1	209.7	203.1	197.3	192.4
50°	272.9	257.5	242.1	229.9	220.2	210.9	200.4	196.1	185.8	183.0	180.0
52.5°	253.9	239.3	225.2	213.2	203.5	194.5	185.1	179.7	172.7	169.8	167.7
55°	227.3	213.2	199.7	189.1	179.4	170.0	164.3	157.6	154.3	152.1	149.5
57.5°	200.5	187.9	177.5	166.8	157.0	149.6	142.9	138.9	135.5	132.6	129.5
60°	183.6	171.3	162.0	152.1	142.2	136.0	130.9	126.1	122.2	117.7	116.4
62.5°	165.6	154.9	146.4	136.6	127.9	122.3	117.5	113.0	108.3	101.8	100.0
65°	140.9	132.5	123.5	115.5	107.7	102.3	95.1	90.1	88.1	87.5	87.1
67.5°	118.5	110.6	102.8	94.6	87.6	82.5	78.9	78.1	76.8	76.4	75.5
70°	103.5	96.2	88.4	80.7	74.0	73.0	71.7	70.4	68.8	68.2	67.5
72.5°	90.1	82.5	74.8	68.6	65.7	64.5	63.2	61.9	60.9	60.2	59.8
75°	69.1	62.1	56.9	54.7	53.0	52.1	50.2	49.2	48.6	47.6	47.3
77.5°	49.8	45.8	43.4	42.0	40.3	39.3	38.2	37.2	36.5	36.3	35.8
80°	38.0	36.0	34.4	32.5	31.9	30.6	30.2	29.3	29.6	28.6	28.6
82.5°	29.4	27.0	25.7	24.8	24.1	23.1	22.7	22.3	22.4	21.7	21.7
85°	15.2	14.5	13.9	13.2	13.2	12.2	12.6	12.2	12.2	11.5	11.3
87.5°	6.4	6.6	6.7	7.3	7.9	8.4	8.3	7.9	7.9	7.8	7.6
90°	7.5	9.9	13.0	16.1	19.2	22.4	22.0	21.8	21.5	21.3	21.2
92.5°	16.4	17.4	18.1	18.9	19.5	20.3	20.4	20.4	20.5	20.6	20.6
95°	38.9	39.8	40.0	40.3	40.6	40.9	40.9	40.9	40.9	40.9	40.7
97.5°	65.7	66.6	67.2	67.7	68.2	68.7	68.7	68.7	68.7	68.7	68.7
100°	85.7	86.4	86.9	87.3	87.7	88.2	88.2	88.2	88.2	88.2	88.1
102.5°	106.2	106.9	107.5	108.1	108.6	109.1	109.3	109.3	109.4	109.6	109.6
105°	139.1	139.4	139.7	140.0	140.3	140.6	140.9	141.1	141.4	141.7	141.8
107.5°	174.9	175.2	175.2	175.2	175.2	175.2	175.3	175.4	175.6	175.6	175.4
110°	198.3	198.7	198.7	198.7	198.7	198.7	198.7	198.7	198.7	198.7	198.5



TEST NUMBER: P331790-935

CATALOG NUMBER: S122RDIW-S485D710U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	222.8	223.2	223.1	222.9	222.8	222.7	222.4	222.1	221.7	221.4	221.0
115°	259.0	259.2	259.0	258.6	258.4	258.1	258.0	257.9	257.7	257.5	257.3
117.5°	296.1	296.3	295.5	294.7	293.9	293.2	292.8	292.5	292.1	291.8	291.4
120°	320.1	320.1	319.0	317.9	316.8	315.6	315.6	315.6	315.6	315.6	315.4
122.5°	343.0	343.4	342.5	341.7	341.0	340.2	339.8	339.5	339.1	338.8	338.5
125°	376.9	377.4	376.9	376.5	376.1	375.7	375.2	374.8	374.4	373.9	373.7
127.5°	411.6	412.2	411.7	411.2	410.7	410.2	409.7	409.1	408.6	408.1	407.7
130°	433.5	434.3	434.0	433.8	433.4	433.2	432.9	432.7	432.3	432.0	431.6
132.5°	455.6	456.5	456.5	456.6	456.7	456.7	456.1	455.5	454.8	454.2	453.7
135°	487.3	488.3	488.5	488.9	489.1	489.4	489.2	489.1	489.0	488.9	488.5
137.5°	519.3	520.1	520.5	520.9	521.2	521.6	521.5	521.3	521.2	521.2	520.8
140°	539.2	540.2	541.0	541.7	542.3	543.0	543.0	543.0	543.0	543.0	542.8
142.5°	559.6	560.6	561.0	561.5	562.0	562.5	562.6	562.7	562.8	562.9	562.7
145°	588.0	588.8	589.7	590.6	591.4	592.3	592.4	592.5	592.7	592.8	592.6
147.5°	614.9	615.8	616.4	616.9	617.5	618.1	618.4	618.7	619.0	619.3	619.2
150°	631.5	632.1	632.7	633.3	633.9	634.5	634.9	635.2	635.7	636.1	636.1
152.5°	647.3	648.1	648.8	649.5	650.1	650.8	651.3	651.9	652.4	653.0	653.0
155°	669.3	669.8	670.2	670.6	671.1	671.5	672.2	672.9	673.6	674.3	674.5
157.5°	689.1	689.4	689.7	689.9	690.2	690.4	691.4	692.3	693.3	694.2	694.4
160°	701.4	701.6	701.7	701.9	702.0	702.1	703.0	703.9	704.7	705.6	705.7
162.5°	711.7	711.8	712.0	712.1	712.2	712.4	713.3	714.3	715.3	716.3	716.4
165°	725.9	725.8	725.8	725.8	725.8	725.8	726.8	727.8	728.8	729.8	730.0
167.5°	737.3	737.0	737.0	736.9	736.9	736.9	737.9	738.9	739.9	740.9	741.0
170°	743.9	743.6	743.5	743.3	743.2	743.0	744.1	745.0	746.1	747.0	747.1
172.5°	748.5	748.2	748.0	748.0	747.8	747.6	748.6	749.7	750.6	751.7	751.7
175°	754.1	753.8	753.5	753.2	752.9	752.6	753.6	754.6	755.6	756.6	756.6
177.5°	756.7	756.5	756.2	756.0	755.8	755.5	756.2	756.9	757.6	758.3	758.3
180°	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1



TEST NUMBER: P331790-935

CATALOG NUMBER: S122RDIW-S485D710U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4
2.5°	888.6	889.1	888.3	888.8	888.3	889.1	888.6	891.4	891.9	892.4	891.9
5°	827.9	824.1	823.5	822.5	823.5	824.1	827.9	829.6	830.9	833.4	837.9
7.5°	755.5	754.9	753.4	751.1	753.4	754.9	755.5	761.0	765.4	770.4	779.6
10°	708.9	707.4	707.1	704.8	707.1	707.4	708.9	716.0	721.2	728.2	740.8
12.5°	654.4	644.1	643.0	637.4	643.0	644.1	654.4	663.6	677.4	684.2	697.6
15°	557.2	555.3	548.9	544.7	548.9	555.3	557.2	564.9	570.1	588.8	610.3
17.5°	501.6	495.3	493.4	492.5	493.4	495.3	501.6	505.4	512.7	522.5	535.5
20°	465.9	460.1	459.2	458.5	459.2	460.1	465.9	470.4	476.2	486.8	500.3
22.5°	441.2	435.1	432.7	430.8	432.7	435.1	441.2	444.7	450.0	458.2	467.4
25°	399.0	396.7	395.5	394.9	395.5	396.7	399.0	402.3	407.3	418.6	428.3
27.5°	366.0	361.1	360.1	358.4	360.1	361.1	366.0	371.8	377.1	382.2	390.8
30°	347.2	345.6	343.4	341.5	343.4	345.6	347.2	350.2	353.7	362.4	370.7
32.5°	325.1	323.8	321.8	320.9	321.8	323.8	325.1	329.1	336.5	341.8	347.8
35°	300.7	296.1	294.2	291.3	294.2	296.1	300.7	303.8	306.8	311.3	322.2
37.5°	274.7	272.3	269.7	270.6	269.7	272.3	274.7	276.0	282.1	288.4	293.2
40°	254.7	253.0	252.4	252.1	252.4	253.0	254.7	258.8	266.2	269.1	276.2
42.5°	238.7	234.3	232.6	232.6	232.6	234.3	238.7	243.4	248.0	252.6	260.0
45°	214.5	210.3	207.4	207.7	207.4	210.3	214.5	216.0	219.9	229.3	233.4
47.5°	189.7	189.5	187.7	188.3	187.7	189.5	189.7	192.4	197.3	203.1	209.7
50°	177.8	175.9	174.6	174.9	174.6	175.9	177.8	180.0	183.0	185.8	196.1
52.5°	166.5	164.8	163.8	165.1	163.8	164.8	166.5	167.7	169.8	172.7	179.7
55°	147.9	145.9	145.7	145.3	145.7	145.9	147.9	149.5	152.1	154.3	157.6
57.5°	127.2	125.9	123.9	123.1	123.9	125.9	127.2	129.5	132.6	135.5	138.9
60°	112.2	109.6	106.4	106.1	106.4	109.6	112.2	116.4	117.7	122.2	126.1
62.5°	98.6	98.1	97.5	97.4	97.5	98.1	98.6	100.0	101.8	108.3	113.0
65°	86.5	86.2	86.5	86.8	86.5	86.2	86.5	87.1	87.5	88.1	90.1
67.5°	75.3	74.8	74.2	74.5	74.2	74.8	75.3	75.5	76.4	76.8	78.1
70°	66.9	66.6	66.2	66.2	66.2	66.6	66.9	67.5	68.2	68.8	70.4
72.5°	58.6	58.5	58.3	58.0	58.3	58.5	58.6	59.8	60.2	60.9	61.9
75°	46.9	46.3	46.3	46.3	46.3	46.3	46.9	47.3	47.6	48.6	49.2
77.5°	35.7	35.5	35.1	34.9	35.1	35.5	35.7	35.8	36.3	36.5	37.2
80°	28.3	28.0	27.6	27.6	27.6	28.0	28.3	28.6	28.6	29.6	29.3
82.5°	21.6	21.3	21.2	20.9	21.2	21.3	21.6	21.7	21.7	22.4	22.3
85°	11.5	11.9	11.5	12.2	11.5	11.9	11.5	11.3	11.5	12.2	12.2
87.5°	7.6	7.4	7.7	7.4	7.7	7.4	7.6	7.6	7.8	7.9	7.9
90°	21.3	21.4	21.6	21.7	21.6	21.4	21.3	21.2	21.3	21.5	21.8
92.5°	20.6	20.7	20.7	20.7	20.7	20.7	20.6	20.6	20.6	20.5	20.4
95°	40.5	40.2	39.9	39.6	39.9	40.2	40.5	40.7	40.9	40.9	40.9
97.5°	68.7	68.7	68.6	68.6	68.6	68.7	68.7	68.7	68.7	68.7	68.7
100°	88.0	87.8	87.6	87.6	87.6	87.8	88.0	88.1	88.2	88.2	88.2
102.5°	109.4	109.3	109.2	109.0	109.2	109.3	109.4	109.6	109.6	109.4	109.3
105°	141.8	141.8	141.8	141.8	141.8	141.8	141.8	141.8	141.7	141.4	141.1
107.5°	174.7	174.1	173.4	172.8	173.4	174.1	174.7	175.4	175.6	175.6	175.4
110°	198.0	197.6	197.2	196.8	197.2	197.6	198.0	198.5	198.7	198.7	198.7



TEST NUMBER: P331790-935

CATALOG NUMBER: S122RDIW-S485D710U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	220.8	220.4	220.1	219.8	220.1	220.4	220.8	221.0	221.4	221.7	222.1
115°	256.8	256.4	256.0	255.5	256.0	256.4	256.8	257.3	257.5	257.7	257.9
117.5°	290.9	290.5	290.1	289.6	290.1	290.5	290.9	291.4	291.8	292.1	292.5
120°	315.0	314.5	314.1	313.7	314.1	314.5	315.0	315.4	315.6	315.6	315.6
122.5°	338.1	337.9	337.5	337.3	337.5	337.9	338.1	338.5	338.8	339.1	339.5
125°	373.6	373.4	373.2	373.2	373.2	373.4	373.6	373.7	373.9	374.4	374.8
127.5°	407.2	406.7	406.3	405.9	406.3	406.7	407.2	407.7	408.1	408.6	409.1
130°	431.0	430.5	429.9	429.4	429.9	430.5	431.0	431.6	432.0	432.3	432.7
132.5°	453.2	452.7	452.3	451.9	452.3	452.7	453.2	453.7	454.2	454.8	455.5
135°	488.1	487.7	487.2	486.8	487.2	487.7	488.1	488.5	488.9	489.0	489.1
137.5°	520.2	519.7	519.1	518.5	519.1	519.7	520.2	520.8	521.2	521.2	521.3
140°	542.3	541.7	541.1	540.5	541.1	541.7	542.3	542.8	543.0	543.0	543.0
142.5°	562.1	561.5	561.0	560.4	561.0	561.5	562.1	562.7	562.9	562.8	562.7
145°	592.0	591.5	590.9	590.4	590.9	591.5	592.0	592.6	592.8	592.7	592.5
147.5°	618.7	618.1	617.6	617.1	617.6	618.1	618.7	619.2	619.3	619.0	618.7
150°	635.7	635.2	634.9	634.5	634.9	635.2	635.7	636.1	636.1	635.7	635.2
152.5°	652.4	651.9	651.3	650.8	651.3	651.9	652.4	653.0	653.0	652.4	651.9
155°	674.1	673.6	673.2	672.8	673.2	673.6	674.1	674.5	674.3	673.6	672.9
157.5°	693.7	693.0	692.3	691.6	692.3	693.0	693.7	694.4	694.2	693.3	692.3
160°	705.2	704.6	704.0	703.4	704.0	704.6	705.2	705.7	705.6	704.7	703.9
162.5°	715.7	715.1	714.4	713.7	714.4	715.1	715.7	716.4	716.3	715.3	714.3
165°	729.2	728.5	727.8	727.1	727.8	728.5	729.2	730.0	729.8	728.8	727.8
167.5°	740.3	739.5	738.8	738.0	738.8	739.5	740.3	741.0	740.9	739.9	738.9
170°	746.2	745.4	744.5	743.6	744.5	745.4	746.2	747.1	747.0	746.1	745.0
172.5°	750.9	750.0	749.2	748.3	749.2	750.0	750.9	751.7	751.7	750.6	749.7
175°	755.8	755.0	754.1	753.3	754.1	755.0	755.8	756.6	756.6	755.6	754.6
177.5°	757.6	756.9	756.2	755.5	756.2	756.9	757.6	758.3	758.3	757.6	756.9
180°	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1



TEST NUMBER: P331790-935

CATALOG NUMBER: S122RDIW-S485D710U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4
2.5°	889.8	893.5	898.9	902.0	907.1	910.4	912.2	915.6	917.4	923.9	930.5
5°	840.2	845.3	854.3	862.6	871.7	881.0	887.8	895.4	902.5	914.7	927.6
7.5°	783.2	790.3	804.3	817.6	833.3	846.4	858.1	871.2	883.0	900.5	918.8
10°	740.5	753.0	771.4	783.9	804.4	817.6	835.9	850.4	866.9	890.0	910.6
12.5°	703.7	718.8	733.6	751.0	769.5	791.4	811.6	830.1	849.6	873.6	897.7
15°	637.0	658.8	681.7	699.3	724.4	747.5	771.0	796.1	819.9	848.5	880.0
17.5°	551.0	576.4	614.8	645.1	674.5	697.8	726.8	757.2	785.1	819.7	854.7
20°	512.2	530.8	556.9	597.7	642.1	666.8	696.5	729.9	762.0	799.6	837.2
22.5°	481.0	497.7	518.6	550.4	599.9	633.7	664.5	698.5	735.8	774.2	815.9
25°	436.6	448.2	470.1	495.8	529.9	585.5	619.2	653.3	693.9	735.0	782.6
27.5°	403.3	413.7	427.9	452.5	477.8	517.7	571.4	608.6	648.9	695.3	744.7
30°	377.8	390.0	405.8	423.1	450.8	482.0	535.6	578.8	618.6	666.2	718.9
32.5°	359.3	368.9	382.4	400.0	423.0	452.9	495.8	548.1	586.9	637.1	692.2
35°	328.9	340.2	351.1	367.8	386.5	413.8	446.3	502.2	540.8	590.3	645.7
37.5°	303.9	310.8	322.9	336.1	355.8	376.2	404.3	454.5	496.3	544.8	601.5
40°	284.9	293.5	302.6	317.4	333.5	353.0	380.6	418.0	465.9	513.5	568.8
42.5°	266.4	277.3	286.9	296.8	314.4	334.0	356.5	388.1	437.0	482.1	535.9
45°	244.0	251.2	261.1	272.0	286.5	303.2	323.1	350.8	397.7	436.6	487.2
47.5°	218.1	228.4	234.9	245.6	259.3	275.3	293.8	317.7	355.8	392.2	439.0
50°	200.4	210.9	220.2	229.9	242.1	257.5	272.9	296.1	326.7	365.0	408.6
52.5°	185.1	194.5	203.5	213.2	225.2	239.3	253.9	274.2	300.4	335.6	378.1
55°	164.3	170.0	179.4	189.1	199.7	213.2	227.3	244.4	266.9	296.4	330.9
57.5°	142.9	149.6	157.0	166.8	177.5	187.9	200.5	216.0	233.8	260.5	290.0
60°	130.9	136.0	142.2	152.1	162.0	171.3	183.6	196.5	213.2	236.3	261.4
62.5°	117.5	122.3	127.9	136.6	146.4	154.9	165.6	179.3	193.4	214.5	236.4
65°	95.1	102.3	107.7	115.5	123.5	132.5	140.9	151.8	164.3	181.0	200.6
67.5°	78.9	82.5	87.6	94.6	102.8	110.6	118.5	127.0	137.8	150.8	166.3
70°	71.7	73.0	74.0	80.7	88.4	96.2	103.5	111.6	120.9	131.5	145.0
72.5°	63.2	64.5	65.7	68.6	74.8	82.5	90.1	96.2	105.0	113.7	124.7
75°	50.2	52.1	53.0	54.7	56.9	62.1	69.1	74.9	80.1	86.8	95.5
77.5°	38.2	39.3	40.3	42.0	43.4	45.8	49.8	55.0	59.8	63.7	69.7
80°	30.2	30.6	31.9	32.5	34.4	36.0	38.0	42.1	46.9	48.6	52.7
82.5°	22.7	23.1	24.1	24.8	25.7	27.0	29.4	30.6	34.4	36.4	39.1
85°	12.6	12.2	13.2	13.2	13.9	14.5	15.2	16.7	17.7	20.2	20.9
87.5°	8.3	8.4	7.9	7.3	6.7	6.6	6.4	6.3	6.5	6.9	7.6
90°	22.0	22.4	19.2	16.1	13.0	9.9	7.5	5.8	4.0	2.3	0.6
92.5°	20.4	20.3	19.5	18.9	18.1	17.4	16.4	15.2	13.9	12.7	11.4
95°	40.9	40.9	40.6	40.3	40.0	39.8	38.9	37.5	36.1	34.6	33.2
97.5°	68.7	68.7	68.2	67.7	67.2	66.6	65.7	64.4	63.2	61.9	60.7
100°	88.2	88.2	87.7	87.3	86.9	86.4	85.7	84.6	83.4	82.3	81.1
102.5°	109.3	109.1	108.6	108.1	107.5	106.9	106.2	105.3	104.4	103.5	102.6
105°	140.9	140.6	140.3	140.0	139.7	139.4	139.1	138.6	138.2	137.8	137.3
107.5°	175.3	175.2	175.2	175.2	175.2	175.2	174.9	174.3	173.7	173.0	172.4
110°	198.7	198.7	198.7	198.7	198.7	198.7	198.3	197.4	196.6	195.7	194.8



TEST NUMBER: P331790-935

CATALOG NUMBER: S122RDIW-S485D710U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	222.4	222.7	222.8	222.9	223.1	223.2	222.8	222.0	221.1	220.2	219.4
115°	258.0	258.1	258.4	258.6	259.0	259.2	259.0	258.1	257.3	256.4	255.5
117.5°	292.8	293.2	293.9	294.7	295.5	296.3	296.1	295.0	293.9	292.7	291.6
120°	315.6	315.6	316.8	317.9	319.0	320.1	320.1	319.0	317.9	316.8	315.6
122.5°	339.8	340.2	341.0	341.7	342.5	343.4	343.0	341.6	340.4	339.0	337.6
125°	375.2	375.7	376.1	376.5	376.9	377.4	376.9	375.7	374.4	373.2	371.9
127.5°	409.7	410.2	410.7	411.2	411.7	412.2	411.6	410.0	408.5	406.8	405.2
130°	432.9	433.2	433.4	433.8	434.0	434.3	433.5	431.7	429.8	428.0	426.1
132.5°	456.1	456.7	456.7	456.6	456.5	456.5	455.6	454.2	452.7	451.2	449.7
135°	489.2	489.4	489.1	488.9	488.5	488.3	487.3	485.8	484.2	482.7	481.1
137.5°	521.5	521.6	521.2	520.9	520.5	520.1	519.3	518.1	516.8	515.5	514.2
140°	543.0	543.0	542.3	541.7	541.0	540.2	539.2	538.0	536.7	535.4	534.2
142.5°	562.6	562.5	562.0	561.5	561.0	560.6	559.6	558.4	557.2	555.9	554.6
145°	592.4	592.3	591.4	590.6	589.7	588.8	588.0	586.9	585.9	585.0	583.9
147.5°	618.4	618.1	617.5	616.9	616.4	615.8	614.9	613.7	612.5	611.3	610.2
150°	634.9	634.5	633.9	633.3	632.7	632.1	631.5	630.6	629.7	628.9	628.0
152.5°	651.3	650.8	650.1	649.5	648.8	648.1	647.3	646.4	645.6	644.7	643.9
155°	672.2	671.5	671.1	670.6	670.2	669.8	669.3	668.9	668.5	668.0	667.6
157.5°	691.4	690.4	690.2	689.9	689.7	689.4	689.1	688.8	688.5	688.3	687.9
160°	703.0	702.1	702.0	701.9	701.7	701.6	701.4	701.1	700.8	700.5	700.3
162.5°	713.3	712.4	712.2	712.1	712.0	711.8	711.7	711.6	711.6	711.5	711.4
165°	726.8	725.8	725.8	725.8	725.8	725.8	725.9	726.0	726.2	726.3	726.4
167.5°	737.9	736.9	736.9	736.9	737.0	737.0	737.3	737.7	738.1	738.6	739.0
170°	744.1	743.0	743.2	743.3	743.5	743.6	743.9	744.3	744.8	745.2	745.6
172.5°	748.6	747.6	747.8	748.0	748.0	748.2	748.5	748.9	749.3	749.8	750.2
175°	753.6	752.6	752.9	753.2	753.5	753.8	754.1	754.6	755.0	755.4	755.8
177.5°	756.2	755.5	755.8	756.0	756.2	756.5	756.7	757.1	757.4	757.8	758.1
180°	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1



TEST NUMBER: P331790-935

CATALOG NUMBER: S122RDIW-S485D710U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4	925.4
2.5°	930.7	931.5	936.7	939.0	943.7	945.5	947.4	946.9	946.9	948.0	955.2
5°	932.7	939.2	948.8	958.1	967.2	974.9	980.0	985.2	987.1	996.4	1004.8
7.5°	929.4	941.2	957.2	971.4	988.4	1001.8	1012.8	1022.8	1029.6	1043.2	1057.0
10°	925.1	941.8	959.8	978.1	1001.6	1019.3	1037.2	1051.1	1055.6	1075.8	1087.4
12.5°	916.3	938.7	961.6	985.3	1008.2	1032.6	1052.4	1066.3	1082.1	1100.3	1121.6
15°	903.2	928.9	958.8	989.4	1022.2	1051.7	1073.0	1097.1	1114.4	1134.4	1153.0
17.5°	884.3	917.5	955.5	990.8	1028.7	1060.5	1089.8	1112.8	1125.1	1136.4	1139.3
20°	869.4	905.1	949.8	991.6	1029.5	1066.2	1095.1	1114.4	1117.7	1117.9	1100.9
22.5°	853.3	893.5	940.3	983.1	1028.5	1069.3	1091.7	1100.0	1087.3	1065.5	1032.5
25°	823.5	870.0	924.4	973.3	1022.8	1061.4	1069.1	1054.6	1010.0	962.9	903.5
27.5°	791.2	843.5	901.8	956.1	1008.9	1032.9	1016.2	964.0	883.5	813.6	728.8
30°	767.5	826.3	883.6	944.3	993.2	1003.5	965.3	888.4	794.5	689.1	604.5
32.5°	740.5	802.1	865.0	927.9	968.8	958.7	895.5	800.9	690.9	587.2	507.2
35°	701.9	765.6	833.4	896.4	922.5	879.1	784.5	661.4	548.9	452.1	397.1
37.5°	657.4	726.7	797.2	855.1	853.3	780.8	652.1	525.0	430.4	373.2	334.0
40°	625.7	695.8	772.0	820.9	800.0	705.8	566.2	446.3	377.1	331.5	302.9
42.5°	595.4	665.7	741.4	780.2	743.9	628.1	489.0	395.1	338.0	302.5	279.2
45°	543.7	617.9	688.1	709.6	644.6	517.0	395.5	327.4	289.4	263.0	246.9
47.5°	493.3	566.3	630.3	630.7	542.8	419.3	333.6	283.3	250.9	230.5	218.8
50°	462.4	531.8	585.5	577.1	477.5	373.0	298.3	254.9	228.0	212.2	200.0
52.5°	427.7	495.0	541.5	517.7	422.1	328.2	266.7	230.3	207.9	194.2	183.3
55°	377.1	437.0	469.8	433.8	344.4	272.9	225.4	196.7	180.0	168.5	159.2
57.5°	327.6	376.9	397.5	355.6	283.6	226.4	190.6	169.2	152.6	144.3	139.5
60°	296.4	338.5	353.0	306.8	246.6	198.0	168.8	148.9	136.6	131.2	126.4
62.5°	265.9	300.2	306.3	263.8	215.0	173.4	148.3	131.4	123.3	118.0	113.5
65°	220.6	245.3	242.5	208.4	170.0	137.6	119.2	109.0	102.9	95.5	87.5
67.5°	181.6	196.7	187.6	162.0	129.8	106.9	95.0	87.2	79.6	72.6	70.8
70°	156.9	165.6	155.9	132.5	106.4	89.7	80.1	70.8	66.2	64.7	61.7
72.5°	133.3	136.3	125.9	105.7	86.6	74.3	64.9	59.7	57.3	55.9	54.0
75°	100.0	97.7	88.8	73.0	60.1	51.7	48.9	46.9	45.4	44.1	43.0
77.5°	70.3	66.9	58.9	48.6	41.8	37.9	36.2	35.1	34.4	33.7	32.7
80°	52.7	50.5	42.4	34.7	31.9	29.9	28.9	27.6	27.6	27.0	26.0
82.5°	38.6	36.1	29.1	25.5	23.8	22.7	22.0	21.2	20.9	21.1	20.4
85°	20.2	16.4	14.5	13.9	12.8	12.2	12.6	11.9	11.9	11.9	11.5
87.5°	6.6	5.7	5.8	5.9	6.6	7.2	7.6	8.2	9.1	8.8	9.0
90°	2.3	4.0	5.8	7.5	9.9	13.0	16.1	19.2	22.4	22.0	21.8
92.5°	12.7	13.9	15.2	16.4	17.4	18.1	18.9	19.5	20.3	20.4	20.4
95°	34.6	36.1	37.5	38.9	39.8	40.0	40.3	40.6	40.9	40.9	40.9
97.5°	61.9	63.2	64.4	65.7	66.6	67.2	67.7	68.2	68.7	68.7	68.7
100°	82.3	83.4	84.6	85.7	86.4	86.9	87.3	87.7	88.2	88.2	88.2
102.5°	103.5	104.4	105.3	106.2	106.9	107.5	108.1	108.6	109.1	109.3	109.3
105°	137.8	138.2	138.6	139.1	139.4	139.7	140.0	140.3	140.6	140.9	141.1
107.5°	173.0	173.7	174.3	174.9	175.2	175.2	175.2	175.2	175.2	175.3	175.4
110°	195.7	196.6	197.4	198.3	198.7	198.7	198.7	198.7	198.7	198.7	198.7



TEST NUMBER: P331790-935

CATALOG NUMBER: S122RDIW-S485D710U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	220.2	221.1	222.0	222.8	223.2	223.1	222.9	222.8	222.7	222.4	222.1
115°	256.4	257.3	258.1	259.0	259.2	259.0	258.6	258.4	258.1	258.0	257.9
117.5°	292.7	293.9	295.0	296.1	296.3	295.5	294.7	293.9	293.2	292.8	292.5
120°	316.8	317.9	319.0	320.1	320.1	319.0	317.9	316.8	315.6	315.6	315.6
122.5°	339.0	340.4	341.6	343.0	343.4	342.5	341.7	341.0	340.2	339.8	339.5
125°	373.2	374.4	375.7	376.9	377.4	376.9	376.5	376.1	375.7	375.2	374.8
127.5°	406.8	408.5	410.0	411.6	412.2	411.7	411.2	410.7	410.2	409.7	409.1
130°	428.0	429.8	431.7	433.5	434.3	434.0	433.8	433.4	433.2	432.9	432.7
132.5°	451.2	452.7	454.2	455.6	456.5	456.5	456.6	456.7	456.7	456.1	455.5
135°	482.7	484.2	485.8	487.3	488.3	488.5	488.9	489.1	489.4	489.2	489.1
137.5°	515.5	516.8	518.1	519.3	520.1	520.5	520.9	521.2	521.6	521.5	521.3
140°	535.4	536.7	538.0	539.2	540.2	541.0	541.7	542.3	543.0	543.0	543.0
142.5°	555.9	557.2	558.4	559.6	560.6	561.0	561.5	562.0	562.5	562.6	562.7
145°	585.0	585.9	586.9	588.0	588.8	589.7	590.6	591.4	592.3	592.4	592.5
147.5°	611.3	612.5	613.7	614.9	615.8	616.4	616.9	617.5	618.1	618.4	618.7
150°	628.9	629.7	630.6	631.5	632.1	632.7	633.3	633.9	634.5	634.9	635.2
152.5°	644.7	645.6	646.4	647.3	648.1	648.8	649.5	650.1	650.8	651.3	651.9
155°	668.0	668.5	668.9	669.3	669.8	670.2	670.6	671.1	671.5	672.2	672.9
157.5°	688.3	688.5	688.8	689.1	689.4	689.7	689.9	690.2	690.4	691.4	692.3
160°	700.5	700.8	701.1	701.4	701.6	701.7	701.9	702.0	702.1	703.0	703.9
162.5°	711.5	711.6	711.6	711.7	711.8	712.0	712.1	712.2	712.4	713.3	714.3
165°	726.3	726.2	726.0	725.9	725.8	725.8	725.8	725.8	725.8	726.8	727.8
167.5°	738.6	738.1	737.7	737.3	737.0	737.0	736.9	736.9	736.9	737.9	738.9
170°	745.2	744.8	744.3	743.9	743.6	743.5	743.3	743.2	743.0	744.1	745.0
172.5°	749.8	749.3	748.9	748.5	748.2	748.0	748.0	747.8	747.6	748.6	749.7
175°	755.4	755.0	754.6	754.1	753.8	753.5	753.2	752.9	752.6	753.6	754.6
177.5°	757.8	757.4	757.1	756.7	756.5	756.2	756.0	755.8	755.5	756.2	756.9
180°	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1	757.1



TEST NUMBER: P331790-935

CATALOG NUMBER: S122RDIW-S485D710U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	925.4	925.4	925.4	925.4	925.4	925.4	925.4
2.5°	957.8	961.1	962.7	962.7	964.5	963.7	962.9
5°	1012.8	1018.9	1020.2	1026.0	1030.2	1028.9	1029.5
7.5°	1067.6	1077.4	1087.1	1091.5	1092.3	1094.8	1095.8
10°	1101.2	1109.3	1124.4	1122.1	1133.4	1139.8	1129.2
12.5°	1133.7	1144.5	1155.0	1157.9	1164.2	1166.3	1162.1
15°	1163.0	1168.7	1169.4	1167.8	1169.8	1168.1	1162.0
17.5°	1135.6	1126.2	1107.2	1098.1	1091.0	1080.5	1076.2
20°	1090.3	1062.6	1030.5	1017.6	1002.5	972.9	980.0
22.5°	992.6	961.0	928.9	891.3	873.4	845.3	843.7
25°	840.5	786.2	726.3	684.5	660.1	632.1	619.9
27.5°	653.5	585.0	536.1	511.3	488.6	466.5	465.5
30°	530.5	479.1	441.2	419.9	406.1	396.7	398.7
32.5°	447.2	411.9	386.3	368.8	358.5	351.5	351.4
35°	365.6	341.5	325.0	317.7	310.3	305.1	305.5
37.5°	312.9	298.3	289.2	281.1	276.5	274.0	272.5
40°	285.9	274.0	266.9	262.1	258.2	254.7	254.0
42.5°	264.5	254.7	247.5	243.7	240.2	237.6	237.0
45°	234.7	226.7	220.2	216.0	214.5	212.2	212.2
47.5°	208.8	200.9	195.9	193.2	190.5	189.0	188.9
50°	191.3	185.2	180.7	179.1	176.8	175.9	175.6
52.5°	175.6	171.1	167.8	166.8	165.7	164.5	164.7
55°	154.3	151.8	150.5	149.5	147.9	145.9	147.2
57.5°	136.4	134.2	130.7	127.7	126.2	124.8	125.4
60°	123.8	119.2	114.8	111.2	110.3	107.4	107.4
62.5°	107.9	101.5	96.0	94.0	93.1	91.7	91.4
65°	82.9	80.4	79.1	77.8	77.1	77.1	76.5
67.5°	68.7	67.7	66.3	66.0	65.3	65.2	64.9
70°	60.8	59.5	58.8	58.5	57.9	58.2	57.3
72.5°	53.0	52.0	51.9	51.1	50.7	50.7	50.0
75°	41.8	41.8	41.5	41.2	40.6	40.2	40.6
77.5°	32.1	32.2	31.6	31.6	31.5	31.6	31.3
80°	25.7	26.0	25.7	25.4	25.1	25.4	25.1
82.5°	20.3	19.9	19.8	19.7	19.7	19.5	19.5
85°	11.5	11.9	11.5	11.3	11.3	11.3	11.5
87.5°	8.7	8.6	8.6	8.6	8.7	8.7	8.4
90°	21.5	21.3	21.2	21.3	21.4	21.6	21.7
92.5°	20.5	20.6	20.6	20.6	20.7	20.7	20.7
95°	40.9	40.9	40.7	40.5	40.2	39.9	39.6
97.5°	68.7	68.7	68.7	68.7	68.7	68.6	68.6
100°	88.2	88.2	88.1	88.0	87.8	87.6	87.6
102.5°	109.4	109.6	109.6	109.4	109.3	109.2	109.0
105°	141.4	141.7	141.8	141.8	141.8	141.8	141.8
107.5°	175.6	175.6	175.4	174.7	174.1	173.4	172.8
110°	198.7	198.7	198.5	198.0	197.6	197.2	196.8



TEST NUMBER: P331790-935

CATALOG NUMBER: S122RDIW-S485D710U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	221.7	221.4	221.0	220.8	220.4	220.1	219.8
115°	257.7	257.5	257.3	256.8	256.4	256.0	255.5
117.5°	292.1	291.8	291.4	290.9	290.5	290.1	289.6
120°	315.6	315.6	315.4	315.0	314.5	314.1	313.7
122.5°	339.1	338.8	338.5	338.1	337.9	337.5	337.3
125°	374.4	373.9	373.7	373.6	373.4	373.2	373.2
127.5°	408.6	408.1	407.7	407.2	406.7	406.3	405.9
130°	432.3	432.0	431.6	431.0	430.5	429.9	429.4
132.5°	454.8	454.2	453.7	453.2	452.7	452.3	451.9
135°	489.0	488.9	488.5	488.1	487.7	487.2	486.8
137.5°	521.2	521.2	520.8	520.2	519.7	519.1	518.5
140°	543.0	543.0	542.8	542.3	541.7	541.1	540.5
142.5°	562.8	562.9	562.7	562.1	561.5	561.0	560.4
145°	592.7	592.8	592.6	592.0	591.5	590.9	590.4
147.5°	619.0	619.3	619.2	618.7	618.1	617.6	617.1
150°	635.7	636.1	636.1	635.7	635.2	634.9	634.5
152.5°	652.4	653.0	653.0	652.4	651.9	651.3	650.8
155°	673.6	674.3	674.5	674.1	673.6	673.2	672.8
157.5°	693.3	694.2	694.4	693.7	693.0	692.3	691.6
160°	704.7	705.6	705.7	705.2	704.6	704.0	703.4
162.5°	715.3	716.3	716.4	715.7	715.1	714.4	713.7
165°	728.8	729.8	730.0	729.2	728.5	727.8	727.1
167.5°	739.9	740.9	741.0	740.3	739.5	738.8	738.0
170°	746.1	747.0	747.1	746.2	745.4	744.5	743.6
172.5°	750.6	751.7	751.7	750.9	750.0	749.2	748.3
175°	755.6	756.6	756.6	755.8	755.0	754.1	753.3
177.5°	757.6	758.3	758.3	757.6	756.9	756.2	755.5
180°	757.1	757.1	757.1	757.1	757.1	757.1	757.1

(END OF REPORT)