

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331806-935

Luminaire Tested: **S122RDIW-S675D435U935-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331806-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S675D435U935-4F0-1E-UDD-A1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 435 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3480.4 lumens
Efficiency: N/A
Efficacy: 92.3 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 37.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331806-935

CATALOG NUMBER: S122RDIW-S675D435U935-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

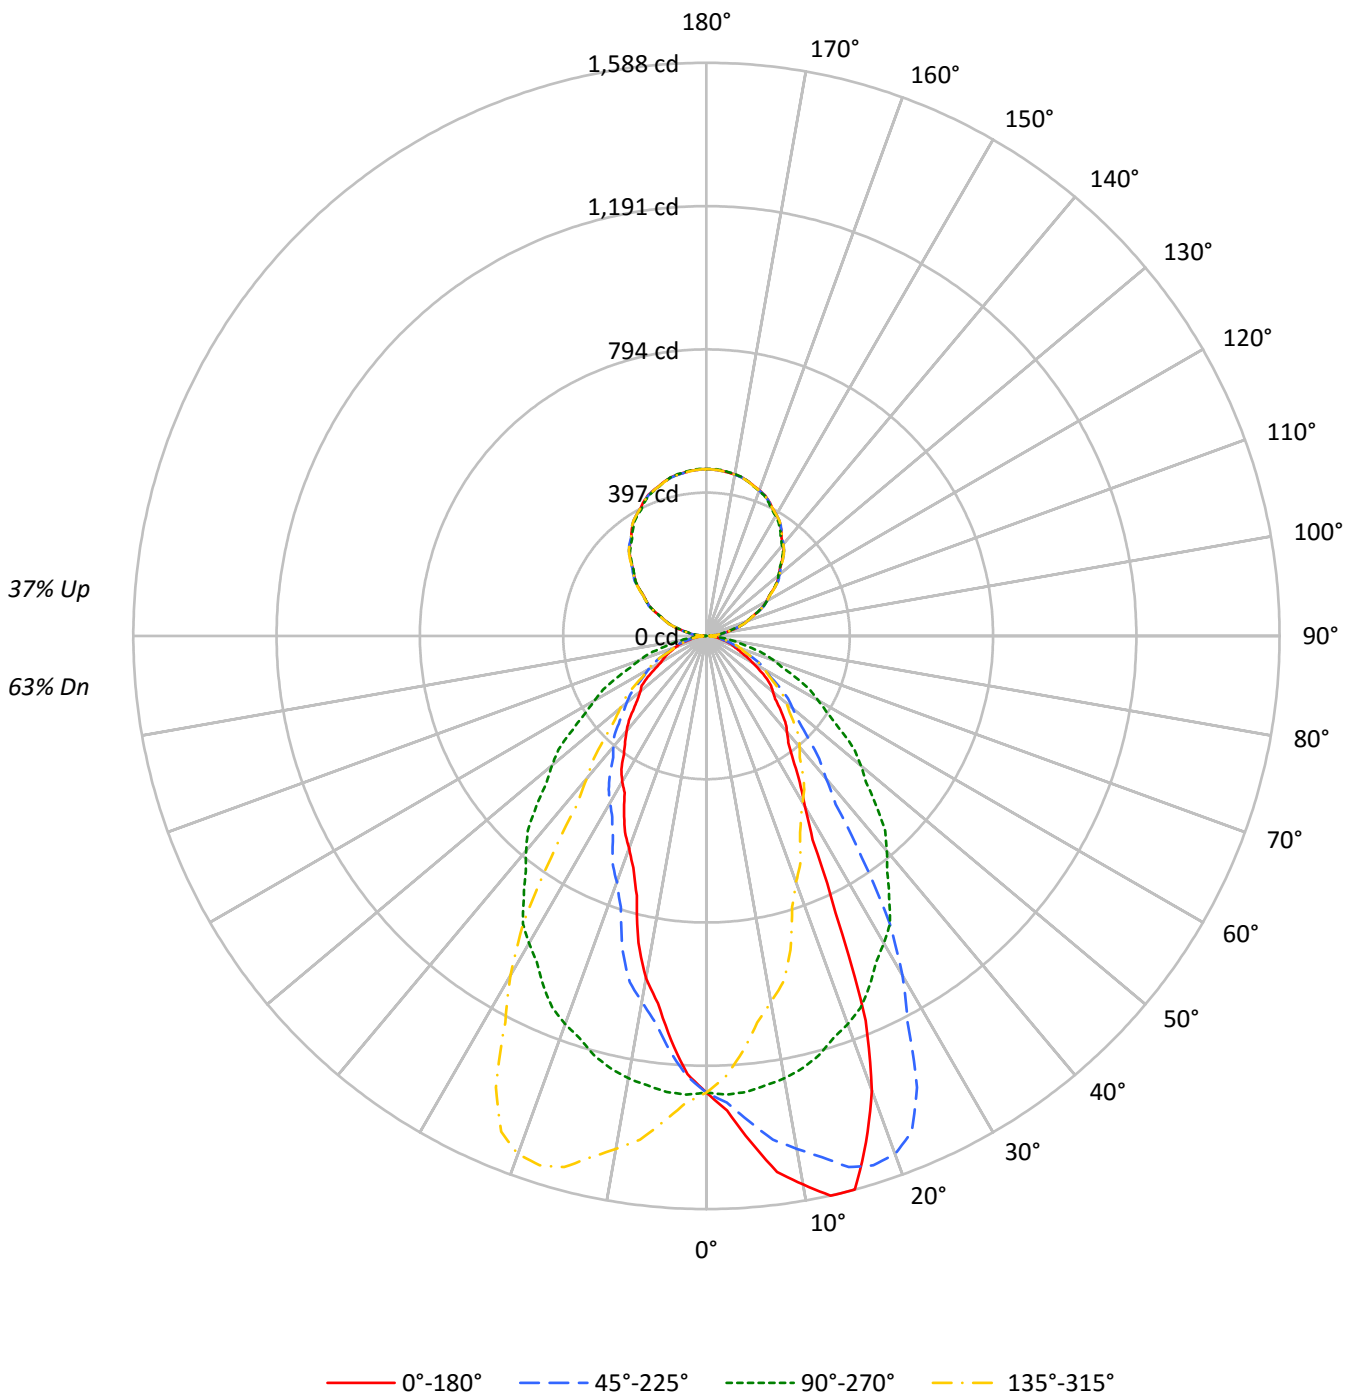



TEST NUMBER: P331806-935

CATALOG NUMBER: S122RDIW-S675D435U935-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	110	110	110	110	103	103	103	103	90	90	90		79	79	79		68	68	68	63
1	102	98	94	91	95	92	89	86	81	78	76		71	69	68		62	60	59	55
2	93	86	81	76	87	81	76	72	72	68	65		63	61	58		55	53	52	48
3	86	77	70	65	80	73	67	62	65	60	56		57	53	50		50	47	45	42
4	79	69	61	56	74	65	59	53	58	53	49		52	48	44		46	42	40	37
5	73	62	54	49	69	59	52	47	53	47	43		47	43	39		42	38	36	33
6	68	56	49	43	64	53	46	41	48	42	38		43	38	35		38	35	32	29
7	63	51	44	38	59	49	42	37	44	38	34		40	35	32		35	32	29	27
8	59	47	40	34	55	45	38	33	41	35	31		37	32	29		33	29	26	24
9	55	43	36	31	52	41	35	30	38	32	28		34	29	26		31	27	24	22
10	52	40	33	28	49	38	32	27	35	29	26		32	27	24		29	25	22	20

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	20423	20423	20423	20423
5°	22809	20551	18220	20551
10°	25306	20407	15795	20407
15°	26551	20107	12445	20107
20°	23017	19663	10768	19663
25°	15096	19057	9615	19057
30°	10161	18321	8701	18321
35°	8229	17394	7849	17394
40°	7318	16387	7263	16387
45°	6624	15203	6485	15203
50°	6028	14031	6006	14031
55°	5666	12732	5590	12732
60°	4740	11538	4682	11538
65°	3996	10476	4531	10476
70°	3696	9356	4277	9356
75°	3456	8141	3949	8141
80°	3189	6704	3515	6704
85°	2927	5298	3094	5298



TEST NUMBER: P331806-935

CATALOG NUMBER: S122RDIW-S675D435U935-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	119.9	3.4
10°-20°	334.1	9.6
20°-30°	430.5	12.4
30°-40°	409.1	11.8
40°-50°	350.5	10.1
50°-60°	266.9	7.7
60°-70°	168.7	4.8
70°-80°	84.3	2.4
80°-90°	23.8	0.7
90°-100°	29.3	0.8
100°-110°	91.0	2.6
110°-120°	155.5	4.5
120°-130°	204.5	5.9
130°-140°	229.5	6.6
140°-150°	225.0	6.5
150°-160°	188.8	5.4
160°-170°	125.2	3.6
170°-180°	43.8	1.3
0°-30°	884.5	25.4
0°-40°	1293.7	37.2
0°-60°	1911.1	54.9
0°-90°	2187.8	62.9
90°-120°	275.7	7.9
90°-150°	934.8	26.9
90°-180°	1293.0	37.2
0°-180°	3480.4	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1265	1265	1265	1265	1265	
5°	1407	1268	1124	1268	1407	139
15°	1588	1203	744	1203	1588	428
25°	847	1070	540	1070	847	402
35°	418	882	398	882	418	267
45°	290	666	284	666	290	224
55°	201	452	199	452	201	177
65°	105	274	119	274	105	106
75°	55	130	63	130	55	59
85°	16	29	17	29	16	17
90°	13	0	13	0	13	7
95°	24	20	24	20	24	27
105°	87	84	87	84	87	91
115°	156	156	156	156	156	154
125°	228	227	228	227	228	203
135°	297	294	297	294	297	229
145°	360	356	360	356	360	225
155°	411	408	411	408	411	189
165°	444	444	444	444	444	125
175°	460	462	460	462	460	44
180°	462	462	462	462	462	



TEST NUMBER: P331806-935

CATALOG NUMBER: S122RDIW-S675D435U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1316.2	1317.2	1318.4	1315.9	1315.9	1313.7	1309.2	1305.7	1295.8	1294.4	1294.4
5°	1407.3	1406.4	1408.2	1402.5	1394.6	1392.8	1384.4	1373.5	1362.0	1349.3	1346.6
7.5°	1497.8	1496.5	1493.0	1492.0	1485.9	1472.7	1459.2	1444.9	1425.9	1407.4	1398.1
10°	1543.5	1558.1	1549.2	1533.9	1537.0	1516.3	1505.3	1486.4	1470.6	1442.9	1436.8
12.5°	1588.5	1594.2	1591.5	1582.7	1578.7	1564.4	1549.6	1533.2	1504.0	1479.1	1457.5
15°	1588.4	1596.7	1598.9	1596.3	1598.4	1597.6	1589.7	1576.1	1550.6	1523.3	1499.6
17.5°	1471.1	1476.9	1491.3	1501.1	1513.4	1539.4	1552.2	1557.2	1553.4	1537.9	1521.2
20°	1339.6	1329.9	1370.4	1391.0	1408.6	1452.5	1490.3	1504.9	1528.1	1527.7	1523.3
22.5°	1153.2	1155.5	1193.9	1218.4	1269.7	1313.6	1356.8	1411.4	1456.4	1486.2	1503.7
25°	847.4	864.1	902.3	935.7	992.8	1074.6	1148.8	1235.0	1316.3	1380.4	1441.6
27.5°	636.4	637.7	668.0	698.8	732.7	799.7	893.2	996.1	1112.0	1207.6	1317.7
30°	545.0	542.3	555.1	574.0	603.0	654.9	725.1	826.3	941.8	1086.0	1214.4
32.5°	480.3	480.4	490.1	504.0	528.1	563.1	611.2	693.4	802.6	944.3	1094.8
35°	417.5	417.1	424.1	434.2	444.4	466.7	499.7	542.8	617.9	750.2	904.0
37.5°	372.6	374.4	377.9	384.2	395.4	407.9	427.7	456.6	510.1	588.3	717.6
40°	347.2	348.1	352.9	358.2	364.8	374.4	390.7	414.0	453.1	515.6	610.0
42.5°	324.0	324.9	328.3	333.2	338.4	348.1	361.5	381.7	413.4	462.1	540.0
45°	290.1	290.1	293.2	295.3	301.1	309.9	320.8	337.5	359.6	395.5	447.4
47.5°	258.2	258.3	260.4	264.2	267.8	274.6	285.4	299.0	315.0	342.9	387.2
50°	240.0	240.4	241.7	244.8	247.0	253.1	261.5	273.4	290.1	311.6	348.5
52.5°	225.2	224.9	226.6	227.9	229.5	233.8	240.0	250.6	265.4	284.2	314.8
55°	201.3	199.5	202.2	204.4	205.7	207.4	210.9	217.6	230.3	246.2	269.0
57.5°	171.4	170.7	172.5	174.6	178.7	183.5	186.4	190.6	197.3	208.6	231.3
60°	146.8	146.8	150.8	152.1	156.9	163.1	169.2	172.7	179.3	186.8	203.5
62.5°	125.0	125.4	127.2	128.5	131.2	138.8	147.4	155.2	161.4	168.5	179.6
65°	104.6	105.5	105.5	106.3	108.1	109.9	113.4	119.5	130.5	140.6	149.0
67.5°	88.8	89.0	89.3	90.1	90.7	92.6	93.9	96.7	99.3	108.8	119.2
70°	78.3	79.6	79.1	80.0	80.4	81.3	83.1	84.4	88.3	90.6	96.7
72.5°	68.4	69.3	69.2	69.8	70.9	71.1	72.5	73.9	76.4	78.3	81.5
75°	55.4	54.9	55.4	56.2	56.7	57.2	57.2	58.9	60.2	62.0	64.1
77.5°	42.7	43.1	43.0	43.1	43.2	44.0	43.9	44.8	46.1	46.9	48.0
80°	34.3	34.7	34.3	34.7	35.1	35.6	35.1	35.6	36.9	37.8	37.8
82.5°	26.5	26.6	26.9	26.9	27.0	27.1	27.8	27.9	28.8	28.7	29.0
85°	15.8	15.4	15.4	15.4	15.8	16.3	15.8	15.8	16.3	16.3	16.3
87.5°	8.3	8.6	8.6	8.6	8.5	8.6	8.6	9.0	8.7	9.0	8.4
90°	13.3	13.2	13.1	13.0	12.9	13.0	13.2	13.3	13.5	13.7	11.7
92.5°	12.7	12.7	12.6	12.6	12.6	12.6	12.5	12.5	12.4	12.4	12.0
95°	24.2	24.4	24.5	24.7	24.9	25.0	25.0	25.0	25.0	25.0	24.8
97.5°	41.9	41.9	41.9	41.9	41.9	41.9	41.9	41.9	41.9	41.9	41.7
100°	53.5	53.6	53.6	53.7	53.8	53.8	53.8	53.8	53.8	53.8	53.6
102.5°	66.6	66.6	66.7	66.8	66.9	66.9	66.8	66.7	66.7	66.6	66.3
105°	86.6	86.6	86.6	86.6	86.6	86.5	86.4	86.2	86.0	85.8	85.7
107.5°	105.5	105.9	106.2	106.7	107.1	107.3	107.2	107.1	107.0	106.9	106.9
110°	120.1	120.4	120.6	120.9	121.1	121.3	121.3	121.3	121.3	121.3	121.3



TEST NUMBER: P331806-935

CATALOG NUMBER: S122RDIW-S675D435U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	134.2	134.4	134.6	134.7	134.9	135.2	135.3	135.6	135.8	136.0	136.0
115°	156.0	156.3	156.5	156.8	157.0	157.2	157.3	157.4	157.5	157.6	157.7
117.5°	176.8	177.1	177.4	177.6	177.9	178.1	178.3	178.6	178.7	179.0	179.4
120°	191.6	191.8	192.1	192.3	192.6	192.7	192.7	192.7	192.7	192.7	193.4
122.5°	205.9	206.0	206.3	206.5	206.6	206.8	207.1	207.2	207.5	207.7	208.2
125°	227.8	227.9	228.0	228.1	228.2	228.3	228.6	228.9	229.1	229.4	229.6
127.5°	247.8	248.1	248.3	248.6	248.9	249.2	249.5	249.8	250.1	250.5	250.7
130°	262.2	262.5	262.9	263.2	263.6	263.8	264.0	264.2	264.3	264.5	264.7
132.5°	275.9	276.1	276.4	276.7	277.0	277.3	277.7	278.1	278.4	278.8	278.8
135°	297.2	297.5	297.7	298.0	298.3	298.4	298.5	298.6	298.7	298.8	298.6
137.5°	316.6	316.9	317.3	317.6	318.0	318.2	318.2	318.3	318.4	318.5	318.2
140°	330.0	330.4	330.7	331.1	331.4	331.6	331.6	331.6	331.6	331.6	331.1
142.5°	342.2	342.5	342.9	343.2	343.5	343.7	343.6	343.5	343.5	343.5	343.1
145°	360.4	360.8	361.1	361.4	361.8	362.0	361.9	361.8	361.7	361.6	361.1
147.5°	376.8	377.0	377.4	377.7	378.1	378.2	378.0	377.7	377.5	377.4	377.0
150°	387.4	387.6	387.9	388.1	388.4	388.4	388.1	387.9	387.6	387.4	387.0
152.5°	397.4	397.7	398.0	398.3	398.6	398.6	398.3	398.0	397.7	397.4	396.9
155°	410.8	411.0	411.3	411.6	411.8	411.7	411.3	410.9	410.4	410.0	409.7
157.5°	422.3	422.8	423.1	423.5	424.0	423.9	423.3	422.7	422.1	421.5	421.4
160°	429.5	429.8	430.2	430.5	430.8	430.8	430.2	429.7	429.2	428.7	428.6
162.5°	435.8	436.1	436.5	437.0	437.4	437.3	436.7	436.1	435.5	435.0	434.9
165°	443.9	444.4	444.8	445.2	445.7	445.6	445.0	444.4	443.8	443.2	443.2
167.5°	450.6	451.1	451.5	451.9	452.5	452.4	451.8	451.2	450.6	450.0	450.0
170°	454.1	454.6	455.1	455.6	456.2	456.1	455.5	454.9	454.3	453.7	453.7
172.5°	456.8	457.4	457.9	458.4	458.9	458.9	458.3	457.7	457.1	456.5	456.6
175°	459.9	460.5	461.0	461.5	462.0	461.9	461.3	460.7	460.1	459.5	459.7
177.5°	461.3	461.8	462.2	462.5	463.0	463.0	462.5	462.2	461.8	461.3	461.4
180°	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3



TEST NUMBER: P331806-935

CATALOG NUMBER: S122RDIW-S675D435U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1295.1	1292.3	1289.9	1283.5	1280.4	1273.3	1272.3	1272.0	1262.7	1254.0	1251.5
5°	1339.6	1332.6	1322.0	1309.7	1296.9	1283.8	1275.0	1268.0	1250.3	1233.6	1224.0
7.5°	1384.4	1369.3	1351.1	1327.8	1308.4	1286.6	1270.4	1255.9	1231.0	1207.0	1190.9
10°	1417.8	1393.2	1369.1	1337.0	1311.9	1287.3	1264.5	1244.7	1216.5	1184.9	1162.4
12.5°	1438.6	1411.5	1378.2	1346.8	1314.4	1283.1	1252.5	1227.1	1194.0	1161.3	1134.7
15°	1466.6	1437.6	1397.1	1352.4	1310.6	1269.7	1234.6	1202.9	1159.9	1120.8	1088.2
17.5°	1489.5	1449.7	1406.2	1354.4	1306.1	1254.0	1208.8	1168.4	1120.4	1073.2	1034.9
20°	1496.9	1457.4	1407.3	1355.4	1298.3	1237.2	1188.4	1144.4	1093.0	1041.6	997.6
22.5°	1492.4	1461.6	1405.8	1343.8	1285.3	1221.3	1166.2	1115.3	1058.3	1005.7	954.8
25°	1461.4	1450.8	1398.1	1330.3	1263.6	1189.3	1125.6	1069.7	1004.7	948.5	893.0
27.5°	1389.0	1411.8	1379.1	1307.0	1232.7	1153.1	1081.4	1017.9	950.4	887.1	831.9
30°	1319.4	1371.7	1357.6	1290.8	1207.7	1129.5	1049.1	982.7	910.7	845.6	791.1
32.5°	1224.1	1310.5	1324.2	1268.3	1182.4	1096.5	1012.2	946.2	870.9	802.4	749.2
35°	1072.4	1201.6	1260.9	1225.3	1139.2	1046.5	959.4	882.5	806.9	739.3	686.5
37.5°	891.4	1067.4	1166.2	1168.8	1089.7	993.2	898.5	822.2	744.8	678.3	621.3
40°	774.0	964.7	1093.5	1122.1	1055.2	951.1	855.2	777.5	701.9	636.8	571.4
42.5°	668.5	858.5	1016.8	1066.5	1013.4	909.9	813.8	732.5	659.0	597.4	530.5
45°	540.6	706.7	881.2	970.0	940.6	844.7	743.2	665.8	596.8	543.6	479.5
47.5°	456.0	573.1	741.9	862.0	861.5	774.0	674.2	600.1	536.1	486.3	434.3
50°	407.9	509.8	652.6	788.9	800.3	726.9	632.0	558.6	498.9	446.5	404.8
52.5°	364.6	448.7	577.0	707.7	740.2	676.7	584.5	516.8	458.7	410.7	374.9
55°	308.1	373.2	470.7	592.9	642.1	597.3	515.6	452.3	405.2	364.8	334.0
57.5°	260.6	309.4	387.7	486.1	543.4	515.2	447.7	396.3	356.1	319.5	295.2
60°	230.7	270.7	337.1	419.3	482.6	462.8	405.2	357.3	323.0	291.4	268.5
62.5°	202.6	236.9	293.9	360.6	418.6	410.4	363.3	323.2	293.2	264.3	245.0
65°	163.1	188.1	232.5	284.8	331.4	335.4	301.5	274.2	247.5	224.5	207.4
67.5°	129.8	146.2	177.5	221.5	256.4	268.9	248.2	227.4	206.1	188.5	173.6
70°	109.4	122.6	145.5	181.1	213.2	226.4	214.5	198.2	179.8	165.2	152.5
72.5°	88.7	101.5	118.4	144.5	172.0	186.2	182.1	170.5	155.5	143.4	131.4
75°	66.8	70.8	82.2	99.8	121.3	133.6	136.7	130.5	118.6	109.4	102.4
77.5°	49.4	51.7	57.3	66.5	80.5	91.5	96.0	95.3	87.1	81.7	75.2
80°	39.5	40.9	43.5	47.4	58.0	69.0	72.1	72.1	66.4	64.1	57.6
82.5°	30.0	31.0	32.6	34.8	39.7	49.3	52.8	53.5	49.9	46.9	41.8
85°	17.1	16.7	17.6	18.9	19.8	22.4	27.7	28.6	27.7	24.2	22.8
87.5°	7.9	7.9	7.5	6.9	7.1	7.1	8.7	10.2	9.0	8.3	7.7
90°	9.8	7.9	6.0	4.6	3.5	2.5	1.5	0.4	1.5	2.5	3.5
92.5°	11.5	11.0	10.6	10.0	9.2	8.4	7.7	7.0	7.7	8.4	9.2
95°	24.6	24.5	24.3	23.8	22.9	22.0	21.2	20.3	21.2	22.0	22.9
97.5°	41.3	41.0	40.6	40.1	39.3	38.6	37.8	37.0	37.8	38.6	39.3
100°	53.3	53.0	52.8	52.3	51.7	50.9	50.2	49.5	50.2	50.9	51.7
102.5°	66.0	65.6	65.3	64.8	64.3	63.7	63.2	62.7	63.2	63.7	64.3
105°	85.5	85.3	85.2	84.9	84.6	84.4	84.1	83.9	84.1	84.4	84.6
107.5°	106.9	106.9	106.9	106.8	106.4	106.0	105.6	105.2	105.6	106.0	106.4
110°	121.3	121.3	121.3	121.1	120.5	120.0	119.5	119.0	119.5	120.0	120.5



TEST NUMBER: P331806-935

CATALOG NUMBER: S122RDIW-S675D435U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	136.1	136.2	136.3	136.0	135.5	135.0	134.5	134.0	134.5	135.0	135.5
115°	157.9	158.1	158.3	158.1	157.6	157.0	156.5	156.0	156.5	157.0	157.6
117.5°	179.9	180.5	180.9	180.8	180.1	179.4	178.7	178.1	178.7	179.4	180.1
120°	194.1	194.8	195.4	195.4	194.8	194.1	193.4	192.7	193.4	194.1	194.8
122.5°	208.6	209.1	209.7	209.5	208.6	207.8	207.0	206.1	207.0	207.8	208.6
125°	229.9	230.1	230.4	230.1	229.4	228.6	227.8	227.0	227.8	228.6	229.4
127.5°	251.1	251.4	251.7	251.3	250.4	249.3	248.4	247.4	248.4	249.3	250.4
130°	264.8	265.0	265.2	264.7	263.6	262.4	261.3	260.2	261.3	262.4	263.6
132.5°	278.8	278.7	278.7	278.2	277.3	276.4	275.4	274.6	275.4	276.4	277.3
135°	298.4	298.3	298.1	297.6	296.6	295.7	294.7	293.8	294.7	295.7	296.6
137.5°	318.1	317.8	317.5	317.0	316.2	315.5	314.7	313.9	314.7	315.5	316.2
140°	330.7	330.3	329.8	329.2	328.5	327.7	326.9	326.1	326.9	327.7	328.5
142.5°	342.9	342.5	342.2	341.7	341.0	340.2	339.4	338.6	339.4	340.2	341.0
145°	360.6	360.1	359.6	359.0	358.3	357.7	357.1	356.5	357.1	357.7	358.3
147.5°	376.7	376.3	376.0	375.5	374.7	374.0	373.2	372.6	373.2	374.0	374.7
150°	386.7	386.3	386.0	385.6	385.0	384.5	384.0	383.5	384.0	384.5	385.0
152.5°	396.5	396.1	395.7	395.2	394.7	394.2	393.6	393.1	393.6	394.2	394.7
155°	409.5	409.2	409.0	408.7	408.5	408.1	407.9	407.6	407.9	408.1	408.5
157.5°	421.2	421.0	420.9	420.8	420.6	420.4	420.3	420.1	420.3	420.4	420.6
160°	428.5	428.4	428.3	428.3	428.1	427.9	427.7	427.6	427.7	427.9	428.1
162.5°	434.8	434.7	434.6	434.5	434.5	434.5	434.5	434.4	434.5	434.5	434.5
165°	443.2	443.2	443.2	443.2	443.2	443.3	443.4	443.5	443.4	443.3	443.2
167.5°	450.0	450.0	450.0	450.1	450.4	450.6	450.9	451.2	450.9	450.6	450.4
170°	453.8	453.9	454.0	454.2	454.4	454.7	455.0	455.2	455.0	454.7	454.4
172.5°	456.7	456.8	456.8	457.0	457.3	457.5	457.8	458.1	457.8	457.5	457.3
175°	459.9	460.0	460.2	460.5	460.7	461.0	461.2	461.5	461.2	461.0	460.7
177.5°	461.6	461.8	461.8	462.0	462.3	462.4	462.7	462.9	462.7	462.4	462.3
180°	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3



TEST NUMBER: P331806-935

CATALOG NUMBER: S122RDIW-S675D435U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1247.0	1244.5	1239.9	1232.9	1228.6	1221.2	1216.3	1219.2	1219.9	1219.2	1218.5
5°	1213.5	1204.2	1191.5	1179.1	1167.8	1155.5	1148.4	1145.3	1139.2	1135.7	1133.9
7.5°	1172.9	1157.0	1139.0	1117.6	1099.3	1080.3	1070.6	1065.7	1053.1	1046.3	1040.3
10°	1142.7	1117.7	1099.7	1071.5	1054.4	1029.3	1012.2	1012.6	995.5	985.8	978.8
12.5°	1109.3	1081.8	1051.8	1026.5	1002.6	982.6	961.9	953.6	935.3	926.0	907.1
15°	1054.0	1021.8	990.2	955.9	931.8	900.5	870.6	834.1	804.7	779.2	772.2
17.5°	993.4	953.7	922.0	881.8	840.3	787.8	753.2	732.0	714.3	700.9	690.8
20°	951.9	911.5	877.7	817.0	761.2	725.7	700.2	683.9	665.4	650.9	643.0
22.5°	908.4	866.2	820.0	752.3	708.9	680.3	657.5	638.9	626.4	615.0	607.9
25°	846.4	800.3	724.3	677.7	642.6	612.7	596.8	585.4	572.2	556.8	549.8
27.5°	781.1	707.7	653.1	618.5	584.9	565.4	551.2	534.2	522.4	515.5	508.2
30°	732.2	658.8	616.2	578.4	554.7	533.1	516.4	506.8	495.3	483.5	478.6
32.5°	677.7	619.1	578.2	546.7	522.6	504.3	491.1	475.4	467.2	459.9	449.8
35°	610.0	565.7	528.3	502.8	479.9	465.0	449.6	440.4	425.4	419.3	415.3
37.5°	552.7	514.2	486.4	459.4	441.3	424.8	415.4	400.7	394.3	385.7	377.4
40°	520.4	482.6	455.7	433.8	413.5	401.2	389.4	377.5	367.8	363.9	353.8
42.5°	487.3	456.6	429.7	405.6	392.1	379.1	364.1	355.4	345.3	339.0	332.7
45°	441.7	414.5	391.6	371.8	356.9	343.3	333.6	319.1	313.4	300.6	295.3
47.5°	401.7	376.3	354.5	335.7	321.1	312.2	298.1	286.7	277.6	269.8	263.0
50°	373.2	352.1	331.0	314.3	301.1	288.3	273.8	268.1	254.0	250.0	246.2
52.5°	347.2	327.1	307.7	291.4	278.2	265.8	253.0	245.6	236.1	232.1	229.3
55°	310.7	291.4	272.9	258.4	245.2	232.5	224.5	215.3	210.9	207.8	204.4
57.5°	274.1	256.8	242.6	227.9	214.6	204.6	195.4	189.9	185.3	181.2	177.0
60°	251.0	234.3	221.5	207.8	194.2	185.9	178.9	172.3	167.0	160.8	159.1
62.5°	226.4	211.7	200.1	186.8	175.0	167.3	160.6	154.4	148.0	139.1	136.6
65°	192.5	181.1	168.8	157.8	147.2	139.7	130.1	123.0	120.5	119.5	119.1
67.5°	162.0	151.1	140.5	129.3	119.7	112.8	107.9	106.8	105.0	104.4	103.2
70°	141.5	131.4	120.9	110.3	101.1	99.8	98.0	96.3	94.0	93.2	92.3
72.5°	123.2	112.8	102.2	93.8	89.8	88.2	86.4	84.6	83.2	82.3	81.7
75°	94.5	84.8	77.8	74.7	72.5	71.2	68.5	67.2	66.4	65.0	64.6
77.5°	68.0	62.6	59.3	57.4	55.1	53.7	52.2	50.9	49.9	49.7	49.0
80°	51.8	49.2	47.0	44.4	43.5	41.8	41.3	40.0	40.5	39.1	39.1
82.5°	40.3	36.9	35.0	33.8	33.0	31.6	31.1	30.5	30.6	29.6	29.6
85°	20.7	19.8	18.9	18.0	18.0	16.7	17.1	16.7	16.7	15.8	15.4
87.5°	7.6	7.5	7.2	7.6	8.0	8.0	8.0	7.6	7.6	7.5	7.1
90°	4.6	6.0	7.9	9.8	11.7	13.7	13.5	13.3	13.2	13.0	12.9
92.5°	10.0	10.6	11.0	11.5	12.0	12.4	12.4	12.5	12.5	12.6	12.6
95°	23.8	24.3	24.5	24.6	24.8	25.0	25.0	25.0	25.0	25.0	24.9
97.5°	40.1	40.6	41.0	41.3	41.7	41.9	41.9	41.9	41.9	41.9	41.9
100°	52.3	52.8	53.0	53.3	53.6	53.8	53.8	53.8	53.8	53.8	53.8
102.5°	64.8	65.3	65.6	66.0	66.3	66.6	66.7	66.7	66.8	66.9	66.9
105°	84.9	85.2	85.3	85.5	85.7	85.8	86.0	86.2	86.4	86.5	86.6
107.5°	106.8	106.9	106.9	106.9	106.9	106.9	107.0	107.1	107.2	107.3	107.1
110°	121.1	121.3	121.3	121.3	121.3	121.3	121.3	121.3	121.3	121.3	121.1



TEST NUMBER: P331806-935

CATALOG NUMBER: S122RDIW-S675D435U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	136.0	136.3	136.2	136.1	136.0	136.0	135.8	135.6	135.3	135.2	134.9
115°	158.1	158.3	158.1	157.9	157.7	157.6	157.5	157.4	157.3	157.2	157.0
117.5°	180.8	180.9	180.5	179.9	179.4	179.0	178.7	178.6	178.3	178.1	177.9
120°	195.4	195.4	194.8	194.1	193.4	192.7	192.7	192.7	192.7	192.7	192.6
122.5°	209.5	209.7	209.1	208.6	208.2	207.7	207.5	207.2	207.1	206.8	206.6
125°	230.1	230.4	230.1	229.9	229.6	229.4	229.1	228.9	228.6	228.3	228.2
127.5°	251.3	251.7	251.4	251.1	250.7	250.5	250.1	249.8	249.5	249.2	248.9
130°	264.7	265.2	265.0	264.8	264.7	264.5	264.3	264.2	264.0	263.8	263.6
132.5°	278.2	278.7	278.7	278.8	278.8	278.8	278.4	278.1	277.7	277.3	277.0
135°	297.6	298.1	298.3	298.4	298.6	298.8	298.7	298.6	298.5	298.4	298.3
137.5°	317.0	317.5	317.8	318.1	318.2	318.5	318.4	318.3	318.2	318.2	318.0
140°	329.2	329.8	330.3	330.7	331.1	331.6	331.6	331.6	331.6	331.6	331.4
142.5°	341.7	342.2	342.5	342.9	343.1	343.5	343.5	343.5	343.6	343.7	343.5
145°	359.0	359.6	360.1	360.6	361.1	361.6	361.7	361.8	361.9	362.0	361.8
147.5°	375.5	376.0	376.3	376.7	377.0	377.4	377.5	377.7	378.0	378.2	378.1
150°	385.6	386.0	386.3	386.7	387.0	387.4	387.6	387.9	388.1	388.4	388.4
152.5°	395.2	395.7	396.1	396.5	396.9	397.4	397.7	398.0	398.3	398.6	398.6
155°	408.7	409.0	409.2	409.5	409.7	410.0	410.4	410.9	411.3	411.7	411.8
157.5°	420.8	420.9	421.0	421.2	421.4	421.5	422.1	422.7	423.3	423.9	424.0
160°	428.3	428.3	428.4	428.5	428.6	428.7	429.2	429.7	430.2	430.8	430.8
162.5°	434.5	434.6	434.7	434.8	434.9	435.0	435.5	436.1	436.7	437.3	437.4
165°	443.2	443.2	443.2	443.2	443.2	443.2	443.8	444.4	445.0	445.6	445.7
167.5°	450.1	450.0	450.0	450.0	450.0	450.0	450.6	451.2	451.8	452.4	452.5
170°	454.2	454.0	453.9	453.8	453.7	453.7	454.3	454.9	455.5	456.1	456.2
172.5°	457.0	456.8	456.8	456.7	456.6	456.5	457.1	457.7	458.3	458.9	458.9
175°	460.5	460.2	460.0	459.9	459.7	459.5	460.1	460.7	461.3	461.9	462.0
177.5°	462.0	461.8	461.8	461.6	461.4	461.3	461.8	462.2	462.5	463.0	463.0
180°	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3



TEST NUMBER: P331806-935

CATALOG NUMBER: S122RDIW-S675D435U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1214.6	1215.3	1214.3	1215.0	1214.3	1215.3	1214.6	1218.5	1219.2	1219.9	1219.2
5°	1131.7	1126.4	1125.6	1124.2	1125.6	1126.4	1131.7	1133.9	1135.7	1139.2	1145.3
7.5°	1032.8	1031.9	1029.8	1026.7	1029.8	1031.9	1032.8	1040.3	1046.3	1053.1	1065.7
10°	969.1	966.9	966.5	963.4	966.5	966.9	969.1	978.8	985.8	995.5	1012.6
12.5°	894.6	880.4	878.9	871.2	878.9	880.4	894.6	907.1	926.0	935.3	953.6
15°	761.6	759.1	750.2	744.5	750.2	759.1	761.6	772.2	779.2	804.7	834.1
17.5°	685.7	677.1	674.3	673.1	674.3	677.1	685.7	690.8	700.9	714.3	732.0
20°	636.8	629.0	627.6	626.7	627.6	629.0	636.8	643.0	650.9	665.4	683.9
22.5°	603.0	594.8	591.4	588.8	591.4	594.8	603.0	607.9	615.0	626.4	638.9
25°	545.4	542.3	540.6	539.7	540.6	542.3	545.4	549.8	556.8	572.2	585.4
27.5°	500.3	493.5	492.2	490.0	492.2	493.5	500.3	508.2	515.5	522.4	534.2
30°	474.7	472.4	469.4	466.7	469.4	472.4	474.7	478.6	483.5	495.3	506.8
32.5°	444.4	442.6	439.9	438.6	439.9	442.6	444.4	449.8	459.9	467.2	475.4
35°	411.0	404.8	402.2	398.2	402.2	404.8	411.0	415.3	419.3	425.4	440.4
37.5°	375.5	372.3	368.6	369.9	368.6	372.3	375.5	377.4	385.7	394.3	400.7
40°	348.1	345.9	345.0	344.6	345.0	345.9	348.1	353.8	363.9	367.8	377.5
42.5°	326.3	320.2	318.0	317.9	318.0	320.2	326.3	332.7	339.0	345.3	355.4
45°	293.2	287.4	283.4	284.0	283.4	287.4	293.2	295.3	300.6	313.4	319.1
47.5°	259.2	259.1	256.6	257.4	256.6	259.1	259.2	263.0	269.8	277.6	286.7
50°	243.1	240.4	238.7	239.1	238.7	240.4	243.1	246.2	250.0	254.0	268.1
52.5°	227.6	225.3	223.9	225.8	223.9	225.3	227.6	229.3	232.1	236.1	245.6
55°	202.2	199.5	199.1	198.6	199.1	199.5	202.2	204.4	207.8	210.9	215.3
57.5°	173.7	172.0	169.4	168.2	169.4	172.0	173.7	177.0	181.2	185.3	189.9
60°	153.3	149.9	145.5	145.0	145.5	149.9	153.3	159.1	160.8	167.0	172.3
62.5°	134.7	134.1	133.2	133.1	133.2	134.1	134.7	136.6	139.1	148.0	154.4
65°	118.2	117.8	118.2	118.6	118.2	117.8	118.2	119.1	119.5	120.5	123.0
67.5°	103.1	102.2	101.4	101.8	101.4	102.2	103.1	103.2	104.4	105.0	106.8
70°	91.4	91.0	90.6	90.6	90.6	91.0	91.4	92.3	93.2	94.0	96.3
72.5°	80.2	80.1	79.6	79.3	79.6	80.1	80.2	81.7	82.3	83.2	84.6
75°	64.1	63.3	63.3	63.3	63.3	63.3	64.1	64.6	65.0	66.4	67.2
77.5°	48.9	48.5	48.0	47.6	48.0	48.5	48.9	49.0	49.7	49.9	50.9
80°	38.7	38.2	37.8	37.8	37.8	38.2	38.7	39.1	39.1	40.5	40.0
82.5°	29.5	29.1	29.0	28.7	29.0	29.1	29.5	29.6	29.6	30.6	30.5
85°	15.8	16.3	15.8	16.7	15.8	16.3	15.8	15.4	15.8	16.7	16.7
87.5°	7.1	6.8	7.2	6.9	7.2	6.8	7.1	7.1	7.5	7.6	7.6
90°	13.0	13.1	13.2	13.3	13.2	13.1	13.0	12.9	13.0	13.2	13.3
92.5°	12.6	12.6	12.7	12.7	12.7	12.6	12.6	12.6	12.6	12.5	12.5
95°	24.7	24.5	24.4	24.2	24.4	24.5	24.7	24.9	25.0	25.0	25.0
97.5°	41.9	41.9	41.9	41.9	41.9	41.9	41.9	41.9	41.9	41.9	41.9
100°	53.7	53.6	53.6	53.5	53.6	53.6	53.7	53.8	53.8	53.8	53.8
102.5°	66.8	66.7	66.6	66.6	66.6	66.7	66.8	66.9	66.9	66.8	66.7
105°	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.6	86.5	86.4	86.2
107.5°	106.7	106.2	105.9	105.5	105.9	106.2	106.7	107.1	107.3	107.2	107.1
110°	120.9	120.6	120.4	120.1	120.4	120.6	120.9	121.1	121.3	121.3	121.3



TEST NUMBER: P331806-935

CATALOG NUMBER: S122RDIW-S675D435U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	134.7	134.6	134.4	134.2	134.4	134.6	134.7	134.9	135.2	135.3	135.6
115°	156.8	156.5	156.3	156.0	156.3	156.5	156.8	157.0	157.2	157.3	157.4
117.5°	177.6	177.4	177.1	176.8	177.1	177.4	177.6	177.9	178.1	178.3	178.6
120°	192.3	192.1	191.8	191.6	191.8	192.1	192.3	192.6	192.7	192.7	192.7
122.5°	206.5	206.3	206.0	205.9	206.0	206.3	206.5	206.6	206.8	207.1	207.2
125°	228.1	228.0	227.9	227.8	227.9	228.0	228.1	228.2	228.3	228.6	228.9
127.5°	248.6	248.3	248.1	247.8	248.1	248.3	248.6	248.9	249.2	249.5	249.8
130°	263.2	262.9	262.5	262.2	262.5	262.9	263.2	263.6	263.8	264.0	264.2
132.5°	276.7	276.4	276.1	275.9	276.1	276.4	276.7	277.0	277.3	277.7	278.1
135°	298.0	297.7	297.5	297.2	297.5	297.7	298.0	298.3	298.4	298.5	298.6
137.5°	317.6	317.3	316.9	316.6	316.9	317.3	317.6	318.0	318.2	318.2	318.3
140°	331.1	330.7	330.4	330.0	330.4	330.7	331.1	331.4	331.6	331.6	331.6
142.5°	343.2	342.9	342.5	342.2	342.5	342.9	343.2	343.5	343.7	343.6	343.5
145°	361.4	361.1	360.8	360.4	360.8	361.1	361.4	361.8	362.0	361.9	361.8
147.5°	377.7	377.4	377.0	376.8	377.0	377.4	377.7	378.1	378.2	378.0	377.7
150°	388.1	387.9	387.6	387.4	387.6	387.9	388.1	388.4	388.4	388.1	387.9
152.5°	398.3	398.0	397.7	397.4	397.7	398.0	398.3	398.6	398.6	398.3	398.0
155°	411.6	411.3	411.0	410.8	411.0	411.3	411.6	411.8	411.7	411.3	410.9
157.5°	423.5	423.1	422.8	422.3	422.8	423.1	423.5	424.0	423.9	423.3	422.7
160°	430.5	430.2	429.8	429.5	429.8	430.2	430.5	430.8	430.8	430.2	429.7
162.5°	437.0	436.5	436.1	435.8	436.1	436.5	437.0	437.4	437.3	436.7	436.1
165°	445.2	444.8	444.4	443.9	444.4	444.8	445.2	445.7	445.6	445.0	444.4
167.5°	451.9	451.5	451.1	450.6	451.1	451.5	451.9	452.5	452.4	451.8	451.2
170°	455.6	455.1	454.6	454.1	454.6	455.1	455.6	456.2	456.1	455.5	454.9
172.5°	458.4	457.9	457.4	456.8	457.4	457.9	458.4	458.9	458.9	458.3	457.7
175°	461.5	461.0	460.5	459.9	460.5	461.0	461.5	462.0	461.9	461.3	460.7
177.5°	462.5	462.2	461.8	461.3	461.8	462.2	462.5	463.0	463.0	462.5	462.2
180°	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3



TEST NUMBER: P331806-935

CATALOG NUMBER: S122RDIW-S675D435U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1216.3	1221.2	1228.6	1232.9	1239.9	1244.5	1247.0	1251.5	1254.0	1262.7	1272.0
5°	1148.4	1155.5	1167.8	1179.1	1191.5	1204.2	1213.5	1224.0	1233.6	1250.3	1268.0
7.5°	1070.6	1080.3	1099.3	1117.6	1139.0	1157.0	1172.9	1190.9	1207.0	1231.0	1255.9
10°	1012.2	1029.3	1054.4	1071.5	1099.7	1117.7	1142.7	1162.4	1184.9	1216.5	1244.7
12.5°	961.9	982.6	1002.6	1026.5	1051.8	1081.8	1109.3	1134.7	1161.3	1194.0	1227.1
15°	870.6	900.5	931.8	955.9	990.2	1021.8	1054.0	1088.2	1120.8	1159.9	1202.9
17.5°	753.2	787.8	840.3	881.8	922.0	953.7	993.4	1034.9	1073.2	1120.4	1168.4
20°	700.2	725.7	761.2	817.0	877.7	911.5	951.9	997.6	1041.6	1093.0	1144.4
22.5°	657.5	680.3	708.9	752.3	820.0	866.2	908.4	954.8	1005.7	1058.3	1115.3
25°	596.8	612.7	642.6	677.7	724.3	800.3	846.4	893.0	948.5	1004.7	1069.7
27.5°	551.2	565.4	584.9	618.5	653.1	707.7	781.1	831.9	887.1	950.4	1017.9
30°	516.4	533.1	554.7	578.4	616.2	658.8	732.2	791.1	845.6	910.7	982.7
32.5°	491.1	504.3	522.6	546.7	578.2	619.1	677.7	749.2	802.4	870.9	946.2
35°	449.6	465.0	479.9	502.8	528.3	565.7	610.0	686.5	739.3	806.9	882.5
37.5°	415.4	424.8	441.3	459.4	486.4	514.2	552.7	621.3	678.3	744.8	822.2
40°	389.4	401.2	413.5	433.8	455.7	482.6	520.4	571.4	636.8	701.9	777.5
42.5°	364.1	379.1	392.1	405.6	429.7	456.6	487.3	530.5	597.4	659.0	732.5
45°	333.6	343.3	356.9	371.8	391.6	414.5	441.7	479.5	543.6	596.8	665.8
47.5°	298.1	312.2	321.1	335.7	354.5	376.3	401.7	434.3	486.3	536.1	600.1
50°	273.8	288.3	301.1	314.3	331.0	352.1	373.2	404.8	446.5	498.9	558.6
52.5°	253.0	265.8	278.2	291.4	307.7	327.1	347.2	374.9	410.7	458.7	516.8
55°	224.5	232.5	245.2	258.4	272.9	291.4	310.7	334.0	364.8	405.2	452.3
57.5°	195.4	204.6	214.6	227.9	242.6	256.8	274.1	295.2	319.5	356.1	396.3
60°	178.9	185.9	194.2	207.8	221.5	234.3	251.0	268.5	291.4	323.0	357.3
62.5°	160.6	167.3	175.0	186.8	200.1	211.7	226.4	245.0	264.3	293.2	323.2
65°	130.1	139.7	147.2	157.8	168.8	181.1	192.5	207.4	224.5	247.5	274.2
67.5°	107.9	112.8	119.7	129.3	140.5	151.1	162.0	173.6	188.5	206.1	227.4
70°	98.0	99.8	101.1	110.3	120.9	131.4	141.5	152.5	165.2	179.8	198.2
72.5°	86.4	88.2	89.8	93.8	102.2	112.8	123.2	131.4	143.4	155.5	170.5
75°	68.5	71.2	72.5	74.7	77.8	84.8	94.5	102.4	109.4	118.6	130.5
77.5°	52.2	53.7	55.1	57.4	59.3	62.6	68.0	75.2	81.7	87.1	95.3
80°	41.3	41.8	43.5	44.4	47.0	49.2	51.8	57.6	64.1	66.4	72.1
82.5°	31.1	31.6	33.0	33.8	35.0	36.9	40.3	41.8	46.9	49.9	53.5
85°	17.1	16.7	18.0	18.0	18.9	19.8	20.7	22.8	24.2	27.7	28.6
87.5°	8.0	8.0	8.0	7.6	7.2	7.5	7.6	7.7	8.3	9.0	10.2
90°	13.5	13.7	11.7	9.8	7.9	6.0	4.6	3.5	2.5	1.5	0.4
92.5°	12.4	12.4	12.0	11.5	11.0	10.6	10.0	9.2	8.4	7.7	7.0
95°	25.0	25.0	24.8	24.6	24.5	24.3	23.8	22.9	22.0	21.2	20.3
97.5°	41.9	41.9	41.7	41.3	41.0	40.6	40.1	39.3	38.6	37.8	37.0
100°	53.8	53.8	53.6	53.3	53.0	52.8	52.3	51.7	50.9	50.2	49.5
102.5°	66.7	66.6	66.3	66.0	65.6	65.3	64.8	64.3	63.7	63.2	62.7
105°	86.0	85.8	85.7	85.5	85.3	85.2	84.9	84.6	84.4	84.1	83.9
107.5°	107.0	106.9	106.9	106.9	106.9	106.9	106.8	106.4	106.0	105.6	105.2
110°	121.3	121.3	121.3	121.3	121.3	121.3	121.1	120.5	120.0	119.5	119.0



TEST NUMBER: P331806-935

CATALOG NUMBER: S122RDIW-S675D435U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	135.8	136.0	136.0	136.1	136.2	136.3	136.0	135.5	135.0	134.5	134.0
115°	157.5	157.6	157.7	157.9	158.1	158.3	158.1	157.6	157.0	156.5	156.0
117.5°	178.7	179.0	179.4	179.9	180.5	180.9	180.8	180.1	179.4	178.7	178.1
120°	192.7	192.7	193.4	194.1	194.8	195.4	195.4	194.8	194.1	193.4	192.7
122.5°	207.5	207.7	208.2	208.6	209.1	209.7	209.5	208.6	207.8	207.0	206.1
125°	229.1	229.4	229.6	229.9	230.1	230.4	230.1	229.4	228.6	227.8	227.0
127.5°	250.1	250.5	250.7	251.1	251.4	251.7	251.3	250.4	249.3	248.4	247.4
130°	264.3	264.5	264.7	264.8	265.0	265.2	264.7	263.6	262.4	261.3	260.2
132.5°	278.4	278.8	278.8	278.8	278.7	278.7	278.2	277.3	276.4	275.4	274.6
135°	298.7	298.8	298.6	298.4	298.3	298.1	297.6	296.6	295.7	294.7	293.8
137.5°	318.4	318.5	318.2	318.1	317.8	317.5	317.0	316.2	315.5	314.7	313.9
140°	331.6	331.6	331.1	330.7	330.3	329.8	329.2	328.5	327.7	326.9	326.1
142.5°	343.5	343.5	343.1	342.9	342.5	342.2	341.7	341.0	340.2	339.4	338.6
145°	361.7	361.6	361.1	360.6	360.1	359.6	359.0	358.3	357.7	357.1	356.5
147.5°	377.5	377.4	377.0	376.7	376.3	376.0	375.5	374.7	374.0	373.2	372.6
150°	387.6	387.4	387.0	386.7	386.3	386.0	385.6	385.0	384.5	384.0	383.5
152.5°	397.7	397.4	396.9	396.5	396.1	395.7	395.2	394.7	394.2	393.6	393.1
155°	410.4	410.0	409.7	409.5	409.2	409.0	408.7	408.5	408.1	407.9	407.6
157.5°	422.1	421.5	421.4	421.2	421.0	420.9	420.8	420.6	420.4	420.3	420.1
160°	429.2	428.7	428.6	428.5	428.4	428.3	428.3	428.1	427.9	427.7	427.6
162.5°	435.5	435.0	434.9	434.8	434.7	434.6	434.5	434.5	434.5	434.5	434.4
165°	443.8	443.2	443.2	443.2	443.2	443.2	443.2	443.2	443.3	443.4	443.5
167.5°	450.6	450.0	450.0	450.0	450.0	450.0	450.1	450.4	450.6	450.9	451.2
170°	454.3	453.7	453.7	453.8	453.9	454.0	454.2	454.4	454.7	455.0	455.2
172.5°	457.1	456.5	456.6	456.7	456.8	456.8	457.0	457.3	457.5	457.8	458.1
175°	460.1	459.5	459.7	459.9	460.0	460.2	460.5	460.7	461.0	461.2	461.5
177.5°	461.8	461.3	461.4	461.6	461.8	461.8	462.0	462.3	462.4	462.7	462.9
180°	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3



TEST NUMBER: P331806-935

CATALOG NUMBER: S122RDIW-S675D435U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1272.3	1273.3	1280.4	1283.5	1289.9	1292.3	1295.1	1294.4	1294.4	1295.8	1305.7
5°	1275.0	1283.8	1296.9	1309.7	1322.0	1332.6	1339.6	1346.6	1349.3	1362.0	1373.5
7.5°	1270.4	1286.6	1308.4	1327.8	1351.1	1369.3	1384.4	1398.1	1407.4	1425.9	1444.9
10°	1264.5	1287.3	1311.9	1337.0	1369.1	1393.2	1417.8	1436.8	1442.9	1470.6	1486.4
12.5°	1252.5	1283.1	1314.4	1346.8	1378.2	1411.5	1438.6	1457.5	1479.1	1504.0	1533.2
15°	1234.6	1269.7	1310.6	1352.4	1397.1	1437.6	1466.6	1499.6	1523.3	1550.6	1576.1
17.5°	1208.8	1254.0	1306.1	1354.4	1406.2	1449.7	1489.5	1521.2	1537.9	1553.4	1557.2
20°	1188.4	1237.2	1298.3	1355.4	1407.3	1457.4	1496.9	1523.3	1527.7	1528.1	1504.9
22.5°	1166.2	1221.3	1285.3	1343.8	1405.8	1461.6	1492.4	1503.7	1486.2	1456.4	1411.4
25°	1125.6	1189.3	1263.6	1330.3	1398.1	1450.8	1461.4	1441.6	1380.4	1316.3	1235.0
27.5°	1081.4	1153.1	1232.7	1307.0	1379.1	1411.8	1389.0	1317.7	1207.6	1112.0	996.1
30°	1049.1	1129.5	1207.7	1290.8	1357.6	1371.7	1319.4	1214.4	1086.0	941.8	826.3
32.5°	1012.2	1096.5	1182.4	1268.3	1324.2	1310.5	1224.1	1094.8	944.3	802.6	693.4
35°	959.4	1046.5	1139.2	1225.3	1260.9	1201.6	1072.4	904.0	750.2	617.9	542.8
37.5°	898.5	993.2	1089.7	1168.8	1166.2	1067.4	891.4	717.6	588.3	510.1	456.6
40°	855.2	951.1	1055.2	1122.1	1093.5	964.7	774.0	610.0	515.6	453.1	414.0
42.5°	813.8	909.9	1013.4	1066.5	1016.8	858.5	668.5	540.0	462.1	413.4	381.7
45°	743.2	844.7	940.6	970.0	881.2	706.7	540.6	447.4	395.5	359.6	337.5
47.5°	674.2	774.0	861.5	862.0	741.9	573.1	456.0	387.2	342.9	315.0	299.0
50°	632.0	726.9	800.3	788.9	652.6	509.8	407.9	348.5	311.6	290.1	273.4
52.5°	584.5	676.7	740.2	707.7	577.0	448.7	364.6	314.8	284.2	265.4	250.6
55°	515.6	597.3	642.1	592.9	470.7	373.2	308.1	269.0	246.2	230.3	217.6
57.5°	447.7	515.2	543.4	486.1	387.7	309.4	260.6	231.3	208.6	197.3	190.6
60°	405.2	462.8	482.6	419.3	337.1	270.7	230.7	203.5	186.8	179.3	172.7
62.5°	363.3	410.4	418.6	360.6	293.9	236.9	202.6	179.6	168.5	161.4	155.2
65°	301.5	335.4	331.4	284.8	232.5	188.1	163.1	149.0	140.6	130.5	119.5
67.5°	248.2	268.9	256.4	221.5	177.5	146.2	129.8	119.2	108.8	99.3	96.7
70°	214.5	226.4	213.2	181.1	145.5	122.6	109.4	96.7	90.6	88.3	84.4
72.5°	182.1	186.2	172.0	144.5	118.4	101.5	88.7	81.5	78.3	76.4	73.9
75°	136.7	133.6	121.3	99.8	82.2	70.8	66.8	64.1	62.0	60.2	58.9
77.5°	96.0	91.5	80.5	66.5	57.3	51.7	49.4	48.0	46.9	46.1	44.8
80°	72.1	69.0	58.0	47.4	43.5	40.9	39.5	37.8	37.8	36.9	35.6
82.5°	52.8	49.3	39.7	34.8	32.6	31.0	30.0	29.0	28.7	28.8	27.9
85°	27.7	22.4	19.8	18.9	17.6	16.7	17.1	16.3	16.3	16.3	15.8
87.5°	8.7	7.1	7.1	6.9	7.5	7.9	7.9	8.4	9.0	8.7	9.0
90°	1.5	2.5	3.5	4.6	6.0	7.9	9.8	11.7	13.7	13.5	13.3
92.5°	7.7	8.4	9.2	10.0	10.6	11.0	11.5	12.0	12.4	12.4	12.5
95°	21.2	22.0	22.9	23.8	24.3	24.5	24.6	24.8	25.0	25.0	25.0
97.5°	37.8	38.6	39.3	40.1	40.6	41.0	41.3	41.7	41.9	41.9	41.9
100°	50.2	50.9	51.7	52.3	52.8	53.0	53.3	53.6	53.8	53.8	53.8
102.5°	63.2	63.7	64.3	64.8	65.3	65.6	66.0	66.3	66.6	66.7	66.7
105°	84.1	84.4	84.6	84.9	85.2	85.3	85.5	85.7	85.8	86.0	86.2
107.5°	105.6	106.0	106.4	106.8	106.9	106.9	106.9	106.9	106.9	107.0	107.1
110°	119.5	120.0	120.5	121.1	121.3	121.3	121.3	121.3	121.3	121.3	121.3



TEST NUMBER: P331806-935

CATALOG NUMBER: S122RDIW-S675D435U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	134.5	135.0	135.5	136.0	136.3	136.2	136.1	136.0	136.0	135.8	135.6
115°	156.5	157.0	157.6	158.1	158.3	158.1	157.9	157.7	157.6	157.5	157.4
117.5°	178.7	179.4	180.1	180.8	180.9	180.5	179.9	179.4	179.0	178.7	178.6
120°	193.4	194.1	194.8	195.4	195.4	194.8	194.1	193.4	192.7	192.7	192.7
122.5°	207.0	207.8	208.6	209.5	209.7	209.1	208.6	208.2	207.7	207.5	207.2
125°	227.8	228.6	229.4	230.1	230.4	230.1	229.9	229.6	229.4	229.1	228.9
127.5°	248.4	249.3	250.4	251.3	251.7	251.4	251.1	250.7	250.5	250.1	249.8
130°	261.3	262.4	263.6	264.7	265.2	265.0	264.8	264.7	264.5	264.3	264.2
132.5°	275.4	276.4	277.3	278.2	278.7	278.7	278.8	278.8	278.8	278.4	278.1
135°	294.7	295.7	296.6	297.6	298.1	298.3	298.4	298.6	298.8	298.7	298.6
137.5°	314.7	315.5	316.2	317.0	317.5	317.8	318.1	318.2	318.5	318.4	318.3
140°	326.9	327.7	328.5	329.2	329.8	330.3	330.7	331.1	331.6	331.6	331.6
142.5°	339.4	340.2	341.0	341.7	342.2	342.5	342.9	343.1	343.5	343.5	343.5
145°	357.1	357.7	358.3	359.0	359.6	360.1	360.6	361.1	361.6	361.7	361.8
147.5°	373.2	374.0	374.7	375.5	376.0	376.3	376.7	377.0	377.4	377.5	377.7
150°	384.0	384.5	385.0	385.6	386.0	386.3	386.7	387.0	387.4	387.6	387.9
152.5°	393.6	394.2	394.7	395.2	395.7	396.1	396.5	396.9	397.4	397.7	398.0
155°	407.9	408.1	408.5	408.7	409.0	409.2	409.5	409.7	410.0	410.4	410.9
157.5°	420.3	420.4	420.6	420.8	420.9	421.0	421.2	421.4	421.5	422.1	422.7
160°	427.7	427.9	428.1	428.3	428.3	428.4	428.5	428.6	428.7	429.2	429.7
162.5°	434.5	434.5	434.5	434.5	434.6	434.7	434.8	434.9	435.0	435.5	436.1
165°	443.4	443.3	443.2	443.2	443.2	443.2	443.2	443.2	443.2	443.8	444.4
167.5°	450.9	450.6	450.4	450.1	450.0	450.0	450.0	450.0	450.0	450.6	451.2
170°	455.0	454.7	454.4	454.2	454.0	453.9	453.8	453.7	453.7	454.3	454.9
172.5°	457.8	457.5	457.3	457.0	456.8	456.8	456.7	456.6	456.5	457.1	457.7
175°	461.2	461.0	460.7	460.5	460.2	460.0	459.9	459.7	459.5	460.1	460.7
177.5°	462.7	462.4	462.3	462.0	461.8	461.8	461.6	461.4	461.3	461.8	462.2
180°	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3	462.3



TEST NUMBER: P331806-935

CATALOG NUMBER: S122RDIW-S675D435U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1309.2	1313.7	1315.9	1315.9	1318.4	1317.2	1316.2
5°	1384.4	1392.8	1394.6	1402.5	1408.2	1406.4	1407.3
7.5°	1459.2	1472.7	1485.9	1492.0	1493.0	1496.5	1497.8
10°	1505.3	1516.3	1537.0	1533.9	1549.2	1558.1	1543.5
12.5°	1549.6	1564.4	1578.7	1582.7	1591.5	1594.2	1588.5
15°	1589.7	1597.6	1598.4	1596.3	1598.9	1596.7	1588.4
17.5°	1552.2	1539.4	1513.4	1501.1	1491.3	1476.9	1471.1
20°	1490.3	1452.5	1408.6	1391.0	1370.4	1329.9	1339.6
22.5°	1356.8	1313.6	1269.7	1218.4	1193.9	1155.5	1153.2
25°	1148.8	1074.6	992.8	935.7	902.3	864.1	847.4
27.5°	893.2	799.7	732.7	698.8	668.0	637.7	636.4
30°	725.1	654.9	603.0	574.0	555.1	542.3	545.0
32.5°	611.2	563.1	528.1	504.0	490.1	480.4	480.3
35°	499.7	466.7	444.4	434.2	424.1	417.1	417.5
37.5°	427.7	407.9	395.4	384.2	377.9	374.4	372.6
40°	390.7	374.4	364.8	358.2	352.9	348.1	347.2
42.5°	361.5	348.1	338.4	333.2	328.3	324.9	324.0
45°	320.8	309.9	301.1	295.3	293.2	290.1	290.1
47.5°	285.4	274.6	267.8	264.2	260.4	258.3	258.2
50°	261.5	253.1	247.0	244.8	241.7	240.4	240.0
52.5°	240.0	233.8	229.5	227.9	226.6	224.9	225.2
55°	210.9	207.4	205.7	204.4	202.2	199.5	201.3
57.5°	186.4	183.5	178.7	174.6	172.5	170.7	171.4
60°	169.2	163.1	156.9	152.1	150.8	146.8	146.8
62.5°	147.4	138.8	131.2	128.5	127.2	125.4	125.0
65°	113.4	109.9	108.1	106.3	105.5	105.5	104.6
67.5°	93.9	92.6	90.7	90.1	89.3	89.0	88.8
70°	83.1	81.3	80.4	80.0	79.1	79.6	78.3
72.5°	72.5	71.1	70.9	69.8	69.2	69.3	68.4
75°	57.2	57.2	56.7	56.2	55.4	54.9	55.4
77.5°	43.9	44.0	43.2	43.1	43.0	43.1	42.7
80°	35.1	35.6	35.1	34.7	34.3	34.7	34.3
82.5°	27.8	27.1	27.0	26.9	26.9	26.6	26.5
85°	15.8	16.3	15.8	15.4	15.4	15.4	15.8
87.5°	8.6	8.6	8.5	8.6	8.6	8.6	8.3
90°	13.2	13.0	12.9	13.0	13.1	13.2	13.3
92.5°	12.5	12.6	12.6	12.6	12.6	12.7	12.7
95°	25.0	25.0	24.9	24.7	24.5	24.4	24.2
97.5°	41.9	41.9	41.9	41.9	41.9	41.9	41.9
100°	53.8	53.8	53.8	53.7	53.6	53.6	53.5
102.5°	66.8	66.9	66.9	66.8	66.7	66.6	66.6
105°	86.4	86.5	86.6	86.6	86.6	86.6	86.6
107.5°	107.2	107.3	107.1	106.7	106.2	105.9	105.5
110°	121.3	121.3	121.1	120.9	120.6	120.4	120.1



TEST NUMBER: P331806-935

CATALOG NUMBER: S122RDIW-S675D435U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	135.3	135.2	134.9	134.7	134.6	134.4	134.2
115°	157.3	157.2	157.0	156.8	156.5	156.3	156.0
117.5°	178.3	178.1	177.9	177.6	177.4	177.1	176.8
120°	192.7	192.7	192.6	192.3	192.1	191.8	191.6
122.5°	207.1	206.8	206.6	206.5	206.3	206.0	205.9
125°	228.6	228.3	228.2	228.1	228.0	227.9	227.8
127.5°	249.5	249.2	248.9	248.6	248.3	248.1	247.8
130°	264.0	263.8	263.6	263.2	262.9	262.5	262.2
132.5°	277.7	277.3	277.0	276.7	276.4	276.1	275.9
135°	298.5	298.4	298.3	298.0	297.7	297.5	297.2
137.5°	318.2	318.2	318.0	317.6	317.3	316.9	316.6
140°	331.6	331.6	331.4	331.1	330.7	330.4	330.0
142.5°	343.6	343.7	343.5	343.2	342.9	342.5	342.2
145°	361.9	362.0	361.8	361.4	361.1	360.8	360.4
147.5°	378.0	378.2	378.1	377.7	377.4	377.0	376.8
150°	388.1	388.4	388.4	388.1	387.9	387.6	387.4
152.5°	398.3	398.6	398.6	398.3	398.0	397.7	397.4
155°	411.3	411.7	411.8	411.6	411.3	411.0	410.8
157.5°	423.3	423.9	424.0	423.5	423.1	422.8	422.3
160°	430.2	430.8	430.8	430.5	430.2	429.8	429.5
162.5°	436.7	437.3	437.4	437.0	436.5	436.1	435.8
165°	445.0	445.6	445.7	445.2	444.8	444.4	443.9
167.5°	451.8	452.4	452.5	451.9	451.5	451.1	450.6
170°	455.5	456.1	456.2	455.6	455.1	454.6	454.1
172.5°	458.3	458.9	458.9	458.4	457.9	457.4	456.8
175°	461.3	461.9	462.0	461.5	461.0	460.5	459.9
177.5°	462.5	463.0	463.0	462.5	462.2	461.8	461.3
180°	462.3	462.3	462.3	462.3	462.3	462.3	462.3

(END OF REPORT)