

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331816-935

Luminaire Tested: **S122RDIW-S675D970U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331816-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIW-S675D970U935-4F0-1E-UDD-F1  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 970 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4891.3 lumens  
Efficiency: N/A  
Efficacy: 93.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 52.6  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331816-935

CATALOG NUMBER: S122RDIW-S675D970U935-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

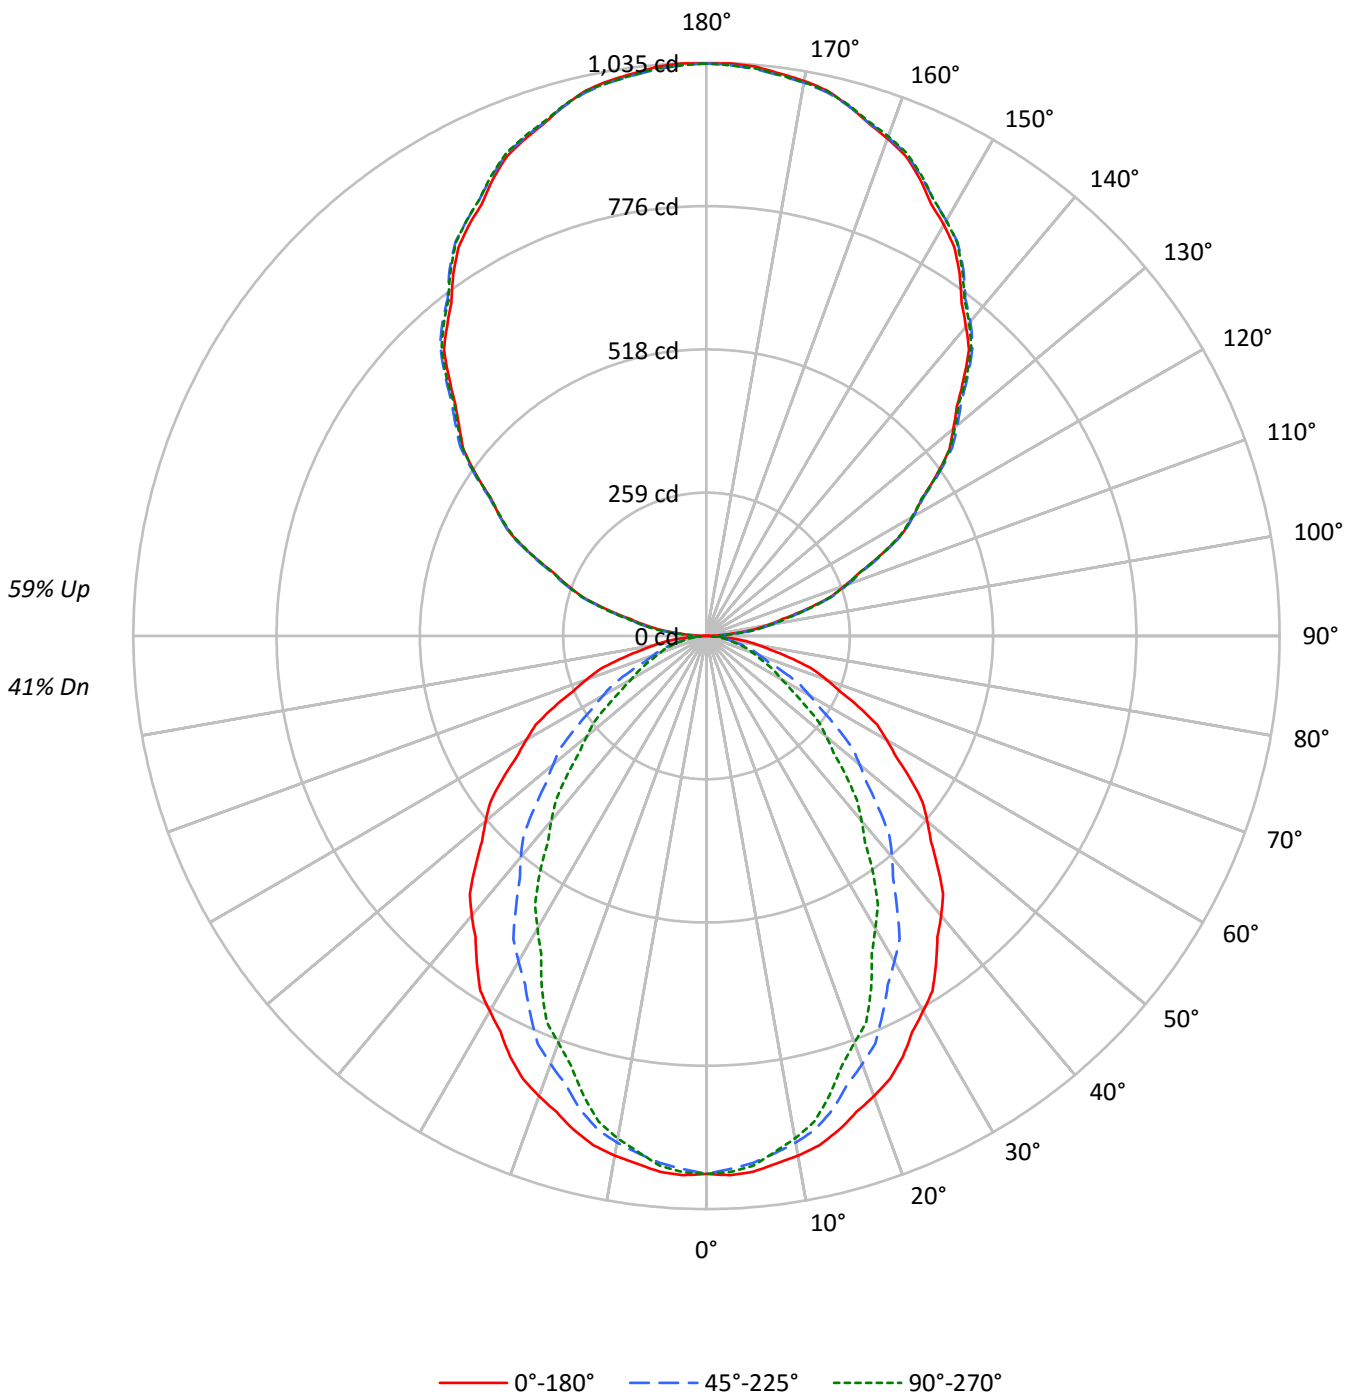



TEST NUMBER: P331816-935

CATALOG NUMBER: S122RDIW-S675D970U935-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	48	48	48	41
1	96	92	88	85	87	84	81	78	69	67	65	55	54	53	43	42	41	35
2	88	81	75	70	80	74	69	65	61	57	54	49	47	45	38	37	35	30
3	80	71	64	59	73	65	59	54	54	50	46	44	41	38	34	32	30	26
4	74	63	56	50	67	58	52	46	48	43	40	39	36	33	31	28	26	23
5	68	57	49	43	62	52	45	40	43	38	34	35	32	29	28	25	23	20
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	25	23	21	18
7	58	46	38	33	53	42	36	31	36	30	27	29	25	23	23	21	19	16
8	54	42	34	29	49	39	32	27	33	27	24	27	23	20	21	19	17	14
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	20	17	15	13
10	47	35	28	23	43	32	26	22	28	23	19	23	19	17	18	16	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	15681	15681	15681
5°	15741	15486	15571
10°	15621	15231	15101
15°	15442	14780	14355
20°	15192	14136	13426
25°	14938	13402	12527
30°	14585	12652	11373
35°	14241	11832	10360
40°	13894	10985	9187
45°	13486	10035	8127
50°	13069	9075	7086
55°	12645	8042	6086
60°	12148	6952	5050
65°	11584	5841	4604
70°	10914	4810	4230
75°	10087	4386	3949
80°	8908	3924	3598
85°	7003	3094	3094



TEST NUMBER: P331816-935

CATALOG NUMBER: S122RDIW-S675D970U935-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	90.9	1.9
10°-20°	249.6	5.1
20°-30°	350.5	7.2
30°-40°	382.2	7.8
40°-50°	351.5	7.2
50°-60°	276.0	5.6
60°-70°	180.0	3.7
70°-80°	92.8	1.9
80°-90°	28.2	0.6
90°-100°	65.5	1.3
100°-110°	203.4	4.2
110°-120°	347.6	7.1
120°-130°	457.2	9.3
130°-140°	513.1	10.5
140°-150°	503.1	10.3
150°-160°	422.0	8.6
160°-170°	279.9	5.7
170°-180°	97.8	2.0
0°-30°	691.1	14.1
0°-40°	1073.3	21.9
0°-60°	1700.8	34.8
0°-90°	2001.7	40.9
90°-120°	616.5	12.6
90°-150°	2089.9	42.7
90°-180°	2890.0	59.1
0°-180°	4891.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	971	971	971	971	971	
5°	971	966	956	963	961	92
15°	924	913	884	868	859	260
25°	838	809	752	718	703	385
35°	722	676	600	547	526	452
45°	591	530	440	379	356	456
55°	449	379	286	235	216	401
65°	303	232	153	125	120	300
75°	162	102	70	64	63	171
85°	38	20	17	17	17	45
90°	1	12	30	29	30	4
95°	45	54	56	56	54	52
105°	188	190	192	194	194	198
115°	349	354	352	351	349	345
125°	508	515	513	510	509	453
135°	657	666	668	667	664	507
145°	797	803	808	809	806	498
155°	911	914	916	920	918	419
165°	992	991	991	996	992	280
175°	1032	1029	1027	1033	1028	98
180°	1033	1033	1033	1033	1033	



TEST NUMBER: P331816-935

CATALOG NUMBER: S122RDIW-S675D970U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	971.2	971.2	971.2	971.2	971.2	971.2	971.2	971.2	971.2	971.2	971.2
2.5°	974.7	974.0	973.2	972.4	971.6	970.3	968.6	966.9	965.3	963.5	965.1
5°	971.2	970.3	969.3	968.3	967.3	965.6	963.0	960.5	957.9	955.5	957.2
7.5°	961.2	960.0	958.8	957.6	956.4	954.2	951.3	948.4	945.4	942.5	942.9
10°	952.8	951.4	950.0	948.6	947.3	944.7	940.7	936.9	933.0	929.0	928.5
12.5°	942.2	940.6	938.8	937.2	935.5	932.2	927.2	922.2	917.1	912.1	911.1
15°	923.8	921.6	919.5	917.3	915.2	910.8	904.1	897.5	890.9	884.2	880.5
17.5°	901.1	897.9	894.6	891.2	887.9	882.1	873.6	865.0	856.5	848.0	843.6
20°	884.2	880.3	876.4	872.5	868.6	861.8	852.0	842.2	832.5	822.7	817.8
22.5°	865.9	861.6	857.2	852.8	848.4	840.8	829.7	818.7	807.7	796.7	790.4
25°	838.5	832.2	826.0	819.8	813.6	803.9	791.1	778.2	765.3	752.3	744.3
27.5°	805.5	798.7	791.9	785.1	778.3	767.6	753.1	738.6	724.0	709.5	700.2
30°	782.3	774.8	767.4	760.0	752.6	741.1	725.4	709.8	694.1	678.6	668.6
32.5°	759.7	751.1	742.4	733.7	725.0	712.7	696.8	680.9	665.0	649.0	637.7
35°	722.5	712.6	702.6	692.6	682.7	669.1	651.9	634.7	617.5	600.3	588.0
37.5°	685.3	674.2	663.3	652.4	641.4	626.8	608.6	590.2	571.9	553.5	540.0
40°	659.2	647.5	635.8	624.1	612.3	597.0	578.1	559.1	540.2	521.2	507.4
42.5°	632.5	620.2	607.8	595.5	583.2	567.1	547.6	528.1	508.4	488.9	474.5
45°	590.6	577.6	564.5	551.4	538.3	521.5	501.0	480.5	459.9	439.5	425.6
47.5°	549.8	536.0	522.1	508.2	494.4	476.9	455.7	434.5	413.4	392.2	378.4
50°	520.3	506.4	492.6	478.7	464.9	447.2	425.7	404.2	382.7	361.3	347.8
52.5°	491.5	477.0	462.5	448.1	433.5	415.8	394.8	373.8	352.8	331.7	318.7
55°	449.2	433.9	418.7	403.5	388.2	370.1	349.0	327.9	306.8	285.7	274.0
57.5°	405.7	390.1	374.4	358.9	343.2	325.3	305.0	284.7	264.4	244.2	233.4
60°	376.2	360.6	344.9	329.3	313.7	295.8	275.7	255.5	235.5	215.3	205.3
62.5°	347.3	331.7	316.1	300.5	284.8	267.4	248.3	229.1	209.9	190.7	181.2
65°	303.2	287.4	271.6	255.8	240.0	223.3	205.7	188.1	170.5	152.9	146.3
67.5°	260.7	245.0	229.3	213.6	197.9	182.1	166.3	150.5	134.7	118.8	115.8
70°	231.2	215.9	200.7	185.5	170.2	155.8	142.4	128.9	115.5	101.9	100.0
72.5°	203.0	188.4	173.8	159.2	144.6	131.9	121.1	110.2	99.4	88.6	87.0
75°	161.7	148.1	134.4	120.7	107.0	96.9	90.2	83.6	77.0	70.3	69.0
77.5°	121.1	109.1	97.1	85.2	73.2	65.5	62.3	59.2	56.0	52.8	51.9
80°	95.8	85.8	75.9	66.0	56.0	50.0	48.0	46.1	44.2	42.2	41.4
82.5°	72.6	64.8	57.1	49.2	41.5	36.9	35.6	34.3	33.0	31.7	31.2
85°	37.8	33.7	29.6	25.5	21.4	19.0	18.4	17.9	17.3	16.7	16.7
87.5°	11.5	10.7	9.8	9.0	8.3	8.4	9.2	10.0	10.8	11.7	11.5
90°	0.9	3.2	5.5	7.8	10.2	13.4	17.7	22.0	26.3	30.5	30.1
92.5°	15.5	17.2	18.9	20.7	22.4	23.7	24.7	25.7	26.7	27.7	27.8
95°	45.4	47.3	49.2	51.1	53.1	54.2	54.7	55.0	55.4	55.8	55.8
97.5°	82.8	84.6	86.3	88.0	89.6	90.9	91.6	92.4	93.1	93.8	93.8
100°	110.7	112.3	113.8	115.4	116.9	118.0	118.6	119.2	119.8	120.4	120.4
102.5°	140.1	141.3	142.5	143.8	145.0	146.0	146.7	147.5	148.2	149.0	149.1
105°	187.5	188.0	188.6	189.2	189.9	190.3	190.7	191.1	191.5	191.8	192.3
107.5°	235.3	236.2	236.9	237.8	238.7	239.1	239.1	239.1	239.1	239.1	239.3
110°	266.0	267.2	268.3	269.5	270.6	271.2	271.2	271.2	271.2	271.2	271.2



TEST NUMBER: P331816-935

CATALOG NUMBER: S122RDIW-S675D970U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	299.5	300.7	301.8	303.0	304.1	304.6	304.4	304.3	304.2	304.0	303.5
115°	348.8	350.0	351.1	352.3	353.4	353.9	353.4	353.1	352.7	352.3	352.1
117.5°	398.0	399.6	401.1	402.7	404.2	404.4	403.4	402.3	401.2	400.1	399.7
120°	430.8	432.4	433.9	435.5	437.0	437.0	435.5	433.9	432.4	430.8	430.8
122.5°	460.8	462.7	464.5	466.4	468.2	468.6	467.5	466.5	465.4	464.3	463.8
125°	507.6	509.3	511.0	512.8	514.5	515.1	514.5	513.9	513.3	512.8	512.2
127.5°	553.1	555.3	557.5	559.7	561.9	562.7	562.0	561.3	560.6	559.9	559.1
130°	581.7	584.2	586.7	589.3	591.8	592.8	592.5	592.0	591.7	591.2	590.9
132.5°	613.7	615.8	617.9	619.9	622.0	623.0	623.1	623.2	623.3	623.4	622.5
135°	656.7	658.8	660.9	663.1	665.2	666.4	666.8	667.2	667.6	668.0	667.8
137.5°	701.8	703.6	705.3	707.1	708.8	710.0	710.4	710.9	711.4	712.0	711.8
140°	729.0	730.8	732.5	734.3	736.0	737.4	738.4	739.3	740.3	741.2	741.2
142.5°	757.0	758.7	760.4	762.2	764.0	765.2	765.8	766.5	767.2	767.8	767.9
145°	797.0	798.4	799.8	801.2	802.5	803.7	804.9	806.1	807.3	808.4	808.6
147.5°	832.8	834.5	836.1	837.7	839.3	840.5	841.3	842.1	842.8	843.6	844.0
150°	857.2	858.4	859.5	860.7	861.9	862.9	863.7	864.4	865.2	866.0	866.5
152.5°	878.9	880.0	881.2	882.4	883.6	884.6	885.5	886.4	887.3	888.3	889.0
155°	911.3	911.9	912.5	913.1	913.6	914.2	914.8	915.4	915.9	916.5	917.5
157.5°	939.0	939.4	939.8	940.2	940.6	941.0	941.3	941.7	942.0	942.4	943.7
160°	955.8	956.1	956.6	956.9	957.3	957.6	957.9	958.0	958.2	958.4	959.6
162.5°	971.1	971.2	971.3	971.4	971.5	971.6	971.8	972.0	972.2	972.3	973.7
165°	991.5	991.4	991.2	990.9	990.8	990.7	990.7	990.7	990.7	990.7	992.0
167.5°	1008.7	1008.1	1007.5	1006.9	1006.3	1006.0	1006.0	1005.9	1005.9	1005.8	1007.2
170°	1017.7	1017.1	1016.6	1016.0	1015.4	1015.0	1014.8	1014.6	1014.4	1014.3	1015.5
172.5°	1024.0	1023.4	1022.8	1022.3	1021.7	1021.2	1021.1	1020.9	1020.7	1020.5	1021.8
175°	1031.7	1031.0	1030.5	1029.9	1029.3	1028.8	1028.5	1028.0	1027.7	1027.3	1028.6
177.5°	1034.8	1034.3	1033.9	1033.4	1032.9	1032.5	1032.3	1031.9	1031.7	1031.3	1032.3
180°	1033.4	1033.4	1033.4	1033.4	1033.4	1033.4	1033.4	1033.4	1033.4	1033.4	1033.4



TEST NUMBER: P331816-935

CATALOG NUMBER: S122RDIW-S675D970U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	971.2	971.2	971.2	971.2	971.2	971.2	971.2	971.2
2.5°	966.6	968.2	969.7	970.3	970.1	969.7	969.5	969.1
5°	958.9	960.7	962.4	963.0	962.4	961.8	961.3	960.7
7.5°	943.4	943.9	944.4	944.2	943.1	942.2	941.2	940.1
10°	927.9	927.3	926.7	925.8	924.6	923.5	922.3	921.1
12.5°	910.1	909.0	907.9	906.5	904.5	902.6	900.6	898.6
15°	876.8	873.1	869.4	866.5	864.6	862.6	860.7	858.8
17.5°	839.2	834.7	830.3	826.5	823.1	819.8	816.4	813.0
20°	813.0	808.0	803.1	798.6	794.3	790.0	785.7	781.4
22.5°	784.1	777.8	771.5	766.8	763.5	760.3	757.2	754.0
25°	736.3	728.3	720.3	714.9	712.0	709.0	706.1	703.2
27.5°	690.8	681.5	672.2	665.1	660.5	655.8	651.2	646.5
30°	658.7	648.7	638.7	631.1	625.8	620.5	615.3	610.0
32.5°	626.3	614.9	603.6	595.4	590.4	585.5	580.5	575.6
35°	575.8	563.4	551.1	542.8	538.5	534.2	529.9	525.6
37.5°	526.4	512.9	499.4	490.1	485.2	480.3	475.4	470.5
40°	493.4	479.6	465.7	456.2	451.2	446.1	441.0	435.9
42.5°	460.2	445.8	431.5	421.9	417.0	412.1	407.2	402.2
45°	411.7	397.9	384.0	374.7	370.1	365.3	360.7	355.9
47.5°	364.6	350.9	337.0	328.0	323.7	319.5	315.2	311.0
50°	334.3	320.8	307.4	298.5	294.5	290.3	286.3	282.1
52.5°	305.7	292.7	279.7	271.3	267.5	263.7	259.9	256.1
55°	262.3	250.5	238.8	231.1	227.4	223.6	219.9	216.2
57.5°	222.7	212.0	201.2	194.2	191.1	188.0	184.9	181.8
60°	195.4	185.5	175.5	168.9	165.8	162.7	159.5	156.4
62.5°	171.8	162.2	152.7	147.1	145.2	143.4	141.5	139.6
65°	139.7	133.0	126.4	122.8	122.2	121.6	121.0	120.5
67.5°	112.7	109.7	106.7	104.8	104.2	103.6	103.0	102.3
70°	98.1	96.1	94.1	92.8	92.0	91.2	90.4	89.6
72.5°	85.3	83.7	82.1	81.0	80.5	80.1	79.6	79.1
75°	67.6	66.2	64.8	64.1	63.9	63.7	63.5	63.3
77.5°	51.1	50.4	49.6	49.1	48.7	48.5	48.1	47.8
80°	40.6	39.9	39.1	38.7	38.7	38.7	38.7	38.7
82.5°	30.7	30.2	29.8	29.5	29.5	29.5	29.5	29.5
85°	16.7	16.7	16.7	16.7	16.7	16.7	16.7	16.7
87.5°	11.3	11.0	10.8	10.7	10.8	10.8	10.8	10.8
90°	29.7	29.4	28.9	28.8	29.1	29.3	29.4	29.6
92.5°	27.9	28.0	28.1	28.1	28.2	28.2	28.2	28.2
95°	55.8	55.8	55.8	55.6	55.2	54.8	54.4	54.1
97.5°	93.8	93.8	93.8	93.8	93.8	93.8	93.7	93.7
100°	120.4	120.4	120.4	120.3	120.0	119.9	119.7	119.5
102.5°	149.3	149.4	149.6	149.6	149.4	149.1	149.0	148.8
105°	192.6	193.0	193.4	193.6	193.6	193.6	193.6	193.6
107.5°	239.4	239.6	239.7	239.4	238.5	237.5	236.7	235.8
110°	271.2	271.2	271.2	271.0	270.4	269.8	269.1	268.6





TEST NUMBER: P331816-935

CATALOG NUMBER: S122RDIW-S675D970U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	303.1	302.6	302.1	301.7	301.3	300.8	300.4	300.0
115°	351.9	351.7	351.5	351.1	350.6	350.0	349.4	348.8
117.5°	399.2	398.7	398.2	397.7	397.2	396.6	396.0	395.4
120°	430.8	430.8	430.8	430.5	429.9	429.4	428.8	428.2
122.5°	463.4	462.9	462.4	462.0	461.6	461.2	460.7	460.3
125°	511.6	511.0	510.5	510.1	509.9	509.7	509.5	509.3
127.5°	558.4	557.8	557.1	556.4	555.8	555.2	554.6	554.0
130°	590.5	590.1	589.7	589.1	588.3	587.5	586.8	586.0
132.5°	621.6	620.8	619.9	619.2	618.6	617.9	617.3	616.7
135°	667.6	667.4	667.2	666.8	666.2	665.6	665.1	664.5
137.5°	711.6	711.5	711.4	710.8	710.1	709.3	708.5	707.7
140°	741.2	741.2	741.2	740.9	740.1	739.3	738.6	737.8
142.5°	768.1	768.3	768.4	768.1	767.3	766.5	765.8	765.0
145°	808.8	809.0	809.2	808.9	808.1	807.4	806.6	805.8
147.5°	844.5	844.9	845.3	845.2	844.5	843.7	843.0	842.2
150°	867.1	867.7	868.3	868.3	867.7	867.1	866.5	866.0
152.5°	889.8	890.5	891.2	891.2	890.5	889.8	889.0	888.3
155°	918.5	919.5	920.4	920.6	920.1	919.5	918.9	918.3
157.5°	945.0	946.3	947.6	947.8	946.9	946.0	945.0	944.1
160°	960.7	961.9	963.0	963.3	962.5	961.7	961.0	960.2
162.5°	975.0	976.3	977.7	977.8	976.9	975.9	975.0	974.1
165°	993.4	994.7	996.1	996.3	995.3	994.4	993.4	992.4
167.5°	1008.6	1010.0	1011.2	1011.4	1010.5	1009.4	1008.4	1007.5
170°	1016.9	1018.3	1019.7	1019.8	1018.6	1017.4	1016.2	1015.1
172.5°	1023.2	1024.6	1025.9	1026.1	1024.8	1023.7	1022.5	1021.4
175°	1030.0	1031.4	1032.7	1032.9	1031.7	1030.5	1029.3	1028.2
177.5°	1033.2	1034.1	1035.0	1035.0	1034.1	1033.2	1032.3	1031.3
180°	1033.4	1033.4	1033.4	1033.4	1033.4	1033.4	1033.4	1033.4

(END OF REPORT)