

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331614-840

Luminaire Tested: **S122DIW-S1005D1440U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331614-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S1005D1440U840-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1440 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9146.7 lumens
Efficiency: N/A
Efficacy: 110.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 82.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331614-840

CATALOG NUMBER: S122DIW-S1005D1440U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

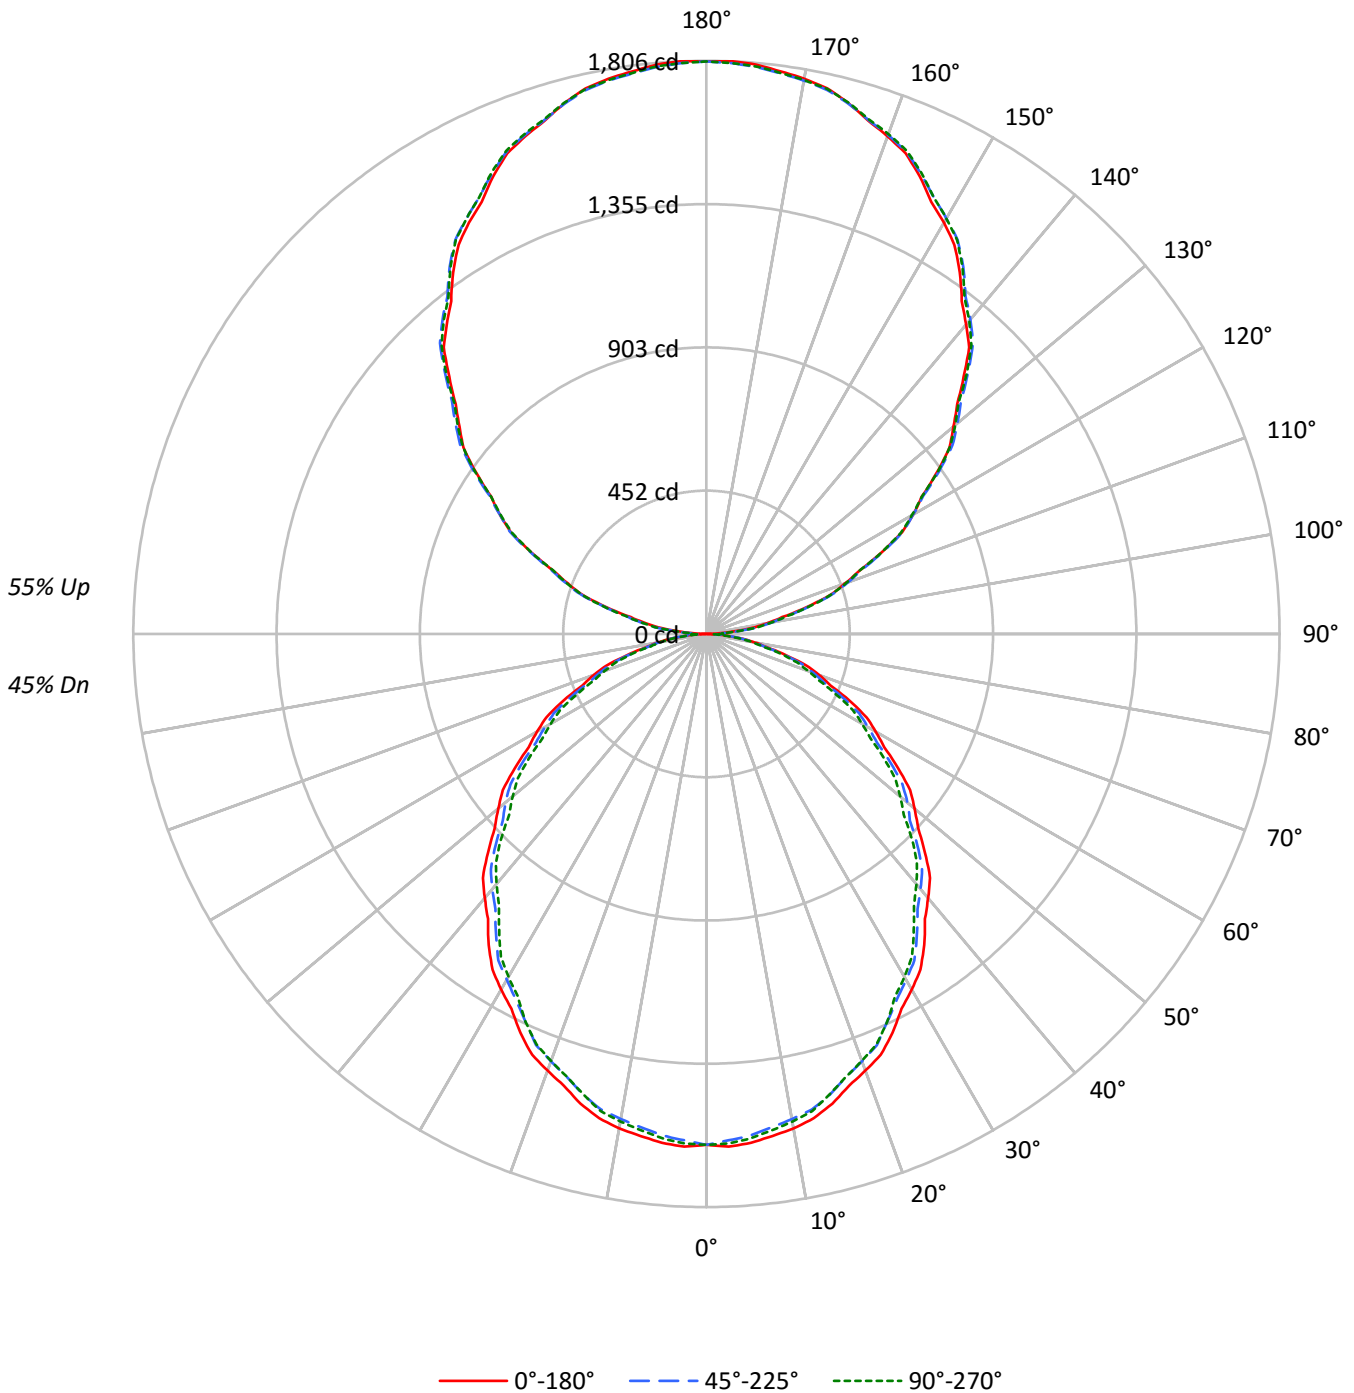



TEST NUMBER: P331614-840

CATALOG NUMBER: S122DIW-S1005D1440U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	106	106	106	106	97	97	97	97	80	80	80		65	65	65		51	51	51	45
1	97	92	88	85	88	85	81	78	70	68	66		57	56	54		45	44	43	38
2	88	81	74	69	80	74	69	64	62	58	55		50	48	45		40	38	36	32
3	80	71	64	58	73	65	59	54	54	50	46		45	41	38		35	33	31	27
4	73	63	55	49	67	58	51	46	48	43	39		40	36	33		32	29	27	23
5	67	56	48	42	61	51	44	39	43	38	34		36	32	28		28	26	23	20
6	62	50	42	36	57	46	39	34	39	33	29		32	28	25		26	23	21	18
7	57	45	37	32	52	42	35	30	35	30	26		29	25	22		24	21	18	16
8	53	41	33	28	49	38	31	26	32	27	23		27	23	20		22	19	16	14
9	49	37	30	25	45	35	28	23	29	24	20		25	21	18		20	17	15	13
10	46	34	27	22	42	32	25	21	27	22	18		23	19	16		19	16	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	25987	25987	25987
5°	26086	25710	25861
10°	25932	25450	25576
15°	25611	25120	25095
20°	25156	24624	24598
25°	24704	24015	24015
30°	24121	23457	23256
35°	23580	22787	22450
40°	22898	22118	21692
45°	22229	21450	20922
50°	21499	20760	20022
55°	20738	19952	19212
60°	19888	18991	18290
65°	18980	18032	17207
70°	17825	16877	16074
75°	16220	15540	15159
80°	14393	13966	13240
85°	11745	11189	10022



TEST NUMBER: P331614-840

CATALOG NUMBER: S122DIW-S1005D1440U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	151.3	1.7
10°-20°	425.9	4.7
20°-30°	626.0	6.8
30°-40°	727.1	7.9
40°-50°	726.3	7.9
50°-60°	633.4	6.9
60°-70°	468.3	5.1
70°-80°	265.3	2.9
80°-90°	78.5	0.9
90°-100°	114.3	1.2
100°-110°	355.0	3.9
110°-120°	606.9	6.6
120°-130°	798.1	8.7
130°-140°	895.8	9.8
140°-150°	878.3	9.6
150°-160°	736.7	8.1
160°-170°	488.6	5.3
170°-180°	170.8	1.9
0°-30°	1203.2	13.2
0°-40°	1930.3	21.1
0°-60°	3290.0	36.0
0°-90°	4102.1	44.8
90°-120°	1076.2	11.8
90°-150°	3648.4	39.9
90°-180°	5045.0	55.2
0°-180°	9146.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1610	1610	1610	1610	1610	
5°	1610	1603	1586	1598	1596	153
15°	1532	1522	1503	1508	1501	431
25°	1387	1374	1348	1351	1348	638
35°	1196	1180	1156	1147	1139	747
45°	974	962	939	923	916	751
55°	737	727	709	691	682	658
65°	497	487	472	458	450	491
75°	260	257	249	241	243	278
85°	63	62	60	56	54	73
90°	2	21	53	50	52	7
95°	79	94	98	97	94	91
105°	327	332	335	338	338	346
115°	609	617	615	613	609	602
125°	886	899	895	891	889	791
135°	1146	1162	1166	1165	1160	885
145°	1392	1402	1411	1412	1407	869
155°	1591	1596	1600	1607	1603	732
165°	1731	1730	1730	1739	1732	488
175°	1801	1797	1793	1803	1795	171
180°	1804	1804	1804	1804	1804	



TEST NUMBER: P331614-840

CATALOG NUMBER: S122DIW-S1005D1440U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5
2.5°	1617.0	1615.6	1614.3	1612.9	1611.4	1609.3	1606.3	1603.3	1600.2	1597.2	1599.9
5°	1609.5	1608.2	1606.8	1605.4	1604.1	1601.4	1597.7	1593.9	1590.1	1586.3	1589.1
7.5°	1595.3	1593.2	1591.0	1588.9	1586.8	1583.8	1579.9	1576.1	1572.3	1568.4	1571.1
10°	1581.7	1579.3	1576.9	1574.5	1572.1	1568.8	1564.7	1560.5	1556.4	1552.3	1555.1
12.5°	1563.2	1560.9	1558.8	1556.7	1554.6	1551.5	1547.3	1543.2	1539.1	1535.0	1536.9
15°	1532.2	1530.1	1528.0	1526.0	1523.9	1520.7	1516.2	1511.7	1507.2	1502.8	1504.2
17.5°	1492.6	1490.5	1488.4	1486.3	1484.3	1481.0	1476.4	1471.9	1467.3	1462.9	1464.4
20°	1464.1	1462.0	1460.0	1457.8	1455.8	1452.4	1447.5	1442.8	1437.9	1433.1	1434.1
22.5°	1435.6	1432.7	1429.9	1426.9	1424.0	1420.4	1415.8	1411.3	1406.7	1402.2	1402.4
25°	1386.7	1383.9	1381.2	1378.5	1375.7	1371.4	1365.5	1359.7	1353.8	1348.0	1348.7
27.5°	1331.0	1328.5	1326.1	1323.5	1321.1	1317.6	1312.9	1308.3	1303.7	1299.1	1298.1
30°	1293.8	1291.1	1288.3	1285.6	1282.8	1278.9	1273.7	1268.6	1263.4	1258.2	1257.2
32.5°	1254.3	1252.0	1249.8	1247.6	1245.4	1241.6	1236.2	1230.7	1225.3	1219.8	1218.0
35°	1196.3	1192.9	1189.4	1186.0	1182.6	1178.1	1172.6	1167.1	1161.6	1156.1	1154.1
37.5°	1131.0	1128.0	1125.0	1122.0	1118.9	1114.7	1109.1	1103.7	1098.1	1092.7	1090.0
40°	1086.4	1083.7	1081.0	1078.2	1075.4	1071.4	1065.8	1060.4	1054.8	1049.4	1046.2
42.5°	1043.1	1040.4	1037.6	1034.9	1032.1	1027.9	1022.5	1016.9	1011.5	1005.9	1002.6
45°	973.5	971.1	968.7	966.2	963.8	960.1	954.9	949.8	944.6	939.4	935.6
47.5°	904.1	901.9	899.6	897.4	895.0	891.2	885.9	880.5	875.1	869.8	865.8
50°	855.9	854.1	852.4	850.7	849.0	845.7	840.9	836.1	831.2	826.5	821.6
52.5°	808.8	806.6	804.3	802.0	799.7	796.3	791.7	787.2	782.7	778.2	774.2
55°	736.7	734.6	732.6	730.5	728.4	725.3	721.2	717.1	713.0	708.8	704.7
57.5°	664.3	662.6	661.0	659.3	657.6	654.6	650.1	645.5	641.0	636.4	632.4
60°	615.9	614.6	613.2	611.9	610.5	607.3	602.6	597.7	592.9	588.1	584.3
62.5°	569.0	566.7	564.5	562.3	560.1	557.1	553.4	549.8	546.0	542.3	538.8
65°	496.8	494.7	492.7	490.6	488.6	485.7	482.3	478.9	475.4	472.0	469.0
67.5°	423.4	421.8	420.1	418.5	416.9	414.4	411.3	408.3	405.2	402.1	399.7
70°	377.6	376.3	374.9	373.5	372.1	369.9	366.8	363.7	360.6	357.5	355.1
72.5°	330.5	329.2	327.8	326.5	325.1	323.4	321.4	319.4	317.4	315.4	313.0
75°	260.0	259.3	258.6	257.9	257.2	256.0	254.3	252.6	250.9	249.1	247.1
77.5°	196.8	195.7	194.5	193.4	192.2	191.3	190.6	189.9	189.1	188.5	187.4
80°	154.8	154.4	154.1	153.7	153.4	152.9	152.2	151.5	150.8	150.2	149.1
82.5°	115.1	115.1	115.0	114.9	114.8	114.6	114.2	113.8	113.4	113.0	111.7
85°	63.4	63.1	62.8	62.4	62.1	61.7	61.4	61.0	60.7	60.4	59.3
87.5°	22.6	22.8	23.1	23.3	23.6	24.2	25.1	26.2	27.1	28.0	27.1
90°	1.5	5.6	9.6	13.7	17.8	23.5	31.0	38.4	45.8	53.3	52.6
92.5°	27.1	30.1	33.0	36.1	39.0	41.4	43.1	44.9	46.7	48.4	48.6
95°	79.2	82.5	85.9	89.3	92.7	94.7	95.4	96.0	96.7	97.5	97.5
97.5°	144.6	147.6	150.6	153.6	156.5	158.6	160.0	161.3	162.5	163.8	163.8
100°	193.4	196.0	198.7	201.5	204.2	206.0	207.0	208.0	209.0	210.1	210.1
102.5°	244.5	246.7	248.8	251.0	253.2	254.9	256.2	257.4	258.7	260.0	260.3
105°	327.3	328.3	329.3	330.3	331.3	332.2	333.0	333.6	334.3	335.0	335.6
107.5°	410.7	412.2	413.7	415.3	416.7	417.5	417.5	417.5	417.5	417.5	417.7
110°	464.3	466.4	468.4	470.4	472.4	473.5	473.5	473.5	473.5	473.5	473.5



TEST NUMBER: P331614-840

CATALOG NUMBER: S122DIW-S1005D1440U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	522.8	524.8	526.8	528.9	530.9	531.8	531.5	531.3	531.0	530.7	529.9
115°	608.9	611.0	613.0	615.1	617.1	617.7	617.1	616.4	615.7	615.1	614.7
117.5°	694.9	697.5	700.2	703.0	705.7	706.1	704.2	702.3	700.3	698.5	697.7
120°	752.0	754.8	757.5	760.2	763.0	763.0	760.2	757.5	754.8	752.0	752.0
122.5°	804.5	807.7	810.9	814.2	817.5	818.1	816.3	814.4	812.4	810.5	809.7
125°	886.1	889.1	892.1	895.1	898.3	899.3	898.3	897.3	896.3	895.1	894.1
127.5°	965.5	969.4	973.2	977.1	981.0	982.3	981.1	979.9	978.7	977.4	976.1
130°	1015.4	1019.9	1024.3	1028.6	1033.1	1034.9	1034.2	1033.6	1032.9	1032.2	1031.6
132.5°	1071.5	1075.1	1078.6	1082.3	1085.8	1087.7	1087.8	1087.9	1088.1	1088.2	1086.7
135°	1146.4	1150.1	1153.9	1157.5	1161.2	1163.5	1164.2	1164.9	1165.5	1166.2	1165.9
137.5°	1225.3	1228.3	1231.3	1234.4	1237.4	1239.4	1240.3	1241.1	1242.0	1242.9	1242.6
140°	1272.7	1275.8	1278.9	1281.9	1285.0	1287.3	1289.0	1290.7	1292.4	1294.0	1294.0
142.5°	1321.5	1324.5	1327.6	1330.6	1333.6	1335.7	1336.9	1338.1	1339.2	1340.4	1340.6
145°	1391.5	1393.9	1396.2	1398.6	1401.0	1403.2	1405.2	1407.2	1409.3	1411.3	1411.6
147.5°	1453.9	1456.7	1459.6	1462.5	1465.3	1467.4	1468.7	1470.1	1471.5	1472.8	1473.6
150°	1496.5	1498.5	1500.7	1502.7	1504.7	1506.3	1507.7	1509.0	1510.5	1511.8	1512.8
152.5°	1534.3	1536.3	1538.3	1540.3	1542.5	1544.3	1545.9	1547.5	1549.1	1550.7	1552.1
155°	1590.9	1592.0	1593.0	1594.0	1595.0	1596.0	1597.0	1598.0	1599.0	1600.0	1601.7
157.5°	1639.3	1640.0	1640.7	1641.4	1642.0	1642.7	1643.4	1644.0	1644.6	1645.2	1647.4
160°	1668.6	1669.3	1669.9	1670.6	1671.3	1671.8	1672.1	1672.4	1672.8	1673.1	1675.2
162.5°	1695.4	1695.6	1695.7	1695.8	1696.0	1696.2	1696.5	1696.9	1697.2	1697.5	1699.8
165°	1731.0	1730.7	1730.3	1730.0	1729.7	1729.5	1729.5	1729.5	1729.5	1729.5	1731.8
167.5°	1760.8	1759.8	1758.8	1757.8	1756.8	1756.3	1756.2	1756.2	1756.1	1756.0	1758.4
170°	1776.7	1775.6	1774.6	1773.6	1772.6	1771.9	1771.6	1771.3	1770.9	1770.6	1772.9
172.5°	1787.7	1786.7	1785.6	1784.6	1783.6	1782.9	1782.6	1782.2	1781.9	1781.5	1783.9
175°	1801.0	1800.0	1799.0	1798.0	1797.0	1796.1	1795.4	1794.7	1794.1	1793.4	1795.8
177.5°	1806.5	1805.7	1804.9	1804.1	1803.3	1802.6	1802.0	1801.5	1801.0	1800.4	1802.0
180°	1804.1	1804.1	1804.1	1804.1	1804.1	1804.1	1804.1	1804.1	1804.1	1804.1	1804.1



TEST NUMBER: P331614-840

CATALOG NUMBER: S122DIW-S1005D1440U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5
2.5°	1602.7	1605.4	1608.2	1609.3	1608.7	1608.2	1607.6	1607.1
5°	1591.9	1594.6	1597.3	1598.4	1597.7	1597.0	1596.3	1595.6
7.5°	1573.9	1576.6	1579.4	1580.4	1579.6	1578.9	1578.1	1577.4
10°	1557.8	1560.5	1563.3	1564.2	1563.2	1562.1	1561.0	1560.0
12.5°	1538.8	1540.8	1542.7	1543.3	1542.5	1541.8	1541.0	1540.2
15°	1505.5	1506.9	1508.2	1508.1	1506.4	1504.7	1503.0	1501.3
17.5°	1466.0	1467.6	1469.2	1469.2	1467.4	1465.8	1464.2	1462.5
20°	1435.2	1436.2	1437.2	1437.0	1435.7	1434.3	1433.0	1431.6
22.5°	1402.6	1402.8	1403.0	1402.7	1401.9	1401.1	1400.2	1399.4
25°	1349.4	1350.1	1350.8	1350.8	1350.1	1349.4	1348.7	1348.0
27.5°	1297.1	1296.0	1294.9	1293.6	1292.0	1290.3	1288.7	1287.1
30°	1256.2	1255.2	1254.2	1252.9	1251.5	1250.1	1248.8	1247.4
32.5°	1216.2	1214.3	1212.4	1210.8	1209.4	1208.1	1206.7	1205.3
35°	1152.0	1149.9	1147.8	1146.0	1144.3	1142.6	1140.7	1139.0
37.5°	1087.5	1085.0	1082.5	1080.4	1078.7	1077.0	1075.4	1073.8
40°	1043.1	1040.1	1036.9	1034.7	1033.3	1032.0	1030.6	1029.2
42.5°	999.3	995.8	992.5	989.9	988.0	986.0	984.1	982.1
45°	931.9	928.1	924.3	921.7	920.3	919.0	917.6	916.3
47.5°	861.8	857.8	853.8	850.8	848.8	846.9	844.9	842.8
50°	816.8	812.0	807.2	804.0	802.2	800.5	798.8	797.1
52.5°	770.2	766.2	762.2	759.1	756.8	754.6	752.2	750.0
55°	700.5	696.4	692.4	689.4	687.7	686.0	684.3	682.5
57.5°	628.2	624.2	620.2	617.4	616.2	614.9	613.6	612.3
60°	580.6	576.7	573.0	570.6	569.6	568.6	567.4	566.4
62.5°	535.3	531.8	528.3	525.8	524.5	523.2	521.9	520.6
65°	465.9	462.7	459.7	457.3	455.6	453.8	452.1	450.4
67.5°	397.3	394.9	392.4	390.5	389.2	387.8	386.5	385.1
70°	352.6	350.3	347.9	346.0	344.6	343.3	341.8	340.5
72.5°	310.6	308.2	305.8	304.1	303.0	301.8	300.7	299.6
75°	245.1	243.0	241.0	240.2	241.0	241.6	242.3	243.0
77.5°	186.4	185.4	184.4	183.4	182.4	181.5	180.5	179.6
80°	148.0	147.0	146.0	145.1	144.4	143.8	143.1	142.4
82.5°	110.4	109.1	107.8	107.0	106.8	106.7	106.6	106.4
85°	58.3	57.3	56.2	55.5	55.2	54.8	54.5	54.1
87.5°	26.1	25.1	24.1	23.5	23.3	23.1	22.9	22.7
90°	51.9	51.3	50.6	50.4	50.8	51.1	51.4	51.8
92.5°	48.7	48.8	49.0	49.1	49.1	49.2	49.3	49.3
95°	97.5	97.5	97.5	97.0	96.4	95.7	95.0	94.4
97.5°	163.8	163.8	163.8	163.8	163.7	163.6	163.6	163.5
100°	210.1	210.1	210.1	210.0	209.5	209.2	208.9	208.5
102.5°	260.5	260.8	261.2	261.1	260.7	260.4	260.0	259.7
105°	336.3	337.0	337.6	338.0	338.0	338.0	338.0	338.0
107.5°	418.0	418.3	418.5	417.9	416.4	414.8	413.2	411.6
110°	473.5	473.5	473.5	472.9	471.9	470.9	469.9	468.9



TEST NUMBER: P331614-840

CATALOG NUMBER: S122DIW-S1005D1440U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	529.1	528.3	527.5	526.6	525.9	525.2	524.4	523.7
115°	614.4	614.0	613.7	613.0	612.0	611.0	610.0	608.9
117.5°	696.9	696.1	695.3	694.3	693.3	692.3	691.3	690.2
120°	752.0	752.0	752.0	751.5	750.5	749.5	748.5	747.5
122.5°	808.9	808.1	807.3	806.5	805.8	805.1	804.3	803.5
125°	893.1	892.1	891.1	890.5	890.1	889.8	889.5	889.1
127.5°	974.9	973.7	972.5	971.4	970.3	969.2	968.2	967.0
130°	1030.9	1030.2	1029.5	1028.4	1027.1	1025.8	1024.4	1023.1
132.5°	1085.3	1083.8	1082.3	1081.0	1079.9	1078.8	1077.7	1076.6
135°	1165.5	1165.2	1164.9	1164.2	1163.2	1162.2	1161.1	1160.1
137.5°	1242.3	1242.1	1241.8	1241.0	1239.7	1238.3	1237.0	1235.6
140°	1294.0	1294.0	1294.0	1293.4	1292.0	1290.7	1289.3	1288.0
142.5°	1340.9	1341.2	1341.4	1340.9	1339.6	1338.2	1336.9	1335.4
145°	1412.0	1412.3	1412.6	1412.1	1410.8	1409.5	1408.1	1406.7
147.5°	1474.3	1475.0	1475.8	1475.5	1474.2	1472.9	1471.7	1470.4
150°	1513.8	1514.8	1515.8	1515.8	1514.8	1513.8	1512.8	1511.8
152.5°	1553.3	1554.6	1555.9	1555.9	1554.6	1553.3	1552.1	1550.7
155°	1603.5	1605.2	1606.8	1607.2	1606.2	1605.2	1604.2	1603.2
157.5°	1649.7	1652.0	1654.4	1654.7	1653.0	1651.4	1649.8	1648.2
160°	1677.2	1679.2	1681.2	1681.6	1680.2	1678.9	1677.6	1676.2
162.5°	1702.1	1704.5	1706.7	1707.1	1705.5	1703.8	1702.2	1700.5
165°	1734.2	1736.6	1739.0	1739.3	1737.6	1736.0	1734.2	1732.5
167.5°	1760.7	1763.1	1765.4	1765.7	1764.0	1762.2	1760.5	1758.7
170°	1775.3	1777.7	1780.1	1780.2	1778.2	1776.2	1774.1	1772.1
172.5°	1786.2	1788.7	1791.0	1791.2	1789.2	1787.2	1785.1	1783.1
175°	1798.2	1800.5	1802.9	1803.1	1801.0	1799.0	1797.0	1794.9
177.5°	1803.7	1805.3	1807.0	1807.0	1805.3	1803.7	1802.0	1800.4
180°	1804.1	1804.1	1804.1	1804.1	1804.1	1804.1	1804.1	1804.1

(END OF REPORT)