

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331589-840

Luminaire Tested: **S122DIW-S1005D435U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331589-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S1005D435U840-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 435 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5844.5 lumens
Efficiency: N/A
Efficacy: 111.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 52.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331589-840

CATALOG NUMBER: S122DIW-S1005D435U840-4F0-1E-UDD-F

Luminous Intensity Polar Plot

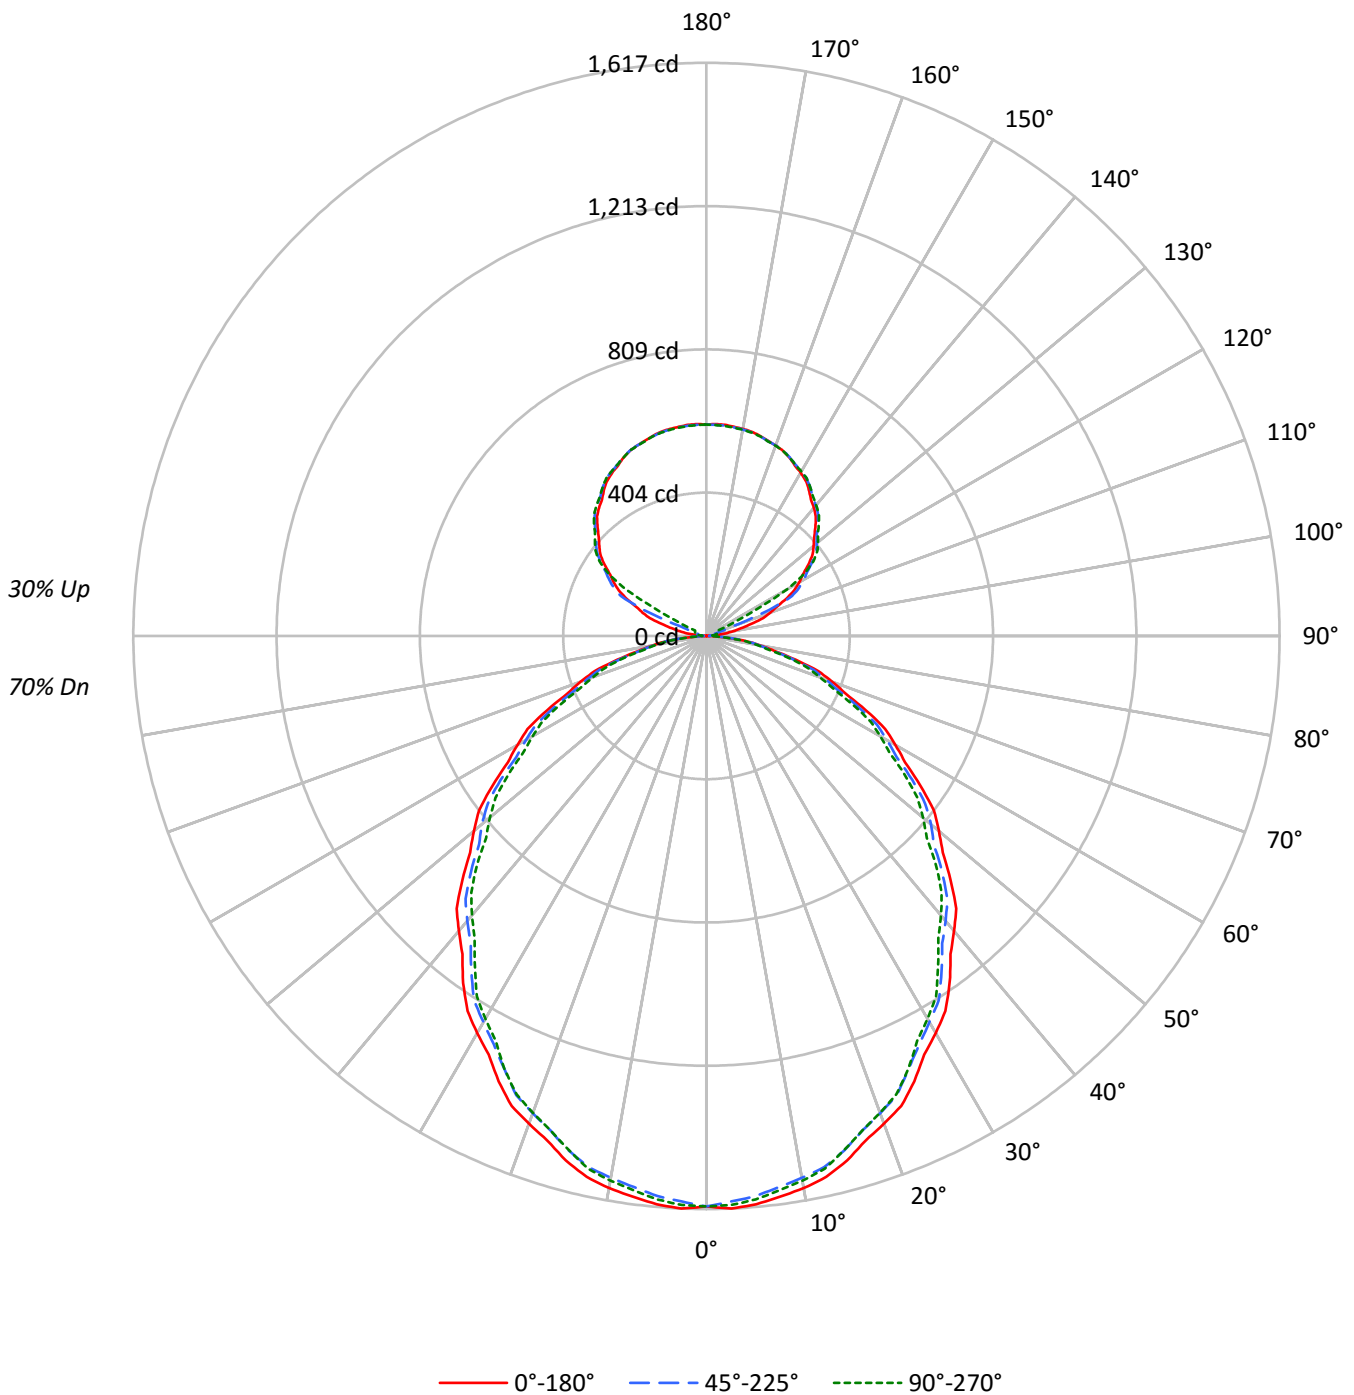



TEST NUMBER: P331589-840

CATALOG NUMBER: S122DIW-S1005D435U840-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	106	106	106	106	94	94	94	84	84	84	75	75	75	70
1	102	98	94	90	97	93	89	86	83	80	78	74	72	70	66	64	63	59
2	93	85	79	74	88	81	75	71	73	68	64	65	62	59	58	55	53	49
3	85	75	68	62	80	71	65	59	64	59	54	58	53	50	51	48	45	42
4	78	67	58	52	73	63	56	50	57	51	46	51	47	43	46	42	39	36
5	72	60	51	45	67	57	49	43	51	45	40	46	41	37	42	37	34	31
6	66	54	45	39	62	51	43	38	46	40	35	42	37	33	38	33	30	27
7	61	48	40	34	58	46	39	33	42	36	31	38	33	29	34	30	27	24
8	57	44	36	31	54	42	35	30	38	32	28	35	30	26	32	27	24	22
9	53	40	33	27	50	39	32	27	35	29	25	32	27	23	29	25	22	20
10	50	37	30	25	47	36	29	24	33	27	23	30	25	21	27	23	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	25987	25987	25987
5°	26086	25710	25861
10°	25932	25450	25576
15°	25611	25120	25095
20°	25156	24624	24598
25°	24704	24015	24015
30°	24121	23457	23256
35°	23580	22787	22450
40°	22898	22118	21692
45°	22229	21450	20922
50°	21499	20760	20022
55°	20738	19952	19212
60°	19888	18991	18290
65°	18980	18032	17207
70°	17825	16877	16074
75°	16220	15540	15159
80°	14393	13966	13240
85°	11745	11189	10022



TEST NUMBER: P331589-840

CATALOG NUMBER: S122DIW-S1005D435U840-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	151.3	2.6
10°-20°	425.9	7.3
20°-30°	626.0	10.7
30°-40°	727.1	12.4
40°-50°	726.3	12.4
50°-60°	633.4	10.8
60°-70°	468.3	8.0
70°-80°	265.3	4.5
80°-90°	72.8	1.2
90°-100°	19.9	0.3
100°-110°	73.0	1.2
110°-120°	195.0	3.3
120°-130°	322.0	5.5
130°-140°	342.4	5.9
140°-150°	318.3	5.4
150°-160°	255.9	4.4
160°-170°	164.9	2.8
170°-180°	56.8	1.0
0°-30°	1203.2	20.6
0°-40°	1930.3	33.0
0°-60°	3290.0	56.3
0°-90°	4096.4	70.1
90°-120°	287.9	4.9
90°-150°	1270.6	21.7
90°-180°	1748.0	29.9
0°-180°	5844.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1610	1610	1610	1610	1610	
5°	1610	1603	1586	1598	1596	153
15°	1532	1522	1503	1508	1501	431
25°	1387	1374	1348	1351	1348	638
35°	1196	1180	1156	1147	1139	747
45°	974	962	939	923	916	751
55°	737	727	709	691	682	658
65°	497	487	472	458	450	491
75°	260	257	249	241	243	278
85°	63	62	60	56	54	73
90°	0	5	9	11	12	4
95°	28	15	17	19	19	34
105°	131	137	26	31	33	140
115°	248	256	266	76	35	244
125°	351	357	365	368	369	313
135°	434	441	445	449	448	335
145°	504	504	511	513	512	315
155°	555	551	556	558	555	255
165°	584	582	583	586	583	165
175°	598	595	596	598	594	57
180°	596	596	596	596	596	



TEST NUMBER: P331589-840

CATALOG NUMBER: S122DIW-S1005D435U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5
2.5°	1617.0	1615.6	1614.3	1612.9	1611.4	1609.3	1606.3	1603.3	1600.2	1597.2	1599.9
5°	1609.5	1608.2	1606.8	1605.4	1604.1	1601.4	1597.7	1593.9	1590.1	1586.3	1589.1
7.5°	1595.3	1593.2	1591.0	1588.9	1586.8	1583.8	1579.9	1576.1	1572.3	1568.4	1571.1
10°	1581.7	1579.3	1576.9	1574.5	1572.1	1568.8	1564.7	1560.5	1556.4	1552.3	1555.1
12.5°	1563.2	1560.9	1558.8	1556.7	1554.6	1551.5	1547.3	1543.2	1539.1	1535.0	1536.9
15°	1532.2	1530.1	1528.0	1526.0	1523.9	1520.7	1516.2	1511.7	1507.2	1502.8	1504.2
17.5°	1492.6	1490.5	1488.4	1486.3	1484.3	1481.0	1476.4	1471.9	1467.3	1462.9	1464.4
20°	1464.1	1462.0	1460.0	1457.8	1455.8	1452.4	1447.5	1442.8	1437.9	1433.1	1434.1
22.5°	1435.6	1432.7	1429.9	1426.9	1424.0	1420.4	1415.8	1411.3	1406.7	1402.2	1402.4
25°	1386.7	1383.9	1381.2	1378.5	1375.7	1371.4	1365.5	1359.7	1353.8	1348.0	1348.7
27.5°	1331.0	1328.5	1326.1	1323.5	1321.1	1317.6	1312.9	1308.3	1303.7	1299.1	1298.1
30°	1293.8	1291.1	1288.3	1285.6	1282.8	1278.9	1273.7	1268.6	1263.4	1258.2	1257.2
32.5°	1254.3	1252.0	1249.8	1247.6	1245.4	1241.6	1236.2	1230.7	1225.3	1219.8	1218.0
35°	1196.3	1192.9	1189.4	1186.0	1182.6	1178.1	1172.6	1167.1	1161.6	1156.1	1154.1
37.5°	1131.0	1128.0	1125.0	1122.0	1118.9	1114.7	1109.1	1103.7	1098.1	1092.7	1090.0
40°	1086.4	1083.7	1081.0	1078.2	1075.4	1071.4	1065.8	1060.4	1054.8	1049.4	1046.2
42.5°	1043.1	1040.4	1037.6	1034.9	1032.1	1027.9	1022.5	1016.9	1011.5	1005.9	1002.6
45°	973.5	971.1	968.7	966.2	963.8	960.1	954.9	949.8	944.6	939.4	935.6
47.5°	904.1	901.9	899.6	897.4	895.0	891.2	885.9	880.5	875.1	869.8	865.8
50°	855.9	854.1	852.4	850.7	849.0	845.7	840.9	836.1	831.2	826.5	821.6
52.5°	808.8	806.6	804.3	802.0	799.7	796.3	791.7	787.2	782.7	778.2	774.2
55°	736.7	734.6	732.6	730.5	728.4	725.3	721.2	717.1	713.0	708.8	704.7
57.5°	664.3	662.6	661.0	659.3	657.6	654.6	650.1	645.5	641.0	636.4	632.4
60°	615.9	614.6	613.2	611.9	610.5	607.3	602.6	597.7	592.9	588.1	584.3
62.5°	569.0	566.7	564.5	562.3	560.1	557.1	553.4	549.8	546.0	542.3	538.8
65°	496.8	494.7	492.7	490.6	488.6	485.7	482.3	478.9	475.4	472.0	469.0
67.5°	423.4	421.8	420.1	418.5	416.9	414.4	411.3	408.3	405.2	402.1	399.7
70°	377.6	376.3	374.9	373.5	372.1	369.9	366.8	363.7	360.6	357.5	355.1
72.5°	330.5	329.2	327.8	326.5	325.1	323.4	321.4	319.4	317.4	315.4	313.0
75°	260.0	259.3	258.6	257.9	257.2	256.0	254.3	252.6	250.9	249.1	247.1
77.5°	196.8	195.7	194.5	193.4	192.2	191.3	190.6	189.9	189.1	188.5	187.4
80°	154.8	154.4	154.1	153.7	153.4	152.9	152.2	151.5	150.8	150.2	149.1
82.5°	115.1	115.1	115.0	114.9	114.8	114.6	114.2	113.8	113.4	113.0	111.7
85°	63.4	63.1	62.8	62.4	62.1	61.7	61.4	61.0	60.7	60.4	59.3
87.5°	22.4	22.0	21.7	21.3	21.0	20.6	20.3	19.9	19.5	19.1	18.4
90°	0.4	1.5	2.5	3.6	4.6	5.6	6.4	7.1	7.9	8.6	9.1
92.5°	8.7	8.6	8.5	8.4	8.4	8.5	8.9	9.3	9.6	10.0	10.3
95°	28.1	24.8	21.7	18.6	15.3	14.1	14.8	15.5	16.2	16.9	17.3
97.5°	55.6	46.8	37.9	28.9	20.0	16.4	17.9	19.4	21.0	22.5	22.9
100°	76.4	63.2	50.1	37.0	23.8	18.1	19.7	21.3	22.9	24.6	25.3
102.5°	99.2	96.4	93.6	90.9	88.1	79.9	66.2	52.6	39.0	25.2	26.3
105°	131.2	134.1	136.9	139.9	142.7	131.1	104.9	78.7	52.5	26.4	27.4
107.5°	167.7	170.1	172.4	174.7	177.0	162.5	131.1	99.7	68.3	36.9	35.7
110°	191.2	193.2	195.2	197.2	199.2	186.4	158.6	131.0	103.2	75.5	65.9



TEST NUMBER: P331589-840

CATALOG NUMBER: S122DIW-S1005D435U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	213.3	215.1	216.9	218.6	220.5	217.9	211.1	204.2	197.3	190.6	155.5
115°	248.2	249.8	251.5	253.1	254.7	256.7	259.1	261.6	263.9	266.3	221.9
117.5°	279.3	281.1	283.0	284.8	286.6	288.4	290.0	291.6	293.4	295.0	284.3
120°	302.2	303.6	305.0	306.5	307.9	309.5	311.2	313.0	314.7	316.4	317.5
122.5°	321.4	323.0	324.5	326.0	327.5	329.2	331.1	333.0	334.9	336.8	337.5
125°	350.9	352.1	353.5	354.7	355.9	357.4	359.3	361.1	362.9	364.8	365.4
127.5°	377.6	379.0	380.3	381.7	383.1	384.5	385.9	387.2	388.6	389.9	390.9
130°	394.6	396.1	397.6	399.1	400.6	401.9	403.0	404.0	405.2	406.2	407.2
132.5°	411.8	413.0	414.3	415.7	417.0	418.2	419.2	420.3	421.3	422.4	423.3
135°	434.2	435.8	437.3	438.8	440.4	441.5	442.4	443.3	444.1	445.0	446.0
137.5°	457.0	458.0	459.1	460.2	461.2	462.2	463.2	464.2	465.1	466.2	467.1
140°	471.8	472.5	473.3	474.0	474.8	475.7	476.9	477.9	478.9	480.0	480.8
142.5°	484.2	484.9	485.5	486.3	487.0	488.0	489.1	490.3	491.5	492.7	493.5
145°	503.7	503.6	503.5	503.4	503.3	504.1	505.7	507.4	509.0	510.6	511.3
147.5°	520.7	520.4	520.0	519.7	519.3	519.9	521.5	523.1	524.7	526.3	526.8
150°	531.8	531.1	530.4	529.8	529.1	529.5	531.1	532.6	534.1	535.6	536.2
152.5°	541.1	540.4	539.6	538.9	538.1	538.5	539.9	541.4	542.8	544.3	544.8
155°	554.6	553.8	552.9	552.1	551.2	551.4	552.5	553.6	554.8	555.9	556.5
157.5°	565.2	564.5	563.8	563.1	562.4	562.4	563.2	564.0	564.8	565.6	566.2
160°	571.5	570.9	570.4	569.8	569.2	569.2	569.8	570.4	570.9	571.5	572.1
162.5°	577.0	576.4	575.8	575.3	574.7	574.7	575.1	575.6	576.1	576.6	577.3
165°	584.4	583.9	583.3	582.7	582.1	582.0	582.3	582.6	582.9	583.1	583.8
167.5°	590.0	589.4	588.9	588.2	587.6	587.5	587.7	588.0	588.3	588.5	589.3
170°	593.1	592.5	591.9	591.4	590.8	590.6	590.8	591.0	591.2	591.4	592.0
172.5°	595.1	594.6	594.0	593.4	592.8	592.7	592.8	593.0	593.2	593.4	594.1
175°	597.8	597.1	596.4	595.8	595.1	594.9	595.1	595.3	595.4	595.6	596.3
177.5°	598.2	597.7	597.1	596.6	596.1	595.8	595.9	596.0	596.1	596.1	596.7
180°	596.5	596.5	596.5	596.5	596.5	596.5	596.5	596.5	596.5	596.5	596.5



TEST NUMBER: P331589-840

CATALOG NUMBER: S122DIW-S1005D435U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5
2.5°	1602.7	1605.4	1608.2	1609.3	1608.7	1608.2	1607.6	1607.1
5°	1591.9	1594.6	1597.3	1598.4	1597.7	1597.0	1596.3	1595.6
7.5°	1573.9	1576.6	1579.4	1580.4	1579.6	1578.9	1578.1	1577.4
10°	1557.8	1560.5	1563.3	1564.2	1563.2	1562.1	1561.0	1560.0
12.5°	1538.8	1540.8	1542.7	1543.3	1542.5	1541.8	1541.0	1540.2
15°	1505.5	1506.9	1508.2	1508.1	1506.4	1504.7	1503.0	1501.3
17.5°	1466.0	1467.6	1469.2	1469.2	1467.4	1465.8	1464.2	1462.5
20°	1435.2	1436.2	1437.2	1437.0	1435.7	1434.3	1433.0	1431.6
22.5°	1402.6	1402.8	1403.0	1402.7	1401.9	1401.1	1400.2	1399.4
25°	1349.4	1350.1	1350.8	1350.8	1350.1	1349.4	1348.7	1348.0
27.5°	1297.1	1296.0	1294.9	1293.6	1292.0	1290.3	1288.7	1287.1
30°	1256.2	1255.2	1254.2	1252.9	1251.5	1250.1	1248.8	1247.4
32.5°	1216.2	1214.3	1212.4	1210.8	1209.4	1208.1	1206.7	1205.3
35°	1152.0	1149.9	1147.8	1146.0	1144.3	1142.6	1140.7	1139.0
37.5°	1087.5	1085.0	1082.5	1080.4	1078.7	1077.0	1075.4	1073.8
40°	1043.1	1040.1	1036.9	1034.7	1033.3	1032.0	1030.6	1029.2
42.5°	999.3	995.8	992.5	989.9	988.0	986.0	984.1	982.1
45°	931.9	928.1	924.3	921.7	920.3	919.0	917.6	916.3
47.5°	861.8	857.8	853.8	850.8	848.8	846.9	844.9	842.8
50°	816.8	812.0	807.2	804.0	802.2	800.5	798.8	797.1
52.5°	770.2	766.2	762.2	759.1	756.8	754.6	752.2	750.0
55°	700.5	696.4	692.4	689.4	687.7	686.0	684.3	682.5
57.5°	628.2	624.2	620.2	617.4	616.2	614.9	613.6	612.3
60°	580.6	576.7	573.0	570.6	569.6	568.6	567.4	566.4
62.5°	535.3	531.8	528.3	525.8	524.5	523.2	521.9	520.6
65°	465.9	462.7	459.7	457.3	455.6	453.8	452.1	450.4
67.5°	397.3	394.9	392.4	390.5	389.2	387.8	386.5	385.1
70°	352.6	350.3	347.9	346.0	344.6	343.3	341.8	340.5
72.5°	310.6	308.2	305.8	304.1	303.0	301.8	300.7	299.6
75°	245.1	243.0	241.0	240.2	241.0	241.6	242.3	243.0
77.5°	186.4	185.4	184.4	183.4	182.4	181.5	180.5	179.6
80°	148.0	147.0	146.0	145.1	144.4	143.8	143.1	142.4
82.5°	110.4	109.1	107.8	107.0	106.8	106.7	106.6	106.4
85°	58.3	57.3	56.2	55.5	55.2	54.8	54.5	54.1
87.5°	17.6	16.9	16.2	15.7	15.5	15.1	14.9	14.7
90°	9.6	10.1	10.5	10.9	11.1	11.3	11.5	11.6
92.5°	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.6
95°	17.8	18.3	18.8	19.0	18.9	18.8	18.7	18.6
97.5°	23.3	23.7	24.0	24.3	24.4	24.5	24.6	24.7
100°	26.2	26.9	27.7	28.2	28.4	28.6	28.7	28.9
102.5°	27.3	28.3	29.3	29.9	30.2	30.5	30.7	31.0
105°	28.5	29.5	30.6	31.3	31.6	32.0	32.4	32.8
107.5°	34.7	33.6	32.5	32.2	32.6	33.0	33.3	33.7
110°	56.4	46.8	37.2	32.5	32.9	33.3	33.7	34.1



TEST NUMBER: P331589-840

CATALOG NUMBER: S122DIW-S1005D435U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	120.6	85.5	50.6	33.2	33.5	33.8	34.1	34.4
115°	177.5	133.1	88.7	63.0	56.1	49.2	42.3	35.3
117.5°	273.5	262.8	252.0	235.3	212.6	189.9	167.2	144.5
120°	318.7	319.8	321.0	315.1	302.2	289.2	276.2	263.3
122.5°	338.1	338.8	339.5	338.6	336.1	333.6	331.0	328.5
125°	366.1	366.8	367.4	367.9	368.2	368.5	368.8	369.0
127.5°	391.9	392.8	393.8	394.4	394.5	394.5	394.6	394.6
130°	408.3	409.3	410.4	410.9	410.8	410.7	410.6	410.5
132.5°	424.2	425.1	426.0	426.4	426.3	426.2	426.2	426.1
135°	447.0	447.9	448.9	449.2	449.1	448.9	448.7	448.5
137.5°	468.1	469.0	469.9	470.2	469.9	469.6	469.3	468.9
140°	481.7	482.6	483.4	483.6	483.1	482.6	482.2	481.7
142.5°	494.3	495.1	495.9	496.0	495.5	495.1	494.6	494.1
145°	512.0	512.6	513.3	513.4	512.9	512.4	512.0	511.5
147.5°	527.4	527.9	528.4	528.4	528.0	527.6	527.1	526.7
150°	536.8	537.3	538.0	538.1	537.6	537.0	536.5	536.1
152.5°	545.4	546.0	546.6	546.5	545.9	545.3	544.6	544.0
155°	557.1	557.6	558.3	558.2	557.3	556.6	555.8	555.1
157.5°	566.9	567.5	568.3	568.2	567.4	566.6	565.9	565.2
160°	572.6	573.2	573.8	573.7	573.1	572.4	571.7	571.1
162.5°	577.9	578.7	579.3	579.2	578.3	577.5	576.7	575.9
165°	584.5	585.1	585.8	585.8	585.1	584.5	583.8	583.1
167.5°	590.0	590.6	591.3	591.2	590.3	589.5	588.5	587.7
170°	592.7	593.4	594.0	593.9	593.1	592.2	591.4	590.5
172.5°	594.7	595.4	596.1	596.0	595.1	594.3	593.4	592.6
175°	597.0	597.6	598.3	598.2	597.2	596.3	595.3	594.4
177.5°	597.2	597.7	598.3	598.2	597.5	596.8	596.1	595.5
180°	596.5	596.5	596.5	596.5	596.5	596.5	596.5	596.5

(END OF REPORT)