

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331591-840

Luminaire Tested: **S122DIW-S1005D710U840-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331591-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S1005D710U840-4F0-1E-UDD-A
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 710 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7308.2 lumens
Efficiency: N/A
Efficacy: 122.2 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.16 / 1.23
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 59.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331591-840

CATALOG NUMBER: S122DIW-S1005D710U840-4F0-1E-UDD-A

Luminous Intensity Polar Plot

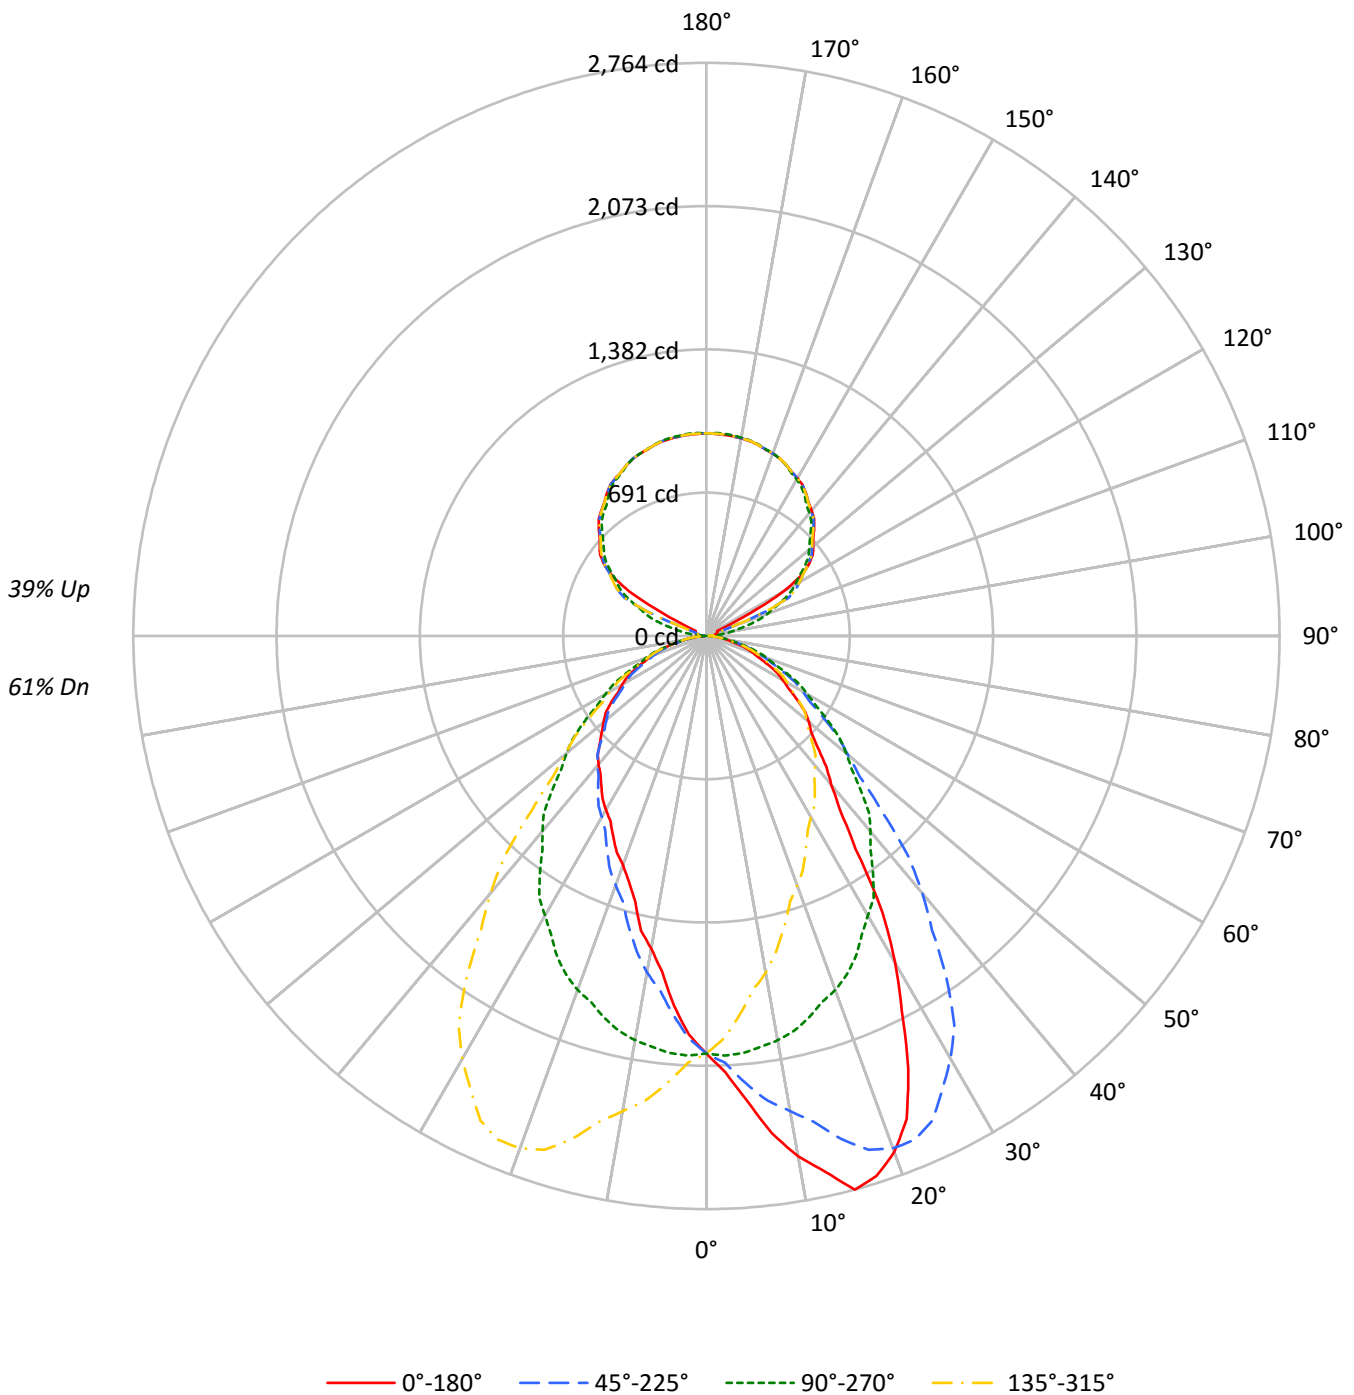



TEST NUMBER: P331591-840

CATALOG NUMBER: S122DIW-S1005D710U840-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66	66	66	66	66	66	66	61														
1	101	97	93	90	94	91	87	84	79	77	75	69	67	66	59	58	57	57	57	57	57	57	57	52														
2	92	85	79	74	86	80	75	70	70	66	63	61	58	56	53	51	49	49	49	49	49	49	49	45														
3	85	75	68	62	79	71	65	59	62	58	54	55	51	48	47	45	42	42	42	42	42	42	42	39														
4	78	67	59	53	73	63	56	51	56	50	46	49	45	41	43	40	37	37	37	37	37	37	37	34														
5	72	60	52	46	67	57	50	44	50	45	40	44	40	36	39	35	33	33	33	33	33	33	33	30														
6	66	54	46	41	62	51	44	39	46	40	36	40	36	32	35	32	29	29	29	29	29	29	29	26														
7	61	49	41	36	57	47	40	34	42	36	32	37	32	29	33	29	26	26	26	26	26	26	26	24														
8	57	45	37	32	54	43	36	31	38	32	28	34	29	26	30	26	24	24	24	24	24	24	24	21														
9	53	41	34	29	50	39	32	28	35	30	26	31	27	23	28	24	21	21	21	21	21	21	21	19														
10	50	38	31	26	47	36	30	25	33	27	23	29	25	21	26	22	20	20	20	20	20	20	20	18														

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	32513	32513	32513	32513
5°	36451	32725	29000	32725
10°	41769	32455	25097	32455
15°	46208	31861	22173	31861
20°	45505	31223	20213	31223
25°	41031	30375	18971	30375
30°	33907	29015	18066	29015
35°	24711	27595	17420	27595
40°	19736	25918	17062	25918
45°	17249	23980	16575	23980
50°	16211	22102	16252	22102
55°	14945	20194	15817	20194
60°	13695	18167	15145	18167
65°	12478	16351	14487	16351
70°	11325	14578	13520	14578
75°	10044	12601	11977	12601
80°	8638	10432	9642	10432
85°	7744	7744	5743	7744



TEST NUMBER: P331591-840

CATALOG NUMBER: S122DIW-S1005D710U840-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	191.8	2.6
10°-20°	557.5	7.6
20°-30°	809.1	11.1
30°-40°	853.9	11.7
40°-50°	756.0	10.3
50°-60°	603.3	8.3
60°-70°	410.1	5.6
70°-80°	210.2	2.9
80°-90°	53.1	0.7
90°-100°	32.6	0.4
100°-110°	119.5	1.6
110°-120°	319.5	4.4
120°-130°	527.3	7.2
130°-140°	560.8	7.7
140°-150°	521.3	7.1
150°-160°	419.1	5.7
160°-170°	270.1	3.7
170°-180°	93.0	1.3
0°-30°	1558.5	21.3
0°-40°	2412.3	33.0
0°-60°	3771.7	51.6
0°-90°	4445.1	60.8
90°-120°	471.6	6.5
90°-150°	2081.0	28.5
90°-180°	2863.0	39.2
0°-180°	7308.2	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2014	2014	2014	2014	2014	
5°	2249	2019	1789	2019	2249	225
15°	2764	1906	1326	1906	2764	763
25°	2303	1705	1065	1705	2303	1041
35°	1254	1400	884	1400	1254	815
45°	755	1050	726	1050	755	594
55°	531	717	562	717	531	476
65°	327	428	379	428	327	325
75°	161	202	192	202	161	172
85°	42	42	31	42	42	46
90°	19	1	19	1	19	11
95°	30	46	30	46	30	28
105°	54	215	54	215	54	56
115°	58	406	58	406	58	145
125°	604	575	604	575	604	523
135°	735	711	735	711	735	566
145°	838	825	838	825	838	524
155°	909	908	909	908	909	419
165°	955	957	955	957	955	270
175°	974	979	974	979	974	93
180°	977	977	977	977	977	



TEST NUMBER: P331591-840

CATALOG NUMBER: S122DIW-S1005D710U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7
2.5°	2106.6	2107.2	2108.4	2098.5	2097.3	2097.3	2088.6	2081.2	2072.5	2060.7	2062.0
5°	2249.0	2257.5	2260.6	2251.3	2237.4	2235.8	2222.7	2201.0	2180.9	2164.6	2153.0
7.5°	2418.9	2422.4	2414.8	2402.6	2392.2	2373.6	2349.1	2325.1	2291.6	2260.8	2237.9
10°	2547.7	2552.3	2539.2	2521.4	2506.7	2485.1	2449.4	2413.1	2368.9	2326.4	2292.3
12.5°	2645.5	2657.0	2640.1	2637.8	2612.6	2582.8	2540.4	2522.0	2459.9	2400.7	2364.2
15°	2764.4	2763.6	2765.2	2750.5	2731.9	2727.2	2682.4	2633.6	2546.2	2511.3	2450.9
17.5°	2730.1	2741.8	2747.2	2747.0	2746.6	2743.7	2729.3	2698.5	2654.6	2598.2	2528.5
20°	2648.4	2663.8	2666.1	2683.9	2694.0	2707.1	2712.6	2704.0	2677.0	2629.8	2569.4
22.5°	2522.0	2526.4	2533.7	2561.3	2583.1	2616.2	2633.3	2661.9	2651.6	2628.5	2578.1
25°	2303.2	2295.4	2322.5	2336.4	2386.7	2439.3	2477.3	2519.1	2556.3	2578.7	2563.9
27.5°	2040.3	2028.7	2069.3	2106.3	2147.2	2204.1	2263.2	2333.0	2391.1	2463.7	2488.6
30°	1818.7	1825.6	1864.3	1903.8	1965.7	2046.2	2112.7	2189.4	2272.2	2353.5	2409.9
32.5°	1579.7	1606.5	1630.9	1691.4	1746.0	1835.7	1933.2	2029.0	2132.3	2224.7	2312.2
35°	1253.7	1284.6	1318.8	1362.8	1439.5	1528.4	1623.7	1752.9	1893.8	2019.9	2123.6
37.5°	1055.3	1050.4	1069.9	1101.8	1163.8	1235.7	1345.2	1472.9	1638.7	1787.0	1933.2
40°	936.4	933.3	947.3	976.6	1023.9	1076.5	1172.5	1284.6	1438.7	1619.8	1793.9
42.5°	854.7	856.6	864.3	885.0	917.4	960.7	1032.6	1128.0	1269.1	1439.7	1626.8
45°	755.4	760.7	769.3	779.3	797.9	833.5	873.7	941.9	1053.3	1195.7	1379.9
47.5°	683.8	684.0	692.7	701.5	712.5	732.6	765.4	808.1	886.8	1002.7	1161.0
50°	645.4	640.1	646.2	653.2	664.8	678.7	700.3	740.6	793.2	886.9	1019.3
52.5°	598.3	598.5	604.1	606.7	617.1	631.1	650.9	678.7	726.4	799.6	908.4
55°	530.9	534.7	537.9	542.5	551.8	561.9	577.3	595.9	633.1	688.0	768.5
57.5°	467.5	468.7	471.8	480.6	486.5	495.7	510.5	527.4	551.5	592.2	652.7
60°	424.1	424.1	430.3	434.1	441.9	451.2	462.8	479.1	500.7	534.0	582.8
62.5°	384.5	383.8	386.4	392.6	398.6	407.3	418.8	432.6	453.0	482.6	522.7
65°	326.6	325.1	329.7	331.2	337.4	346.0	355.3	369.9	386.2	407.9	443.4
67.5°	270.8	272.8	275.2	278.1	281.6	290.5	296.7	307.1	320.8	338.8	362.9
70°	239.9	239.9	239.9	242.3	246.9	251.6	257.7	266.2	279.4	294.9	316.5
72.5°	205.2	207.7	210.2	208.8	214.7	217.4	224.9	229.7	242.3	252.2	271.4
75°	161.0	161.0	161.0	164.8	167.1	169.5	174.1	178.7	185.0	197.3	207.4
77.5°	120.1	119.8	120.6	121.5	124.0	126.7	128.2	132.3	138.0	143.8	152.3
80°	92.9	94.4	95.2	96.7	96.7	98.3	99.1	104.5	108.4	112.2	117.6
82.5°	71.8	72.1	72.3	72.6	73.2	74.1	76.1	77.9	79.3	82.5	86.6
85°	41.8	41.0	41.0	42.5	41.8	41.8	43.3	44.8	44.8	45.6	48.0
87.5°	19.9	19.9	20.4	19.7	19.7	20.2	20.0	19.3	19.7	20.2	20.5
90°	19.1	18.8	18.5	18.2	17.9	17.3	16.5	15.8	14.9	14.1	12.9
92.5°	19.1	18.9	18.7	18.5	18.4	18.1	17.7	17.3	16.8	16.4	15.8
95°	30.4	30.6	30.7	30.9	31.0	30.7	29.9	29.2	28.4	27.6	26.5
97.5°	40.6	40.4	40.2	40.0	39.8	39.4	38.8	38.2	37.6	36.9	34.3
100°	47.4	47.1	46.8	46.5	46.2	45.3	44.0	42.8	41.5	40.3	37.7
102.5°	50.8	50.3	49.9	49.5	49.0	48.0	46.4	44.7	43.0	41.4	63.7
105°	53.7	53.1	52.5	51.8	51.2	50.0	48.3	46.6	44.8	43.1	86.0
107.5°	55.2	54.6	54.0	53.4	52.8	53.3	55.1	56.9	58.6	60.4	111.8
110°	55.8	55.2	54.6	53.9	53.3	60.9	76.5	92.3	108.1	123.7	169.2



TEST NUMBER: P331591-840

CATALOG NUMBER: S122DIW-S1005D710U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	56.5	55.9	55.4	54.9	54.4	82.8	140.2	197.4	254.8	312.0	323.3
115°	58.0	69.3	80.6	91.9	103.2	145.2	217.9	290.7	363.5	436.2	432.2
117.5°	236.7	273.9	311.0	348.2	385.4	412.7	430.3	448.0	465.5	483.1	480.4
120°	431.2	452.4	473.6	494.8	516.0	525.7	523.8	522.0	520.1	518.2	515.3
122.5°	538.2	542.3	546.3	550.5	554.6	556.1	554.9	553.8	552.7	551.6	548.5
125°	604.4	604.0	603.5	603.0	602.6	601.8	600.7	599.6	598.4	597.3	594.4
127.5°	646.3	646.2	646.1	646.0	645.9	645.1	643.5	641.9	640.3	638.6	636.4
130°	672.4	672.5	672.7	672.8	673.0	672.2	670.4	668.7	667.0	665.3	663.5
132.5°	697.8	697.9	698.1	698.2	698.4	697.7	696.3	694.8	693.3	691.9	690.1
135°	734.6	734.9	735.2	735.5	735.8	735.2	733.6	732.1	730.4	728.9	727.5
137.5°	768.0	768.6	769.1	769.6	770.2	769.7	768.1	766.6	765.1	763.6	761.9
140°	789.0	789.7	790.5	791.3	792.1	791.8	790.4	789.0	787.6	786.2	784.4
142.5°	809.3	810.1	810.9	811.7	812.4	812.2	810.9	809.6	808.4	807.1	805.1
145°	837.8	838.5	839.3	840.1	840.9	840.7	839.6	838.5	837.5	836.4	833.6
147.5°	862.7	863.4	864.1	864.7	865.5	865.4	864.5	863.7	862.9	862.0	859.4
150°	878.1	878.8	879.6	880.4	881.2	881.1	880.2	879.2	878.3	877.4	874.8
152.5°	891.0	892.1	893.1	894.1	895.2	895.2	894.3	893.3	892.4	891.5	889.1
155°	909.2	910.4	911.7	912.9	914.1	914.3	913.4	912.4	911.5	910.6	908.7
157.5°	925.6	927.0	928.2	929.4	930.6	930.7	929.6	928.6	927.5	926.3	925.0
160°	935.3	936.4	937.5	938.6	939.7	939.8	938.9	937.9	937.0	936.0	935.0
162.5°	943.2	944.5	945.9	947.3	948.7	948.8	947.7	946.6	945.5	944.5	943.7
165°	955.1	956.2	957.4	958.4	959.5	959.5	958.4	957.4	956.2	955.1	954.6
167.5°	962.6	964.0	965.4	966.8	968.3	968.4	967.3	966.2	965.1	964.0	963.6
170°	967.1	968.6	970.0	971.4	972.8	972.9	971.8	970.8	969.7	968.6	968.3
172.5°	970.5	971.9	973.3	974.7	976.1	976.3	975.2	974.1	973.0	971.9	971.6
175°	973.5	975.0	976.6	978.2	979.8	980.0	978.9	977.9	976.7	975.6	975.3
177.5°	975.3	976.4	977.5	978.8	979.9	980.0	979.1	978.3	977.3	976.4	976.3
180°	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0



TEST NUMBER: P331591-840

CATALOG NUMBER: S122DIW-S1005D710U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7
2.5°	2066.4	2061.4	2058.3	2047.2	2037.2	2027.3	2024.3	2025.5	2011.9	1998.8	1993.3
5°	2146.9	2131.3	2116.7	2095.8	2071.0	2043.9	2029.9	2019.1	1992.1	1962.7	1945.6
7.5°	2219.0	2196.9	2168.5	2129.2	2093.1	2050.5	2023.5	1999.4	1959.8	1918.3	1893.0
10°	2262.9	2232.7	2196.4	2148.4	2104.3	2052.4	2016.0	1979.6	1933.2	1883.7	1852.7
12.5°	2300.7	2260.0	2224.2	2162.6	2110.4	2045.6	2002.5	1951.2	1902.3	1843.4	1813.1
15°	2390.7	2315.5	2247.5	2177.8	2113.5	2023.0	1975.0	1906.1	1841.9	1769.2	1734.3
17.5°	2460.1	2375.7	2268.5	2180.0	2105.1	2004.8	1934.3	1851.8	1775.8	1692.7	1645.4
20°	2499.7	2403.0	2287.6	2182.4	2092.6	1978.1	1901.5	1817.2	1728.2	1634.5	1583.5
22.5°	2523.2	2421.6	2307.5	2173.1	2067.9	1956.4	1860.0	1767.6	1677.4	1576.3	1522.8
25°	2530.7	2437.8	2317.1	2165.5	2036.9	1910.8	1794.7	1705.0	1595.8	1501.4	1423.2
27.5°	2493.9	2427.3	2311.2	2150.8	2001.1	1853.7	1724.2	1622.6	1507.4	1404.9	1326.4
30°	2448.6	2409.9	2296.9	2136.0	1972.7	1814.0	1671.6	1556.3	1441.8	1338.1	1257.6
32.5°	2378.7	2370.4	2271.0	2115.0	1942.4	1763.9	1616.6	1500.0	1373.1	1271.2	1194.5
35°	2241.3	2278.4	2215.7	2067.9	1885.2	1692.5	1533.1	1400.0	1268.5	1170.9	1098.9
37.5°	2057.1	2149.3	2132.9	1999.0	1808.2	1614.9	1438.9	1299.7	1174.4	1075.9	1005.3
40°	1930.2	2047.8	2064.8	1946.4	1753.7	1554.8	1368.3	1229.7	1107.4	1017.7	946.4
42.5°	1793.9	1931.4	1978.1	1883.2	1694.3	1491.7	1305.1	1161.6	1040.6	953.3	890.2
45°	1565.6	1747.5	1831.9	1777.7	1595.1	1387.7	1195.7	1050.2	940.3	858.3	809.5
47.5°	1352.2	1551.0	1664.4	1645.2	1484.7	1279.3	1089.5	949.9	842.9	777.5	733.9
50°	1201.1	1405.4	1542.4	1548.6	1405.4	1201.8	1011.5	879.9	781.6	720.5	684.9
52.5°	1069.9	1264.9	1414.2	1447.0	1316.9	1121.4	941.5	810.6	724.1	667.9	636.0
55°	898.5	1063.4	1229.0	1289.3	1184.9	999.2	832.7	717.4	636.1	597.4	569.6
57.5°	747.0	884.4	1037.3	1104.1	1039.7	880.7	724.7	624.5	558.7	524.7	503.3
60°	667.1	775.5	911.7	991.4	935.6	794.1	657.8	562.6	508.5	478.3	458.2
62.5°	592.8	688.8	804.0	876.9	846.5	713.0	591.0	507.0	460.2	431.8	417.3
65°	489.1	564.9	654.0	721.2	701.1	599.8	500.0	428.0	390.8	368.4	356.8
67.5°	402.7	457.6	519.3	578.2	562.0	490.2	410.0	354.0	326.3	306.9	299.9
70°	348.3	390.0	445.0	492.2	479.1	420.2	356.8	308.8	284.8	268.5	261.6
72.5°	296.3	330.6	372.5	411.1	402.2	353.4	300.4	264.2	245.8	230.8	225.1
75°	223.7	249.9	275.5	301.0	298.7	260.8	229.8	202.0	187.3	175.7	173.4
77.5°	165.1	179.9	197.2	212.4	208.1	186.5	162.2	146.2	135.4	127.6	126.4
80°	126.1	134.6	147.0	157.8	152.5	143.2	123.8	112.2	104.5	96.7	93.6
82.5°	91.5	100.0	107.4	113.3	109.2	100.5	88.6	80.7	76.0	70.7	69.5
85°	48.0	52.6	55.7	57.3	55.7	50.3	44.8	41.8	38.0	35.6	34.8
87.5°	20.9	20.6	20.4	21.3	19.1	18.8	16.0	13.7	13.5	13.2	12.3
90°	11.6	10.4	9.1	7.6	5.9	4.1	2.4	0.7	2.4	4.1	5.9
92.5°	15.1	14.5	13.9	13.6	13.8	13.9	14.1	14.2	14.1	13.9	13.8
95°	25.3	24.2	23.1	25.2	30.4	35.5	40.8	45.9	40.8	35.5	30.4
97.5°	31.8	29.3	26.8	32.7	47.4	62.0	76.5	91.2	76.5	62.0	47.4
100°	34.9	32.3	29.6	39.1	60.6	82.1	103.6	125.1	103.6	82.1	60.6
102.5°	86.1	108.5	130.8	144.2	148.8	153.3	157.9	162.5	157.9	153.3	148.8
105°	128.9	171.8	214.7	233.8	229.0	224.4	219.6	214.9	219.6	224.4	229.0
107.5°	163.3	214.7	266.1	289.9	286.1	282.4	278.5	274.7	278.5	282.4	286.1
110°	214.5	259.9	305.3	326.4	323.1	319.8	316.5	313.2	316.5	319.8	323.1



TEST NUMBER: P331591-840

CATALOG NUMBER: S122DIW-S1005D710U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	334.5	345.7	356.9	361.0	358.1	355.3	352.3	349.4	352.3	355.3	358.1
115°	428.4	424.4	420.5	417.2	414.5	411.8	409.2	406.5	409.2	411.8	414.5
117.5°	477.8	475.0	472.3	469.5	466.5	463.5	460.5	457.6	460.5	463.5	466.5
120°	512.5	509.7	506.9	504.3	501.9	499.6	497.3	494.8	497.3	499.6	501.9
122.5°	545.4	542.3	539.3	536.4	534.0	531.5	529.1	526.5	529.1	531.5	534.0
125°	591.4	588.4	585.4	582.9	580.9	578.9	576.8	574.7	576.8	578.9	580.9
127.5°	634.2	632.0	629.8	627.5	625.2	623.0	620.7	618.4	620.7	623.0	625.2
130°	661.8	660.0	658.3	656.2	653.7	651.2	648.6	646.1	648.6	651.2	653.7
132.5°	688.3	686.6	684.9	683.0	680.9	678.7	676.6	674.5	676.6	678.7	680.9
135°	726.1	724.7	723.3	721.2	718.7	716.2	713.7	711.2	713.7	716.2	718.7
137.5°	760.3	758.7	757.1	755.4	753.7	751.9	750.1	748.4	750.1	751.9	753.7
140°	782.6	780.9	779.2	777.7	776.5	775.2	774.0	772.7	774.0	775.2	776.5
142.5°	803.1	801.1	799.1	797.6	796.5	795.4	794.2	793.0	794.2	795.4	796.5
145°	831.0	828.3	825.7	824.4	824.6	824.8	824.9	825.1	824.9	824.8	824.6
147.5°	856.8	854.1	851.5	850.5	851.1	851.7	852.3	852.8	852.3	851.7	851.1
150°	872.3	869.8	867.3	866.6	867.7	868.8	869.9	871.0	869.9	868.8	867.7
152.5°	886.7	884.3	881.9	881.3	882.5	883.8	885.0	886.3	885.0	883.8	882.5
155°	906.8	904.9	903.0	902.8	904.2	905.6	907.1	908.5	907.1	905.6	904.2
157.5°	923.7	922.4	921.1	921.1	922.2	923.4	924.6	925.8	924.6	923.4	922.2
160°	934.1	933.2	932.2	932.2	933.2	934.1	935.0	936.0	935.0	934.1	933.2
162.5°	942.9	942.0	941.2	941.3	942.2	943.2	944.1	945.0	944.1	943.2	942.2
165°	954.1	953.7	953.2	953.4	954.4	955.3	956.2	957.3	956.2	955.3	954.4
167.5°	963.1	962.7	962.3	962.5	963.4	964.4	965.3	966.2	965.3	964.4	963.4
170°	968.0	967.6	967.2	967.6	968.6	969.5	970.4	971.4	970.4	969.5	968.6
172.5°	971.3	971.0	970.7	971.0	971.9	972.9	973.8	974.7	973.8	972.9	971.9
175°	975.0	974.6	974.3	974.7	975.8	976.9	978.1	979.2	978.1	976.9	975.8
177.5°	976.2	976.0	975.9	976.3	977.2	978.1	979.0	979.9	979.0	978.1	977.2
180°	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0



TEST NUMBER: P331591-840

CATALOG NUMBER: S122DIW-S1005D710U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7
2.5°	1987.1	1983.4	1970.3	1963.6	1952.5	1941.9	1935.1	1938.2	1940.7	1939.4	1937.5
5°	1930.2	1915.4	1893.0	1873.6	1859.7	1834.2	1823.3	1818.0	1813.3	1807.9	1802.4
7.5°	1862.3	1839.2	1807.0	1779.4	1753.3	1721.6	1703.5	1692.7	1681.5	1669.3	1658.5
10°	1814.0	1781.5	1747.5	1708.8	1677.9	1649.2	1623.7	1606.6	1591.1	1576.5	1565.6
12.5°	1763.3	1725.9	1683.7	1630.8	1596.7	1555.7	1551.9	1521.9	1497.6	1488.5	1475.8
15°	1682.4	1629.8	1576.5	1513.8	1486.7	1449.6	1426.3	1403.1	1382.2	1367.5	1363.6
17.5°	1590.7	1522.6	1469.5	1424.4	1380.1	1342.0	1320.6	1302.0	1284.9	1265.2	1262.5
20°	1520.8	1461.9	1403.9	1364.4	1318.8	1280.0	1253.7	1235.2	1220.4	1208.8	1198.8
22.5°	1454.5	1390.1	1337.0	1293.8	1248.8	1217.5	1196.8	1178.8	1166.6	1153.8	1144.3
25°	1348.2	1297.9	1239.8	1191.0	1153.9	1133.8	1116.7	1101.3	1093.6	1085.0	1074.2
27.5°	1255.2	1199.2	1144.9	1107.1	1074.5	1056.7	1044.6	1034.1	1026.8	1021.9	1015.7
30°	1189.5	1133.0	1090.5	1053.3	1026.2	1008.5	1000.7	994.5	985.9	982.9	979.8
32.5°	1126.3	1075.4	1039.1	1006.8	981.0	969.4	962.3	956.7	950.1	947.0	940.8
35°	1037.0	994.5	958.9	941.1	920.2	910.1	904.7	897.0	890.8	887.7	886.9
37.5°	953.0	916.0	892.6	869.7	860.9	854.7	847.3	842.0	840.2	839.7	838.9
40°	898.5	868.3	847.5	828.9	825.0	815.7	809.5	804.9	804.9	805.7	804.9
42.5°	849.0	821.9	803.4	787.4	782.8	777.3	771.1	770.8	772.0	774.7	772.0
45°	774.0	754.6	741.4	733.7	725.2	719.7	718.9	721.2	722.1	722.9	725.2
47.5°	704.9	692.1	680.1	671.6	667.9	666.9	666.0	670.0	673.8	675.2	678.7
50°	664.0	649.3	639.2	633.8	630.8	629.1	630.8	635.4	638.4	642.4	644.7
52.5°	618.2	607.8	600.9	596.7	595.4	596.4	596.7	602.0	606.9	608.3	609.4
55°	554.9	547.1	545.6	538.7	541.7	541.0	544.8	548.0	552.6	557.2	558.0
57.5°	491.7	485.5	481.4	482.0	482.9	486.4	489.6	495.0	500.0	504.9	505.3
60°	449.7	446.6	444.2	444.2	445.8	450.4	454.2	459.7	462.8	465.9	468.2
62.5°	411.2	408.2	405.9	407.1	411.1	413.8	418.4	421.3	424.4	427.5	428.6
65°	350.6	349.0	351.3	352.9	353.7	357.6	362.9	365.3	368.4	369.9	375.4
67.5°	294.7	295.0	294.7	296.9	301.3	302.3	307.4	312.9	313.5	316.4	319.9
70°	256.9	258.5	260.0	261.6	265.5	267.0	270.8	273.2	276.3	278.6	280.9
72.5°	222.3	222.6	224.1	223.8	227.0	230.5	233.7	236.0	239.1	242.1	244.4
75°	171.1	171.1	172.6	173.4	177.2	181.1	180.4	181.9	185.0	188.0	189.7
77.5°	124.9	123.2	124.9	125.7	126.9	130.2	130.8	133.0	136.5	135.4	137.1
80°	95.2	92.9	95.2	95.9	95.9	99.9	99.9	101.4	103.7	101.4	103.7
82.5°	68.0	66.9	68.6	68.8	70.0	70.1	71.4	71.7	74.0	72.9	74.0
85°	34.0	33.3	34.0	33.3	34.0	34.8	34.8	34.0	34.0	35.6	33.3
87.5°	12.0	11.7	11.3	11.6	11.2	10.9	10.4	10.6	10.7	9.7	9.8
90°	7.6	9.1	10.4	11.6	12.9	14.1	14.9	15.8	16.5	17.3	17.9
92.5°	13.6	13.9	14.5	15.1	15.8	16.4	16.8	17.3	17.7	18.1	18.4
95°	25.2	23.1	24.2	25.3	26.5	27.6	28.4	29.2	29.9	30.7	31.0
97.5°	32.7	26.8	29.3	31.8	34.3	36.9	37.6	38.2	38.8	39.4	39.8
100°	39.1	29.6	32.3	34.9	37.7	40.3	41.5	42.8	44.0	45.3	46.2
102.5°	144.2	130.8	108.5	86.1	63.7	41.4	43.0	44.7	46.4	48.0	49.0
105°	233.8	214.7	171.8	128.9	86.0	43.1	44.8	46.6	48.3	50.0	51.2
107.5°	289.9	266.1	214.7	163.3	111.8	60.4	58.6	56.9	55.1	53.3	52.8
110°	326.4	305.3	259.9	214.5	169.2	123.7	108.1	92.3	76.5	60.9	53.3



TEST NUMBER: P331591-840

CATALOG NUMBER: S122DIW-S1005D710U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	361.0	356.9	345.7	334.5	323.3	312.0	254.8	197.4	140.2	82.8	54.4
115°	417.2	420.5	424.4	428.4	432.2	436.2	363.5	290.7	217.9	145.2	103.2
117.5°	469.5	472.3	475.0	477.8	480.4	483.1	465.5	448.0	430.3	412.7	385.4
120°	504.3	506.9	509.7	512.5	515.3	518.2	520.1	522.0	523.8	525.7	516.0
122.5°	536.4	539.3	542.3	545.4	548.5	551.6	552.7	553.8	554.9	556.1	554.6
125°	582.9	585.4	588.4	591.4	594.4	597.3	598.4	599.6	600.7	601.8	602.6
127.5°	627.5	629.8	632.0	634.2	636.4	638.6	640.3	641.9	643.5	645.1	645.9
130°	656.2	658.3	660.0	661.8	663.5	665.3	667.0	668.7	670.4	672.2	673.0
132.5°	683.0	684.9	686.6	688.3	690.1	691.9	693.3	694.8	696.3	697.7	698.4
135°	721.2	723.3	724.7	726.1	727.5	728.9	730.4	732.1	733.6	735.2	735.8
137.5°	755.4	757.1	758.7	760.3	761.9	763.6	765.1	766.6	768.1	769.7	770.2
140°	777.7	779.2	780.9	782.6	784.4	786.2	787.6	789.0	790.4	791.8	792.1
142.5°	797.6	799.1	801.1	803.1	805.1	807.1	808.4	809.6	810.9	812.2	812.4
145°	824.4	825.7	828.3	831.0	833.6	836.4	837.5	838.5	839.6	840.7	840.9
147.5°	850.5	851.5	854.1	856.8	859.4	862.0	862.9	863.7	864.5	865.4	865.5
150°	866.6	867.3	869.8	872.3	874.8	877.4	878.3	879.2	880.2	881.1	881.2
152.5°	881.3	881.9	884.3	886.7	889.1	891.5	892.4	893.3	894.3	895.2	895.2
155°	902.8	903.0	904.9	906.8	908.7	910.6	911.5	912.4	913.4	914.3	914.1
157.5°	921.1	921.1	922.4	923.7	925.0	926.3	927.5	928.6	929.6	930.7	930.6
160°	932.2	932.2	933.2	934.1	935.0	936.0	937.0	937.9	938.9	939.8	939.7
162.5°	941.3	941.2	942.0	942.9	943.7	944.5	945.5	946.6	947.7	948.8	948.7
165°	953.4	953.2	953.7	954.1	954.6	955.1	956.2	957.4	958.4	959.5	959.5
167.5°	962.5	962.3	962.7	963.1	963.6	964.0	965.1	966.2	967.3	968.4	968.3
170°	967.6	967.2	967.6	968.0	968.3	968.6	969.7	970.8	971.8	972.9	972.8
172.5°	971.0	970.7	971.0	971.3	971.6	971.9	973.0	974.1	975.2	976.3	976.1
175°	974.7	974.3	974.6	975.0	975.3	975.6	976.7	977.9	978.9	980.0	979.8
177.5°	976.3	975.9	976.0	976.2	976.3	976.4	977.3	978.3	979.1	980.0	979.9
180°	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0



TEST NUMBER: P331591-840

CATALOG NUMBER: S122DIW-S1005D710U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7
2.5°	1931.4	1930.2	1930.2	1924.6	1930.2	1930.2	1931.4	1937.5	1939.4	1940.7	1938.2
5°	1791.6	1789.3	1785.4	1789.3	1785.4	1789.3	1791.6	1802.4	1807.9	1813.3	1818.0
7.5°	1653.4	1644.1	1642.7	1633.6	1642.7	1644.1	1653.4	1658.5	1669.3	1681.5	1692.7
10°	1552.5	1546.3	1545.5	1530.8	1545.5	1546.3	1552.5	1565.6	1576.5	1591.1	1606.6
12.5°	1475.7	1460.9	1463.8	1455.2	1463.8	1460.9	1475.7	1475.8	1488.5	1497.6	1521.9
15°	1342.7	1342.7	1339.7	1326.5	1339.7	1342.7	1342.7	1363.6	1367.5	1382.2	1403.1
17.5°	1247.3	1245.7	1238.3	1241.9	1238.3	1245.7	1247.3	1262.5	1265.2	1284.9	1302.0
20°	1190.2	1185.7	1176.4	1176.4	1176.4	1185.7	1190.2	1198.8	1208.8	1220.4	1235.2
22.5°	1136.4	1136.1	1126.2	1129.3	1126.2	1136.1	1136.4	1144.3	1153.8	1166.6	1178.8
25°	1073.4	1067.2	1062.6	1064.9	1062.6	1067.2	1073.4	1074.2	1085.0	1093.6	1101.3
27.5°	1013.7	1010.3	1010.0	1003.6	1010.0	1010.3	1013.7	1015.7	1021.9	1026.8	1034.1
30°	979.0	971.3	972.8	969.0	972.8	971.3	979.0	979.8	982.9	985.9	994.5
32.5°	939.4	936.5	935.0	931.8	935.0	936.5	939.4	940.8	947.0	950.1	956.7
35°	885.3	886.2	882.2	883.8	882.2	886.2	885.3	886.9	887.7	890.8	897.0
37.5°	838.2	840.6	838.8	839.2	838.8	840.6	838.2	838.9	839.7	840.2	842.0
40°	807.2	807.2	807.2	809.5	807.2	807.2	807.2	804.9	805.7	804.9	804.9
42.5°	777.5	776.3	775.0	774.9	775.0	776.3	777.5	772.0	774.7	772.0	770.8
45°	726.7	729.0	729.8	725.9	729.8	729.0	726.7	725.2	722.9	722.1	721.2
47.5°	680.8	681.1	680.8	684.2	680.8	681.1	680.8	678.7	675.2	673.8	670.0
50°	648.5	647.0	648.5	647.0	648.5	647.0	648.5	644.7	642.4	638.4	635.4
52.5°	614.5	614.8	613.9	613.6	613.9	614.8	614.5	609.4	608.3	606.9	602.0
55°	561.1	562.6	561.9	561.9	561.9	562.6	561.1	558.0	557.2	552.6	548.0
57.5°	505.8	507.3	508.3	504.9	508.3	507.3	505.8	505.3	504.9	500.0	495.0
60°	467.5	471.3	470.5	469.0	470.5	471.3	467.5	468.2	465.9	462.8	459.7
62.5°	432.1	433.5	433.4	433.1	433.4	433.5	432.1	428.6	427.5	424.4	421.3
65°	377.7	379.2	376.9	379.2	376.9	379.2	377.7	375.4	369.9	368.4	365.3
67.5°	319.0	319.5	321.1	322.2	321.1	319.5	319.0	319.9	316.4	313.5	312.9
70°	282.5	281.8	284.1	286.4	284.1	281.8	282.5	280.9	278.6	276.3	273.2
72.5°	244.1	245.8	245.0	246.7	245.0	245.8	244.1	244.4	242.1	239.1	236.0
75°	188.0	190.4	189.7	192.0	189.7	190.4	188.0	189.7	188.0	185.0	181.9
77.5°	135.9	136.2	135.9	137.1	135.9	136.2	135.9	137.1	135.4	136.5	133.0
80°	103.7	102.2	100.6	103.7	100.6	102.2	103.7	103.7	101.4	103.7	101.4
82.5°	72.1	73.0	71.5	71.5	71.5	73.0	72.1	74.0	72.9	74.0	71.7
85°	33.3	32.5	31.0	31.0	31.0	32.5	33.3	33.3	35.6	34.0	34.0
87.5°	9.8	9.3	9.3	8.8	9.3	9.3	9.8	9.8	9.7	10.7	10.6
90°	18.2	18.5	18.8	19.1	18.8	18.5	18.2	17.9	17.3	16.5	15.8
92.5°	18.5	18.7	18.9	19.1	18.9	18.7	18.5	18.4	18.1	17.7	17.3
95°	30.9	30.7	30.6	30.4	30.6	30.7	30.9	31.0	30.7	29.9	29.2
97.5°	40.0	40.2	40.4	40.6	40.4	40.2	40.0	39.8	39.4	38.8	38.2
100°	46.5	46.8	47.1	47.4	47.1	46.8	46.5	46.2	45.3	44.0	42.8
102.5°	49.5	49.9	50.3	50.8	50.3	49.9	49.5	49.0	48.0	46.4	44.7
105°	51.8	52.5	53.1	53.7	53.1	52.5	51.8	51.2	50.0	48.3	46.6
107.5°	53.4	54.0	54.6	55.2	54.6	54.0	53.4	52.8	53.3	55.1	56.9
110°	53.9	54.6	55.2	55.8	55.2	54.6	53.9	53.3	60.9	76.5	92.3



TEST NUMBER: P331591-840

CATALOG NUMBER: S122DIW-S1005D710U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	54.9	55.4	55.9	56.5	55.9	55.4	54.9	54.4	82.8	140.2	197.4
115°	91.9	80.6	69.3	58.0	69.3	80.6	91.9	103.2	145.2	217.9	290.7
117.5°	348.2	311.0	273.9	236.7	273.9	311.0	348.2	385.4	412.7	430.3	448.0
120°	494.8	473.6	452.4	431.2	452.4	473.6	494.8	516.0	525.7	523.8	522.0
122.5°	550.5	546.3	542.3	538.2	542.3	546.3	550.5	554.6	556.1	554.9	553.8
125°	603.0	603.5	604.0	604.4	604.0	603.5	603.0	602.6	601.8	600.7	599.6
127.5°	646.0	646.1	646.2	646.3	646.2	646.1	646.0	645.9	645.1	643.5	641.9
130°	672.8	672.7	672.5	672.4	672.5	672.7	672.8	673.0	672.2	670.4	668.7
132.5°	698.2	698.1	697.9	697.8	697.9	698.1	698.2	698.4	697.7	696.3	694.8
135°	735.5	735.2	734.9	734.6	734.9	735.2	735.5	735.8	735.2	733.6	732.1
137.5°	769.6	769.1	768.6	768.0	768.6	769.1	769.6	770.2	769.7	768.1	766.6
140°	791.3	790.5	789.7	789.0	789.7	790.5	791.3	792.1	791.8	790.4	789.0
142.5°	811.7	810.9	810.1	809.3	810.1	810.9	811.7	812.4	812.2	810.9	809.6
145°	840.1	839.3	838.5	837.8	838.5	839.3	840.1	840.9	840.7	839.6	838.5
147.5°	864.7	864.1	863.4	862.7	863.4	864.1	864.7	865.5	865.4	864.5	863.7
150°	880.4	879.6	878.8	878.1	878.8	879.6	880.4	881.2	881.1	880.2	879.2
152.5°	894.1	893.1	892.1	891.0	892.1	893.1	894.1	895.2	895.2	894.3	893.3
155°	912.9	911.7	910.4	909.2	910.4	911.7	912.9	914.1	914.3	913.4	912.4
157.5°	929.4	928.2	927.0	925.6	927.0	928.2	929.4	930.6	930.7	929.6	928.6
160°	938.6	937.5	936.4	935.3	936.4	937.5	938.6	939.7	939.8	938.9	937.9
162.5°	947.3	945.9	944.5	943.2	944.5	945.9	947.3	948.7	948.8	947.7	946.6
165°	958.4	957.4	956.2	955.1	956.2	957.4	958.4	959.5	959.5	958.4	957.4
167.5°	966.8	965.4	964.0	962.6	964.0	965.4	966.8	968.3	968.4	967.3	966.2
170°	971.4	970.0	968.6	967.1	968.6	970.0	971.4	972.8	972.9	971.8	970.8
172.5°	974.7	973.3	971.9	970.5	971.9	973.3	974.7	976.1	976.3	975.2	974.1
175°	978.2	976.6	975.0	973.5	975.0	976.6	978.2	979.8	980.0	978.9	977.9
177.5°	978.8	977.5	976.4	975.3	976.4	977.5	978.8	979.9	980.0	979.1	978.3
180°	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0



TEST NUMBER: P331591-840

CATALOG NUMBER: S122DIW-S1005D710U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7
2.5°	1935.1	1941.9	1952.5	1963.6	1970.3	1983.4	1987.1	1993.3	1998.8	2011.9	2025.5
5°	1823.3	1834.2	1859.7	1873.6	1893.0	1915.4	1930.2	1945.6	1962.7	1992.1	2019.1
7.5°	1703.5	1721.6	1753.3	1779.4	1807.0	1839.2	1862.3	1893.0	1918.3	1959.8	1999.4
10°	1623.7	1649.2	1677.9	1708.8	1747.5	1781.5	1814.0	1852.7	1883.7	1933.2	1979.6
12.5°	1551.9	1555.7	1596.7	1630.8	1683.7	1725.9	1763.3	1813.1	1843.4	1902.3	1951.2
15°	1426.3	1449.6	1486.7	1513.8	1576.5	1629.8	1682.4	1734.3	1769.2	1841.9	1906.1
17.5°	1320.6	1342.0	1380.1	1424.4	1469.5	1522.6	1590.7	1645.4	1692.7	1775.8	1851.8
20°	1253.7	1280.0	1318.8	1364.4	1403.9	1461.9	1520.8	1583.5	1634.5	1728.2	1817.2
22.5°	1196.8	1217.5	1248.8	1293.8	1337.0	1390.1	1454.5	1522.8	1576.3	1677.4	1767.6
25°	1116.7	1133.8	1153.9	1191.0	1239.8	1297.9	1348.2	1423.2	1501.4	1595.8	1705.0
27.5°	1044.6	1056.7	1074.5	1107.1	1144.9	1199.2	1255.2	1326.4	1404.9	1507.4	1622.6
30°	1000.7	1008.5	1026.2	1053.3	1090.5	1133.0	1189.5	1257.6	1338.1	1441.8	1556.3
32.5°	962.3	969.4	981.0	1006.8	1039.1	1075.4	1126.3	1194.5	1271.2	1373.1	1500.0
35°	904.7	910.1	920.2	941.1	958.9	994.5	1037.0	1098.9	1170.9	1268.5	1400.0
37.5°	847.3	854.7	860.9	869.7	892.6	916.0	953.0	1005.3	1075.9	1174.4	1299.7
40°	809.5	815.7	825.0	828.9	847.5	868.3	898.5	946.4	1017.7	1107.4	1229.7
42.5°	771.1	777.3	782.8	787.4	803.4	821.9	849.0	890.2	953.3	1040.6	1161.6
45°	718.9	719.7	725.2	733.7	741.4	754.6	774.0	809.5	858.3	940.3	1050.2
47.5°	666.0	666.9	667.9	671.6	680.1	692.1	704.9	733.9	777.5	842.9	949.9
50°	630.8	629.1	630.8	633.8	639.2	649.3	664.0	684.9	720.5	781.6	879.9
52.5°	596.7	596.4	595.4	596.7	600.9	607.8	618.2	636.0	667.9	724.1	810.6
55°	544.8	541.0	541.7	538.7	545.6	547.1	554.9	569.6	597.4	636.1	717.4
57.5°	489.6	486.4	482.9	482.0	481.4	485.5	491.7	503.3	524.7	558.7	624.5
60°	454.2	450.4	445.8	444.2	444.2	446.6	449.7	458.2	478.3	508.5	562.6
62.5°	418.4	413.8	411.1	407.1	405.9	408.2	411.2	417.3	431.8	460.2	507.0
65°	362.9	357.6	353.7	352.9	351.3	349.0	350.6	356.8	368.4	390.8	428.0
67.5°	307.4	302.3	301.3	296.9	294.7	295.0	294.7	299.9	306.9	326.3	354.0
70°	270.8	267.0	265.5	261.6	260.0	258.5	256.9	261.6	268.5	284.8	308.8
72.5°	233.7	230.5	227.0	223.8	224.1	222.6	222.3	225.1	230.8	245.8	264.2
75°	180.4	181.1	177.2	173.4	172.6	171.1	171.1	173.4	175.7	187.3	202.0
77.5°	130.8	130.2	126.9	125.7	124.9	123.2	124.9	126.4	127.6	135.4	146.2
80°	99.9	99.9	95.9	95.9	95.2	92.9	95.2	93.6	96.7	104.5	112.2
82.5°	71.4	70.1	70.0	68.8	68.6	66.9	68.0	69.5	70.7	76.0	80.7
85°	34.8	34.8	34.0	33.3	34.0	33.3	34.0	34.8	35.6	38.0	41.8
87.5°	10.4	10.9	11.2	11.6	11.3	11.7	12.0	12.3	13.2	13.5	13.7
90°	14.9	14.1	12.9	11.6	10.4	9.1	7.6	5.9	4.1	2.4	0.7
92.5°	16.8	16.4	15.8	15.1	14.5	13.9	13.6	13.8	13.9	14.1	14.2
95°	28.4	27.6	26.5	25.3	24.2	23.1	25.2	30.4	35.5	40.8	45.9
97.5°	37.6	36.9	34.3	31.8	29.3	26.8	32.7	47.4	62.0	76.5	91.2
100°	41.5	40.3	37.7	34.9	32.3	29.6	39.1	60.6	82.1	103.6	125.1
102.5°	43.0	41.4	63.7	86.1	108.5	130.8	144.2	148.8	153.3	157.9	162.5
105°	44.8	43.1	86.0	128.9	171.8	214.7	233.8	229.0	224.4	219.6	214.9
107.5°	58.6	60.4	111.8	163.3	214.7	266.1	289.9	286.1	282.4	278.5	274.7
110°	108.1	123.7	169.2	214.5	259.9	305.3	326.4	323.1	319.8	316.5	313.2



TEST NUMBER: P331591-840

CATALOG NUMBER: S122DIW-S1005D710U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	254.8	312.0	323.3	334.5	345.7	356.9	361.0	358.1	355.3	352.3	349.4
115°	363.5	436.2	432.2	428.4	424.4	420.5	417.2	414.5	411.8	409.2	406.5
117.5°	465.5	483.1	480.4	477.8	475.0	472.3	469.5	466.5	463.5	460.5	457.6
120°	520.1	518.2	515.3	512.5	509.7	506.9	504.3	501.9	499.6	497.3	494.8
122.5°	552.7	551.6	548.5	545.4	542.3	539.3	536.4	534.0	531.5	529.1	526.5
125°	598.4	597.3	594.4	591.4	588.4	585.4	582.9	580.9	578.9	576.8	574.7
127.5°	640.3	638.6	636.4	634.2	632.0	629.8	627.5	625.2	623.0	620.7	618.4
130°	667.0	665.3	663.5	661.8	660.0	658.3	656.2	653.7	651.2	648.6	646.1
132.5°	693.3	691.9	690.1	688.3	686.6	684.9	683.0	680.9	678.7	676.6	674.5
135°	730.4	728.9	727.5	726.1	724.7	723.3	721.2	718.7	716.2	713.7	711.2
137.5°	765.1	763.6	761.9	760.3	758.7	757.1	755.4	753.7	751.9	750.1	748.4
140°	787.6	786.2	784.4	782.6	780.9	779.2	777.7	776.5	775.2	774.0	772.7
142.5°	808.4	807.1	805.1	803.1	801.1	799.1	797.6	796.5	795.4	794.2	793.0
145°	837.5	836.4	833.6	831.0	828.3	825.7	824.4	824.6	824.8	824.9	825.1
147.5°	862.9	862.0	859.4	856.8	854.1	851.5	850.5	851.1	851.7	852.3	852.8
150°	878.3	877.4	874.8	872.3	869.8	867.3	866.6	867.7	868.8	869.9	871.0
152.5°	892.4	891.5	889.1	886.7	884.3	881.9	881.3	882.5	883.8	885.0	886.3
155°	911.5	910.6	908.7	906.8	904.9	903.0	902.8	904.2	905.6	907.1	908.5
157.5°	927.5	926.3	925.0	923.7	922.4	921.1	921.1	922.2	923.4	924.6	925.8
160°	937.0	936.0	935.0	934.1	933.2	932.2	932.2	933.2	934.1	935.0	936.0
162.5°	945.5	944.5	943.7	942.9	942.0	941.2	941.3	942.2	943.2	944.1	945.0
165°	956.2	955.1	954.6	954.1	953.7	953.2	953.4	954.4	955.3	956.2	957.3
167.5°	965.1	964.0	963.6	963.1	962.7	962.3	962.5	963.4	964.4	965.3	966.2
170°	969.7	968.6	968.3	968.0	967.6	967.2	967.6	968.6	969.5	970.4	971.4
172.5°	973.0	971.9	971.6	971.3	971.0	970.7	971.0	971.9	972.9	973.8	974.7
175°	976.7	975.6	975.3	975.0	974.6	974.3	974.7	975.8	976.9	978.1	979.2
177.5°	977.3	976.4	976.3	976.2	976.0	975.9	976.3	977.2	978.1	979.0	979.9
180°	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0



TEST NUMBER: P331591-840

CATALOG NUMBER: S122DIW-S1005D710U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7
2.5°	2024.3	2027.3	2037.2	2047.2	2058.3	2061.4	2066.4	2062.0	2060.7	2072.5	2081.2
5°	2029.9	2043.9	2071.0	2095.8	2116.7	2131.3	2146.9	2153.0	2164.6	2180.9	2201.0
7.5°	2023.5	2050.5	2093.1	2129.2	2168.5	2196.9	2219.0	2237.9	2260.8	2291.6	2325.1
10°	2016.0	2052.4	2104.3	2148.4	2196.4	2232.7	2262.9	2292.3	2326.4	2368.9	2413.1
12.5°	2002.5	2045.6	2110.4	2162.6	2224.2	2260.0	2300.7	2364.2	2400.7	2459.9	2522.0
15°	1975.0	2023.0	2113.5	2177.8	2247.5	2315.5	2390.7	2450.9	2511.3	2546.2	2633.6
17.5°	1934.3	2004.8	2105.1	2180.0	2268.5	2375.7	2460.1	2528.5	2598.2	2654.6	2698.5
20°	1901.5	1978.1	2092.6	2182.4	2287.6	2403.0	2499.7	2569.4	2629.8	2677.0	2704.0
22.5°	1860.0	1956.4	2067.9	2173.1	2307.5	2421.6	2523.2	2578.1	2628.5	2651.6	2661.9
25°	1794.7	1910.8	2036.9	2165.5	2317.1	2437.8	2530.7	2563.9	2578.7	2556.3	2519.1
27.5°	1724.2	1853.7	2001.1	2150.8	2311.2	2427.3	2493.9	2488.6	2463.7	2391.1	2333.0
30°	1671.6	1814.0	1972.7	2136.0	2296.9	2409.9	2448.6	2409.9	2353.5	2272.2	2189.4
32.5°	1616.6	1763.9	1942.4	2115.0	2271.0	2370.4	2378.7	2312.2	2224.7	2132.3	2029.0
35°	1533.1	1692.5	1885.2	2067.9	2215.7	2278.4	2241.3	2123.6	2019.9	1893.8	1752.9
37.5°	1438.9	1614.9	1808.2	1999.0	2132.9	2149.3	2057.1	1933.2	1787.0	1638.7	1472.9
40°	1368.3	1554.8	1753.7	1946.4	2064.8	2047.8	1930.2	1793.9	1619.8	1438.7	1284.6
42.5°	1305.1	1491.7	1694.3	1883.2	1978.1	1931.4	1793.9	1626.8	1439.7	1269.1	1128.0
45°	1195.7	1387.7	1595.1	1777.7	1831.9	1747.5	1565.6	1379.9	1195.7	1053.3	941.9
47.5°	1089.5	1279.3	1484.7	1645.2	1664.4	1551.0	1352.2	1161.0	1002.7	886.8	808.1
50°	1011.5	1201.8	1405.4	1548.6	1542.4	1405.4	1201.1	1019.3	886.9	793.2	740.6
52.5°	941.5	1121.4	1316.9	1447.0	1414.2	1264.9	1069.9	908.4	799.6	726.4	678.7
55°	832.7	999.2	1184.9	1289.3	1229.0	1063.4	898.5	768.5	688.0	633.1	595.9
57.5°	724.7	880.7	1039.7	1104.1	1037.3	884.4	747.0	652.7	592.2	551.5	527.4
60°	657.8	794.1	935.6	991.4	911.7	775.5	667.1	582.8	534.0	500.7	479.1
62.5°	591.0	713.0	846.5	876.9	804.0	688.8	592.8	522.7	482.6	453.0	432.6
65°	500.0	599.8	701.1	721.2	654.0	564.9	489.1	443.4	407.9	386.2	369.9
67.5°	410.0	490.2	562.0	578.2	519.3	457.6	402.7	362.9	338.8	320.8	307.1
70°	356.8	420.2	479.1	492.2	445.0	390.0	348.3	316.5	294.9	279.4	266.2
72.5°	300.4	353.4	402.2	411.1	372.5	330.6	296.3	271.4	252.2	242.3	229.7
75°	229.8	260.8	298.7	301.0	275.5	249.9	223.7	207.4	197.3	185.0	178.7
77.5°	162.2	186.5	208.1	212.4	197.2	179.9	165.1	152.3	143.8	138.0	132.3
80°	123.8	143.2	152.5	157.8	147.0	134.6	126.1	117.6	112.2	108.4	104.5
82.5°	88.6	100.5	109.2	113.3	107.4	100.0	91.5	86.6	82.5	79.3	77.9
85°	44.8	50.3	55.7	57.3	55.7	52.6	48.0	48.0	45.6	44.8	44.8
87.5°	16.0	18.8	19.1	21.3	20.4	20.6	20.9	20.5	20.2	19.7	19.3
90°	2.4	4.1	5.9	7.6	9.1	10.4	11.6	12.9	14.1	14.9	15.8
92.5°	14.1	13.9	13.8	13.6	13.9	14.5	15.1	15.8	16.4	16.8	17.3
95°	40.8	35.5	30.4	25.2	23.1	24.2	25.3	26.5	27.6	28.4	29.2
97.5°	76.5	62.0	47.4	32.7	26.8	29.3	31.8	34.3	36.9	37.6	38.2
100°	103.6	82.1	60.6	39.1	29.6	32.3	34.9	37.7	40.3	41.5	42.8
102.5°	157.9	153.3	148.8	144.2	130.8	108.5	86.1	63.7	41.4	43.0	44.7
105°	219.6	224.4	229.0	233.8	214.7	171.8	128.9	86.0	43.1	44.8	46.6
107.5°	278.5	282.4	286.1	289.9	266.1	214.7	163.3	111.8	60.4	58.6	56.9
110°	316.5	319.8	323.1	326.4	305.3	259.9	214.5	169.2	123.7	108.1	92.3



TEST NUMBER: P331591-840

CATALOG NUMBER: S122DIW-S1005D710U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	352.3	355.3	358.1	361.0	356.9	345.7	334.5	323.3	312.0	254.8	197.4
115°	409.2	411.8	414.5	417.2	420.5	424.4	428.4	432.2	436.2	363.5	290.7
117.5°	460.5	463.5	466.5	469.5	472.3	475.0	477.8	480.4	483.1	465.5	448.0
120°	497.3	499.6	501.9	504.3	506.9	509.7	512.5	515.3	518.2	520.1	522.0
122.5°	529.1	531.5	534.0	536.4	539.3	542.3	545.4	548.5	551.6	552.7	553.8
125°	576.8	578.9	580.9	582.9	585.4	588.4	591.4	594.4	597.3	598.4	599.6
127.5°	620.7	623.0	625.2	627.5	629.8	632.0	634.2	636.4	638.6	640.3	641.9
130°	648.6	651.2	653.7	656.2	658.3	660.0	661.8	663.5	665.3	667.0	668.7
132.5°	676.6	678.7	680.9	683.0	684.9	686.6	688.3	690.1	691.9	693.3	694.8
135°	713.7	716.2	718.7	721.2	723.3	724.7	726.1	727.5	728.9	730.4	732.1
137.5°	750.1	751.9	753.7	755.4	757.1	758.7	760.3	761.9	763.6	765.1	766.6
140°	774.0	775.2	776.5	777.7	779.2	780.9	782.6	784.4	786.2	787.6	789.0
142.5°	794.2	795.4	796.5	797.6	799.1	801.1	803.1	805.1	807.1	808.4	809.6
145°	824.9	824.8	824.6	824.4	825.7	828.3	831.0	833.6	836.4	837.5	838.5
147.5°	852.3	851.7	851.1	850.5	851.5	854.1	856.8	859.4	862.0	862.9	863.7
150°	869.9	868.8	867.7	866.6	867.3	869.8	872.3	874.8	877.4	878.3	879.2
152.5°	885.0	883.8	882.5	881.3	881.9	884.3	886.7	889.1	891.5	892.4	893.3
155°	907.1	905.6	904.2	902.8	903.0	904.9	906.8	908.7	910.6	911.5	912.4
157.5°	924.6	923.4	922.2	921.1	921.1	922.4	923.7	925.0	926.3	927.5	928.6
160°	935.0	934.1	933.2	932.2	932.2	933.2	934.1	935.0	936.0	937.0	937.9
162.5°	944.1	943.2	942.2	941.3	941.2	942.0	942.9	943.7	944.5	945.5	946.6
165°	956.2	955.3	954.4	953.4	953.2	953.7	954.1	954.6	955.1	956.2	957.4
167.5°	965.3	964.4	963.4	962.5	962.3	962.7	963.1	963.6	964.0	965.1	966.2
170°	970.4	969.5	968.6	967.6	967.2	967.6	968.0	968.3	968.6	969.7	970.8
172.5°	973.8	972.9	971.9	971.0	970.7	971.0	971.3	971.6	971.9	973.0	974.1
175°	978.1	976.9	975.8	974.7	974.3	974.6	975.0	975.3	975.6	976.7	977.9
177.5°	979.0	978.1	977.2	976.3	975.9	976.0	976.2	976.3	976.4	977.3	978.3
180°	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0



TEST NUMBER: P331591-840

CATALOG NUMBER: S122DIW-S1005D710U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7	2013.7
2.5°	2088.6	2097.3	2097.3	2098.5	2108.4	2107.2	2106.6
5°	2222.7	2235.8	2237.4	2251.3	2260.6	2257.5	2249.0
7.5°	2349.1	2373.6	2392.2	2402.6	2414.8	2422.4	2418.9
10°	2449.4	2485.1	2506.7	2521.4	2539.2	2552.3	2547.7
12.5°	2540.4	2582.8	2612.6	2637.8	2640.1	2657.0	2645.5
15°	2682.4	2727.2	2731.9	2750.5	2765.2	2763.6	2764.4
17.5°	2729.3	2743.7	2746.6	2747.0	2747.2	2741.8	2730.1
20°	2712.6	2707.1	2694.0	2683.9	2666.1	2663.8	2648.4
22.5°	2633.3	2616.2	2583.1	2561.3	2533.7	2526.4	2522.0
25°	2477.3	2439.3	2386.7	2336.4	2322.5	2295.4	2303.2
27.5°	2263.2	2204.1	2147.2	2106.3	2069.3	2028.7	2040.3
30°	2112.7	2046.2	1965.7	1903.8	1864.3	1825.6	1818.7
32.5°	1933.2	1835.7	1746.0	1691.4	1630.9	1606.5	1579.7
35°	1623.7	1528.4	1439.5	1362.8	1318.8	1284.6	1253.7
37.5°	1345.2	1235.7	1163.8	1101.8	1069.9	1050.4	1055.3
40°	1172.5	1076.5	1023.9	976.6	947.3	933.3	936.4
42.5°	1032.6	960.7	917.4	885.0	864.3	856.6	854.7
45°	873.7	833.5	797.9	779.3	769.3	760.7	755.4
47.5°	765.4	732.6	712.5	701.5	692.7	684.0	683.8
50°	700.3	678.7	664.8	653.2	646.2	640.1	645.4
52.5°	650.9	631.1	617.1	606.7	604.1	598.5	598.3
55°	577.3	561.9	551.8	542.5	537.9	534.7	530.9
57.5°	510.5	495.7	486.5	480.6	471.8	468.7	467.5
60°	462.8	451.2	441.9	434.1	430.3	424.1	424.1
62.5°	418.8	407.3	398.6	392.6	386.4	383.8	384.5
65°	355.3	346.0	337.4	331.2	329.7	325.1	326.6
67.5°	296.7	290.5	281.6	278.1	275.2	272.8	270.8
70°	257.7	251.6	246.9	242.3	239.9	239.9	239.9
72.5°	224.9	217.4	214.7	208.8	210.2	207.7	205.2
75°	174.1	169.5	167.1	164.8	161.0	161.0	161.0
77.5°	128.2	126.7	124.0	121.5	120.6	119.8	120.1
80°	99.1	98.3	96.7	96.7	95.2	94.4	92.9
82.5°	76.1	74.1	73.2	72.6	72.3	72.1	71.8
85°	43.3	41.8	41.8	42.5	41.0	41.0	41.8
87.5°	20.0	20.2	19.7	19.7	20.4	19.9	19.9
90°	16.5	17.3	17.9	18.2	18.5	18.8	19.1
92.5°	17.7	18.1	18.4	18.5	18.7	18.9	19.1
95°	29.9	30.7	31.0	30.9	30.7	30.6	30.4
97.5°	38.8	39.4	39.8	40.0	40.2	40.4	40.6
100°	44.0	45.3	46.2	46.5	46.8	47.1	47.4
102.5°	46.4	48.0	49.0	49.5	49.9	50.3	50.8
105°	48.3	50.0	51.2	51.8	52.5	53.1	53.7
107.5°	55.1	53.3	52.8	53.4	54.0	54.6	55.2
110°	76.5	60.9	53.3	53.9	54.6	55.2	55.8



TEST NUMBER: P331591-840

CATALOG NUMBER: S122DIW-S1005D710U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	140.2	82.8	54.4	54.9	55.4	55.9	56.5
115°	217.9	145.2	103.2	91.9	80.6	69.3	58.0
117.5°	430.3	412.7	385.4	348.2	311.0	273.9	236.7
120°	523.8	525.7	516.0	494.8	473.6	452.4	431.2
122.5°	554.9	556.1	554.6	550.5	546.3	542.3	538.2
125°	600.7	601.8	602.6	603.0	603.5	604.0	604.4
127.5°	643.5	645.1	645.9	646.0	646.1	646.2	646.3
130°	670.4	672.2	673.0	672.8	672.7	672.5	672.4
132.5°	696.3	697.7	698.4	698.2	698.1	697.9	697.8
135°	733.6	735.2	735.8	735.5	735.2	734.9	734.6
137.5°	768.1	769.7	770.2	769.6	769.1	768.6	768.0
140°	790.4	791.8	792.1	791.3	790.5	789.7	789.0
142.5°	810.9	812.2	812.4	811.7	810.9	810.1	809.3
145°	839.6	840.7	840.9	840.1	839.3	838.5	837.8
147.5°	864.5	865.4	865.5	864.7	864.1	863.4	862.7
150°	880.2	881.1	881.2	880.4	879.6	878.8	878.1
152.5°	894.3	895.2	895.2	894.1	893.1	892.1	891.0
155°	913.4	914.3	914.1	912.9	911.7	910.4	909.2
157.5°	929.6	930.7	930.6	929.4	928.2	927.0	925.6
160°	938.9	939.8	939.7	938.6	937.5	936.4	935.3
162.5°	947.7	948.8	948.7	947.3	945.9	944.5	943.2
165°	958.4	959.5	959.5	958.4	957.4	956.2	955.1
167.5°	967.3	968.4	968.3	966.8	965.4	964.0	962.6
170°	971.8	972.9	972.8	971.4	970.0	968.6	967.1
172.5°	975.2	976.3	976.1	974.7	973.3	971.9	970.5
175°	978.9	980.0	979.8	978.2	976.6	975.0	973.5
177.5°	979.1	980.0	979.9	978.8	977.5	976.4	975.3
180°	977.0	977.0	977.0	977.0	977.0	977.0	977.0

(END OF REPORT)