

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331488-840

Luminaire Tested: **S122DIW-S290D1240U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331488-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S290D1240U840-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1240 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5558.8 lumens
Efficiency: N/A
Efficacy: 119.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 46.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331488-840

CATALOG NUMBER: S122DIW-S290D1240U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

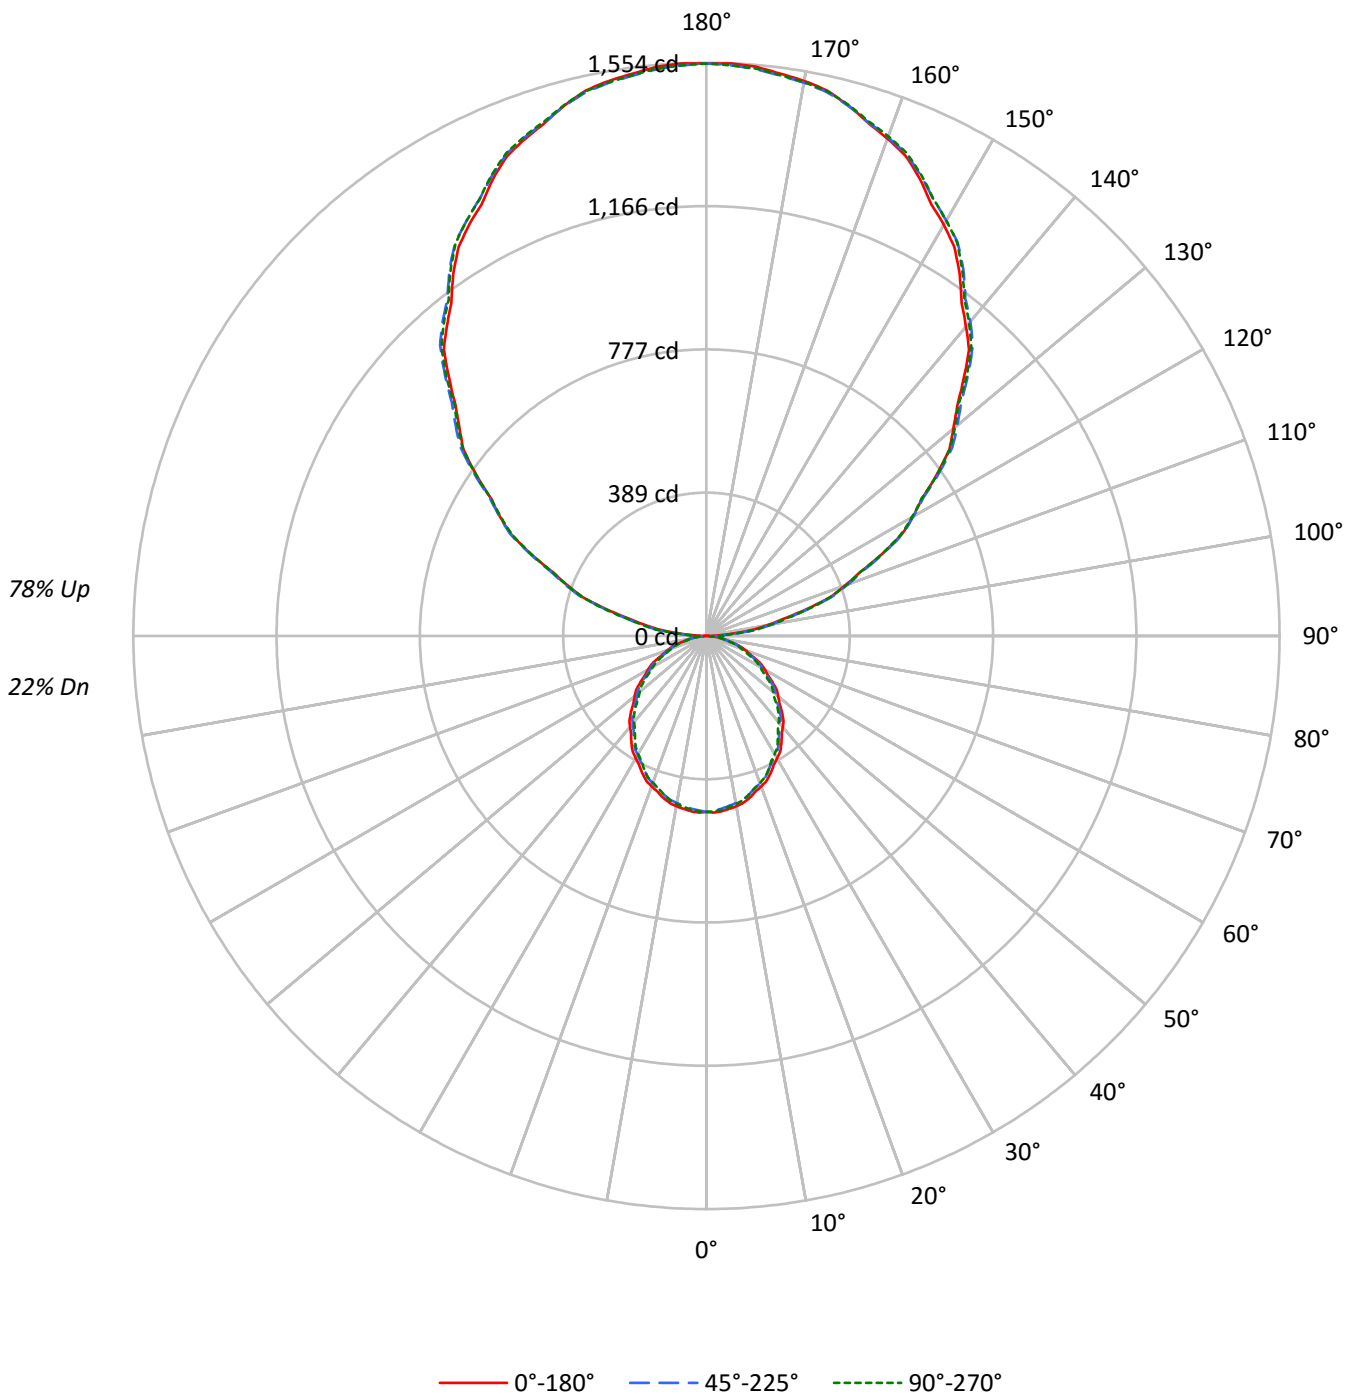



TEST NUMBER: P331488-840

CATALOG NUMBER: S122DIW-S290D1240U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	100	100	100	100	89	89	89	89	68	68	68	48	48	48	30	30	30	22
1	91	87	84	80	81	78	74	72	59	57	55	42	41	40	27	26	25	18
2	83	76	70	65	74	68	63	59	52	49	46	37	35	33	23	22	21	15
3	76	67	60	54	67	59	54	49	46	42	38	33	30	28	21	19	18	13
4	69	59	52	46	61	53	46	41	40	36	33	29	26	24	19	17	16	11
5	63	52	45	39	56	47	40	35	36	31	28	26	23	21	17	15	14	10
6	58	47	39	34	51	42	35	30	32	28	24	23	20	18	15	13	12	9
7	54	42	35	29	47	38	31	26	29	24	21	21	18	16	14	12	11	8
8	50	38	31	26	44	34	28	23	26	22	19	19	16	14	13	11	9	7
9	46	35	27	23	41	31	25	21	24	20	16	18	15	12	12	10	8	6
10	43	32	25	20	38	28	22	18	22	18	15	16	13	11	11	9	8	6

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7703	7703	7703
5°	7733	7621	7666
10°	7688	7543	7581
15°	7590	7447	7438
20°	7455	7301	7290
25°	7322	7119	7119
30°	7150	6952	6893
35°	6991	6753	6654
40°	6787	6555	6431
45°	6588	6357	6202
50°	6373	6154	5935
55°	6145	5917	5695
60°	5896	5628	5422
65°	5624	5349	5100
70°	5282	4999	4763
75°	4810	4604	4492
80°	4258	4138	3924
85°	3483	3316	2983



TEST NUMBER: P331488-840

CATALOG NUMBER: S122DIW-S290D1240U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.9	0.8
10°-20°	126.2	2.3
20°-30°	185.5	3.3
30°-40°	215.5	3.9
40°-50°	215.3	3.9
50°-60°	187.7	3.4
60°-70°	138.8	2.5
70°-80°	78.6	1.4
80°-90°	27.3	0.5
90°-100°	98.3	1.8
100°-110°	305.4	5.5
110°-120°	522.0	9.4
120°-130°	686.4	12.3
130°-140°	770.4	13.9
140°-150°	755.4	13.6
150°-160°	633.6	11.4
160°-170°	420.3	7.6
170°-180°	146.9	2.6
0°-30°	356.6	6.4
0°-40°	572.2	10.3
0°-60°	975.2	17.5
0°-90°	1220.0	21.9
90°-120°	925.7	16.7
90°-150°	3138.0	56.5
90°-180°	4339.0	78.1
0°-180°	5558.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	477	477	477	477	477	
5°	477	475	470	474	473	45
15°	454	451	446	447	445	128
25°	411	407	400	400	400	189
35°	355	350	343	340	338	221
45°	288	285	278	274	272	223
55°	218	215	210	205	202	195
65°	147	144	140	136	134	146
75°	77	76	74	71	72	82
85°	19	18	18	17	16	22
90°	1	18	46	43	44	4
95°	68	81	84	84	81	78
105°	282	285	288	291	291	297
115°	524	531	529	528	524	518
125°	762	773	770	766	765	681
135°	986	1000	1003	1002	998	761
145°	1197	1206	1214	1215	1210	747
155°	1368	1372	1376	1382	1379	630
165°	1489	1488	1488	1496	1490	420
175°	1549	1545	1542	1551	1544	147
180°	1552	1552	1552	1552	1552	



TEST NUMBER: P331488-840

CATALOG NUMBER: S122DIW-S290D1240U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1
2.5°	479.3	478.9	478.5	478.1	477.7	477.1	476.2	475.2	474.3	473.4	474.2
5°	477.1	476.7	476.3	475.8	475.4	474.7	473.6	472.5	471.3	470.2	471.0
7.5°	472.9	472.2	471.6	471.0	470.4	469.5	468.4	467.2	466.1	464.9	465.7
10°	468.9	468.2	467.5	466.8	466.0	465.0	463.8	462.6	461.4	460.1	460.9
12.5°	463.3	462.7	462.1	461.4	460.8	459.9	458.7	457.5	456.3	455.0	455.6
15°	454.1	453.5	452.9	452.3	451.7	450.8	449.4	448.1	446.8	445.5	445.9
17.5°	442.4	441.8	441.2	440.6	440.0	439.0	437.7	436.3	434.9	433.6	434.0
20°	433.9	433.3	432.7	432.1	431.5	430.5	429.1	427.7	426.3	424.9	425.2
22.5°	425.6	424.6	423.8	422.9	422.1	421.0	419.7	418.3	417.0	415.7	415.7
25°	411.0	410.2	409.4	408.6	407.8	406.5	404.8	403.0	401.3	399.6	399.8
27.5°	394.6	393.8	393.0	392.3	391.6	390.5	389.2	387.8	386.5	385.1	384.8
30°	383.5	382.7	381.9	381.1	380.2	379.1	377.6	376.1	374.5	372.9	372.6
32.5°	371.7	371.1	370.5	369.8	369.2	368.0	366.4	364.9	363.2	361.6	361.0
35°	354.7	353.6	352.5	351.5	350.5	349.2	347.6	346.0	344.4	342.6	342.0
37.5°	335.3	334.4	333.5	332.5	331.6	330.4	328.8	327.2	325.5	323.9	323.2
40°	322.0	321.2	320.4	319.6	318.8	317.6	315.9	314.3	312.7	311.0	310.1
42.5°	309.2	308.4	307.6	306.8	306.0	304.7	303.1	301.4	299.8	298.2	297.2
45°	288.5	287.8	287.1	286.4	285.7	284.6	283.1	281.6	280.0	278.4	277.3
47.5°	268.0	267.3	266.7	266.0	265.3	264.2	262.6	261.1	259.4	257.8	256.6
50°	253.7	253.2	252.7	252.2	251.7	250.6	249.2	247.8	246.4	245.0	243.6
52.5°	239.7	239.0	238.4	237.7	237.0	236.0	234.7	233.4	232.0	230.7	229.4
55°	218.3	217.7	217.1	216.5	215.9	215.0	213.8	212.6	211.4	210.2	208.8
57.5°	196.9	196.4	195.9	195.4	194.9	194.0	192.7	191.4	190.0	188.6	187.4
60°	182.6	182.2	181.8	181.4	181.0	180.1	178.6	177.2	175.7	174.3	173.2
62.5°	168.6	167.9	167.3	166.7	166.0	165.1	164.0	163.0	161.9	160.8	159.7
65°	147.2	146.6	146.0	145.4	144.8	144.0	143.0	142.0	141.0	140.0	139.0
67.5°	125.5	125.0	124.5	124.0	123.6	122.9	121.9	121.0	120.1	119.2	118.5
70°	111.9	111.5	111.1	110.7	110.3	109.7	108.8	107.9	106.8	105.9	105.2
72.5°	98.0	97.6	97.1	96.7	96.3	95.8	95.2	94.7	94.1	93.5	92.8
75°	77.1	76.9	76.6	76.4	76.2	75.9	75.4	74.8	74.3	73.8	73.2
77.5°	58.4	58.0	57.7	57.4	57.0	56.7	56.5	56.2	56.0	55.8	55.5
80°	45.8	45.7	45.6	45.5	45.4	45.3	45.1	44.9	44.7	44.5	44.2
82.5°	34.1	34.1	34.1	34.0	34.0	33.9	33.8	33.7	33.6	33.5	33.1
85°	18.8	18.7	18.6	18.5	18.4	18.3	18.2	18.1	18.0	17.9	17.6
87.5°	6.9	7.4	8.0	8.5	9.0	9.8	10.9	12.1	13.2	14.3	13.9
90°	1.3	4.8	8.3	11.8	15.2	20.2	26.7	33.0	39.4	45.8	45.2
92.5°	23.3	25.9	28.5	31.0	33.5	35.5	37.1	38.6	40.1	41.6	41.7
95°	68.1	71.0	73.9	76.9	79.8	81.5	82.1	82.6	83.2	83.8	83.8
97.5°	124.4	126.9	129.6	132.1	134.6	136.4	137.5	138.7	139.8	140.9	140.9
100°	166.3	168.6	171.0	173.3	175.6	177.2	178.0	178.9	179.9	180.7	180.7
102.5°	210.3	212.2	214.0	215.9	217.7	219.2	220.4	221.5	222.6	223.7	223.9
105°	281.6	282.4	283.3	284.2	285.0	285.8	286.3	286.9	287.5	288.1	288.6
107.5°	353.3	354.6	355.9	357.1	358.4	359.0	359.0	359.0	359.0	359.0	359.3
110°	399.4	401.1	402.8	404.7	406.4	407.3	407.3	407.3	407.3	407.3	407.3



TEST NUMBER: P331488-840

CATALOG NUMBER: S122DIW-S290D1240U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	449.7	451.4	453.1	454.9	456.7	457.4	457.2	457.0	456.7	456.5	455.8
115°	523.8	525.5	527.3	529.0	530.8	531.3	530.8	530.2	529.6	529.0	528.8
117.5°	597.6	600.0	602.3	604.6	606.9	607.3	605.6	604.0	602.4	600.8	600.1
120°	646.8	649.1	651.6	653.9	656.2	656.2	653.9	651.6	649.1	646.8	646.8
122.5°	691.9	694.7	697.5	700.2	703.1	703.7	702.1	700.4	698.7	697.1	696.4
125°	762.0	764.7	767.3	769.9	772.5	773.5	772.5	771.7	770.8	769.9	769.1
127.5°	830.4	833.7	837.1	840.4	843.7	844.9	843.8	842.7	841.7	840.6	839.6
130°	873.4	877.2	881.0	884.7	888.5	890.1	889.6	889.0	888.4	887.8	887.2
132.5°	921.6	924.6	927.8	930.8	933.9	935.5	935.6	935.7	935.8	935.9	934.7
135°	986.0	989.2	992.4	995.6	998.9	1000.7	1001.3	1001.9	1002.5	1003.0	1002.7
137.5°	1053.8	1056.4	1059.0	1061.7	1064.3	1066.0	1066.7	1067.5	1068.2	1069.0	1068.8
140°	1094.7	1097.3	1099.9	1102.6	1105.2	1107.2	1108.6	1110.1	1111.6	1113.0	1113.0
142.5°	1136.6	1139.2	1141.9	1144.5	1147.1	1148.8	1149.8	1150.8	1151.9	1152.9	1153.1
145°	1196.8	1198.9	1200.9	1203.0	1205.0	1206.9	1208.6	1210.3	1212.1	1213.9	1214.2
147.5°	1250.5	1252.9	1255.4	1257.9	1260.3	1262.1	1263.2	1264.5	1265.6	1266.8	1267.4
150°	1287.2	1288.9	1290.7	1292.4	1294.1	1295.7	1296.8	1298.0	1299.1	1300.3	1301.1
152.5°	1319.7	1321.4	1323.1	1324.8	1326.7	1328.2	1329.6	1331.0	1332.4	1333.8	1334.9
155°	1368.4	1369.3	1370.1	1371.0	1371.9	1372.7	1373.6	1374.4	1375.3	1376.2	1377.7
157.5°	1410.0	1410.6	1411.2	1411.8	1412.3	1412.9	1413.4	1413.9	1414.4	1415.0	1416.9
160°	1435.1	1435.7	1436.3	1436.9	1437.4	1437.9	1438.1	1438.5	1438.8	1439.1	1440.8
162.5°	1458.1	1458.3	1458.4	1458.5	1458.6	1458.9	1459.2	1459.5	1459.8	1460.1	1462.0
165°	1488.8	1488.5	1488.2	1487.9	1487.6	1487.5	1487.5	1487.5	1487.5	1487.5	1489.6
167.5°	1514.5	1513.6	1512.8	1511.9	1511.0	1510.6	1510.5	1510.5	1510.4	1510.3	1512.4
170°	1528.1	1527.2	1526.4	1525.5	1524.6	1524.1	1523.8	1523.5	1523.2	1522.9	1524.9
172.5°	1537.5	1536.7	1535.8	1534.9	1534.1	1533.5	1533.2	1532.9	1532.6	1532.3	1534.4
175°	1549.0	1548.2	1547.3	1546.4	1545.6	1544.9	1544.3	1543.7	1543.1	1542.5	1544.6
177.5°	1553.8	1553.1	1552.4	1551.7	1551.0	1550.4	1549.9	1549.4	1549.0	1548.5	1549.9
180°	1551.7	1551.7	1551.7	1551.7	1551.7	1551.7	1551.7	1551.7	1551.7	1551.7	1551.7



TEST NUMBER: P331488-840

CATALOG NUMBER: S122DIW-S290D1240U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1
2.5°	475.0	475.8	476.7	477.1	476.9	476.7	476.6	476.4
5°	471.9	472.7	473.5	473.8	473.6	473.4	473.2	473.0
7.5°	466.6	467.4	468.2	468.5	468.3	468.0	467.8	467.6
10°	461.8	462.6	463.4	463.6	463.3	463.0	462.7	462.4
12.5°	456.2	456.7	457.3	457.5	457.3	457.0	456.8	456.6
15°	446.3	446.7	447.1	447.1	446.6	446.1	445.6	445.0
17.5°	434.5	435.0	435.5	435.5	434.9	434.5	434.0	433.5
20°	425.5	425.8	426.1	426.0	425.6	425.2	424.7	424.3
22.5°	415.8	415.9	415.9	415.8	415.6	415.3	415.1	414.9
25°	400.0	400.2	400.4	400.4	400.2	400.0	399.8	399.6
27.5°	384.5	384.2	383.8	383.4	382.9	382.4	382.0	381.5
30°	372.3	372.0	371.7	371.4	371.0	370.6	370.2	369.7
32.5°	360.5	359.9	359.4	358.9	358.5	358.1	357.7	357.3
35°	341.4	340.8	340.2	339.7	339.2	338.7	338.2	337.6
37.5°	322.3	321.6	320.8	320.2	319.7	319.2	318.8	318.3
40°	309.2	308.3	307.4	306.7	306.3	305.9	305.5	305.1
42.5°	296.2	295.2	294.2	293.4	292.9	292.3	291.8	291.1
45°	276.2	275.1	274.0	273.2	272.8	272.4	272.0	271.6
47.5°	255.5	254.3	253.1	252.2	251.7	251.1	250.4	249.8
50°	242.2	240.7	239.2	238.3	237.8	237.3	236.8	236.3
52.5°	228.3	227.1	225.9	225.0	224.3	223.7	223.0	222.3
55°	207.6	206.4	205.2	204.4	203.9	203.3	202.8	202.3
57.5°	186.2	185.0	183.8	183.0	182.7	182.3	181.9	181.5
60°	172.1	171.0	169.9	169.2	168.8	168.5	168.2	167.9
62.5°	158.6	157.6	156.6	155.9	155.5	155.1	154.7	154.3
65°	138.0	137.1	136.2	135.5	135.0	134.5	134.0	133.5
67.5°	117.8	117.0	116.3	115.7	115.3	114.9	114.5	114.1
70°	104.5	103.8	103.1	102.6	102.2	101.7	101.3	100.9
72.5°	92.1	91.4	90.7	90.1	89.8	89.5	89.2	88.8
75°	72.6	72.0	71.4	71.2	71.4	71.6	71.8	72.0
77.5°	55.2	54.9	54.6	54.3	54.0	53.8	53.5	53.2
80°	43.9	43.6	43.3	43.0	42.8	42.6	42.4	42.2
82.5°	32.7	32.3	31.9	31.7	31.7	31.6	31.6	31.6
85°	17.3	17.0	16.7	16.5	16.4	16.3	16.2	16.1
87.5°	13.5	13.2	12.8	12.6	12.6	12.6	12.6	12.6
90°	44.6	44.1	43.5	43.3	43.6	43.9	44.2	44.5
92.5°	41.9	42.0	42.1	42.2	42.2	42.3	42.4	42.4
95°	83.8	83.8	83.8	83.5	82.9	82.3	81.8	81.2
97.5°	140.9	140.9	140.9	140.9	140.8	140.8	140.7	140.7
100°	180.7	180.7	180.7	180.6	180.3	180.0	179.7	179.4
102.5°	224.1	224.4	224.6	224.6	224.3	224.0	223.7	223.4
105°	289.2	289.8	290.4	290.7	290.7	290.7	290.7	290.7
107.5°	359.5	359.7	360.0	359.4	358.1	356.8	355.4	354.1
110°	407.3	407.3	407.3	406.8	406.0	405.1	404.1	403.3



TEST NUMBER: P331488-840

CATALOG NUMBER: S122DIW-S290D1240U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	455.0	454.3	453.6	453.0	452.3	451.7	451.1	450.4
115°	528.5	528.2	527.9	527.3	526.4	525.5	524.6	523.8
117.5°	599.4	598.6	597.9	597.2	596.3	595.4	594.6	593.7
120°	646.8	646.8	646.8	646.4	645.5	644.7	643.8	643.0
122.5°	695.8	695.1	694.4	693.7	693.1	692.4	691.8	691.2
125°	768.2	767.3	766.5	765.9	765.6	765.3	765.0	764.7
127.5°	838.6	837.5	836.5	835.5	834.6	833.6	832.7	831.7
130°	886.7	886.1	885.4	884.6	883.4	882.3	881.1	879.9
132.5°	933.4	932.1	930.9	929.8	928.9	927.9	927.0	926.0
135°	1002.5	1002.2	1001.9	1001.3	1000.4	999.6	998.7	997.7
137.5°	1068.5	1068.3	1068.1	1067.4	1066.2	1065.1	1063.9	1062.8
140°	1113.0	1113.0	1113.0	1112.5	1111.3	1110.1	1108.9	1107.8
142.5°	1153.3	1153.6	1153.8	1153.3	1152.2	1150.9	1149.8	1148.6
145°	1214.5	1214.8	1215.0	1214.6	1213.5	1212.2	1211.1	1209.9
147.5°	1268.0	1268.7	1269.3	1269.1	1268.0	1266.9	1265.8	1264.7
150°	1302.0	1302.9	1303.7	1303.7	1302.9	1302.0	1301.1	1300.3
152.5°	1336.1	1337.1	1338.2	1338.2	1337.1	1336.1	1334.9	1333.8
155°	1379.2	1380.6	1382.0	1382.3	1381.5	1380.6	1379.7	1378.9
157.5°	1419.0	1420.9	1422.9	1423.2	1421.8	1420.4	1419.0	1417.5
160°	1442.6	1444.3	1446.0	1446.3	1445.2	1444.0	1442.9	1441.7
162.5°	1464.0	1465.9	1467.9	1468.2	1466.8	1465.4	1464.0	1462.7
165°	1491.6	1493.6	1495.7	1495.9	1494.5	1493.1	1491.6	1490.2
167.5°	1514.4	1516.4	1518.4	1518.7	1517.2	1515.7	1514.2	1512.7
170°	1526.9	1528.9	1531.1	1531.2	1529.4	1527.7	1525.9	1524.2
172.5°	1536.4	1538.4	1540.4	1540.5	1538.8	1537.1	1535.4	1533.6
175°	1546.6	1548.6	1550.6	1550.8	1549.0	1547.3	1545.6	1543.8
177.5°	1551.4	1552.8	1554.1	1554.1	1552.8	1551.4	1549.9	1548.5
180°	1551.7	1551.7	1551.7	1551.7	1551.7	1551.7	1551.7	1551.7

(END OF REPORT)