

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331481-840

Luminaire Tested: **S122DIW-S290D970U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331481-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S290D970U840-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 970 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5125.2 lumens
Efficiency: N/A
Efficacy: 134.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 38
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331481-840

CATALOG NUMBER: S122DIW-S290D970U840-4F0-1E-UDD-F

Luminous Intensity Polar Plot

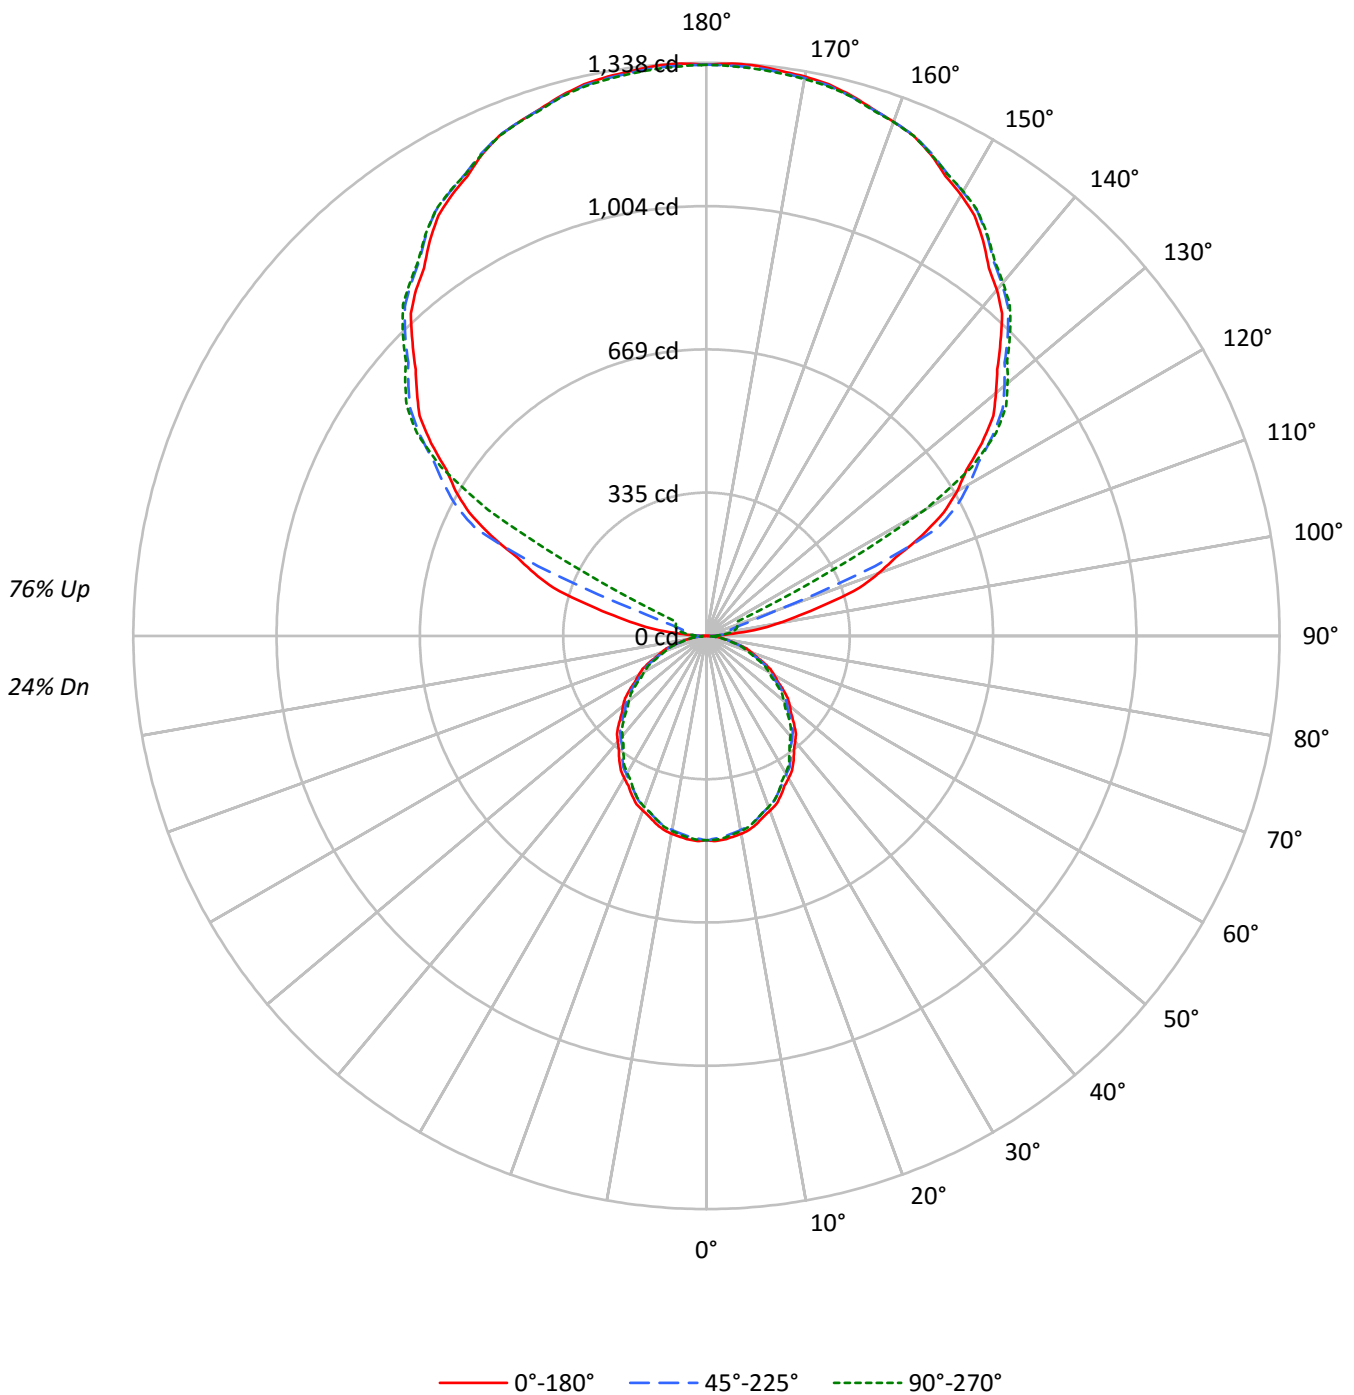



TEST NUMBER: P331481-840

CATALOG NUMBER: S122DIW-S290D970U840-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	32	32	32	24
1	92	88	84	81	82	78	75	72	60	58	56	43	42	41	28	28	27	20
2	84	77	71	66	74	68	63	59	53	49	46	38	36	34	25	24	23	17
3	76	67	60	55	67	60	54	49	46	42	39	34	31	29	22	21	19	14
4	70	59	52	46	62	53	47	42	41	37	33	30	27	25	20	18	17	12
5	64	53	45	39	56	47	41	36	37	32	28	27	24	21	18	16	14	11
6	59	47	39	34	52	42	36	31	33	28	25	24	21	19	16	14	13	9
7	54	42	35	29	48	38	31	27	30	25	21	22	19	16	15	13	11	8
8	50	38	31	26	44	34	28	23	27	22	19	20	17	14	13	11	10	7
9	46	35	28	23	41	31	25	21	25	20	17	18	15	13	12	10	9	7
10	43	32	25	20	38	29	23	18	23	18	15	17	14	12	11	9	8	6

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7703	7703	7703
5°	7733	7621	7666
10°	7688	7543	7581
15°	7590	7447	7438
20°	7455	7301	7290
25°	7322	7119	7119
30°	7150	6952	6893
35°	6991	6753	6654
40°	6787	6555	6431
45°	6588	6357	6202
50°	6373	6154	5935
55°	6145	5917	5695
60°	5896	5628	5422
65°	5624	5349	5100
70°	5282	4999	4763
75°	4810	4604	4492
80°	4258	4138	3924
85°	3483	3316	2983



TEST NUMBER: P331481-840

CATALOG NUMBER: S122DIW-S290D970U840-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.9	0.9
10°-20°	126.2	2.5
20°-30°	185.5	3.6
30°-40°	215.5	4.2
40°-50°	215.3	4.2
50°-60°	187.7	3.7
60°-70°	138.8	2.7
70°-80°	78.6	1.5
80°-90°	24.4	0.5
90°-100°	44.5	0.9
100°-110°	163.1	3.2
110°-120°	436.1	8.5
120°-130°	719.8	14.0
130°-140°	765.5	14.9
140°-150°	711.5	13.9
150°-160°	572.1	11.2
160°-170°	368.6	7.2
170°-180°	126.9	2.5
0°-30°	356.6	7.0
0°-40°	572.2	11.2
0°-60°	975.2	19.0
0°-90°	1217.1	23.7
90°-120°	643.7	12.6
90°-150°	2840.5	55.4
90°-180°	3908.0	76.3
0°-180°	5125.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	477	477	477	477	477	
5°	477	475	470	474	473	45
15°	454	451	446	447	445	128
25°	411	407	400	400	400	189
35°	355	350	343	340	338	221
45°	288	285	278	274	272	223
55°	218	215	210	205	202	195
65°	147	144	140	136	134	146
75°	77	76	74	71	72	82
85°	19	18	18	17	16	22
90°	1	11	19	24	26	4
95°	63	33	38	42	42	77
105°	293	306	59	69	73	313
115°	555	572	595	170	79	546
125°	784	797	815	822	825	699
135°	971	986	995	1004	1003	750
145°	1126	1126	1142	1148	1144	704
155°	1240	1232	1243	1248	1241	571
165°	1307	1301	1304	1310	1304	369
175°	1336	1330	1332	1338	1329	127
180°	1334	1334	1334	1334	1334	



TEST NUMBER: P331481-840

CATALOG NUMBER: S122DIW-S290D970U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1
2.5°	479.3	478.9	478.5	478.1	477.7	477.1	476.2	475.2	474.3	473.4	474.2
5°	477.1	476.7	476.3	475.8	475.4	474.7	473.6	472.5	471.3	470.2	471.0
7.5°	472.9	472.2	471.6	471.0	470.4	469.5	468.4	467.2	466.1	464.9	465.7
10°	468.9	468.2	467.5	466.8	466.0	465.0	463.8	462.6	461.4	460.1	460.9
12.5°	463.3	462.7	462.1	461.4	460.8	459.9	458.7	457.5	456.3	455.0	455.6
15°	454.1	453.5	452.9	452.3	451.7	450.8	449.4	448.1	446.8	445.5	445.9
17.5°	442.4	441.8	441.2	440.6	440.0	439.0	437.7	436.3	434.9	433.6	434.0
20°	433.9	433.3	432.7	432.1	431.5	430.5	429.1	427.7	426.3	424.9	425.2
22.5°	425.6	424.6	423.8	422.9	422.1	421.0	419.7	418.3	417.0	415.7	415.7
25°	411.0	410.2	409.4	408.6	407.8	406.5	404.8	403.0	401.3	399.6	399.8
27.5°	394.6	393.8	393.0	392.3	391.6	390.5	389.2	387.8	386.5	385.1	384.8
30°	383.5	382.7	381.9	381.1	380.2	379.1	377.6	376.1	374.5	372.9	372.6
32.5°	371.7	371.1	370.5	369.8	369.2	368.0	366.4	364.9	363.2	361.6	361.0
35°	354.7	353.6	352.5	351.5	350.5	349.2	347.6	346.0	344.4	342.6	342.0
37.5°	335.3	334.4	333.5	332.5	331.6	330.4	328.8	327.2	325.5	323.9	323.2
40°	322.0	321.2	320.4	319.6	318.8	317.6	315.9	314.3	312.7	311.0	310.1
42.5°	309.2	308.4	307.6	306.8	306.0	304.7	303.1	301.4	299.8	298.2	297.2
45°	288.5	287.8	287.1	286.4	285.7	284.6	283.1	281.6	280.0	278.4	277.3
47.5°	268.0	267.3	266.7	266.0	265.3	264.2	262.6	261.1	259.4	257.8	256.6
50°	253.7	253.2	252.7	252.2	251.7	250.6	249.2	247.8	246.4	245.0	243.6
52.5°	239.7	239.0	238.4	237.7	237.0	236.0	234.7	233.4	232.0	230.7	229.4
55°	218.3	217.7	217.1	216.5	215.9	215.0	213.8	212.6	211.4	210.2	208.8
57.5°	196.9	196.4	195.9	195.4	194.9	194.0	192.7	191.4	190.0	188.6	187.4
60°	182.6	182.2	181.8	181.4	181.0	180.1	178.6	177.2	175.7	174.3	173.2
62.5°	168.6	167.9	167.3	166.7	166.0	165.1	164.0	163.0	161.9	160.8	159.7
65°	147.2	146.6	146.0	145.4	144.8	144.0	143.0	142.0	141.0	140.0	139.0
67.5°	125.5	125.0	124.5	124.0	123.6	122.9	121.9	121.0	120.1	119.2	118.5
70°	111.9	111.5	111.1	110.7	110.3	109.7	108.8	107.9	106.8	105.9	105.2
72.5°	98.0	97.6	97.1	96.7	96.3	95.8	95.2	94.7	94.1	93.5	92.8
75°	77.1	76.9	76.6	76.4	76.2	75.9	75.4	74.8	74.3	73.8	73.2
77.5°	58.4	58.0	57.7	57.4	57.0	56.7	56.5	56.2	56.0	55.8	55.5
80°	45.8	45.7	45.6	45.5	45.4	45.3	45.1	44.9	44.7	44.5	44.2
82.5°	34.1	34.1	34.1	34.0	34.0	33.9	33.8	33.7	33.6	33.5	33.1
85°	18.8	18.7	18.6	18.5	18.4	18.3	18.2	18.1	18.0	17.9	17.6
87.5°	6.8	7.1	7.4	7.7	8.1	8.3	8.5	8.7	8.8	9.0	9.0
90°	1.0	3.3	5.7	8.1	10.4	12.4	14.1	15.9	17.6	19.3	20.4
92.5°	19.5	19.3	19.1	18.9	18.7	19.0	19.8	20.7	21.5	22.4	22.9
95°	62.7	55.6	48.6	41.5	34.4	31.6	33.1	34.6	36.2	37.7	38.7
97.5°	124.5	104.5	84.6	64.6	44.7	36.5	40.0	43.4	46.9	50.4	51.2
100°	170.8	141.4	112.0	82.7	53.3	40.4	44.0	47.7	51.4	55.0	56.8
102.5°	221.8	215.5	209.3	203.1	196.8	178.5	148.0	117.5	87.1	56.6	58.8
105°	293.4	299.8	306.2	312.7	319.1	293.1	234.5	175.9	117.4	58.9	61.2
107.5°	375.0	380.2	385.4	390.5	395.8	363.2	293.1	222.8	152.6	82.4	80.0
110°	427.5	432.0	436.5	441.0	445.5	416.8	354.8	292.9	230.9	168.8	147.4



TEST NUMBER: P331481-840

CATALOG NUMBER: S122DIW-S290D970U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	476.9	480.9	484.8	488.9	492.8	487.2	471.9	456.6	441.2	426.0	347.7
115°	554.8	558.5	562.2	565.8	569.5	573.9	579.3	584.6	590.1	595.4	496.0
117.5°	624.5	628.6	632.7	636.7	640.9	644.7	648.4	652.1	655.8	659.4	635.4
120°	675.5	678.7	681.9	685.1	688.3	691.9	695.7	699.6	703.5	707.3	709.9
122.5°	718.7	722.1	725.5	728.8	732.3	736.1	740.2	744.5	748.6	752.9	754.4
125°	784.5	787.3	790.1	792.8	795.7	799.1	803.1	807.3	811.3	815.4	816.9
127.5°	844.1	847.3	850.3	853.4	856.5	859.6	862.6	865.7	868.7	871.7	873.9
130°	882.0	885.4	888.9	892.2	895.6	898.6	900.9	903.3	905.6	908.1	910.4
132.5°	920.6	923.5	926.5	929.3	932.2	934.8	937.3	939.6	941.9	944.3	946.3
135°	970.8	974.2	977.7	981.1	984.5	987.1	989.1	991.0	992.9	994.9	997.0
137.5°	1021.5	1023.9	1026.3	1028.7	1031.1	1033.4	1035.6	1037.7	1040.0	1042.2	1044.3
140°	1054.7	1056.4	1058.1	1059.9	1061.6	1063.6	1065.9	1068.3	1070.7	1073.1	1075.0
142.5°	1082.5	1084.0	1085.6	1087.1	1088.6	1090.8	1093.5	1096.2	1098.9	1101.6	1103.4
145°	1126.1	1125.9	1125.7	1125.5	1125.3	1127.0	1130.6	1134.3	1137.9	1141.6	1143.1
147.5°	1164.2	1163.3	1162.5	1161.6	1160.8	1162.3	1165.9	1169.4	1173.1	1176.7	1177.8
150°	1188.8	1187.3	1185.8	1184.4	1182.9	1183.8	1187.2	1190.6	1194.1	1197.5	1198.8
152.5°	1209.7	1208.0	1206.3	1204.7	1203.0	1203.8	1207.0	1210.3	1213.6	1216.8	1218.1
155°	1240.0	1238.0	1236.1	1234.2	1232.2	1232.5	1235.2	1237.7	1240.3	1242.8	1244.2
157.5°	1263.7	1262.1	1260.4	1258.8	1257.2	1257.3	1259.1	1260.9	1262.6	1264.5	1266.0
160°	1277.6	1276.4	1275.1	1273.7	1272.4	1272.4	1273.7	1275.1	1276.4	1277.6	1278.9
162.5°	1290.0	1288.7	1287.4	1286.1	1284.9	1284.8	1285.9	1287.0	1288.1	1289.2	1290.6
165°	1306.6	1305.3	1303.9	1302.7	1301.4	1301.1	1301.7	1302.3	1303.0	1303.6	1305.1
167.5°	1318.9	1317.6	1316.4	1315.0	1313.7	1313.4	1314.0	1314.6	1315.2	1315.9	1317.3
170°	1325.9	1324.5	1323.3	1322.0	1320.7	1320.3	1320.7	1321.1	1321.6	1322.0	1323.5
172.5°	1330.5	1329.2	1327.9	1326.7	1325.3	1324.9	1325.3	1325.8	1326.2	1326.7	1328.2
175°	1336.5	1334.9	1333.4	1332.0	1330.5	1329.9	1330.4	1330.8	1331.2	1331.6	1333.1
177.5°	1337.5	1336.3	1335.0	1333.8	1332.6	1332.1	1332.3	1332.4	1332.6	1332.8	1334.0
180°	1333.5	1333.5	1333.5	1333.5	1333.5	1333.5	1333.5	1333.5	1333.5	1333.5	1333.5



TEST NUMBER: P331481-840

CATALOG NUMBER: S122DIW-S290D970U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1
2.5°	475.0	475.8	476.7	477.1	476.9	476.7	476.6	476.4
5°	471.9	472.7	473.5	473.8	473.6	473.4	473.2	473.0
7.5°	466.6	467.4	468.2	468.5	468.3	468.0	467.8	467.6
10°	461.8	462.6	463.4	463.6	463.3	463.0	462.7	462.4
12.5°	456.2	456.7	457.3	457.5	457.3	457.0	456.8	456.6
15°	446.3	446.7	447.1	447.1	446.6	446.1	445.6	445.0
17.5°	434.5	435.0	435.5	435.5	434.9	434.5	434.0	433.5
20°	425.5	425.8	426.1	426.0	425.6	425.2	424.7	424.3
22.5°	415.8	415.9	415.9	415.8	415.6	415.3	415.1	414.9
25°	400.0	400.2	400.4	400.4	400.2	400.0	399.8	399.6
27.5°	384.5	384.2	383.8	383.4	382.9	382.4	382.0	381.5
30°	372.3	372.0	371.7	371.4	371.0	370.6	370.2	369.7
32.5°	360.5	359.9	359.4	358.9	358.5	358.1	357.7	357.3
35°	341.4	340.8	340.2	339.7	339.2	338.7	338.2	337.6
37.5°	322.3	321.6	320.8	320.2	319.7	319.2	318.8	318.3
40°	309.2	308.3	307.4	306.7	306.3	305.9	305.5	305.1
42.5°	296.2	295.2	294.2	293.4	292.9	292.3	291.8	291.1
45°	276.2	275.1	274.0	273.2	272.8	272.4	272.0	271.6
47.5°	255.5	254.3	253.1	252.2	251.7	251.1	250.4	249.8
50°	242.2	240.7	239.2	238.3	237.8	237.3	236.8	236.3
52.5°	228.3	227.1	225.9	225.0	224.3	223.7	223.0	222.3
55°	207.6	206.4	205.2	204.4	203.9	203.3	202.8	202.3
57.5°	186.2	185.0	183.8	183.0	182.7	182.3	181.9	181.5
60°	172.1	171.0	169.9	169.2	168.8	168.5	168.2	167.9
62.5°	158.6	157.6	156.6	155.9	155.5	155.1	154.7	154.3
65°	138.0	137.1	136.2	135.5	135.0	134.5	134.0	133.5
67.5°	117.8	117.0	116.3	115.7	115.3	114.9	114.5	114.1
70°	104.5	103.8	103.1	102.6	102.2	101.7	101.3	100.9
72.5°	92.1	91.4	90.7	90.1	89.8	89.5	89.2	88.8
75°	72.6	72.0	71.4	71.2	71.4	71.6	71.8	72.0
77.5°	55.2	54.9	54.6	54.3	54.0	53.8	53.5	53.2
80°	43.9	43.6	43.3	43.0	42.8	42.6	42.4	42.2
82.5°	32.7	32.3	31.9	31.7	31.7	31.6	31.6	31.6
85°	17.3	17.0	16.7	16.5	16.4	16.3	16.2	16.1
87.5°	9.0	8.9	8.9	8.9	8.9	8.9	8.9	8.9
90°	21.4	22.5	23.6	24.3	24.7	25.1	25.7	26.1
92.5°	23.5	24.0	24.6	25.0	25.2	25.5	25.8	26.1
95°	39.8	40.9	41.9	42.3	42.1	41.9	41.7	41.5
97.5°	52.1	52.9	53.8	54.3	54.6	54.8	55.1	55.3
100°	58.5	60.2	61.9	62.9	63.3	63.8	64.2	64.6
102.5°	61.0	63.2	65.4	66.9	67.5	68.1	68.7	69.3
105°	63.6	65.9	68.3	69.9	70.8	71.6	72.5	73.3
107.5°	77.6	75.2	72.8	72.0	72.9	73.7	74.6	75.4
110°	125.9	104.5	83.1	72.8	73.6	74.5	75.3	76.2



TEST NUMBER: P331481-840

CATALOG NUMBER: S122DIW-S290D970U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	269.4	191.3	113.0	74.2	74.9	75.6	76.3	77.1
115°	396.8	297.5	198.2	140.9	125.4	110.0	94.5	79.2
117.5°	611.4	587.4	563.4	526.0	475.2	424.5	373.9	323.1
120°	712.5	715.0	717.6	704.4	675.5	646.5	617.5	588.7
122.5°	756.0	757.5	759.0	757.0	751.3	745.8	740.1	734.6
125°	818.4	819.9	821.4	822.4	823.1	823.7	824.4	825.1
127.5°	876.2	878.3	880.5	881.6	881.8	881.9	882.0	882.1
130°	912.7	915.1	917.5	918.6	918.3	918.1	917.9	917.7
132.5°	948.4	950.4	952.4	953.3	953.0	952.8	952.6	952.4
135°	999.2	1001.3	1003.4	1004.3	1003.9	1003.4	1003.0	1002.6
137.5°	1046.3	1048.4	1050.6	1051.3	1050.6	1049.8	1049.0	1048.3
140°	1076.9	1078.8	1080.8	1081.2	1080.2	1079.0	1077.9	1076.9
142.5°	1105.1	1106.9	1108.6	1108.9	1107.9	1106.8	1105.8	1104.7
145°	1144.6	1146.1	1147.5	1147.8	1146.7	1145.6	1144.6	1143.5
147.5°	1178.9	1180.0	1181.1	1181.2	1180.3	1179.4	1178.5	1177.6
150°	1200.1	1201.3	1202.6	1202.7	1201.7	1200.6	1199.5	1198.5
152.5°	1219.4	1220.6	1221.9	1221.9	1220.5	1219.1	1217.7	1216.3
155°	1245.5	1246.7	1248.0	1247.8	1246.1	1244.4	1242.6	1240.9
157.5°	1267.4	1268.9	1270.3	1270.2	1268.5	1266.9	1265.2	1263.5
160°	1280.2	1281.4	1282.7	1282.6	1281.1	1279.6	1278.2	1276.7
162.5°	1292.1	1293.5	1295.1	1294.8	1292.9	1291.1	1289.3	1287.5
165°	1306.7	1308.2	1309.7	1309.7	1308.2	1306.7	1305.1	1303.6
167.5°	1318.8	1320.3	1321.8	1321.6	1319.7	1317.8	1315.9	1313.9
170°	1325.0	1326.5	1328.0	1327.8	1325.9	1323.9	1322.0	1320.1
172.5°	1329.6	1331.1	1332.6	1332.4	1330.5	1328.6	1326.7	1324.7
175°	1334.6	1336.2	1337.7	1337.4	1335.1	1333.0	1330.9	1328.8
177.5°	1335.2	1336.4	1337.6	1337.5	1335.8	1334.3	1332.8	1331.3
180°	1333.5	1333.5	1333.5	1333.5	1333.5	1333.5	1333.5	1333.5

(END OF REPORT)