

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331851-840

Luminaire Tested: **S122RDIW-S1005D710U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331851-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIW-S1005D710U840-4F0-1E-UDD-F  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 710 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6382.9 lumens  
Efficiency: N/A  
Efficacy: 106.7 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 59.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331851-840

CATALOG NUMBER: S122RDIW-S1005D710U840-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

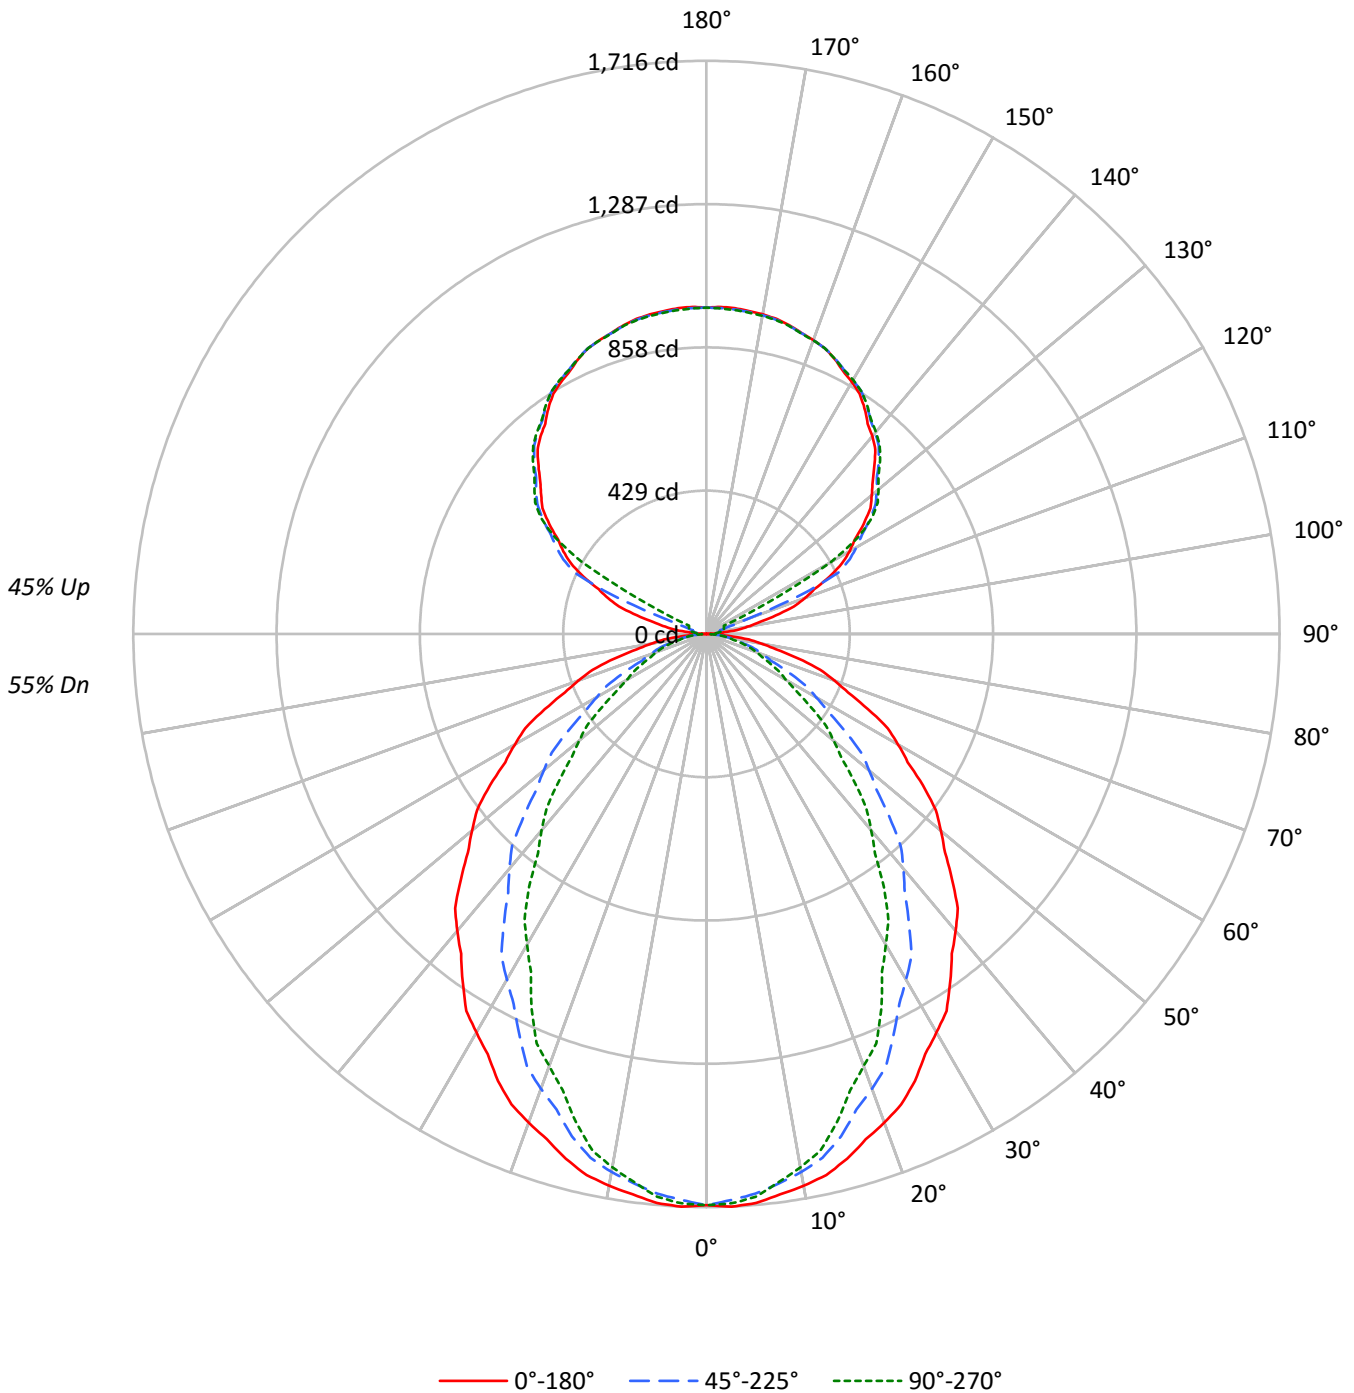



TEST NUMBER: P331851-840

CATALOG NUMBER: S122RDIW-S1005D710U840-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	95	92	88	92	89	85	83	76	74	72	65	63	62	55	53	52	47
2	91	84	78	73	84	78	73	69	68	64	60	58	55	52	49	47	45	41
3	83	74	67	61	77	69	63	58	60	55	51	52	48	45	44	41	39	35
4	77	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34	31
5	70	59	51	45	65	55	48	43	48	43	39	42	38	34	36	33	30	27
6	65	53	45	40	60	50	43	38	44	38	34	38	34	30	33	29	27	24
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24	21
8	56	44	36	31	52	41	35	30	37	31	27	32	28	24	28	24	22	19
9	52	40	33	28	49	38	31	27	34	28	24	29	25	22	26	22	20	18
10	49	37	30	25	46	35	29	24	31	26	22	27	23	20	24	20	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	27611	27611	27611
5°	27716	27266	27417
10°	27506	26820	26591
15°	27189	26024	25275
20°	26751	24890	23639
25°	26302	23599	22057
30°	25682	22275	20025
35°	25074	20834	18242
40°	24464	19344	16179
45°	23749	17671	14312
50°	23016	15978	12479
55°	22261	14159	10716
60°	21390	12245	8896
65°	20397	10288	8103
70°	19218	8478	7449
75°	17767	7723	6949
80°	15676	6908	6332
85°	12338	5446	5446



TEST NUMBER: P331851-840

CATALOG NUMBER: S122RDIW-S1005D710U840-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	160.1	2.5
10°-20°	439.5	6.9
20°-30°	617.2	9.7
30°-40°	673.0	10.5
40°-50°	618.8	9.7
50°-60°	486.0	7.6
60°-70°	316.9	5.0
70°-80°	163.4	2.6
80°-90°	44.8	0.7
90°-100°	32.6	0.5
100°-110°	119.5	1.9
110°-120°	319.5	5.0
120°-130°	527.3	8.3
130°-140°	560.8	8.8
140°-150°	521.3	8.2
150°-160°	419.1	6.6
160°-170°	270.1	4.2
170°-180°	93.0	1.5
0°-30°	1216.8	19.1
0°-40°	1889.8	29.6
0°-60°	2994.7	46.9
0°-90°	3519.8	55.1
90°-120°	471.6	7.4
90°-150°	2081.0	32.6
90°-180°	2863.0	44.9
0°-180°	6382.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1710	1710	1710	1710	1710	
5°	1710	1702	1682	1695	1692	162
15°	1627	1608	1557	1528	1512	458
25°	1476	1424	1325	1264	1238	679
35°	1272	1190	1057	963	926	796
45°	1040	933	774	668	627	803
55°	791	668	503	414	381	706
65°	534	408	269	219	212	529
75°	285	180	124	114	111	301
85°	67	36	29	29	29	78
90°	1	8	14	18	19	5
95°	46	24	28	31	30	56
105°	215	224	43	51	54	230
115°	406	419	436	124	58	400
125°	575	584	597	602	604	512
135°	711	722	729	736	735	549
145°	825	825	836	841	838	516
155°	908	903	911	914	909	418
165°	957	953	955	960	955	270
175°	979	974	976	980	974	93
180°	977	977	977	977	977	



TEST NUMBER: P331851-840

CATALOG NUMBER: S122RDIW-S1005D710U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1
2.5°	1716.4	1715.0	1713.5	1712.2	1710.8	1708.6	1705.6	1702.6	1699.6	1696.6	1699.3
5°	1710.1	1708.4	1706.7	1705.0	1703.2	1700.2	1695.7	1691.2	1686.8	1682.3	1685.4
7.5°	1692.5	1690.4	1688.3	1686.1	1683.9	1680.3	1675.1	1669.8	1664.7	1659.4	1660.3
10°	1677.7	1675.3	1672.8	1670.4	1668.0	1663.3	1656.5	1649.6	1642.7	1635.9	1634.9
12.5°	1659.1	1656.1	1653.1	1650.2	1647.3	1641.3	1632.5	1623.8	1615.0	1606.2	1604.3
15°	1626.6	1622.8	1619.0	1615.2	1611.4	1603.7	1592.1	1580.3	1568.6	1556.9	1550.4
17.5°	1586.6	1580.8	1575.1	1569.3	1563.6	1553.2	1538.1	1523.2	1508.1	1493.2	1485.4
20°	1556.9	1550.0	1543.2	1536.3	1529.4	1517.4	1500.2	1483.0	1465.8	1448.6	1440.0
22.5°	1524.7	1517.0	1509.3	1501.7	1493.9	1480.4	1461.0	1441.6	1422.2	1402.8	1391.7
25°	1476.4	1465.4	1454.4	1443.4	1432.4	1415.6	1392.9	1370.2	1347.5	1324.7	1310.7
27.5°	1418.3	1406.3	1394.3	1382.4	1370.4	1351.6	1326.1	1300.4	1274.9	1249.3	1232.8
30°	1377.5	1364.3	1351.3	1338.2	1325.1	1304.8	1277.3	1249.8	1222.3	1194.8	1177.2
32.5°	1337.8	1322.5	1307.3	1292.0	1276.7	1255.1	1227.0	1198.9	1170.8	1142.8	1122.8
35°	1272.1	1254.7	1237.1	1219.5	1202.0	1178.1	1147.8	1117.6	1087.3	1057.0	1035.4
37.5°	1206.6	1187.3	1168.0	1148.7	1129.5	1103.8	1071.5	1039.3	1006.9	974.7	950.9
40°	1160.7	1140.1	1119.4	1098.8	1078.2	1051.2	1017.8	984.5	951.1	917.8	893.3
42.5°	1113.7	1092.0	1070.3	1048.4	1026.7	998.7	964.2	929.7	895.2	860.8	835.6
45°	1040.1	1016.9	993.9	970.9	947.9	918.3	882.1	846.1	809.9	773.9	749.4
47.5°	968.2	943.8	919.4	894.9	870.5	839.7	802.4	765.1	727.8	690.5	666.3
50°	916.3	891.8	867.4	842.9	818.5	787.4	749.6	711.8	673.9	636.1	612.4
52.5°	865.5	839.9	814.5	788.9	763.4	732.2	695.1	658.1	621.1	584.1	561.2
55°	790.8	764.1	737.2	710.3	683.6	651.6	614.4	577.2	540.2	503.0	482.3
57.5°	714.4	686.9	659.3	631.9	604.3	572.7	537.0	501.3	465.6	429.9	411.0
60°	662.4	634.9	607.3	579.9	552.3	520.9	485.4	450.0	414.5	379.2	361.6
62.5°	611.7	584.1	556.6	529.1	501.6	470.9	437.2	403.3	369.6	335.9	319.1
65°	533.9	506.0	478.3	450.4	422.5	393.1	362.1	331.2	300.2	269.3	257.6
67.5°	459.0	431.4	403.7	376.1	348.4	320.6	292.9	265.0	237.1	209.2	203.9
70°	407.1	380.2	353.4	326.6	299.7	274.5	250.7	227.0	203.3	179.6	176.1
72.5°	357.5	331.7	306.1	280.3	254.6	232.2	213.2	194.1	175.0	156.0	153.1
75°	284.8	260.6	236.6	212.6	188.4	170.6	158.9	147.2	135.5	123.8	121.4
77.5°	213.3	192.2	171.1	150.0	128.8	115.4	109.8	104.1	98.5	92.9	91.5
80°	168.6	151.2	133.6	116.0	98.6	88.1	84.6	81.2	77.8	74.3	72.9
82.5°	127.8	114.1	100.5	86.7	73.1	65.0	62.7	60.4	58.1	55.7	54.9
85°	66.6	59.3	52.1	44.8	37.7	33.5	32.5	31.5	30.4	29.4	29.4
87.5°	20.0	18.1	16.3	14.3	12.5	11.7	12.0	12.2	12.5	12.7	12.6
90°	0.7	2.4	4.1	5.9	7.6	9.1	10.4	11.6	12.9	14.1	14.9
92.5°	14.2	14.1	13.9	13.8	13.6	13.9	14.5	15.1	15.8	16.4	16.8
95°	45.9	40.8	35.5	30.4	25.2	23.1	24.2	25.3	26.5	27.6	28.4
97.5°	91.2	76.5	62.0	47.4	32.7	26.8	29.3	31.8	34.3	36.9	37.6
100°	125.1	103.6	82.1	60.6	39.1	29.6	32.3	34.9	37.7	40.3	41.5
102.5°	162.5	157.9	153.3	148.8	144.2	130.8	108.5	86.1	63.7	41.4	43.0
105°	214.9	219.6	224.4	229.0	233.8	214.7	171.8	128.9	86.0	43.1	44.8
107.5°	274.7	278.5	282.4	286.1	289.9	266.1	214.7	163.3	111.8	60.4	58.6
110°	313.2	316.5	319.8	323.1	326.4	305.3	259.9	214.5	169.2	123.7	108.1



TEST NUMBER: P331851-840

CATALOG NUMBER: S122RDIW-S1005D710U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	349.4	352.3	355.3	358.1	361.0	356.9	345.7	334.5	323.3	312.0	254.8
115°	406.5	409.2	411.8	414.5	417.2	420.5	424.4	428.4	432.2	436.2	363.5
117.5°	457.6	460.5	463.5	466.5	469.5	472.3	475.0	477.8	480.4	483.1	465.5
120°	494.8	497.3	499.6	501.9	504.3	506.9	509.7	512.5	515.3	518.2	520.1
122.5°	526.5	529.1	531.5	534.0	536.4	539.3	542.3	545.4	548.5	551.6	552.7
125°	574.7	576.8	578.9	580.9	582.9	585.4	588.4	591.4	594.4	597.3	598.4
127.5°	618.4	620.7	623.0	625.2	627.5	629.8	632.0	634.2	636.4	638.6	640.3
130°	646.1	648.6	651.2	653.7	656.2	658.3	660.0	661.8	663.5	665.3	667.0
132.5°	674.5	676.6	678.7	680.9	683.0	684.9	686.6	688.3	690.1	691.9	693.3
135°	711.2	713.7	716.2	718.7	721.2	723.3	724.7	726.1	727.5	728.9	730.4
137.5°	748.4	750.1	751.9	753.7	755.4	757.1	758.7	760.3	761.9	763.6	765.1
140°	772.7	774.0	775.2	776.5	777.7	779.2	780.9	782.6	784.4	786.2	787.6
142.5°	793.0	794.2	795.4	796.5	797.6	799.1	801.1	803.1	805.1	807.1	808.4
145°	825.1	824.9	824.8	824.6	824.4	825.7	828.3	831.0	833.6	836.4	837.5
147.5°	852.8	852.3	851.7	851.1	850.5	851.5	854.1	856.8	859.4	862.0	862.9
150°	871.0	869.9	868.8	867.7	866.6	867.3	869.8	872.3	874.8	877.4	878.3
152.5°	886.3	885.0	883.8	882.5	881.3	881.9	884.3	886.7	889.1	891.5	892.4
155°	908.5	907.1	905.6	904.2	902.8	903.0	904.9	906.8	908.7	910.6	911.5
157.5°	925.8	924.6	923.4	922.2	921.1	921.1	922.4	923.7	925.0	926.3	927.5
160°	936.0	935.0	934.1	933.2	932.2	932.2	933.2	934.1	935.0	936.0	937.0
162.5°	945.0	944.1	943.2	942.2	941.3	941.2	942.0	942.9	943.7	944.5	945.5
165°	957.3	956.2	955.3	954.4	953.4	953.2	953.7	954.1	954.6	955.1	956.2
167.5°	966.2	965.3	964.4	963.4	962.5	962.3	962.7	963.1	963.6	964.0	965.1
170°	971.4	970.4	969.5	968.6	967.6	967.2	967.6	968.0	968.3	968.6	969.7
172.5°	974.7	973.8	972.9	971.9	971.0	970.7	971.0	971.3	971.6	971.9	973.0
175°	979.2	978.1	976.9	975.8	974.7	974.3	974.6	975.0	975.3	975.6	976.7
177.5°	979.9	979.0	978.1	977.2	976.3	975.9	976.0	976.2	976.3	976.4	977.3
180°	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0



TEST NUMBER: P331851-840

CATALOG NUMBER: S122RDIW-S1005D710U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1
2.5°	1702.0	1704.8	1707.6	1708.6	1708.1	1707.6	1707.0	1706.5
5°	1688.5	1691.6	1694.7	1695.7	1694.7	1693.6	1692.6	1691.6
7.5°	1661.1	1662.0	1662.9	1662.5	1660.7	1658.9	1657.2	1655.4
10°	1633.8	1632.7	1631.7	1630.2	1628.1	1626.1	1624.0	1621.9
12.5°	1602.5	1600.5	1598.7	1596.1	1592.7	1589.2	1585.8	1582.4
15°	1543.9	1537.3	1530.8	1525.8	1522.4	1518.9	1515.5	1512.1
17.5°	1477.6	1469.9	1462.1	1455.2	1449.4	1443.4	1437.4	1431.6
20°	1431.4	1422.8	1414.2	1406.1	1398.6	1391.0	1383.4	1375.8
22.5°	1380.7	1369.6	1358.5	1350.1	1344.5	1338.9	1333.2	1327.6
25°	1296.6	1282.5	1268.4	1258.8	1253.5	1248.4	1243.2	1238.1
27.5°	1216.4	1199.9	1183.5	1171.1	1163.0	1154.8	1146.6	1138.4
30°	1159.7	1142.2	1124.6	1111.3	1102.0	1092.7	1083.4	1074.1
32.5°	1102.8	1082.8	1062.7	1048.3	1039.7	1030.9	1022.1	1013.4
35°	1013.7	992.1	970.4	955.7	948.2	940.6	933.0	925.5
37.5°	927.0	903.1	879.2	862.9	854.3	845.7	837.0	828.3
40°	868.9	844.4	820.1	803.4	794.5	785.5	776.6	767.6
42.5°	810.3	785.1	759.8	742.9	734.2	725.5	716.9	708.2
45°	725.0	700.5	676.1	659.8	651.6	643.3	635.0	626.8
47.5°	642.0	617.7	593.4	577.5	570.1	562.6	555.0	547.5
50°	588.7	564.9	541.2	525.6	518.5	511.2	504.0	496.8
52.5°	538.3	515.3	492.5	477.7	471.0	464.3	457.7	451.0
55°	461.7	441.1	420.4	406.9	400.3	393.7	387.3	380.7
57.5°	392.1	373.1	354.3	342.0	336.6	331.0	325.6	320.0
60°	344.1	326.6	309.0	297.5	292.0	286.5	280.9	275.5
62.5°	302.5	285.7	269.0	258.9	255.7	252.4	249.0	245.8
65°	245.9	234.2	222.5	216.1	215.1	214.1	213.1	212.1
67.5°	198.5	193.2	187.7	184.5	183.5	182.4	181.3	180.2
70°	172.7	169.3	165.8	163.4	162.0	160.6	159.3	157.8
72.5°	150.3	147.3	144.4	142.6	141.8	141.0	140.1	139.3
75°	119.0	116.6	114.2	112.8	112.5	112.1	111.8	111.4
77.5°	90.1	88.8	87.4	86.3	85.8	85.3	84.7	84.2
80°	71.5	70.2	68.8	68.1	68.1	68.1	68.1	68.1
82.5°	54.0	53.2	52.4	52.0	52.0	52.0	52.0	52.0
85°	29.4	29.4	29.4	29.4	29.4	29.4	29.4	29.4
87.5°	12.5	12.4	12.2	12.2	12.3	12.3	12.4	12.5
90°	15.8	16.5	17.3	17.9	18.2	18.5	18.8	19.1
92.5°	17.3	17.7	18.1	18.4	18.5	18.7	18.9	19.1
95°	29.2	29.9	30.7	31.0	30.9	30.7	30.6	30.4
97.5°	38.2	38.8	39.4	39.8	40.0	40.2	40.4	40.6
100°	42.8	44.0	45.3	46.2	46.5	46.8	47.1	47.4
102.5°	44.7	46.4	48.0	49.0	49.5	49.9	50.3	50.8
105°	46.6	48.3	50.0	51.2	51.8	52.5	53.1	53.7
107.5°	56.9	55.1	53.3	52.8	53.4	54.0	54.6	55.2
110°	92.3	76.5	60.9	53.3	53.9	54.6	55.2	55.8





TEST NUMBER: P331851-840

CATALOG NUMBER: S122RDIW-S1005D710U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	197.4	140.2	82.8	54.4	54.9	55.4	55.9	56.5
115°	290.7	217.9	145.2	103.2	91.9	80.6	69.3	58.0
117.5°	448.0	430.3	412.7	385.4	348.2	311.0	273.9	236.7
120°	522.0	523.8	525.7	516.0	494.8	473.6	452.4	431.2
122.5°	553.8	554.9	556.1	554.6	550.5	546.3	542.3	538.2
125°	599.6	600.7	601.8	602.6	603.0	603.5	604.0	604.4
127.5°	641.9	643.5	645.1	645.9	646.0	646.1	646.2	646.3
130°	668.7	670.4	672.2	673.0	672.8	672.7	672.5	672.4
132.5°	694.8	696.3	697.7	698.4	698.2	698.1	697.9	697.8
135°	732.1	733.6	735.2	735.8	735.5	735.2	734.9	734.6
137.5°	766.6	768.1	769.7	770.2	769.6	769.1	768.6	768.0
140°	789.0	790.4	791.8	792.1	791.3	790.5	789.7	789.0
142.5°	809.6	810.9	812.2	812.4	811.7	810.9	810.1	809.3
145°	838.5	839.6	840.7	840.9	840.1	839.3	838.5	837.8
147.5°	863.7	864.5	865.4	865.5	864.7	864.1	863.4	862.7
150°	879.2	880.2	881.1	881.2	880.4	879.6	878.8	878.1
152.5°	893.3	894.3	895.2	895.2	894.1	893.1	892.1	891.0
155°	912.4	913.4	914.3	914.1	912.9	911.7	910.4	909.2
157.5°	928.6	929.6	930.7	930.6	929.4	928.2	927.0	925.6
160°	937.9	938.9	939.8	939.7	938.6	937.5	936.4	935.3
162.5°	946.6	947.7	948.8	948.7	947.3	945.9	944.5	943.2
165°	957.4	958.4	959.5	959.5	958.4	957.4	956.2	955.1
167.5°	966.2	967.3	968.4	968.3	966.8	965.4	964.0	962.6
170°	970.8	971.8	972.9	972.8	971.4	970.0	968.6	967.1
172.5°	974.1	975.2	976.3	976.1	974.7	973.3	971.9	970.5
175°	977.9	978.9	980.0	979.8	978.2	976.6	975.0	973.5
177.5°	978.3	979.1	980.0	979.9	978.8	977.5	976.4	975.3
180°	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0

(END OF REPORT)