

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331780-840

Luminaire Tested: **S122RDIW-S290D1240U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331780-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122RDIW-S290D1240U840-4F0-1E-UDD-F1  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1240 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5387.6 lumens  
Efficiency: N/A  
Efficacy: 115.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 46.6  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331780-840

CATALOG NUMBER: S122RDIW-S290D1240U840-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

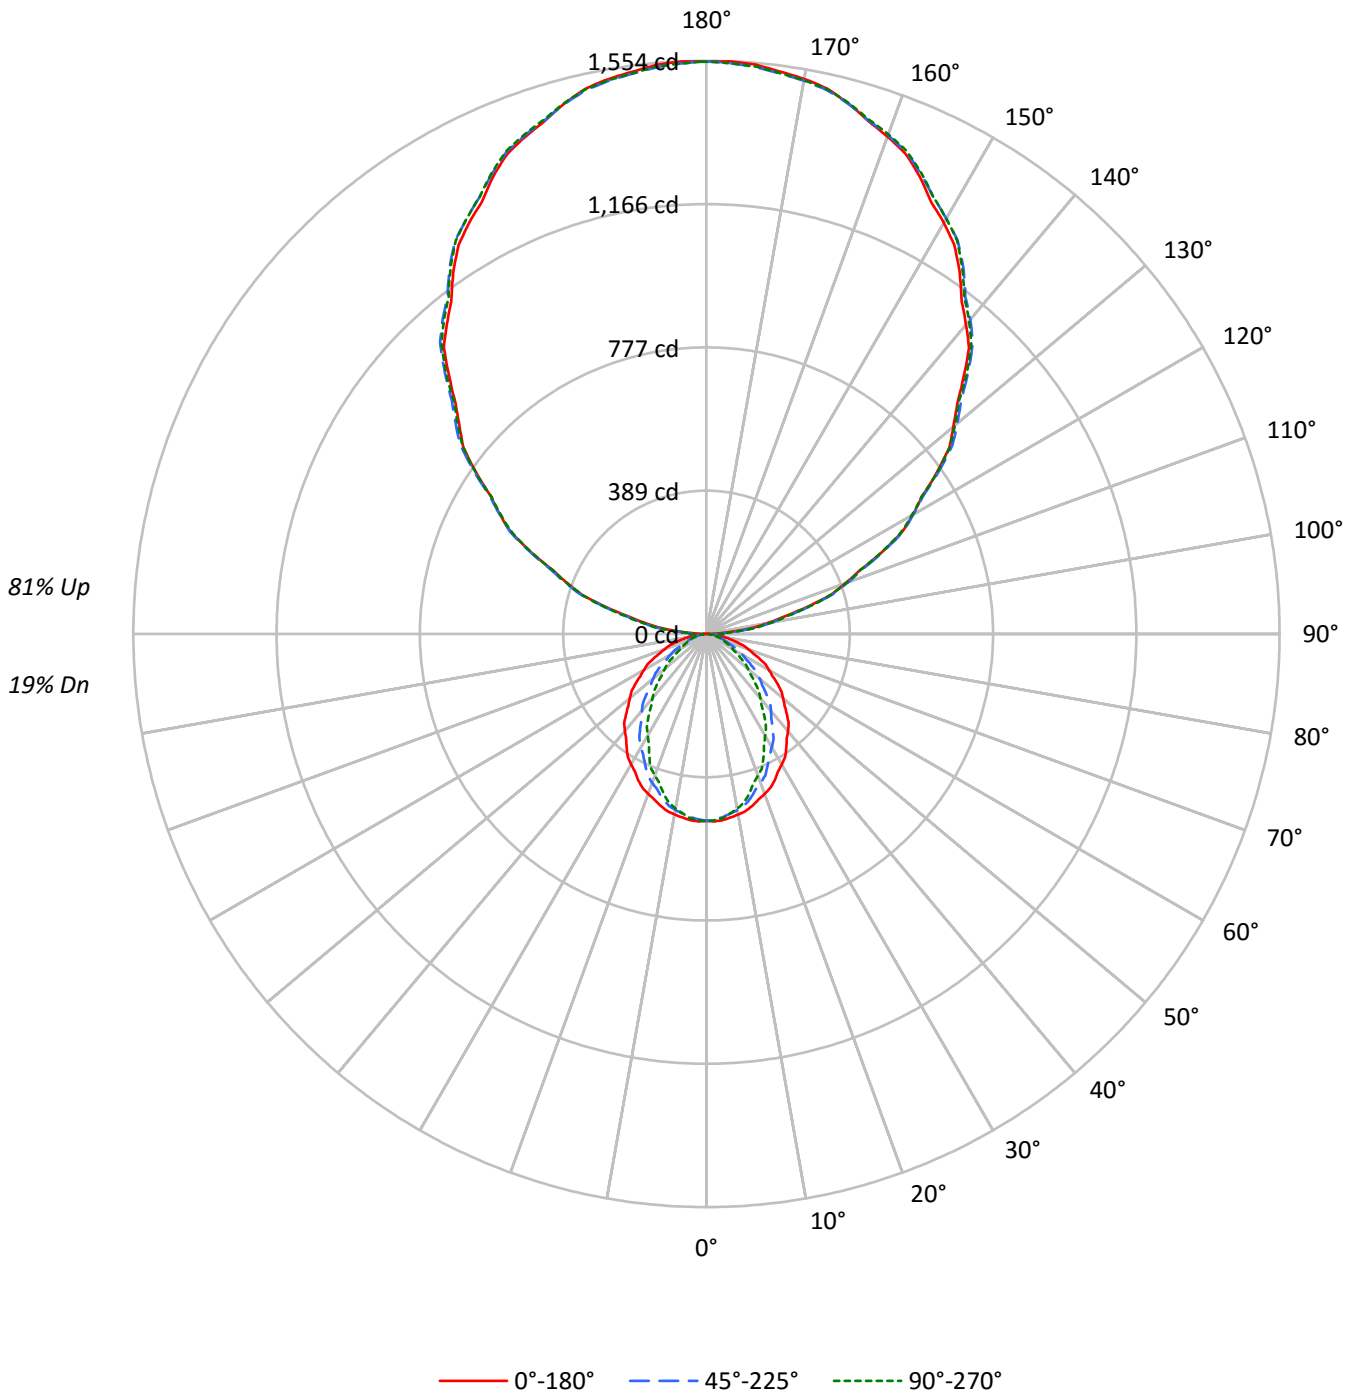



TEST NUMBER: P331780-840

CATALOG NUMBER: S122RDIW-S290D1240U840-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	100	100	100	100	88	88	88	88	66	66	66	46	46	46	28	28	28	19
1	91	87	83	80	80	77	74	71	58	56	54	41	40	39	25	24	24	17
2	83	76	70	66	73	67	63	59	51	48	45	36	34	33	22	21	20	14
3	76	67	60	55	67	59	54	49	45	41	38	32	30	28	20	19	18	12
4	69	59	52	46	61	53	46	42	40	36	33	29	26	24	18	16	15	11
5	64	53	45	39	56	47	40	36	36	31	28	26	23	21	16	15	13	9
6	58	47	40	34	51	42	36	31	32	28	24	23	20	18	15	13	12	8
7	54	42	35	30	48	38	31	27	29	25	21	21	18	16	13	12	11	8
8	50	38	31	26	44	34	28	24	26	22	19	19	16	14	12	11	9	7
9	46	35	28	23	41	31	25	21	24	20	17	18	15	13	11	10	9	6
10	43	32	25	21	38	29	23	19	22	18	15	16	13	11	10	9	8	6

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	8186	8186	8186
5°	8217	8083	8126
10°	8153	7950	7883
15°	8058	7714	7492
20°	7930	7378	7009
25°	7798	6996	6538
30°	7612	6604	5936
35°	7433	6177	5409
40°	7253	5735	4795
45°	7040	5236	4242
50°	6822	4735	3697
55°	6598	4197	3178
60°	6339	3630	2638
65°	6044	3049	2399
70°	5698	2511	2209
75°	5265	2289	2059
80°	4649	2046	1878
85°	3649	1612	1612



TEST NUMBER: P331780-840

CATALOG NUMBER: S122RDIW-S290D1240U840-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	47.4	0.9
10°-20°	130.3	2.4
20°-30°	183.0	3.4
30°-40°	199.5	3.7
40°-50°	183.4	3.4
50°-60°	144.1	2.7
60°-70°	93.9	1.7
70°-80°	48.4	0.9
80°-90°	18.8	0.3
90°-100°	98.3	1.8
100°-110°	305.4	5.7
110°-120°	522.0	9.7
120°-130°	686.4	12.7
130°-140°	770.4	14.3
140°-150°	755.4	14.0
150°-160°	633.6	11.8
160°-170°	420.3	7.8
170°-180°	146.9	2.7
0°-30°	360.7	6.7
0°-40°	560.2	10.4
0°-60°	887.7	16.5
0°-90°	1048.8	19.5
90°-120°	925.7	17.2
90°-150°	3138.0	58.2
90°-180°	4339.0	80.5
0°-180°	5387.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	507	507	507	507	507	
5°	507	504	499	502	501	48
15°	482	476	462	453	448	136
25°	438	422	393	375	367	201
35°	377	353	313	285	274	236
45°	308	277	229	198	186	238
55°	234	198	149	123	113	209
65°	158	121	80	65	63	157
75°	84	53	37	34	33	89
85°	20	11	9	9	9	23
90°	1	18	46	43	44	4
95°	68	81	84	84	81	78
105°	282	285	288	291	291	297
115°	524	531	529	528	524	518
125°	762	773	770	766	765	681
135°	986	1000	1003	1002	998	761
145°	1197	1206	1214	1215	1210	747
155°	1368	1372	1376	1382	1379	630
165°	1489	1488	1488	1496	1490	420
175°	1549	1545	1542	1551	1544	147
180°	1552	1552	1552	1552	1552	



TEST NUMBER: P331780-840

CATALOG NUMBER: S122RDIW-S290D1240U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0
2.5°	508.8	508.4	508.0	507.6	507.2	506.4	505.5	504.7	503.8	502.9	503.7
5°	507.0	506.4	505.9	505.4	504.9	503.9	502.6	501.3	500.0	498.7	499.6
7.5°	501.7	501.1	500.4	499.8	499.2	498.1	496.6	494.9	493.4	491.9	492.1
10°	497.3	496.6	495.8	495.1	494.4	493.0	491.0	489.0	487.0	484.9	484.6
12.5°	491.8	490.9	490.0	489.2	488.3	486.6	483.9	481.3	478.7	476.1	475.5
15°	482.1	481.0	479.9	478.8	477.7	475.3	471.9	468.5	464.9	461.5	459.6
17.5°	470.3	468.6	466.9	465.1	463.4	460.4	456.0	451.5	447.1	442.6	440.3
20°	461.5	459.5	457.5	455.3	453.3	449.8	444.6	439.6	434.5	429.4	426.9
22.5°	452.0	449.7	447.4	445.1	442.8	438.8	433.0	427.3	421.6	415.9	412.5
25°	437.7	434.3	431.1	427.9	424.6	419.6	412.8	406.2	399.4	392.7	388.5
27.5°	420.4	416.9	413.3	409.8	406.2	400.6	393.0	385.5	377.9	370.3	365.5
30°	408.3	404.5	400.5	396.7	392.8	386.8	378.6	370.5	362.3	354.2	349.0
32.5°	396.6	392.0	387.5	382.9	378.4	372.0	363.8	355.4	347.1	338.7	332.9
35°	377.1	371.9	366.7	361.5	356.3	349.2	340.2	331.2	322.3	313.4	306.9
37.5°	357.7	351.9	346.2	340.5	334.8	327.2	317.6	308.0	298.5	288.9	281.9
40°	344.1	338.0	331.8	325.7	319.6	311.6	301.7	291.9	282.0	272.1	264.8
42.5°	330.1	323.7	317.2	310.8	304.4	296.0	285.8	275.6	265.4	255.2	247.7
45°	308.3	301.4	294.6	287.8	280.9	272.2	261.5	250.7	240.0	229.3	222.2
47.5°	287.0	279.7	272.6	265.3	258.0	248.9	237.8	226.8	215.7	204.7	197.5
50°	271.6	264.4	257.1	249.8	242.7	233.4	222.2	211.0	199.8	188.5	181.5
52.5°	256.5	248.9	241.5	233.9	226.3	217.0	206.0	195.1	184.1	173.1	166.3
55°	234.4	226.5	218.5	210.6	202.6	193.2	182.1	171.1	160.1	149.1	143.0
57.5°	211.8	203.6	195.4	187.3	179.2	169.8	159.2	148.7	138.0	127.4	121.8
60°	196.3	188.2	180.1	171.9	163.7	154.4	143.9	133.4	122.9	112.4	107.1
62.5°	181.3	173.2	165.0	156.8	148.7	139.6	129.6	119.6	109.6	99.6	94.6
65°	158.2	150.0	141.8	133.5	125.2	116.5	107.3	98.2	89.0	79.8	76.3
67.5°	136.0	127.8	119.7	111.5	103.3	95.0	86.7	78.6	70.3	62.0	60.4
70°	120.7	112.7	104.7	96.8	88.9	81.4	74.3	67.3	60.3	53.2	52.2
72.5°	105.9	98.4	90.7	83.1	75.4	68.9	63.2	57.6	51.9	46.3	45.3
75°	84.4	77.3	70.2	63.0	55.8	50.6	47.1	43.6	40.2	36.7	36.0
77.5°	63.2	57.0	50.7	44.4	38.2	34.2	32.5	30.9	29.2	27.6	27.2
80°	50.0	44.8	39.6	34.4	29.2	26.1	25.0	24.0	23.0	22.0	21.6
82.5°	37.9	33.8	29.8	25.8	21.7	19.3	18.6	17.9	17.2	16.6	16.3
85°	19.7	17.6	15.5	13.3	11.2	9.9	9.6	9.3	9.0	8.7	8.7
87.5°	6.2	6.2	6.3	6.3	6.4	7.0	8.3	9.5	10.8	12.1	11.9
90°	1.3	4.8	8.3	11.8	15.2	20.2	26.7	33.0	39.4	45.8	45.2
92.5°	23.3	25.9	28.5	31.0	33.5	35.5	37.1	38.6	40.1	41.6	41.7
95°	68.1	71.0	73.9	76.9	79.8	81.5	82.1	82.6	83.2	83.8	83.8
97.5°	124.4	126.9	129.6	132.1	134.6	136.4	137.5	138.7	139.8	140.9	140.9
100°	166.3	168.6	171.0	173.3	175.6	177.2	178.0	178.9	179.9	180.7	180.7
102.5°	210.3	212.2	214.0	215.9	217.7	219.2	220.4	221.5	222.6	223.7	223.9
105°	281.6	282.4	283.3	284.2	285.0	285.8	286.3	286.9	287.5	288.1	288.6
107.5°	353.3	354.6	355.9	357.1	358.4	359.0	359.0	359.0	359.0	359.0	359.3
110°	399.4	401.1	402.8	404.7	406.4	407.3	407.3	407.3	407.3	407.3	407.3



TEST NUMBER: P331780-840

CATALOG NUMBER: S122RDIW-S290D1240U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	449.7	451.4	453.1	454.9	456.7	457.4	457.2	457.0	456.7	456.5	455.8
115°	523.8	525.5	527.3	529.0	530.8	531.3	530.8	530.2	529.6	529.0	528.8
117.5°	597.6	600.0	602.3	604.6	606.9	607.3	605.6	604.0	602.4	600.8	600.1
120°	646.8	649.1	651.6	653.9	656.2	656.2	653.9	651.6	649.1	646.8	646.8
122.5°	691.9	694.7	697.5	700.2	703.1	703.7	702.1	700.4	698.7	697.1	696.4
125°	762.0	764.7	767.3	769.9	772.5	773.5	772.5	771.7	770.8	769.9	769.1
127.5°	830.4	833.7	837.1	840.4	843.7	844.9	843.8	842.7	841.7	840.6	839.6
130°	873.4	877.2	881.0	884.7	888.5	890.1	889.6	889.0	888.4	887.8	887.2
132.5°	921.6	924.6	927.8	930.8	933.9	935.5	935.6	935.7	935.8	935.9	934.7
135°	986.0	989.2	992.4	995.6	998.9	1000.7	1001.3	1001.9	1002.5	1003.0	1002.7
137.5°	1053.8	1056.4	1059.0	1061.7	1064.3	1066.0	1066.7	1067.5	1068.2	1069.0	1068.8
140°	1094.7	1097.3	1099.9	1102.6	1105.2	1107.2	1108.6	1110.1	1111.6	1113.0	1113.0
142.5°	1136.6	1139.2	1141.9	1144.5	1147.1	1148.8	1149.8	1150.8	1151.9	1152.9	1153.1
145°	1196.8	1198.9	1200.9	1203.0	1205.0	1206.9	1208.6	1210.3	1212.1	1213.9	1214.2
147.5°	1250.5	1252.9	1255.4	1257.9	1260.3	1262.1	1263.2	1264.5	1265.6	1266.8	1267.4
150°	1287.2	1288.9	1290.7	1292.4	1294.1	1295.7	1296.8	1298.0	1299.1	1300.3	1301.1
152.5°	1319.7	1321.4	1323.1	1324.8	1326.7	1328.2	1329.6	1331.0	1332.4	1333.8	1334.9
155°	1368.4	1369.3	1370.1	1371.0	1371.9	1372.7	1373.6	1374.4	1375.3	1376.2	1377.7
157.5°	1410.0	1410.6	1411.2	1411.8	1412.3	1412.9	1413.4	1413.9	1414.4	1415.0	1416.9
160°	1435.1	1435.7	1436.3	1436.9	1437.4	1437.9	1438.1	1438.5	1438.8	1439.1	1440.8
162.5°	1458.1	1458.3	1458.4	1458.5	1458.6	1458.9	1459.2	1459.5	1459.8	1460.1	1462.0
165°	1488.8	1488.5	1488.2	1487.9	1487.6	1487.5	1487.5	1487.5	1487.5	1487.5	1489.6
167.5°	1514.5	1513.6	1512.8	1511.9	1511.0	1510.6	1510.5	1510.5	1510.4	1510.3	1512.4
170°	1528.1	1527.2	1526.4	1525.5	1524.6	1524.1	1523.8	1523.5	1523.2	1522.9	1524.9
172.5°	1537.5	1536.7	1535.8	1534.9	1534.1	1533.5	1533.2	1532.9	1532.6	1532.3	1534.4
175°	1549.0	1548.2	1547.3	1546.4	1545.6	1544.9	1544.3	1543.7	1543.1	1542.5	1544.6
177.5°	1553.8	1553.1	1552.4	1551.7	1551.0	1550.4	1549.9	1549.4	1549.0	1548.5	1549.9
180°	1551.7	1551.7	1551.7	1551.7	1551.7	1551.7	1551.7	1551.7	1551.7	1551.7	1551.7



TEST NUMBER: P331780-840

CATALOG NUMBER: S122RDIW-S290D1240U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0
2.5°	504.5	505.3	506.1	506.4	506.3	506.1	505.9	505.8
5°	500.5	501.4	502.3	502.6	502.3	502.0	501.7	501.4
7.5°	492.4	492.7	492.9	492.8	492.3	491.7	491.2	490.7
10°	484.3	484.0	483.7	483.2	482.6	482.0	481.4	480.8
12.5°	475.0	474.4	473.9	473.1	472.1	471.1	470.1	469.1
15°	457.7	455.7	453.7	452.3	451.3	450.2	449.2	448.2
17.5°	438.0	435.7	433.4	431.4	429.6	427.9	426.1	424.3
20°	424.3	421.7	419.2	416.8	414.5	412.3	410.1	407.9
22.5°	409.3	406.0	402.7	400.2	398.5	396.9	395.2	393.5
25°	384.4	380.1	376.0	373.1	371.6	370.0	368.5	367.0
27.5°	360.5	355.7	350.8	347.2	344.8	342.3	339.9	337.5
30°	343.8	338.6	333.4	329.4	326.6	323.9	321.1	318.4
32.5°	326.9	320.9	315.0	310.7	308.2	305.6	303.0	300.4
35°	300.5	294.1	287.6	283.3	281.0	278.8	276.6	274.4
37.5°	274.8	267.7	260.6	255.8	253.3	250.6	248.1	245.5
40°	257.6	250.3	243.1	238.1	235.5	232.9	230.1	227.5
42.5°	240.1	232.7	225.2	220.3	217.6	215.1	212.5	210.0
45°	214.9	207.6	200.5	195.6	193.2	190.7	188.2	185.8
47.5°	190.3	183.1	175.9	171.2	169.0	166.7	164.5	162.3
50°	174.5	167.4	160.4	155.8	153.7	151.6	149.4	147.2
52.5°	159.6	152.8	146.0	141.6	139.7	137.6	135.6	133.7
55°	136.8	130.8	124.6	120.6	118.7	116.7	114.8	112.9
57.5°	116.2	110.6	105.0	101.4	99.8	98.2	96.5	94.8
60°	102.0	96.8	91.6	88.2	86.5	84.9	83.3	81.7
62.5°	89.7	84.7	79.8	76.7	75.7	74.8	73.8	72.8
65°	72.9	69.4	65.9	64.0	63.7	63.4	63.1	62.8
67.5°	58.9	57.3	55.6	54.7	54.3	54.0	53.7	53.4
70°	51.2	50.2	49.2	48.5	48.0	47.6	47.2	46.8
72.5°	44.5	43.6	42.8	42.3	42.0	41.8	41.5	41.3
75°	35.2	34.5	33.8	33.4	33.3	33.2	33.1	33.0
77.5°	26.7	26.3	25.9	25.7	25.4	25.2	25.1	24.9
80°	21.2	20.8	20.4	20.2	20.2	20.2	20.2	20.2
82.5°	16.1	15.8	15.6	15.5	15.5	15.5	15.5	15.5
85°	8.7	8.7	8.7	8.7	8.7	8.7	8.7	8.7
87.5°	11.7	11.5	11.3	11.2	11.3	11.3	11.4	11.5
90°	44.6	44.1	43.5	43.3	43.6	43.9	44.2	44.5
92.5°	41.9	42.0	42.1	42.2	42.2	42.3	42.4	42.4
95°	83.8	83.8	83.8	83.5	82.9	82.3	81.8	81.2
97.5°	140.9	140.9	140.9	140.9	140.8	140.8	140.7	140.7
100°	180.7	180.7	180.7	180.6	180.3	180.0	179.7	179.4
102.5°	224.1	224.4	224.6	224.6	224.3	224.0	223.7	223.4
105°	289.2	289.8	290.4	290.7	290.7	290.7	290.7	290.7
107.5°	359.5	359.7	360.0	359.4	358.1	356.8	355.4	354.1
110°	407.3	407.3	407.3	406.8	406.0	405.1	404.1	403.3





TEST NUMBER: P331780-840

CATALOG NUMBER: S122RDIW-S290D1240U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	455.0	454.3	453.6	453.0	452.3	451.7	451.1	450.4
115°	528.5	528.2	527.9	527.3	526.4	525.5	524.6	523.8
117.5°	599.4	598.6	597.9	597.2	596.3	595.4	594.6	593.7
120°	646.8	646.8	646.8	646.4	645.5	644.7	643.8	643.0
122.5°	695.8	695.1	694.4	693.7	693.1	692.4	691.8	691.2
125°	768.2	767.3	766.5	765.9	765.6	765.3	765.0	764.7
127.5°	838.6	837.5	836.5	835.5	834.6	833.6	832.7	831.7
130°	886.7	886.1	885.4	884.6	883.4	882.3	881.1	879.9
132.5°	933.4	932.1	930.9	929.8	928.9	927.9	927.0	926.0
135°	1002.5	1002.2	1001.9	1001.3	1000.4	999.6	998.7	997.7
137.5°	1068.5	1068.3	1068.1	1067.4	1066.2	1065.1	1063.9	1062.8
140°	1113.0	1113.0	1113.0	1112.5	1111.3	1110.1	1108.9	1107.8
142.5°	1153.3	1153.6	1153.8	1153.3	1152.2	1150.9	1149.8	1148.6
145°	1214.5	1214.8	1215.0	1214.6	1213.5	1212.2	1211.1	1209.9
147.5°	1268.0	1268.7	1269.3	1269.1	1268.0	1266.9	1265.8	1264.7
150°	1302.0	1302.9	1303.7	1303.7	1302.9	1302.0	1301.1	1300.3
152.5°	1336.1	1337.1	1338.2	1338.2	1337.1	1336.1	1334.9	1333.8
155°	1379.2	1380.6	1382.0	1382.3	1381.5	1380.6	1379.7	1378.9
157.5°	1419.0	1420.9	1422.9	1423.2	1421.8	1420.4	1419.0	1417.5
160°	1442.6	1444.3	1446.0	1446.3	1445.2	1444.0	1442.9	1441.7
162.5°	1464.0	1465.9	1467.9	1468.2	1466.8	1465.4	1464.0	1462.7
165°	1491.6	1493.6	1495.7	1495.9	1494.5	1493.1	1491.6	1490.2
167.5°	1514.4	1516.4	1518.4	1518.7	1517.2	1515.7	1514.2	1512.7
170°	1526.9	1528.9	1531.1	1531.2	1529.4	1527.7	1525.9	1524.2
172.5°	1536.4	1538.4	1540.4	1540.5	1538.8	1537.1	1535.4	1533.6
175°	1546.6	1548.6	1550.6	1550.8	1549.0	1547.3	1545.6	1543.8
177.5°	1551.4	1552.8	1554.1	1554.1	1552.8	1551.4	1549.9	1548.5
180°	1551.7	1551.7	1551.7	1551.7	1551.7	1551.7	1551.7	1551.7

(END OF REPORT)