

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331768-840

Luminaire Tested: **S122RDIW-S290D435U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331768-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S290D435U840-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 435 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2560.8 lumens
Efficiency: N/A
Efficacy: 111.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 23
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331768-840

CATALOG NUMBER: S122RDIW-S290D435U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

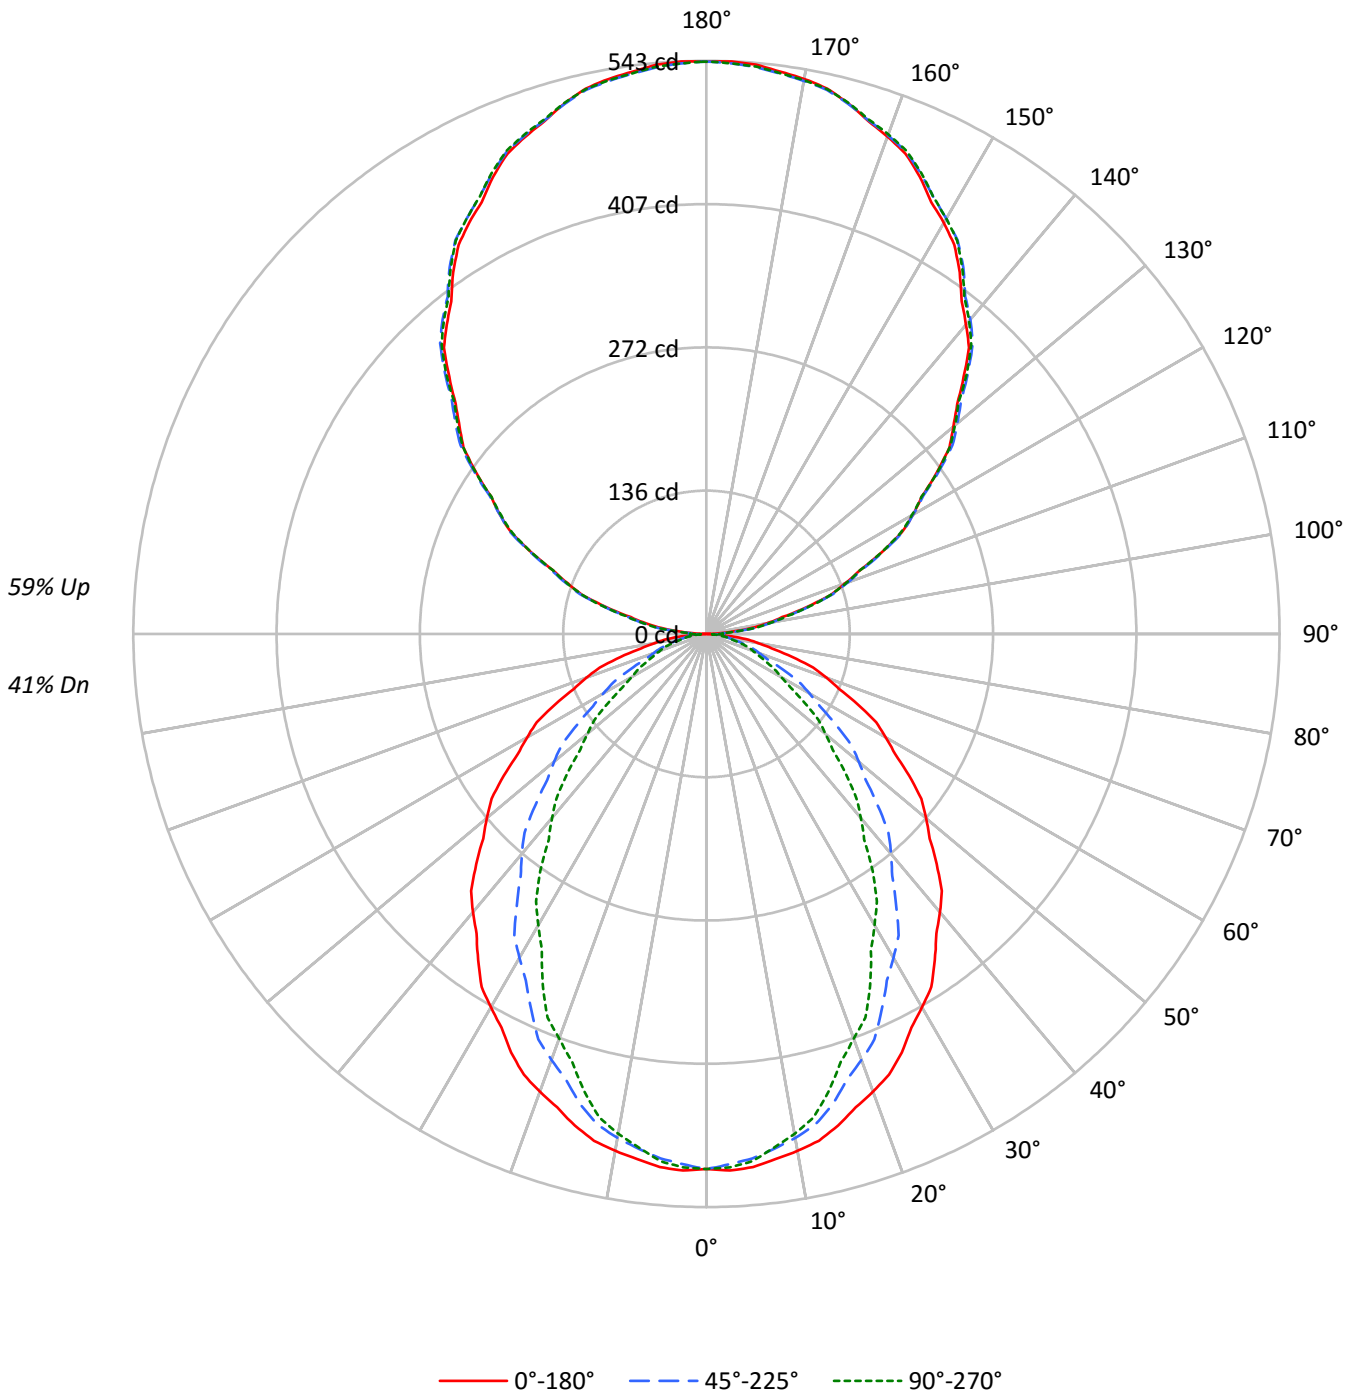



TEST NUMBER: P331768-840

CATALOG NUMBER: S122RDIW-S290D435U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	48	48	48	41
1	96	92	88	85	87	84	81	78	69	67	65	55	54	53	43	42	41	35
2	88	81	75	70	80	74	69	65	61	57	54	49	47	44	38	36	35	30
3	80	71	64	59	73	65	59	54	54	50	46	44	41	38	34	32	30	26
4	74	63	56	50	67	58	52	46	48	43	40	39	36	33	31	28	26	23
5	68	57	49	43	62	52	45	40	43	38	34	35	32	29	28	25	23	20
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	25	23	21	18
7	58	46	38	33	53	42	36	31	36	30	27	29	25	23	23	21	18	16
8	54	42	34	29	49	39	32	27	32	27	24	27	23	20	21	19	17	14
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	20	17	15	13
10	47	35	28	23	43	32	26	22	27	23	19	23	19	17	18	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8186	8186	8186
5°	8217	8083	8126
10°	8153	7950	7883
15°	8058	7714	7492
20°	7930	7378	7009
25°	7798	6996	6538
30°	7612	6604	5936
35°	7433	6177	5409
40°	7253	5735	4795
45°	7040	5236	4242
50°	6822	4735	3697
55°	6598	4197	3178
60°	6339	3630	2638
65°	6044	3049	2399
70°	5698	2511	2209
75°	5265	2289	2059
80°	4649	2046	1878
85°	3649	1612	1612



TEST NUMBER: P331768-840

CATALOG NUMBER: S122RDIW-S290D435U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.4	1.9
10°-20°	130.3	5.1
20°-30°	183.0	7.1
30°-40°	199.5	7.8
40°-50°	183.4	7.2
50°-60°	144.1	5.6
60°-70°	93.9	3.7
70°-80°	48.4	1.9
80°-90°	14.7	0.6
90°-100°	34.4	1.3
100°-110°	106.7	4.2
110°-120°	182.4	7.1
120°-130°	239.9	9.4
130°-140°	269.2	10.5
140°-150°	263.9	10.3
150°-160°	221.4	8.6
160°-170°	146.8	5.7
170°-180°	51.3	2.0
0°-30°	360.7	14.1
0°-40°	560.2	21.9
0°-60°	887.7	34.7
0°-90°	1044.8	40.8
90°-120°	323.4	12.6
90°-150°	1096.4	42.8
90°-180°	1516.0	59.2
0°-180°	2560.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	507	507	507	507	507	
5°	507	504	499	502	501	48
15°	482	476	462	453	448	136
25°	438	422	393	375	367	201
35°	377	353	313	285	274	236
45°	308	277	229	198	186	238
55°	234	198	149	123	113	209
65°	158	121	80	65	63	157
75°	84	53	37	34	33	89
85°	20	11	9	9	9	23
90°	0	6	16	15	16	2
95°	24	28	29	29	28	27
105°	98	100	101	102	102	104
115°	183	186	185	184	183	181
125°	266	270	269	268	267	238
135°	345	349	350	350	349	266
145°	418	421	424	424	423	261
155°	478	480	481	483	482	220
165°	520	520	520	523	521	147
175°	541	540	539	542	540	51
180°	542	542	542	542	542	



TEST NUMBER: P331768-840

CATALOG NUMBER: S122RDIW-S290D435U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0
2.5°	508.8	508.4	508.0	507.6	507.2	506.4	505.5	504.7	503.8	502.9	503.7
5°	507.0	506.4	505.9	505.4	504.9	503.9	502.6	501.3	500.0	498.7	499.6
7.5°	501.7	501.1	500.4	499.8	499.2	498.1	496.6	494.9	493.4	491.9	492.1
10°	497.3	496.6	495.8	495.1	494.4	493.0	491.0	489.0	487.0	484.9	484.6
12.5°	491.8	490.9	490.0	489.2	488.3	486.6	483.9	481.3	478.7	476.1	475.5
15°	482.1	481.0	479.9	478.8	477.7	475.3	471.9	468.5	464.9	461.5	459.6
17.5°	470.3	468.6	466.9	465.1	463.4	460.4	456.0	451.5	447.1	442.6	440.3
20°	461.5	459.5	457.5	455.3	453.3	449.8	444.6	439.6	434.5	429.4	426.9
22.5°	452.0	449.7	447.4	445.1	442.8	438.8	433.0	427.3	421.6	415.9	412.5
25°	437.7	434.3	431.1	427.9	424.6	419.6	412.8	406.2	399.4	392.7	388.5
27.5°	420.4	416.9	413.3	409.8	406.2	400.6	393.0	385.5	377.9	370.3	365.5
30°	408.3	404.5	400.5	396.7	392.8	386.8	378.6	370.5	362.3	354.2	349.0
32.5°	396.6	392.0	387.5	382.9	378.4	372.0	363.8	355.4	347.1	338.7	332.9
35°	377.1	371.9	366.7	361.5	356.3	349.2	340.2	331.2	322.3	313.4	306.9
37.5°	357.7	351.9	346.2	340.5	334.8	327.2	317.6	308.0	298.5	288.9	281.9
40°	344.1	338.0	331.8	325.7	319.6	311.6	301.7	291.9	282.0	272.1	264.8
42.5°	330.1	323.7	317.2	310.8	304.4	296.0	285.8	275.6	265.4	255.2	247.7
45°	308.3	301.4	294.6	287.8	280.9	272.2	261.5	250.7	240.0	229.3	222.2
47.5°	287.0	279.7	272.6	265.3	258.0	248.9	237.8	226.8	215.7	204.7	197.5
50°	271.6	264.4	257.1	249.8	242.7	233.4	222.2	211.0	199.8	188.5	181.5
52.5°	256.5	248.9	241.5	233.9	226.3	217.0	206.0	195.1	184.1	173.1	166.3
55°	234.4	226.5	218.5	210.6	202.6	193.2	182.1	171.1	160.1	149.1	143.0
57.5°	211.8	203.6	195.4	187.3	179.2	169.8	159.2	148.7	138.0	127.4	121.8
60°	196.3	188.2	180.1	171.9	163.7	154.4	143.9	133.4	122.9	112.4	107.1
62.5°	181.3	173.2	165.0	156.8	148.7	139.6	129.6	119.6	109.6	99.6	94.6
65°	158.2	150.0	141.8	133.5	125.2	116.5	107.3	98.2	89.0	79.8	76.3
67.5°	136.0	127.8	119.7	111.5	103.3	95.0	86.7	78.6	70.3	62.0	60.4
70°	120.7	112.7	104.7	96.8	88.9	81.4	74.3	67.3	60.3	53.2	52.2
72.5°	105.9	98.4	90.7	83.1	75.4	68.9	63.2	57.6	51.9	46.3	45.3
75°	84.4	77.3	70.2	63.0	55.8	50.6	47.1	43.6	40.2	36.7	36.0
77.5°	63.2	57.0	50.7	44.4	38.2	34.2	32.5	30.9	29.2	27.6	27.2
80°	50.0	44.8	39.6	34.4	29.2	26.1	25.0	24.0	23.0	22.0	21.6
82.5°	37.9	33.8	29.8	25.8	21.7	19.3	18.6	17.9	17.2	16.6	16.3
85°	19.7	17.6	15.5	13.3	11.2	9.9	9.6	9.3	9.0	8.7	8.7
87.5°	6.0	5.6	5.2	4.7	4.3	4.3	4.7	5.3	5.7	6.2	6.1
90°	0.5	1.7	2.9	4.1	5.4	7.1	9.3	11.5	13.7	16.1	15.9
92.5°	8.2	9.1	9.9	10.8	11.7	12.4	12.9	13.5	14.0	14.5	14.5
95°	23.8	24.8	25.9	26.9	27.9	28.5	28.7	28.9	29.1	29.3	29.3
97.5°	43.4	44.3	45.2	46.2	47.1	47.7	48.1	48.5	48.9	49.2	49.2
100°	58.1	58.9	59.7	60.6	61.4	61.9	62.2	62.5	62.8	63.1	63.1
102.5°	73.5	74.1	74.7	75.4	76.0	76.6	77.0	77.4	77.8	78.2	78.3
105°	98.4	98.7	99.0	99.3	99.6	99.9	100.1	100.3	100.5	100.7	100.9
107.5°	123.4	123.9	124.3	124.8	125.2	125.4	125.4	125.4	125.4	125.4	125.5
110°	139.6	140.2	140.8	141.4	142.0	142.3	142.3	142.3	142.3	142.3	142.3



TEST NUMBER: P331768-840

CATALOG NUMBER: S122RDIW-S290D435U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	157.1	157.7	158.3	159.0	159.6	159.9	159.8	159.7	159.6	159.5	159.3
115°	183.0	183.6	184.2	184.8	185.4	185.6	185.4	185.2	185.0	184.8	184.7
117.5°	208.8	209.6	210.5	211.3	212.1	212.2	211.7	211.1	210.5	210.0	209.6
120°	226.0	226.8	227.6	228.4	229.2	229.2	228.4	227.6	226.8	226.0	226.0
122.5°	241.8	242.8	243.7	244.7	245.7	245.9	245.3	244.7	244.2	243.6	243.4
125°	266.3	267.2	268.1	269.0	269.9	270.2	269.9	269.6	269.3	269.0	268.7
127.5°	290.1	291.3	292.5	293.7	294.8	295.2	294.9	294.5	294.1	293.8	293.4
130°	305.2	306.5	307.8	309.1	310.4	311.0	310.8	310.6	310.4	310.2	310.0
132.5°	322.0	323.1	324.2	325.3	326.3	326.9	326.9	327.0	327.0	327.0	326.6
135°	344.6	345.7	346.8	347.9	349.0	349.6	349.8	350.0	350.2	350.4	350.3
137.5°	368.2	369.1	370.0	370.9	371.8	372.4	372.7	373.0	373.2	373.5	373.4
140°	382.5	383.4	384.4	385.3	386.2	386.9	387.4	387.9	388.4	388.9	388.9
142.5°	397.2	398.1	399.0	399.9	400.8	401.4	401.7	402.1	402.4	402.8	402.9
145°	418.2	418.9	419.6	420.3	421.0	421.7	422.3	422.9	423.5	424.1	424.2
147.5°	437.0	437.8	438.7	439.5	440.4	441.0	441.4	441.8	442.2	442.6	442.8
150°	449.8	450.4	451.0	451.6	452.2	452.7	453.1	453.5	453.9	454.3	454.6
152.5°	461.1	461.7	462.3	462.9	463.5	464.1	464.5	465.0	465.5	466.1	466.5
155°	478.1	478.4	478.7	479.1	479.4	479.7	480.0	480.3	480.6	480.9	481.4
157.5°	492.7	492.9	493.1	493.3	493.5	493.6	493.8	494.0	494.2	494.4	495.1
160°	501.5	501.7	501.9	502.1	502.3	502.4	502.5	502.6	502.7	502.8	503.4
162.5°	509.5	509.6	509.6	509.6	509.7	509.8	509.9	510.0	510.1	510.2	510.8
165°	520.2	520.1	520.0	519.9	519.8	519.8	519.8	519.8	519.8	519.8	520.5
167.5°	529.2	528.9	528.6	528.3	528.0	527.8	527.8	527.8	527.8	527.8	528.5
170°	533.9	533.6	533.3	533.0	532.7	532.5	532.4	532.3	532.2	532.1	532.8
172.5°	537.2	536.9	536.6	536.3	536.0	535.8	535.7	535.6	535.5	535.4	536.1
175°	541.3	541.0	540.7	540.4	540.1	539.8	539.6	539.4	539.2	539.0	539.7
177.5°	542.9	542.7	542.4	542.2	541.9	541.7	541.6	541.4	541.2	541.1	541.6
180°	542.2	542.2	542.2	542.2	542.2	542.2	542.2	542.2	542.2	542.2	542.2



TEST NUMBER: P331768-840

CATALOG NUMBER: S122RDIW-S290D435U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0
2.5°	504.5	505.3	506.1	506.4	506.3	506.1	505.9	505.8
5°	500.5	501.4	502.3	502.6	502.3	502.0	501.7	501.4
7.5°	492.4	492.7	492.9	492.8	492.3	491.7	491.2	490.7
10°	484.3	484.0	483.7	483.2	482.6	482.0	481.4	480.8
12.5°	475.0	474.4	473.9	473.1	472.1	471.1	470.1	469.1
15°	457.7	455.7	453.7	452.3	451.3	450.2	449.2	448.2
17.5°	438.0	435.7	433.4	431.4	429.6	427.9	426.1	424.3
20°	424.3	421.7	419.2	416.8	414.5	412.3	410.1	407.9
22.5°	409.3	406.0	402.7	400.2	398.5	396.9	395.2	393.5
25°	384.4	380.1	376.0	373.1	371.6	370.0	368.5	367.0
27.5°	360.5	355.7	350.8	347.2	344.8	342.3	339.9	337.5
30°	343.8	338.6	333.4	329.4	326.6	323.9	321.1	318.4
32.5°	326.9	320.9	315.0	310.7	308.2	305.6	303.0	300.4
35°	300.5	294.1	287.6	283.3	281.0	278.8	276.6	274.4
37.5°	274.8	267.7	260.6	255.8	253.3	250.6	248.1	245.5
40°	257.6	250.3	243.1	238.1	235.5	232.9	230.1	227.5
42.5°	240.1	232.7	225.2	220.3	217.6	215.1	212.5	210.0
45°	214.9	207.6	200.5	195.6	193.2	190.7	188.2	185.8
47.5°	190.3	183.1	175.9	171.2	169.0	166.7	164.5	162.3
50°	174.5	167.4	160.4	155.8	153.7	151.6	149.4	147.2
52.5°	159.6	152.8	146.0	141.6	139.7	137.6	135.6	133.7
55°	136.8	130.8	124.6	120.6	118.7	116.7	114.8	112.9
57.5°	116.2	110.6	105.0	101.4	99.8	98.2	96.5	94.8
60°	102.0	96.8	91.6	88.2	86.5	84.9	83.3	81.7
62.5°	89.7	84.7	79.8	76.7	75.7	74.8	73.8	72.8
65°	72.9	69.4	65.9	64.0	63.7	63.4	63.1	62.8
67.5°	58.9	57.3	55.6	54.7	54.3	54.0	53.7	53.4
70°	51.2	50.2	49.2	48.5	48.0	47.6	47.2	46.8
72.5°	44.5	43.6	42.8	42.3	42.0	41.8	41.5	41.3
75°	35.2	34.5	33.8	33.4	33.3	33.2	33.1	33.0
77.5°	26.7	26.3	25.9	25.7	25.4	25.2	25.1	24.9
80°	21.2	20.8	20.4	20.2	20.2	20.2	20.2	20.2
82.5°	16.1	15.8	15.6	15.5	15.5	15.5	15.5	15.5
85°	8.7	8.7	8.7	8.7	8.7	8.7	8.7	8.7
87.5°	5.9	5.8	5.7	5.6	5.7	5.7	5.7	5.7
90°	15.7	15.5	15.2	15.1	15.2	15.3	15.5	15.6
92.5°	14.6	14.6	14.7	14.7	14.7	14.7	14.8	14.8
95°	29.3	29.3	29.3	29.2	29.0	28.8	28.6	28.4
97.5°	49.2	49.2	49.2	49.2	49.2	49.2	49.2	49.2
100°	63.1	63.1	63.1	63.1	63.0	62.9	62.8	62.7
102.5°	78.3	78.4	78.5	78.5	78.4	78.3	78.2	78.1
105°	101.1	101.3	101.5	101.6	101.6	101.6	101.6	101.6
107.5°	125.6	125.7	125.8	125.6	125.1	124.6	124.2	123.7
110°	142.3	142.3	142.3	142.1	141.8	141.5	141.2	140.9



TEST NUMBER: P331768-840

CATALOG NUMBER: S122RDIW-S290D435U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	159.1	158.8	158.5	158.2	158.0	157.8	157.6	157.4
115°	184.6	184.5	184.4	184.2	183.9	183.6	183.3	183.0
117.5°	209.4	209.1	208.9	208.6	208.3	208.0	207.7	207.4
120°	226.0	226.0	226.0	225.9	225.6	225.3	225.0	224.7
122.5°	243.1	242.9	242.6	242.4	242.2	242.0	241.7	241.5
125°	268.4	268.1	267.8	267.6	267.5	267.4	267.3	267.2
127.5°	293.0	292.7	292.3	292.0	291.5	291.2	290.9	290.6
130°	309.8	309.6	309.4	309.1	308.7	308.3	307.9	307.5
132.5°	326.2	325.7	325.3	324.9	324.6	324.2	323.9	323.6
135°	350.2	350.1	350.0	349.8	349.5	349.2	348.9	348.6
137.5°	373.3	373.2	373.2	372.9	372.5	372.1	371.7	371.3
140°	388.9	388.9	388.9	388.7	388.3	387.9	387.5	387.1
142.5°	402.9	403.0	403.1	402.9	402.5	402.1	401.7	401.3
145°	424.3	424.4	424.5	424.3	423.9	423.5	423.1	422.7
147.5°	443.0	443.3	443.5	443.4	443.0	442.6	442.2	441.9
150°	454.9	455.2	455.6	455.6	455.2	454.9	454.6	454.3
152.5°	466.8	467.2	467.6	467.6	467.2	466.8	466.5	466.1
155°	481.9	482.4	482.9	483.0	482.7	482.4	482.1	481.8
157.5°	495.7	496.4	497.2	497.3	496.8	496.2	495.8	495.3
160°	504.0	504.6	505.2	505.3	504.9	504.5	504.1	503.7
162.5°	511.5	512.2	512.9	513.0	512.5	512.0	511.5	511.1
165°	521.2	521.9	522.6	522.7	522.2	521.7	521.2	520.7
167.5°	529.2	529.9	530.6	530.7	530.1	529.6	529.1	528.6
170°	533.5	534.2	534.9	535.0	534.4	533.8	533.2	532.6
172.5°	536.8	537.6	538.3	538.3	537.7	537.0	536.4	535.8
175°	540.4	541.1	541.8	541.9	541.3	540.7	540.1	539.5
177.5°	542.1	542.5	543.0	543.0	542.5	542.1	541.6	541.1
180°	542.2	542.2	542.2	542.2	542.2	542.2	542.2	542.2

(END OF REPORT)