

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331775-840

Luminaire Tested: **S122RDIW-S290D970U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331775-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S290D970U840-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 970 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4954.0 lumens
Efficiency: N/A
Efficacy: 130.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 38
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331775-840

CATALOG NUMBER: S122RDIW-S290D970U840-4F0-1E-UDD-F

Luminous Intensity Polar Plot

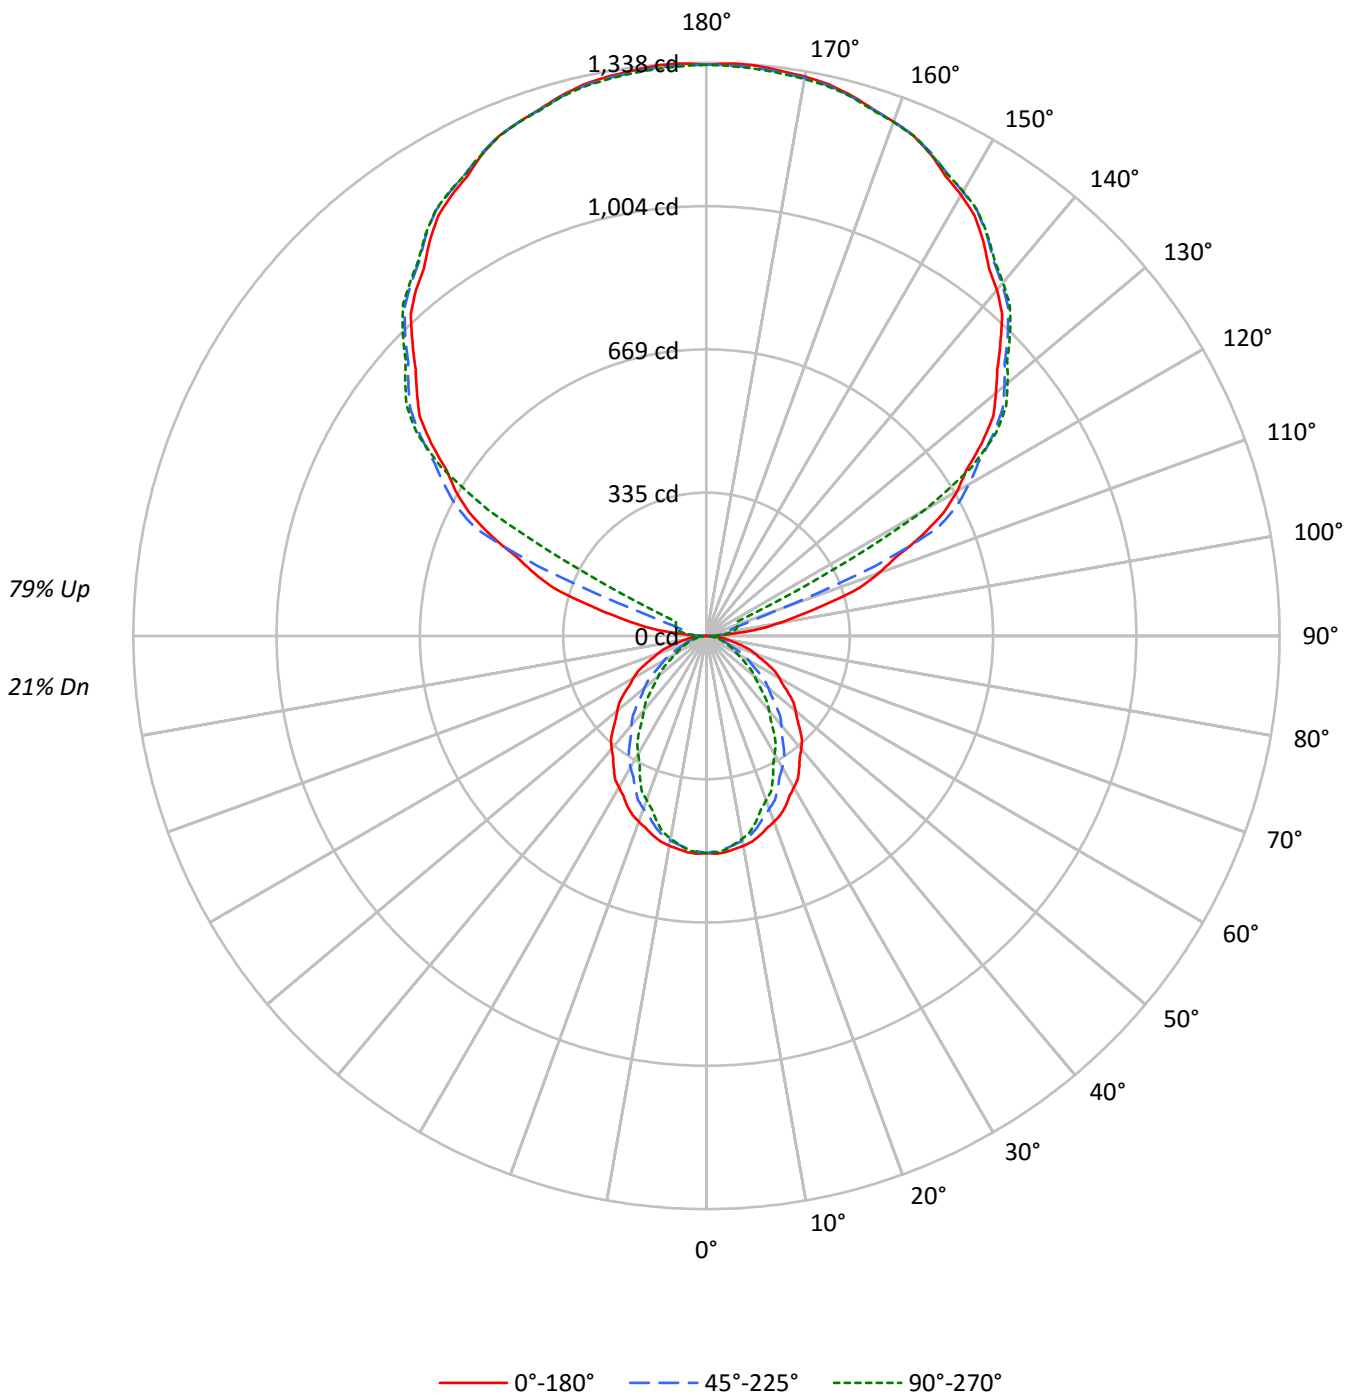



TEST NUMBER: P331775-840

CATALOG NUMBER: S122RDIW-S290D970U840-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	100	100	100	100	89	89	89	89	67	67	67	48	48	48	30	30	30	21
1	92	87	84	81	81	78	75	72	59	57	55	42	41	40	26	26	25	18
2	83	77	71	66	74	68	63	59	52	49	46	37	35	34	23	22	22	16
3	76	67	61	55	67	60	54	50	46	42	39	33	31	29	21	20	19	13
4	70	60	52	47	61	53	47	42	41	37	33	29	27	25	19	17	16	12
5	64	53	45	40	56	47	41	36	36	32	29	26	24	21	17	15	14	10
6	59	47	40	34	52	42	36	31	33	28	25	24	21	19	15	14	12	9
7	54	43	35	30	48	38	32	27	30	25	22	22	19	16	14	12	11	8
8	50	39	31	26	44	35	28	24	27	22	19	20	17	15	13	11	10	7
9	47	35	28	23	41	32	25	21	25	20	17	18	15	13	12	10	9	7
10	43	32	25	21	39	29	23	19	23	18	15	17	14	12	11	9	8	6

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8186	8186	8186
5°	8217	8083	8126
10°	8153	7950	7883
15°	8058	7714	7492
20°	7930	7378	7009
25°	7798	6996	6538
30°	7612	6604	5936
35°	7433	6177	5409
40°	7253	5735	4795
45°	7040	5236	4242
50°	6822	4735	3697
55°	6598	4197	3178
60°	6339	3630	2638
65°	6044	3049	2399
70°	5698	2511	2209
75°	5265	2289	2059
80°	4649	2046	1878
85°	3649	1612	1612



TEST NUMBER: P331775-840

CATALOG NUMBER: S122RDIW-S290D970U840-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.4	1.0
10°-20°	130.3	2.6
20°-30°	183.0	3.7
30°-40°	199.5	4.0
40°-50°	183.4	3.7
50°-60°	144.1	2.9
60°-70°	93.9	1.9
70°-80°	48.4	1.0
80°-90°	15.9	0.3
90°-100°	44.5	0.9
100°-110°	163.1	3.3
110°-120°	436.1	8.8
120°-130°	719.8	14.5
130°-140°	765.5	15.5
140°-150°	711.5	14.4
150°-160°	572.1	11.5
160°-170°	368.6	7.4
170°-180°	126.9	2.6
0°-30°	360.7	7.3
0°-40°	560.2	11.3
0°-60°	887.7	17.9
0°-90°	1045.9	21.1
90°-120°	643.7	13.0
90°-150°	2840.5	57.3
90°-180°	3908.0	78.9
0°-180°	4954.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	507	507	507	507	507	
5°	507	504	499	502	501	48
15°	482	476	462	453	448	136
25°	438	422	393	375	367	201
35°	377	353	313	285	274	236
45°	308	277	229	198	186	238
55°	234	198	149	123	113	209
65°	158	121	80	65	63	157
75°	84	53	37	34	33	89
85°	20	11	9	9	9	23
90°	1	11	19	24	26	4
95°	63	33	38	42	42	77
105°	293	306	59	69	73	313
115°	555	572	595	170	79	546
125°	784	797	815	822	825	699
135°	971	986	995	1004	1003	750
145°	1126	1126	1142	1148	1144	704
155°	1240	1232	1243	1248	1241	571
165°	1307	1301	1304	1310	1304	369
175°	1336	1330	1332	1338	1329	127
180°	1334	1334	1334	1334	1334	



TEST NUMBER: P331775-840

CATALOG NUMBER: S122RDIW-S290D970U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0
2.5°	508.8	508.4	508.0	507.6	507.2	506.4	505.5	504.7	503.8	502.9	503.7
5°	507.0	506.4	505.9	505.4	504.9	503.9	502.6	501.3	500.0	498.7	499.6
7.5°	501.7	501.1	500.4	499.8	499.2	498.1	496.6	494.9	493.4	491.9	492.1
10°	497.3	496.6	495.8	495.1	494.4	493.0	491.0	489.0	487.0	484.9	484.6
12.5°	491.8	490.9	490.0	489.2	488.3	486.6	483.9	481.3	478.7	476.1	475.5
15°	482.1	481.0	479.9	478.8	477.7	475.3	471.9	468.5	464.9	461.5	459.6
17.5°	470.3	468.6	466.9	465.1	463.4	460.4	456.0	451.5	447.1	442.6	440.3
20°	461.5	459.5	457.5	455.3	453.3	449.8	444.6	439.6	434.5	429.4	426.9
22.5°	452.0	449.7	447.4	445.1	442.8	438.8	433.0	427.3	421.6	415.9	412.5
25°	437.7	434.3	431.1	427.9	424.6	419.6	412.8	406.2	399.4	392.7	388.5
27.5°	420.4	416.9	413.3	409.8	406.2	400.6	393.0	385.5	377.9	370.3	365.5
30°	408.3	404.5	400.5	396.7	392.8	386.8	378.6	370.5	362.3	354.2	349.0
32.5°	396.6	392.0	387.5	382.9	378.4	372.0	363.8	355.4	347.1	338.7	332.9
35°	377.1	371.9	366.7	361.5	356.3	349.2	340.2	331.2	322.3	313.4	306.9
37.5°	357.7	351.9	346.2	340.5	334.8	327.2	317.6	308.0	298.5	288.9	281.9
40°	344.1	338.0	331.8	325.7	319.6	311.6	301.7	291.9	282.0	272.1	264.8
42.5°	330.1	323.7	317.2	310.8	304.4	296.0	285.8	275.6	265.4	255.2	247.7
45°	308.3	301.4	294.6	287.8	280.9	272.2	261.5	250.7	240.0	229.3	222.2
47.5°	287.0	279.7	272.6	265.3	258.0	248.9	237.8	226.8	215.7	204.7	197.5
50°	271.6	264.4	257.1	249.8	242.7	233.4	222.2	211.0	199.8	188.5	181.5
52.5°	256.5	248.9	241.5	233.9	226.3	217.0	206.0	195.1	184.1	173.1	166.3
55°	234.4	226.5	218.5	210.6	202.6	193.2	182.1	171.1	160.1	149.1	143.0
57.5°	211.8	203.6	195.4	187.3	179.2	169.8	159.2	148.7	138.0	127.4	121.8
60°	196.3	188.2	180.1	171.9	163.7	154.4	143.9	133.4	122.9	112.4	107.1
62.5°	181.3	173.2	165.0	156.8	148.7	139.6	129.6	119.6	109.6	99.6	94.6
65°	158.2	150.0	141.8	133.5	125.2	116.5	107.3	98.2	89.0	79.8	76.3
67.5°	136.0	127.8	119.7	111.5	103.3	95.0	86.7	78.6	70.3	62.0	60.4
70°	120.7	112.7	104.7	96.8	88.9	81.4	74.3	67.3	60.3	53.2	52.2
72.5°	105.9	98.4	90.7	83.1	75.4	68.9	63.2	57.6	51.9	46.3	45.3
75°	84.4	77.3	70.2	63.0	55.8	50.6	47.1	43.6	40.2	36.7	36.0
77.5°	63.2	57.0	50.7	44.4	38.2	34.2	32.5	30.9	29.2	27.6	27.2
80°	50.0	44.8	39.6	34.4	29.2	26.1	25.0	24.0	23.0	22.0	21.6
82.5°	37.9	33.8	29.8	25.8	21.7	19.3	18.6	17.9	17.2	16.6	16.3
85°	19.7	17.6	15.5	13.3	11.2	9.9	9.6	9.3	9.0	8.7	8.7
87.5°	6.1	5.9	5.7	5.6	5.4	5.5	5.8	6.2	6.5	6.8	7.0
90°	1.0	3.3	5.7	8.1	10.4	12.4	14.1	15.9	17.6	19.3	20.4
92.5°	19.5	19.3	19.1	18.9	18.7	19.0	19.8	20.7	21.5	22.4	22.9
95°	62.7	55.6	48.6	41.5	34.4	31.6	33.1	34.6	36.2	37.7	38.7
97.5°	124.5	104.5	84.6	64.6	44.7	36.5	40.0	43.4	46.9	50.4	51.2
100°	170.8	141.4	112.0	82.7	53.3	40.4	44.0	47.7	51.4	55.0	56.8
102.5°	221.8	215.5	209.3	203.1	196.8	178.5	148.0	117.5	87.1	56.6	58.8
105°	293.4	299.8	306.2	312.7	319.1	293.1	234.5	175.9	117.4	58.9	61.2
107.5°	375.0	380.2	385.4	390.5	395.8	363.2	293.1	222.8	152.6	82.4	80.0
110°	427.5	432.0	436.5	441.0	445.5	416.8	354.8	292.9	230.9	168.8	147.4



TEST NUMBER: P331775-840

CATALOG NUMBER: S122RDIW-S290D970U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	476.9	480.9	484.8	488.9	492.8	487.2	471.9	456.6	441.2	426.0	347.7
115°	554.8	558.5	562.2	565.8	569.5	573.9	579.3	584.6	590.1	595.4	496.0
117.5°	624.5	628.6	632.7	636.7	640.9	644.7	648.4	652.1	655.8	659.4	635.4
120°	675.5	678.7	681.9	685.1	688.3	691.9	695.7	699.6	703.5	707.3	709.9
122.5°	718.7	722.1	725.5	728.8	732.3	736.1	740.2	744.5	748.6	752.9	754.4
125°	784.5	787.3	790.1	792.8	795.7	799.1	803.1	807.3	811.3	815.4	816.9
127.5°	844.1	847.3	850.3	853.4	856.5	859.6	862.6	865.7	868.7	871.7	873.9
130°	882.0	885.4	888.9	892.2	895.6	898.6	900.9	903.3	905.6	908.1	910.4
132.5°	920.6	923.5	926.5	929.3	932.2	934.8	937.3	939.6	941.9	944.3	946.3
135°	970.8	974.2	977.7	981.1	984.5	987.1	989.1	991.0	992.9	994.9	997.0
137.5°	1021.5	1023.9	1026.3	1028.7	1031.1	1033.4	1035.6	1037.7	1040.0	1042.2	1044.3
140°	1054.7	1056.4	1058.1	1059.9	1061.6	1063.6	1065.9	1068.3	1070.7	1073.1	1075.0
142.5°	1082.5	1084.0	1085.6	1087.1	1088.6	1090.8	1093.5	1096.2	1098.9	1101.6	1103.4
145°	1126.1	1125.9	1125.7	1125.5	1125.3	1127.0	1130.6	1134.3	1137.9	1141.6	1143.1
147.5°	1164.2	1163.3	1162.5	1161.6	1160.8	1162.3	1165.9	1169.4	1173.1	1176.7	1177.8
150°	1188.8	1187.3	1185.8	1184.4	1182.9	1183.8	1187.2	1190.6	1194.1	1197.5	1198.8
152.5°	1209.7	1208.0	1206.3	1204.7	1203.0	1203.8	1207.0	1210.3	1213.6	1216.8	1218.1
155°	1240.0	1238.0	1236.1	1234.2	1232.2	1232.5	1235.2	1237.7	1240.3	1242.8	1244.2
157.5°	1263.7	1262.1	1260.4	1258.8	1257.2	1257.3	1259.1	1260.9	1262.6	1264.5	1266.0
160°	1277.6	1276.4	1275.1	1273.7	1272.4	1272.4	1273.7	1275.1	1276.4	1277.6	1278.9
162.5°	1290.0	1288.7	1287.4	1286.1	1284.9	1284.8	1285.9	1287.0	1288.1	1289.2	1290.6
165°	1306.6	1305.3	1303.9	1302.7	1301.4	1301.1	1301.7	1302.3	1303.0	1303.6	1305.1
167.5°	1318.9	1317.6	1316.4	1315.0	1313.7	1313.4	1314.0	1314.6	1315.2	1315.9	1317.3
170°	1325.9	1324.5	1323.3	1322.0	1320.7	1320.3	1320.7	1321.1	1321.6	1322.0	1323.5
172.5°	1330.5	1329.2	1327.9	1326.7	1325.3	1324.9	1325.3	1325.8	1326.2	1326.7	1328.2
175°	1336.5	1334.9	1333.4	1332.0	1330.5	1329.9	1330.4	1330.8	1331.2	1331.6	1333.1
177.5°	1337.5	1336.3	1335.0	1333.8	1332.6	1332.1	1332.3	1332.4	1332.6	1332.8	1334.0
180°	1333.5	1333.5	1333.5	1333.5	1333.5	1333.5	1333.5	1333.5	1333.5	1333.5	1333.5



TEST NUMBER: P331775-840

CATALOG NUMBER: S122RDIW-S290D970U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0
2.5°	504.5	505.3	506.1	506.4	506.3	506.1	505.9	505.8
5°	500.5	501.4	502.3	502.6	502.3	502.0	501.7	501.4
7.5°	492.4	492.7	492.9	492.8	492.3	491.7	491.2	490.7
10°	484.3	484.0	483.7	483.2	482.6	482.0	481.4	480.8
12.5°	475.0	474.4	473.9	473.1	472.1	471.1	470.1	469.1
15°	457.7	455.7	453.7	452.3	451.3	450.2	449.2	448.2
17.5°	438.0	435.7	433.4	431.4	429.6	427.9	426.1	424.3
20°	424.3	421.7	419.2	416.8	414.5	412.3	410.1	407.9
22.5°	409.3	406.0	402.7	400.2	398.5	396.9	395.2	393.5
25°	384.4	380.1	376.0	373.1	371.6	370.0	368.5	367.0
27.5°	360.5	355.7	350.8	347.2	344.8	342.3	339.9	337.5
30°	343.8	338.6	333.4	329.4	326.6	323.9	321.1	318.4
32.5°	326.9	320.9	315.0	310.7	308.2	305.6	303.0	300.4
35°	300.5	294.1	287.6	283.3	281.0	278.8	276.6	274.4
37.5°	274.8	267.7	260.6	255.8	253.3	250.6	248.1	245.5
40°	257.6	250.3	243.1	238.1	235.5	232.9	230.1	227.5
42.5°	240.1	232.7	225.2	220.3	217.6	215.1	212.5	210.0
45°	214.9	207.6	200.5	195.6	193.2	190.7	188.2	185.8
47.5°	190.3	183.1	175.9	171.2	169.0	166.7	164.5	162.3
50°	174.5	167.4	160.4	155.8	153.7	151.6	149.4	147.2
52.5°	159.6	152.8	146.0	141.6	139.7	137.6	135.6	133.7
55°	136.8	130.8	124.6	120.6	118.7	116.7	114.8	112.9
57.5°	116.2	110.6	105.0	101.4	99.8	98.2	96.5	94.8
60°	102.0	96.8	91.6	88.2	86.5	84.9	83.3	81.7
62.5°	89.7	84.7	79.8	76.7	75.7	74.8	73.8	72.8
65°	72.9	69.4	65.9	64.0	63.7	63.4	63.1	62.8
67.5°	58.9	57.3	55.6	54.7	54.3	54.0	53.7	53.4
70°	51.2	50.2	49.2	48.5	48.0	47.6	47.2	46.8
72.5°	44.5	43.6	42.8	42.3	42.0	41.8	41.5	41.3
75°	35.2	34.5	33.8	33.4	33.3	33.2	33.1	33.0
77.5°	26.7	26.3	25.9	25.7	25.4	25.2	25.1	24.9
80°	21.2	20.8	20.4	20.2	20.2	20.2	20.2	20.2
82.5°	16.1	15.8	15.6	15.5	15.5	15.5	15.5	15.5
85°	8.7	8.7	8.7	8.7	8.7	8.7	8.7	8.7
87.5°	7.1	7.2	7.4	7.5	7.5	7.6	7.7	7.8
90°	21.4	22.5	23.6	24.3	24.7	25.1	25.7	26.1
92.5°	23.5	24.0	24.6	25.0	25.2	25.5	25.8	26.1
95°	39.8	40.9	41.9	42.3	42.1	41.9	41.7	41.5
97.5°	52.1	52.9	53.8	54.3	54.6	54.8	55.1	55.3
100°	58.5	60.2	61.9	62.9	63.3	63.8	64.2	64.6
102.5°	61.0	63.2	65.4	66.9	67.5	68.1	68.7	69.3
105°	63.6	65.9	68.3	69.9	70.8	71.6	72.5	73.3
107.5°	77.6	75.2	72.8	72.0	72.9	73.7	74.6	75.4
110°	125.9	104.5	83.1	72.8	73.6	74.5	75.3	76.2



TEST NUMBER: P331775-840

CATALOG NUMBER: S122RDIW-S290D970U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	269.4	191.3	113.0	74.2	74.9	75.6	76.3	77.1
115°	396.8	297.5	198.2	140.9	125.4	110.0	94.5	79.2
117.5°	611.4	587.4	563.4	526.0	475.2	424.5	373.9	323.1
120°	712.5	715.0	717.6	704.4	675.5	646.5	617.5	588.7
122.5°	756.0	757.5	759.0	757.0	751.3	745.8	740.1	734.6
125°	818.4	819.9	821.4	822.4	823.1	823.7	824.4	825.1
127.5°	876.2	878.3	880.5	881.6	881.8	881.9	882.0	882.1
130°	912.7	915.1	917.5	918.6	918.3	918.1	917.9	917.7
132.5°	948.4	950.4	952.4	953.3	953.0	952.8	952.6	952.4
135°	999.2	1001.3	1003.4	1004.3	1003.9	1003.4	1003.0	1002.6
137.5°	1046.3	1048.4	1050.6	1051.3	1050.6	1049.8	1049.0	1048.3
140°	1076.9	1078.8	1080.8	1081.2	1080.2	1079.0	1077.9	1076.9
142.5°	1105.1	1106.9	1108.6	1108.9	1107.9	1106.8	1105.8	1104.7
145°	1144.6	1146.1	1147.5	1147.8	1146.7	1145.6	1144.6	1143.5
147.5°	1178.9	1180.0	1181.1	1181.2	1180.3	1179.4	1178.5	1177.6
150°	1200.1	1201.3	1202.6	1202.7	1201.7	1200.6	1199.5	1198.5
152.5°	1219.4	1220.6	1221.9	1221.9	1220.5	1219.1	1217.7	1216.3
155°	1245.5	1246.7	1248.0	1247.8	1246.1	1244.4	1242.6	1240.9
157.5°	1267.4	1268.9	1270.3	1270.2	1268.5	1266.9	1265.2	1263.5
160°	1280.2	1281.4	1282.7	1282.6	1281.1	1279.6	1278.2	1276.7
162.5°	1292.1	1293.5	1295.1	1294.8	1292.9	1291.1	1289.3	1287.5
165°	1306.7	1308.2	1309.7	1309.7	1308.2	1306.7	1305.1	1303.6
167.5°	1318.8	1320.3	1321.8	1321.6	1319.7	1317.8	1315.9	1313.9
170°	1325.0	1326.5	1328.0	1327.8	1325.9	1323.9	1322.0	1320.1
172.5°	1329.6	1331.1	1332.6	1332.4	1330.5	1328.6	1326.7	1324.7
175°	1334.6	1336.2	1337.7	1337.4	1335.1	1333.0	1330.9	1328.8
177.5°	1335.2	1336.4	1337.6	1337.5	1335.8	1334.3	1332.8	1331.3
180°	1333.5	1333.5	1333.5	1333.5	1333.5	1333.5	1333.5	1333.5

(END OF REPORT)