

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331776-840

Luminaire Tested: **S122RDIW-S290D970U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331776-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S290D970U840-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 970 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4436.6 lumens
Efficiency: N/A
Efficacy: 116.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 38
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331776-840

CATALOG NUMBER: S122RDIW-S290D970U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

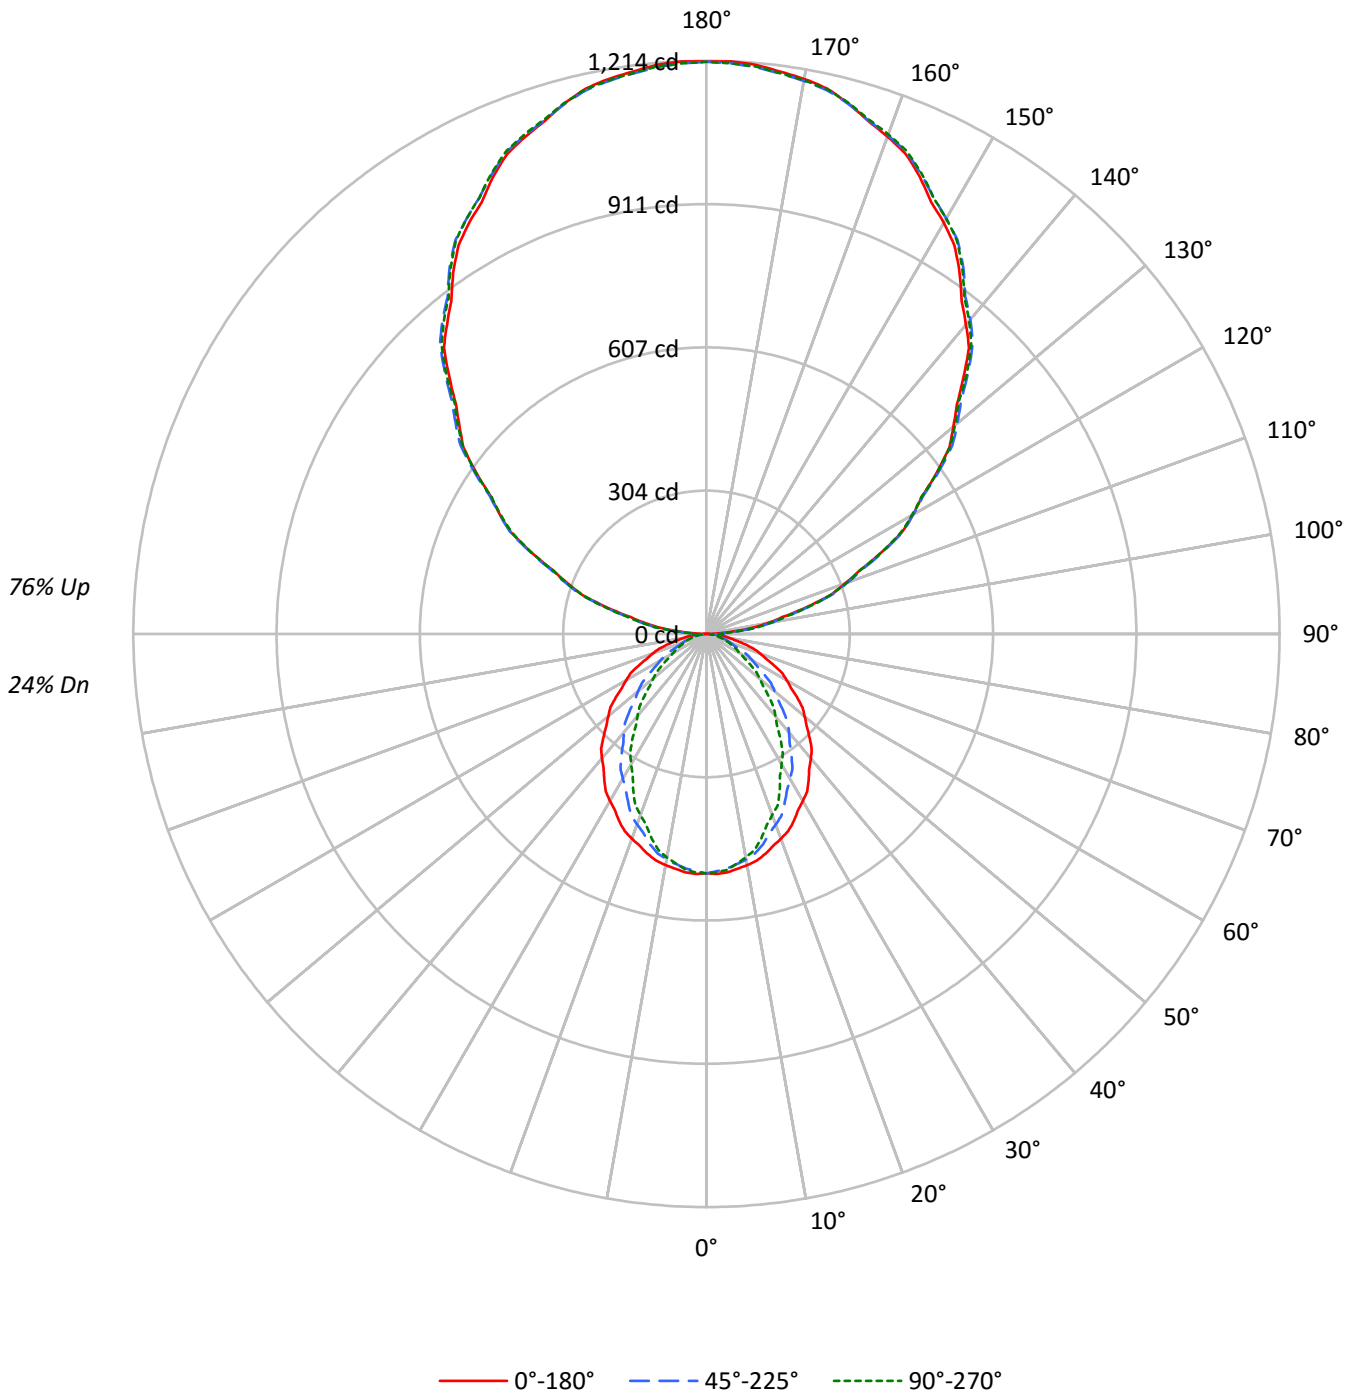



TEST NUMBER: P331776-840

CATALOG NUMBER: S122RDIW-S290D970U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	49	49	49	32	32	32	24
1	92	88	84	81	82	78	75	73	60	58	57	44	43	41	28	28	27	20
2	84	77	71	66	74	69	64	60	53	50	47	39	37	35	25	24	23	17
3	77	68	61	56	68	61	55	50	47	43	40	34	32	30	23	21	20	15
4	70	60	53	47	62	54	47	43	42	37	34	31	28	26	20	19	17	13
5	64	53	46	40	57	48	41	36	37	33	29	28	25	22	18	17	15	11
6	59	48	40	35	52	43	36	32	34	29	25	25	22	19	17	15	14	10
7	55	43	36	30	48	39	32	28	30	26	22	23	19	17	15	13	12	9
8	51	39	32	27	45	35	29	24	28	23	20	21	18	15	14	12	11	8
9	47	35	28	24	42	32	26	22	25	21	18	19	16	14	13	11	10	7
10	44	32	26	21	39	29	23	19	23	19	16	17	14	12	12	10	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8186	8186	8186
5°	8217	8083	8126
10°	8153	7950	7883
15°	8058	7714	7492
20°	7930	7378	7009
25°	7798	6996	6538
30°	7612	6604	5936
35°	7433	6177	5409
40°	7253	5735	4795
45°	7040	5236	4242
50°	6822	4735	3697
55°	6598	4197	3178
60°	6339	3630	2638
65°	6044	3049	2399
70°	5698	2511	2209
75°	5265	2289	2059
80°	4649	2046	1878
85°	3649	1612	1612



TEST NUMBER: P331776-840

CATALOG NUMBER: S122RDIW-S290D970U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.4	1.1
10°-20°	130.3	2.9
20°-30°	183.0	4.1
30°-40°	199.5	4.5
40°-50°	183.4	4.1
50°-60°	144.1	3.2
60°-70°	93.9	2.1
70°-80°	48.4	1.1
80°-90°	17.4	0.4
90°-100°	76.8	1.7
100°-110°	238.5	5.4
110°-120°	407.7	9.2
120°-130°	536.2	12.1
130°-140°	601.8	13.6
140°-150°	590.1	13.3
150°-160°	494.9	11.2
160°-170°	328.3	7.4
170°-180°	114.7	2.6
0°-30°	360.7	8.1
0°-40°	560.2	12.6
0°-60°	887.7	20.0
0°-90°	1047.5	23.6
90°-120°	723.1	16.3
90°-150°	2451.2	55.2
90°-180°	3389.0	76.4
0°-180°	4436.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	507	507	507	507	507	
5°	507	504	499	502	501	48
15°	482	476	462	453	448	136
25°	438	422	393	375	367	201
35°	377	353	313	285	274	236
45°	308	277	229	198	186	238
55°	234	198	149	123	113	209
65°	158	121	80	65	63	157
75°	84	53	37	34	33	89
85°	20	11	9	9	9	23
90°	1	14	36	34	35	4
95°	53	63	65	65	63	61
105°	220	223	225	227	227	232
115°	409	415	413	412	409	405
125°	595	604	602	598	597	532
135°	770	781	784	782	779	595
145°	935	942	948	949	945	584
155°	1069	1072	1075	1080	1077	492
165°	1163	1162	1162	1168	1164	328
175°	1210	1207	1205	1211	1206	115
180°	1212	1212	1212	1212	1212	



TEST NUMBER: P331776-840

CATALOG NUMBER: S122RDIW-S290D970U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0
2.5°	508.8	508.4	508.0	507.6	507.2	506.4	505.5	504.7	503.8	502.9	503.7
5°	507.0	506.4	505.9	505.4	504.9	503.9	502.6	501.3	500.0	498.7	499.6
7.5°	501.7	501.1	500.4	499.8	499.2	498.1	496.6	494.9	493.4	491.9	492.1
10°	497.3	496.6	495.8	495.1	494.4	493.0	491.0	489.0	487.0	484.9	484.6
12.5°	491.8	490.9	490.0	489.2	488.3	486.6	483.9	481.3	478.7	476.1	475.5
15°	482.1	481.0	479.9	478.8	477.7	475.3	471.9	468.5	464.9	461.5	459.6
17.5°	470.3	468.6	466.9	465.1	463.4	460.4	456.0	451.5	447.1	442.6	440.3
20°	461.5	459.5	457.5	455.3	453.3	449.8	444.6	439.6	434.5	429.4	426.9
22.5°	452.0	449.7	447.4	445.1	442.8	438.8	433.0	427.3	421.6	415.9	412.5
25°	437.7	434.3	431.1	427.9	424.6	419.6	412.8	406.2	399.4	392.7	388.5
27.5°	420.4	416.9	413.3	409.8	406.2	400.6	393.0	385.5	377.9	370.3	365.5
30°	408.3	404.5	400.5	396.7	392.8	386.8	378.6	370.5	362.3	354.2	349.0
32.5°	396.6	392.0	387.5	382.9	378.4	372.0	363.8	355.4	347.1	338.7	332.9
35°	377.1	371.9	366.7	361.5	356.3	349.2	340.2	331.2	322.3	313.4	306.9
37.5°	357.7	351.9	346.2	340.5	334.8	327.2	317.6	308.0	298.5	288.9	281.9
40°	344.1	338.0	331.8	325.7	319.6	311.6	301.7	291.9	282.0	272.1	264.8
42.5°	330.1	323.7	317.2	310.8	304.4	296.0	285.8	275.6	265.4	255.2	247.7
45°	308.3	301.4	294.6	287.8	280.9	272.2	261.5	250.7	240.0	229.3	222.2
47.5°	287.0	279.7	272.6	265.3	258.0	248.9	237.8	226.8	215.7	204.7	197.5
50°	271.6	264.4	257.1	249.8	242.7	233.4	222.2	211.0	199.8	188.5	181.5
52.5°	256.5	248.9	241.5	233.9	226.3	217.0	206.0	195.1	184.1	173.1	166.3
55°	234.4	226.5	218.5	210.6	202.6	193.2	182.1	171.1	160.1	149.1	143.0
57.5°	211.8	203.6	195.4	187.3	179.2	169.8	159.2	148.7	138.0	127.4	121.8
60°	196.3	188.2	180.1	171.9	163.7	154.4	143.9	133.4	122.9	112.4	107.1
62.5°	181.3	173.2	165.0	156.8	148.7	139.6	129.6	119.6	109.6	99.6	94.6
65°	158.2	150.0	141.8	133.5	125.2	116.5	107.3	98.2	89.0	79.8	76.3
67.5°	136.0	127.8	119.7	111.5	103.3	95.0	86.7	78.6	70.3	62.0	60.4
70°	120.7	112.7	104.7	96.8	88.9	81.4	74.3	67.3	60.3	53.2	52.2
72.5°	105.9	98.4	90.7	83.1	75.4	68.9	63.2	57.6	51.9	46.3	45.3
75°	84.4	77.3	70.2	63.0	55.8	50.6	47.1	43.6	40.2	36.7	36.0
77.5°	63.2	57.0	50.7	44.4	38.2	34.2	32.5	30.9	29.2	27.6	27.2
80°	50.0	44.8	39.6	34.4	29.2	26.1	25.0	24.0	23.0	22.0	21.6
82.5°	37.9	33.8	29.8	25.8	21.7	19.3	18.6	17.9	17.2	16.6	16.3
85°	19.7	17.6	15.5	13.3	11.2	9.9	9.6	9.3	9.0	8.7	8.7
87.5°	6.1	6.0	5.9	5.8	5.7	6.1	7.1	8.1	9.1	10.1	9.9
90°	1.0	3.7	6.5	9.2	11.9	15.8	20.8	25.8	30.8	35.7	35.3
92.5°	18.2	20.2	22.2	24.2	26.3	27.8	29.0	30.2	31.3	32.5	32.6
95°	53.2	55.4	57.8	60.0	62.3	63.6	64.1	64.5	65.0	65.4	65.4
97.5°	97.1	99.2	101.2	103.2	105.1	106.6	107.4	108.4	109.2	110.1	110.1
100°	129.9	131.7	133.5	135.3	137.1	138.5	139.1	139.8	140.5	141.2	141.2
102.5°	164.3	165.7	167.1	168.6	170.1	171.3	172.1	173.0	173.8	174.7	174.9
105°	219.9	220.6	221.3	222.0	222.7	223.2	223.7	224.1	224.6	225.0	225.5
107.5°	276.0	277.0	277.9	278.9	279.9	280.4	280.4	280.4	280.4	280.4	280.6
110°	311.9	313.4	314.7	316.1	317.4	318.1	318.1	318.1	318.1	318.1	318.1



TEST NUMBER: P331776-840

CATALOG NUMBER: S122RDIW-S290D970U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	351.2	352.6	354.0	355.4	356.7	357.3	357.1	356.9	356.8	356.6	356.0
115°	409.1	410.5	411.8	413.2	414.5	415.1	414.5	414.1	413.6	413.2	413.0
117.5°	466.9	468.7	470.5	472.3	474.1	474.3	473.1	471.8	470.6	469.3	468.8
120°	505.3	507.2	509.0	510.8	512.6	512.6	510.8	509.0	507.2	505.3	505.3
122.5°	540.5	542.7	544.8	547.0	549.2	549.7	548.4	547.1	545.8	544.5	544.0
125°	595.3	597.3	599.4	601.5	603.5	604.2	603.5	602.8	602.1	601.5	600.8
127.5°	648.7	651.3	653.9	656.5	659.0	659.9	659.1	658.3	657.5	656.7	655.8
130°	682.3	685.2	688.1	691.2	694.1	695.3	694.9	694.4	694.0	693.5	693.1
132.5°	719.8	722.3	724.7	727.1	729.5	730.7	730.8	730.9	731.0	731.1	730.1
135°	770.2	772.7	775.2	777.7	780.2	781.6	782.1	782.5	783.0	783.5	783.3
137.5°	823.1	825.3	827.3	829.3	831.3	832.7	833.2	833.8	834.5	835.1	834.9
140°	855.1	857.2	859.2	861.2	863.2	864.8	866.1	867.2	868.3	869.4	869.4
142.5°	887.9	889.9	891.9	893.9	896.1	897.5	898.2	899.0	899.8	900.5	900.7
145°	934.8	936.4	938.1	939.7	941.3	942.7	944.1	945.4	946.8	948.2	948.4
147.5°	976.8	978.8	980.7	982.5	984.4	985.8	986.7	987.6	988.6	989.5	990.0
150°	1005.4	1006.8	1008.1	1009.6	1010.9	1012.1	1013.0	1013.9	1014.8	1015.7	1016.3
152.5°	1030.9	1032.2	1033.6	1034.9	1036.3	1037.5	1038.6	1039.7	1040.8	1041.9	1042.7
155°	1068.8	1069.5	1070.3	1071.0	1071.6	1072.3	1073.0	1073.7	1074.3	1075.0	1076.1
157.5°	1101.4	1101.9	1102.3	1102.8	1103.2	1103.7	1104.1	1104.5	1104.9	1105.3	1106.8
160°	1121.1	1121.5	1122.0	1122.4	1122.9	1123.2	1123.5	1123.7	1123.9	1124.1	1125.5
162.5°	1139.0	1139.1	1139.2	1139.3	1139.4	1139.5	1139.8	1140.0	1140.2	1140.4	1142.1
165°	1163.0	1162.8	1162.6	1162.3	1162.1	1162.0	1162.0	1162.0	1162.0	1162.0	1163.6
167.5°	1183.1	1182.3	1181.6	1180.9	1180.3	1179.9	1179.9	1179.8	1179.8	1179.7	1181.3
170°	1193.7	1193.0	1192.3	1191.6	1190.9	1190.5	1190.2	1190.0	1189.8	1189.6	1191.1
172.5°	1201.0	1200.3	1199.6	1199.0	1198.3	1197.8	1197.6	1197.4	1197.2	1196.9	1198.5
175°	1210.0	1209.3	1208.7	1208.0	1207.3	1206.7	1206.3	1205.8	1205.4	1204.9	1206.5
177.5°	1213.8	1213.2	1212.6	1212.0	1211.5	1211.0	1210.7	1210.3	1210.0	1209.6	1210.7
180°	1212.0	1212.0	1212.0	1212.0	1212.0	1212.0	1212.0	1212.0	1212.0	1212.0	1212.0



TEST NUMBER: P331776-840

CATALOG NUMBER: S122RDIW-S290D970U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	507.0	507.0	507.0	507.0	507.0	507.0	507.0	507.0
2.5°	504.5	505.3	506.1	506.4	506.3	506.1	505.9	505.8
5°	500.5	501.4	502.3	502.6	502.3	502.0	501.7	501.4
7.5°	492.4	492.7	492.9	492.8	492.3	491.7	491.2	490.7
10°	484.3	484.0	483.7	483.2	482.6	482.0	481.4	480.8
12.5°	475.0	474.4	473.9	473.1	472.1	471.1	470.1	469.1
15°	457.7	455.7	453.7	452.3	451.3	450.2	449.2	448.2
17.5°	438.0	435.7	433.4	431.4	429.6	427.9	426.1	424.3
20°	424.3	421.7	419.2	416.8	414.5	412.3	410.1	407.9
22.5°	409.3	406.0	402.7	400.2	398.5	396.9	395.2	393.5
25°	384.4	380.1	376.0	373.1	371.6	370.0	368.5	367.0
27.5°	360.5	355.7	350.8	347.2	344.8	342.3	339.9	337.5
30°	343.8	338.6	333.4	329.4	326.6	323.9	321.1	318.4
32.5°	326.9	320.9	315.0	310.7	308.2	305.6	303.0	300.4
35°	300.5	294.1	287.6	283.3	281.0	278.8	276.6	274.4
37.5°	274.8	267.7	260.6	255.8	253.3	250.6	248.1	245.5
40°	257.6	250.3	243.1	238.1	235.5	232.9	230.1	227.5
42.5°	240.1	232.7	225.2	220.3	217.6	215.1	212.5	210.0
45°	214.9	207.6	200.5	195.6	193.2	190.7	188.2	185.8
47.5°	190.3	183.1	175.9	171.2	169.0	166.7	164.5	162.3
50°	174.5	167.4	160.4	155.8	153.7	151.6	149.4	147.2
52.5°	159.6	152.8	146.0	141.6	139.7	137.6	135.6	133.7
55°	136.8	130.8	124.6	120.6	118.7	116.7	114.8	112.9
57.5°	116.2	110.6	105.0	101.4	99.8	98.2	96.5	94.8
60°	102.0	96.8	91.6	88.2	86.5	84.9	83.3	81.7
62.5°	89.7	84.7	79.8	76.7	75.7	74.8	73.8	72.8
65°	72.9	69.4	65.9	64.0	63.7	63.4	63.1	62.8
67.5°	58.9	57.3	55.6	54.7	54.3	54.0	53.7	53.4
70°	51.2	50.2	49.2	48.5	48.0	47.6	47.2	46.8
72.5°	44.5	43.6	42.8	42.3	42.0	41.8	41.5	41.3
75°	35.2	34.5	33.8	33.4	33.3	33.2	33.1	33.0
77.5°	26.7	26.3	25.9	25.7	25.4	25.2	25.1	24.9
80°	21.2	20.8	20.4	20.2	20.2	20.2	20.2	20.2
82.5°	16.1	15.8	15.6	15.5	15.5	15.5	15.5	15.5
85°	8.7	8.7	8.7	8.7	8.7	8.7	8.7	8.7
87.5°	9.8	9.6	9.4	9.4	9.4	9.4	9.5	9.5
90°	34.8	34.4	33.9	33.8	34.1	34.3	34.5	34.7
92.5°	32.7	32.8	32.9	32.9	33.0	33.0	33.1	33.1
95°	65.4	65.4	65.4	65.2	64.7	64.3	63.8	63.4
97.5°	110.1	110.1	110.1	110.1	110.0	110.0	109.9	109.9
100°	141.2	141.2	141.2	141.1	140.8	140.6	140.4	140.2
102.5°	175.1	175.2	175.4	175.4	175.2	174.9	174.7	174.5
105°	225.9	226.4	226.8	227.1	227.1	227.1	227.1	227.1
107.5°	280.8	281.0	281.1	280.7	279.7	278.6	277.6	276.6
110°	318.1	318.1	318.1	317.8	317.1	316.4	315.7	315.1



TEST NUMBER: P331776-840

CATALOG NUMBER: S122RDIW-S290D970U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	355.5	355.0	354.4	353.9	353.4	352.8	352.3	351.8
115°	412.7	412.5	412.3	411.8	411.2	410.5	409.8	409.1
117.5°	468.2	467.7	467.1	466.5	465.9	465.1	464.4	463.7
120°	505.3	505.3	505.3	504.9	504.2	503.6	502.9	502.2
122.5°	543.5	542.9	542.4	541.9	541.4	540.9	540.4	539.9
125°	600.1	599.4	598.7	598.2	598.0	597.8	597.5	597.3
127.5°	655.0	654.2	653.4	652.6	651.9	651.2	650.5	649.7
130°	692.6	692.2	691.7	690.9	690.0	689.1	688.2	687.3
132.5°	729.1	728.1	727.1	726.3	725.6	724.8	724.1	723.4
135°	783.0	782.8	782.5	782.1	781.4	780.7	780.1	779.4
137.5°	834.7	834.6	834.4	833.7	832.8	831.9	831.0	830.1
140°	869.4	869.4	869.4	869.0	868.1	867.2	866.3	865.4
142.5°	900.9	901.1	901.2	900.9	900.0	899.1	898.2	897.3
145°	948.7	948.9	949.1	948.8	947.9	947.0	946.0	945.1
147.5°	990.5	991.0	991.5	991.3	990.5	989.6	988.8	987.8
150°	1017.0	1017.7	1018.4	1018.4	1017.7	1017.0	1016.3	1015.7
152.5°	1043.6	1044.5	1045.3	1045.3	1044.5	1043.6	1042.7	1041.9
155°	1077.3	1078.4	1079.5	1079.7	1079.1	1078.4	1077.7	1077.0
157.5°	1108.4	1109.9	1111.5	1111.7	1110.6	1109.5	1108.4	1107.3
160°	1126.8	1128.2	1129.5	1129.8	1128.9	1128.0	1127.1	1126.2
162.5°	1143.6	1145.1	1146.7	1146.9	1145.8	1144.7	1143.6	1142.6
165°	1165.2	1166.7	1168.3	1168.5	1167.4	1166.3	1165.2	1164.0
167.5°	1183.0	1184.6	1186.1	1186.3	1185.2	1184.0	1182.8	1181.6
170°	1192.8	1194.4	1196.0	1196.1	1194.7	1193.4	1191.9	1190.6
172.5°	1200.1	1201.7	1203.3	1203.5	1202.0	1200.7	1199.3	1198.0
175°	1208.1	1209.7	1211.2	1211.4	1210.0	1208.7	1207.3	1206.0
177.5°	1211.8	1212.8	1214.0	1214.0	1212.8	1211.8	1210.7	1209.6
180°	1212.0	1212.0	1212.0	1212.0	1212.0	1212.0	1212.0	1212.0

(END OF REPORT)