

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331811-840

Luminaire Tested: **S122RDIW-S675D710U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331811-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S675D710U840-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 710 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5208.6 lumens
Efficiency: N/A
Efficacy: 115.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 45
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331811-840

CATALOG NUMBER: S122RDIW-S675D710U840-4F0-1E-UDD-F

Luminous Intensity Polar Plot

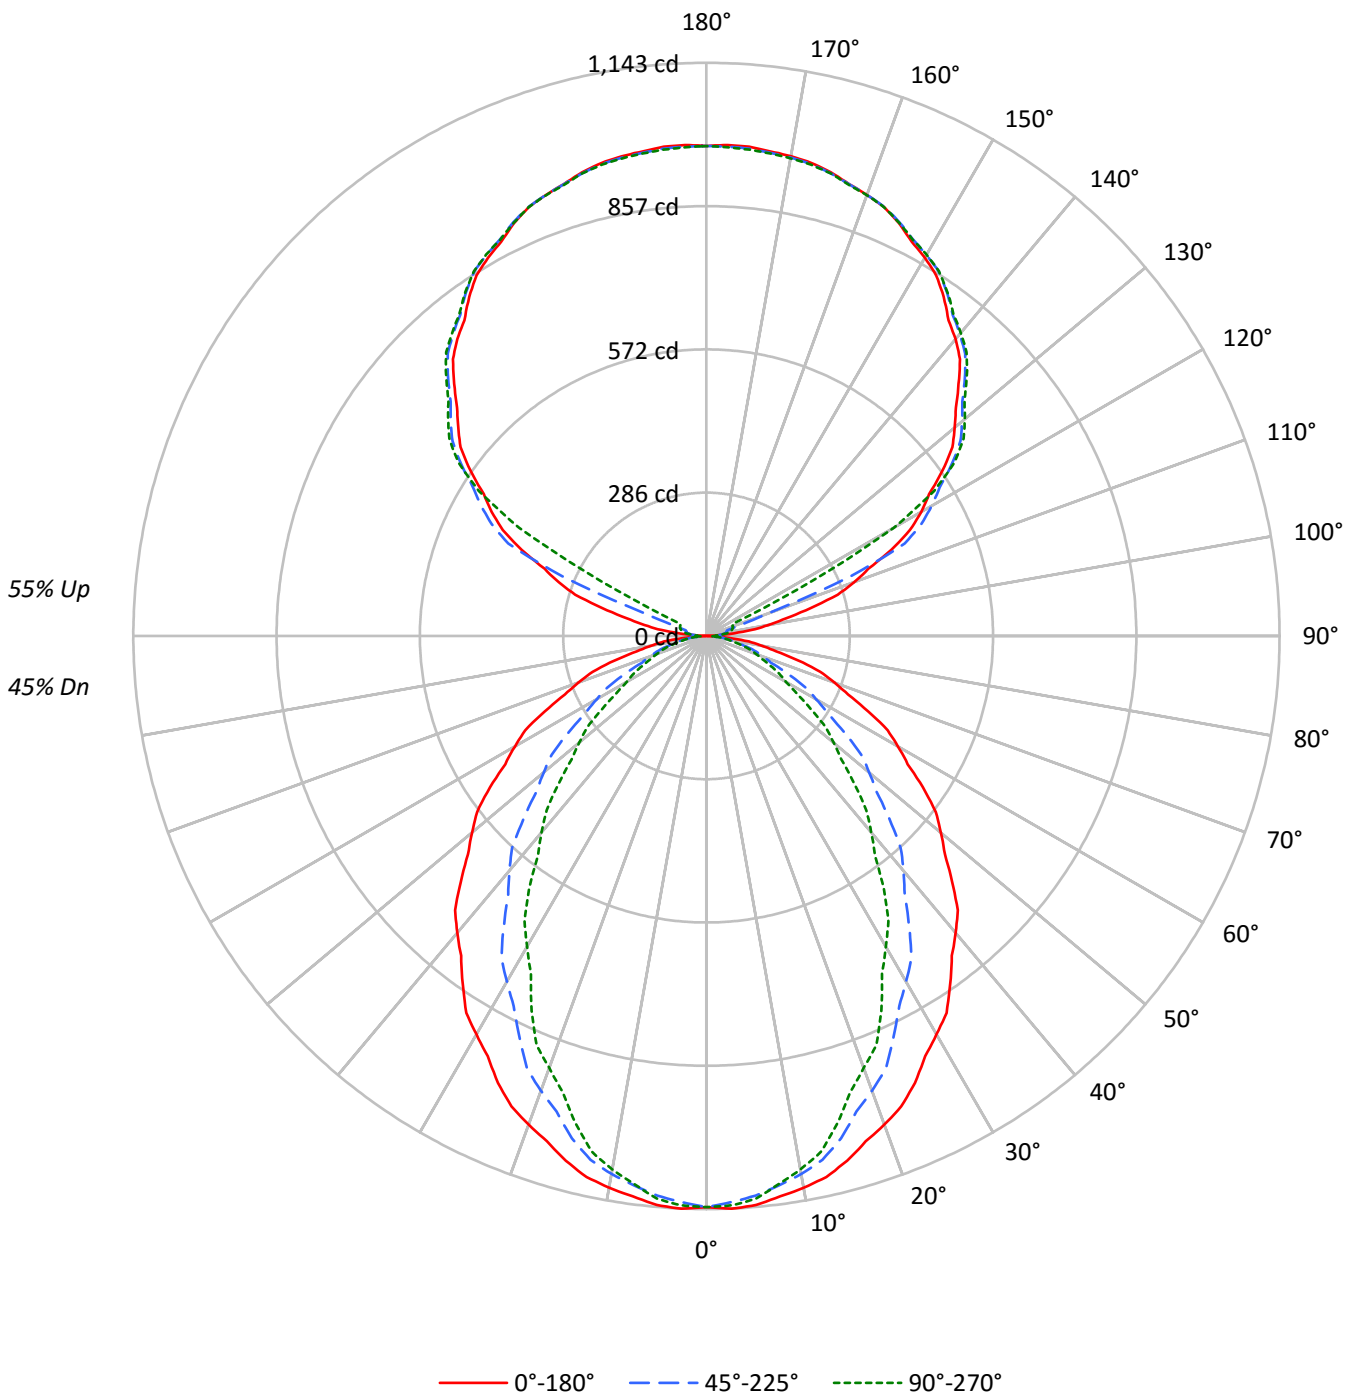



TEST NUMBER: P331811-840

CATALOG NUMBER: S122RDIW-S675D710U840-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	81	81	81	65	65	65	52	52	52	45
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	46	45	44	39
2	89	82	76	71	81	75	70	66	63	59	56	52	49	47	41	40	38	33
3	81	72	65	60	74	66	60	56	56	51	48	46	43	40	37	35	33	29
4	74	64	57	51	68	59	53	47	50	45	41	41	38	35	33	31	29	25
5	69	57	49	44	63	53	46	41	45	40	36	37	33	30	30	27	25	22
6	63	52	44	38	58	48	41	36	41	35	31	34	30	27	28	25	22	19
7	59	47	39	34	54	43	36	32	37	32	28	31	27	24	25	22	20	17
8	54	42	35	30	50	39	33	28	34	28	25	28	24	21	23	20	18	16
9	51	39	32	27	47	36	30	25	31	26	22	26	22	19	22	19	16	14
10	47	36	29	24	44	33	27	23	29	24	20	24	20	18	20	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	18392	18392	18392
5°	18462	18162	18263
10°	18321	17864	17713
15°	18111	17336	16836
20°	17819	16579	15747
25°	17521	15720	14694
30°	17107	14838	13340
35°	16703	13878	12151
40°	16297	12886	10777
45°	15819	11768	9533
50°	15330	10643	8312
55°	14829	9433	7139
60°	14247	8157	5926
65°	13589	6854	5398
70°	12798	5646	4961
75°	11834	5147	4629
80°	10451	4603	4212
85°	8207	3631	3631



TEST NUMBER: P331811-840

CATALOG NUMBER: S122RDIW-S675D710U840-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	106.6	2.0
10°-20°	292.8	5.6
20°-30°	411.1	7.9
30°-40°	448.3	8.6
40°-50°	412.2	7.9
50°-60°	323.8	6.2
60°-70°	211.1	4.1
70°-80°	108.8	2.1
80°-90°	30.6	0.6
90°-100°	32.6	0.6
100°-110°	119.5	2.3
110°-120°	319.5	6.1
120°-130°	527.3	10.1
130°-140°	560.8	10.8
140°-150°	521.3	10.0
150°-160°	419.1	8.0
160°-170°	270.1	5.2
170°-180°	93.0	1.8
0°-30°	810.5	15.6
0°-40°	1258.9	24.2
0°-60°	1994.8	38.3
0°-90°	2345.4	45.0
90°-120°	471.6	9.1
90°-150°	2081.0	40.0
90°-180°	2863.0	55.0
0°-180°	5208.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1139	1139	1139	1139	1139	
5°	1139	1134	1121	1129	1127	108
15°	1084	1071	1037	1018	1007	305
25°	984	949	882	842	825	452
35°	847	793	704	642	616	530
45°	693	622	515	445	418	535
55°	527	445	335	276	254	471
65°	356	272	179	146	141	352
75°	190	120	82	76	74	201
85°	44	24	20	20	20	52
90°	1	8	14	18	19	4
95°	46	24	28	31	30	56
105°	215	224	43	51	54	230
115°	406	419	436	124	58	400
125°	575	584	597	602	604	512
135°	711	722	729	736	735	549
145°	825	825	836	841	838	516
155°	908	903	911	914	909	418
165°	957	953	955	960	955	270
175°	979	974	976	980	974	93
180°	977	977	977	977	977	



TEST NUMBER: P331811-840

CATALOG NUMBER: S122RDIW-S675D710U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1139.1	1139.1	1139.1	1139.1	1139.1	1139.1	1139.1	1139.1	1139.1	1139.1	1139.1
2.5°	1143.3	1142.4	1141.5	1140.5	1139.6	1138.1	1136.1	1134.1	1132.2	1130.1	1132.0
5°	1139.1	1138.0	1136.9	1135.7	1134.6	1132.6	1129.5	1126.6	1123.6	1120.6	1122.7
7.5°	1127.4	1126.0	1124.6	1123.2	1121.8	1119.2	1115.8	1112.4	1108.8	1105.4	1105.9
10°	1117.5	1115.9	1114.3	1112.7	1111.1	1108.0	1103.4	1098.8	1094.3	1089.6	1089.0
12.5°	1105.1	1103.2	1101.2	1099.2	1097.2	1093.4	1087.5	1081.7	1075.7	1069.9	1068.6
15°	1083.5	1081.0	1078.4	1075.9	1073.4	1068.2	1060.5	1052.7	1044.9	1037.1	1032.8
17.5°	1056.9	1053.1	1049.2	1045.3	1041.5	1034.6	1024.6	1014.6	1004.6	994.6	989.5
20°	1037.1	1032.5	1027.9	1023.4	1018.8	1010.8	999.3	987.8	976.4	964.9	959.2
22.5°	1015.6	1010.6	1005.4	1000.3	995.1	986.1	973.2	960.3	947.4	934.4	927.1
25°	983.5	976.1	968.9	961.5	954.2	942.9	927.9	912.7	897.6	882.4	873.0
27.5°	944.7	936.8	928.8	920.8	912.8	900.3	883.3	866.3	849.2	832.1	821.2
30°	917.6	908.8	900.1	891.4	882.7	869.2	850.8	832.5	814.2	795.9	784.2
32.5°	891.1	880.9	870.8	860.6	850.4	836.0	817.3	798.6	779.9	761.2	747.9
35°	847.4	835.8	824.0	812.3	800.7	784.8	764.6	744.5	724.3	704.1	689.6
37.5°	803.8	790.8	778.0	765.2	752.3	735.2	713.8	692.3	670.8	649.2	633.4
40°	773.2	759.4	745.7	732.0	718.2	700.2	678.0	655.8	633.6	611.4	595.1
42.5°	741.8	727.4	712.9	698.4	684.0	665.2	642.3	619.4	596.3	573.4	556.5
45°	692.8	677.4	662.1	646.7	631.4	611.7	587.6	563.6	539.5	515.4	499.2
47.5°	644.9	628.6	612.4	596.1	579.9	559.4	534.5	509.7	484.8	460.0	443.8
50°	610.3	594.0	577.7	561.5	545.2	524.5	499.3	474.1	448.9	423.7	407.9
52.5°	576.5	559.5	542.5	525.5	508.5	487.7	463.0	438.4	413.7	389.1	373.9
55°	526.8	509.0	491.1	473.2	455.3	434.0	409.3	384.6	359.8	335.1	321.3
57.5°	475.8	457.6	439.2	420.9	402.5	381.5	357.7	334.0	310.1	286.4	273.8
60°	441.2	422.9	404.6	386.3	367.9	347.0	323.4	299.7	276.2	252.6	240.9
62.5°	407.4	389.1	370.7	352.4	334.1	313.7	291.2	268.7	246.2	223.7	212.6
65°	355.7	337.1	318.5	300.0	281.4	261.9	241.3	220.7	200.0	179.4	171.6
67.5°	305.8	287.3	268.9	250.5	232.1	213.6	195.0	176.5	157.9	139.4	135.8
70°	271.1	253.3	235.4	217.5	199.7	182.8	167.0	151.2	135.4	119.6	117.2
72.5°	238.1	221.0	203.9	186.7	169.6	154.7	142.0	129.3	116.6	103.9	102.0
75°	189.7	173.7	157.6	141.6	125.5	113.6	105.8	98.1	90.3	82.5	80.9
77.5°	142.1	127.9	113.9	99.9	85.8	76.9	73.1	69.4	65.6	61.9	60.9
80°	112.4	100.7	89.0	77.4	65.6	58.7	56.4	54.0	51.8	49.5	48.6
82.5°	85.1	76.0	67.0	57.8	48.7	43.3	41.8	40.2	38.7	37.2	36.6
85°	44.3	39.5	34.7	29.9	25.0	22.3	21.6	21.0	20.3	19.6	19.6
87.5°	13.3	12.2	11.1	10.0	8.9	8.4	8.7	8.9	9.2	9.4	9.4
90°	0.7	2.4	4.1	5.9	7.6	9.1	10.4	11.6	12.9	14.1	14.9
92.5°	14.2	14.1	13.9	13.8	13.6	13.9	14.5	15.1	15.8	16.4	16.8
95°	45.9	40.8	35.5	30.4	25.2	23.1	24.2	25.3	26.5	27.6	28.4
97.5°	91.2	76.5	62.0	47.4	32.7	26.8	29.3	31.8	34.3	36.9	37.6
100°	125.1	103.6	82.1	60.6	39.1	29.6	32.3	34.9	37.7	40.3	41.5
102.5°	162.5	157.9	153.3	148.8	144.2	130.8	108.5	86.1	63.7	41.4	43.0
105°	214.9	219.6	224.4	229.0	233.8	214.7	171.8	128.9	86.0	43.1	44.8
107.5°	274.7	278.5	282.4	286.1	289.9	266.1	214.7	163.3	111.8	60.4	58.6
110°	313.2	316.5	319.8	323.1	326.4	305.3	259.9	214.5	169.2	123.7	108.1



TEST NUMBER: P331811-840

CATALOG NUMBER: S122RDIW-S675D710U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	349.4	352.3	355.3	358.1	361.0	356.9	345.7	334.5	323.3	312.0	254.8
115°	406.5	409.2	411.8	414.5	417.2	420.5	424.4	428.4	432.2	436.2	363.5
117.5°	457.6	460.5	463.5	466.5	469.5	472.3	475.0	477.8	480.4	483.1	465.5
120°	494.8	497.3	499.6	501.9	504.3	506.9	509.7	512.5	515.3	518.2	520.1
122.5°	526.5	529.1	531.5	534.0	536.4	539.3	542.3	545.4	548.5	551.6	552.7
125°	574.7	576.8	578.9	580.9	582.9	585.4	588.4	591.4	594.4	597.3	598.4
127.5°	618.4	620.7	623.0	625.2	627.5	629.8	632.0	634.2	636.4	638.6	640.3
130°	646.1	648.6	651.2	653.7	656.2	658.3	660.0	661.8	663.5	665.3	667.0
132.5°	674.5	676.6	678.7	680.9	683.0	684.9	686.6	688.3	690.1	691.9	693.3
135°	711.2	713.7	716.2	718.7	721.2	723.3	724.7	726.1	727.5	728.9	730.4
137.5°	748.4	750.1	751.9	753.7	755.4	757.1	758.7	760.3	761.9	763.6	765.1
140°	772.7	774.0	775.2	776.5	777.7	779.2	780.9	782.6	784.4	786.2	787.6
142.5°	793.0	794.2	795.4	796.5	797.6	799.1	801.1	803.1	805.1	807.1	808.4
145°	825.1	824.9	824.8	824.6	824.4	825.7	828.3	831.0	833.6	836.4	837.5
147.5°	852.8	852.3	851.7	851.1	850.5	851.5	854.1	856.8	859.4	862.0	862.9
150°	871.0	869.9	868.8	867.7	866.6	867.3	869.8	872.3	874.8	877.4	878.3
152.5°	886.3	885.0	883.8	882.5	881.3	881.9	884.3	886.7	889.1	891.5	892.4
155°	908.5	907.1	905.6	904.2	902.8	903.0	904.9	906.8	908.7	910.6	911.5
157.5°	925.8	924.6	923.4	922.2	921.1	921.1	922.4	923.7	925.0	926.3	927.5
160°	936.0	935.0	934.1	933.2	932.2	932.2	933.2	934.1	935.0	936.0	937.0
162.5°	945.0	944.1	943.2	942.2	941.3	941.2	942.0	942.9	943.7	944.5	945.5
165°	957.3	956.2	955.3	954.4	953.4	953.2	953.7	954.1	954.6	955.1	956.2
167.5°	966.2	965.3	964.4	963.4	962.5	962.3	962.7	963.1	963.6	964.0	965.1
170°	971.4	970.4	969.5	968.6	967.6	967.2	967.6	968.0	968.3	968.6	969.7
172.5°	974.7	973.8	972.9	971.9	971.0	970.7	971.0	971.3	971.6	971.9	973.0
175°	979.2	978.1	976.9	975.8	974.7	974.3	974.6	975.0	975.3	975.6	976.7
177.5°	979.9	979.0	978.1	977.2	976.3	975.9	976.0	976.2	976.3	976.4	977.3
180°	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0



TEST NUMBER: P331811-840

CATALOG NUMBER: S122RDIW-S675D710U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1139.1	1139.1	1139.1	1139.1	1139.1	1139.1	1139.1	1139.1
2.5°	1133.8	1135.6	1137.4	1138.1	1137.8	1137.4	1137.1	1136.7
5°	1124.7	1126.8	1128.8	1129.5	1128.8	1128.1	1127.5	1126.8
7.5°	1106.5	1107.1	1107.7	1107.4	1106.2	1105.1	1103.9	1102.7
10°	1088.3	1087.6	1086.9	1085.9	1084.5	1083.2	1081.8	1080.4
12.5°	1067.4	1066.2	1064.9	1063.2	1060.9	1058.6	1056.3	1054.0
15°	1028.4	1024.0	1019.7	1016.3	1014.1	1011.8	1009.5	1007.2
17.5°	984.3	979.1	973.9	969.4	965.4	961.5	957.6	953.6
20°	953.5	947.8	942.0	936.6	931.6	926.6	921.5	916.5
22.5°	919.7	912.3	904.9	899.4	895.5	891.8	888.1	884.3
25°	863.6	854.2	844.9	838.5	835.1	831.6	828.2	824.8
27.5°	810.2	799.3	788.4	780.1	774.7	769.2	763.8	758.3
30°	772.5	760.8	749.1	740.2	734.0	727.8	721.6	715.5
32.5°	734.6	721.2	707.9	698.3	692.5	686.7	680.9	675.1
35°	675.3	660.9	646.4	636.6	631.6	626.5	621.6	616.5
37.5°	617.4	601.6	585.7	574.8	569.1	563.3	557.5	551.8
40°	578.8	562.5	546.2	535.1	529.2	523.2	517.3	511.3
42.5°	539.8	522.9	506.1	494.8	489.1	483.3	477.6	471.7
45°	482.9	466.7	450.4	439.5	434.0	428.5	423.0	417.5
47.5°	427.7	411.5	395.3	384.8	379.7	374.8	369.7	364.8
50°	392.1	376.3	360.5	350.1	345.4	340.5	335.8	330.9
52.5°	358.6	343.3	328.0	318.2	313.8	309.3	304.9	300.4
55°	307.6	293.8	280.0	271.0	266.7	262.3	257.9	253.6
57.5°	261.2	248.6	236.0	227.8	224.2	220.6	216.8	213.2
60°	229.2	217.5	205.8	198.1	194.5	190.9	187.1	183.5
62.5°	201.5	190.3	179.2	172.5	170.3	168.1	165.9	163.7
65°	163.8	156.0	148.2	144.0	143.3	142.6	141.9	141.3
67.5°	132.2	128.7	125.1	122.9	122.2	121.5	120.8	120.0
70°	115.0	112.7	110.4	108.9	107.9	106.9	106.0	105.1
72.5°	100.1	98.2	96.2	95.0	94.4	93.9	93.3	92.8
75°	79.3	77.7	76.0	75.1	74.9	74.7	74.4	74.2
77.5°	60.0	59.1	58.2	57.6	57.2	56.9	56.5	56.0
80°	47.7	46.8	45.8	45.3	45.3	45.3	45.3	45.3
82.5°	36.1	35.4	34.9	34.6	34.6	34.6	34.6	34.6
85°	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
87.5°	9.4	9.4	9.3	9.3	9.4	9.5	9.5	9.6
90°	15.8	16.5	17.3	17.9	18.2	18.5	18.8	19.1
92.5°	17.3	17.7	18.1	18.4	18.5	18.7	18.9	19.1
95°	29.2	29.9	30.7	31.0	30.9	30.7	30.6	30.4
97.5°	38.2	38.8	39.4	39.8	40.0	40.2	40.4	40.6
100°	42.8	44.0	45.3	46.2	46.5	46.8	47.1	47.4
102.5°	44.7	46.4	48.0	49.0	49.5	49.9	50.3	50.8
105°	46.6	48.3	50.0	51.2	51.8	52.5	53.1	53.7
107.5°	56.9	55.1	53.3	52.8	53.4	54.0	54.6	55.2
110°	92.3	76.5	60.9	53.3	53.9	54.6	55.2	55.8



TEST NUMBER: P331811-840

CATALOG NUMBER: S122RDIW-S675D710U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	197.4	140.2	82.8	54.4	54.9	55.4	55.9	56.5
115°	290.7	217.9	145.2	103.2	91.9	80.6	69.3	58.0
117.5°	448.0	430.3	412.7	385.4	348.2	311.0	273.9	236.7
120°	522.0	523.8	525.7	516.0	494.8	473.6	452.4	431.2
122.5°	553.8	554.9	556.1	554.6	550.5	546.3	542.3	538.2
125°	599.6	600.7	601.8	602.6	603.0	603.5	604.0	604.4
127.5°	641.9	643.5	645.1	645.9	646.0	646.1	646.2	646.3
130°	668.7	670.4	672.2	673.0	672.8	672.7	672.5	672.4
132.5°	694.8	696.3	697.7	698.4	698.2	698.1	697.9	697.8
135°	732.1	733.6	735.2	735.8	735.5	735.2	734.9	734.6
137.5°	766.6	768.1	769.7	770.2	769.6	769.1	768.6	768.0
140°	789.0	790.4	791.8	792.1	791.3	790.5	789.7	789.0
142.5°	809.6	810.9	812.2	812.4	811.7	810.9	810.1	809.3
145°	838.5	839.6	840.7	840.9	840.1	839.3	838.5	837.8
147.5°	863.7	864.5	865.4	865.5	864.7	864.1	863.4	862.7
150°	879.2	880.2	881.1	881.2	880.4	879.6	878.8	878.1
152.5°	893.3	894.3	895.2	895.2	894.1	893.1	892.1	891.0
155°	912.4	913.4	914.3	914.1	912.9	911.7	910.4	909.2
157.5°	928.6	929.6	930.7	930.6	929.4	928.2	927.0	925.6
160°	937.9	938.9	939.8	939.7	938.6	937.5	936.4	935.3
162.5°	946.6	947.7	948.8	948.7	947.3	945.9	944.5	943.2
165°	957.4	958.4	959.5	959.5	958.4	957.4	956.2	955.1
167.5°	966.2	967.3	968.4	968.3	966.8	965.4	964.0	962.6
170°	970.8	971.8	972.9	972.8	971.4	970.0	968.6	967.1
172.5°	974.1	975.2	976.3	976.1	974.7	973.3	971.9	970.5
175°	977.9	978.9	980.0	979.8	978.2	976.6	975.0	973.5
177.5°	978.3	979.1	980.0	979.9	978.8	977.5	976.4	975.3
180°	977.0	977.0	977.0	977.0	977.0	977.0	977.0	977.0

(END OF REPORT)