

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331832-840

Luminaire Tested: **S122RDIW-S865D710U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331832-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122RDIW-S865D710U840-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 710 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5532.0 lumens
Efficiency: N/A
Efficacy: 103.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 53.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331832-840

CATALOG NUMBER: S122RDIW-S865D710U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

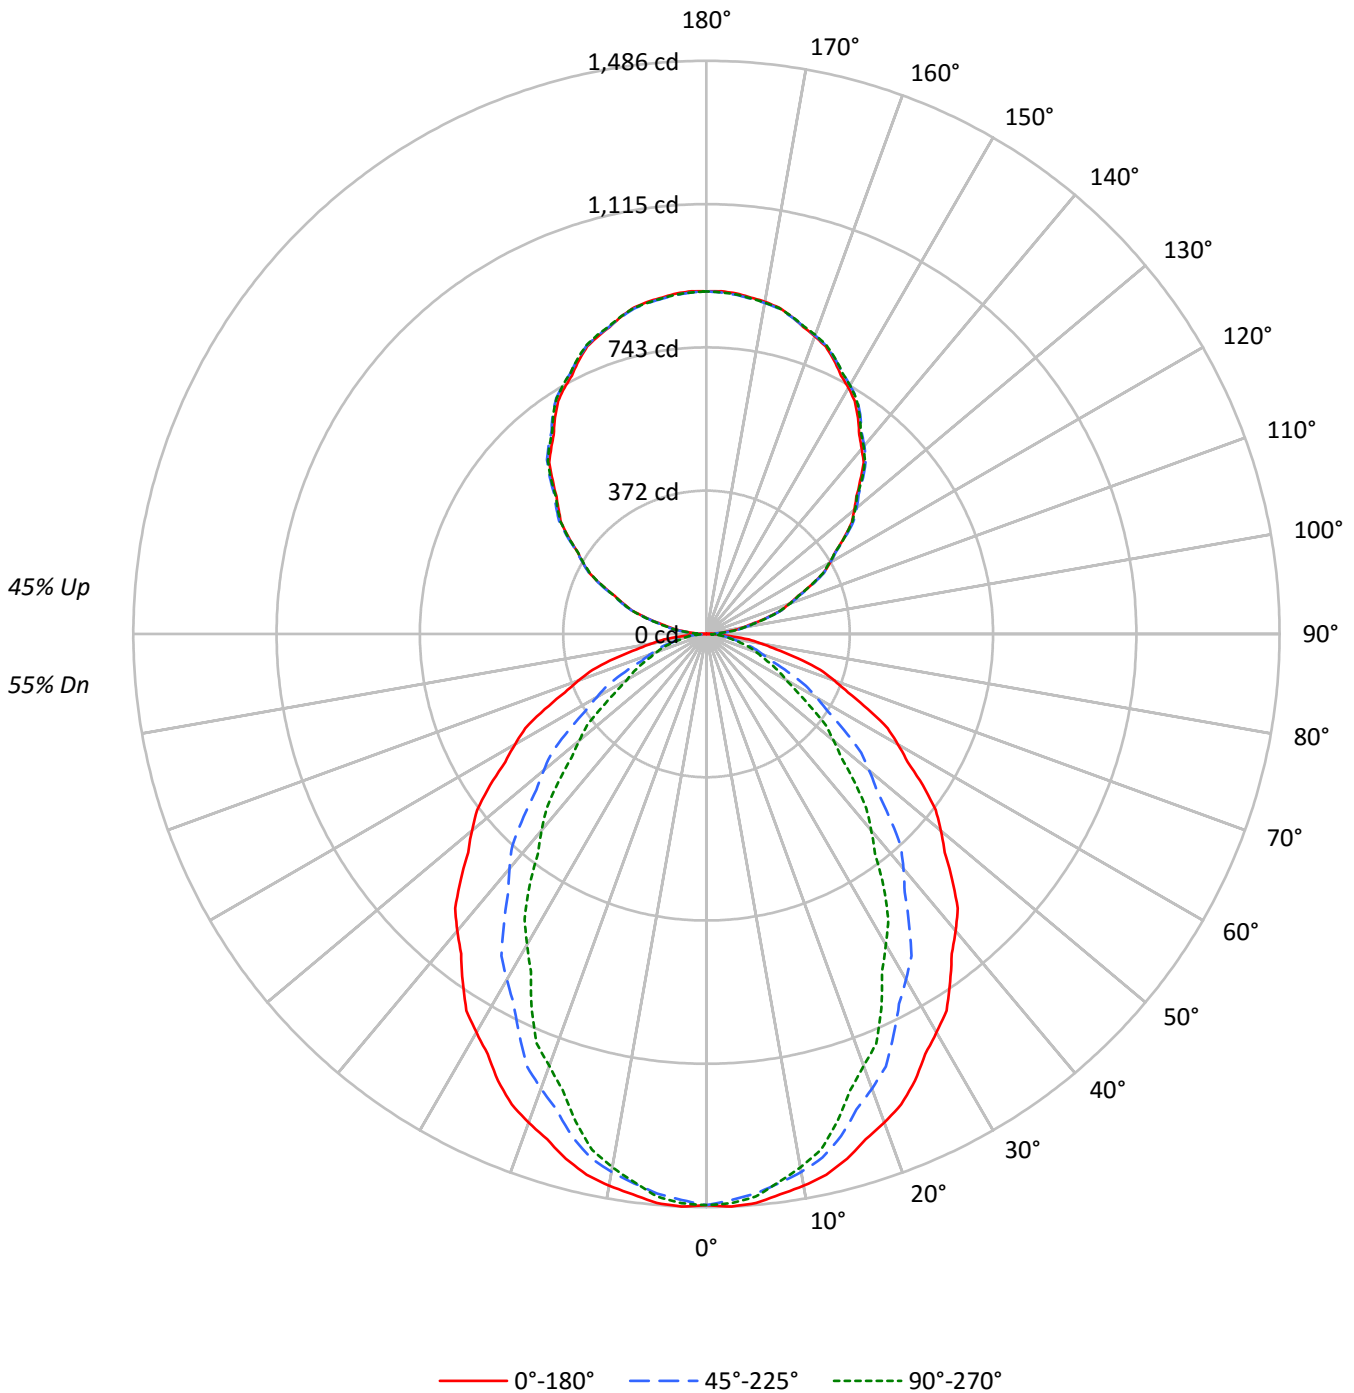



TEST NUMBER: P331832-840

CATALOG NUMBER: S122RDIW-S865D710U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	95	92	88	92	89	85	83	76	74	72	65	63	62	55	53	52	47
2	91	84	78	73	84	78	73	69	68	64	60	58	55	52	49	47	45	41
3	83	74	67	61	77	69	63	58	60	55	51	52	48	45	44	41	39	35
4	77	66	58	52	71	62	55	50	54	48	44	46	42	39	39	36	34	31
5	70	59	51	45	65	55	48	43	48	43	39	42	38	34	36	32	30	27
6	65	53	45	40	60	50	43	38	44	38	34	38	34	30	33	29	27	24
7	60	48	40	35	56	45	38	33	40	34	30	35	30	27	30	26	24	21
8	56	44	36	31	52	41	35	30	37	31	27	32	27	24	28	24	22	19
9	52	40	33	28	49	38	31	27	34	28	24	29	25	22	26	22	20	18
10	49	37	30	25	46	35	29	24	31	26	22	27	23	20	24	20	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	23909	23909	23909
5°	24000	23608	23738
10°	23815	23222	23023
15°	23542	22534	21884
20°	23163	21551	20469
25°	22775	20436	19099
30°	22236	19287	17339
35°	21711	18039	15794
40°	21182	16750	14010
45°	20562	15299	12392
50°	19926	13835	10803
55°	19277	12262	9278
60°	18519	10601	7702
65°	17662	8909	7014
70°	16636	7336	6449
75°	15384	6687	6014
80°	13575	5979	5486
85°	10689	4705	4705



TEST NUMBER: P331832-840

CATALOG NUMBER: S122RDIW-S865D710U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	138.6	2.5
10°-20°	380.6	6.9
20°-30°	534.4	9.7
30°-40°	582.7	10.5
40°-50°	535.8	9.7
50°-60°	420.8	7.6
60°-70°	274.4	5.0
70°-80°	141.5	2.6
80°-90°	40.2	0.7
90°-100°	56.3	1.0
100°-110°	174.8	3.2
110°-120°	298.7	5.4
120°-130°	392.8	7.1
130°-140°	440.9	8.0
140°-150°	432.3	7.8
150°-160°	362.6	6.6
160°-170°	240.5	4.3
170°-180°	84.1	1.5
0°-30°	1053.6	19.0
0°-40°	1636.3	29.6
0°-60°	2593.0	46.9
0°-90°	3049.0	55.1
90°-120°	529.8	9.6
90°-150°	1795.8	32.5
90°-180°	2483.0	44.9
0°-180°	5532.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1481	1481	1481	1481	1481	
5°	1481	1473	1457	1468	1465	140
15°	1408	1392	1348	1323	1309	397
25°	1278	1233	1147	1094	1072	588
35°	1102	1030	915	834	801	689
45°	900	808	670	578	543	695
55°	685	578	436	358	330	612
65°	462	353	233	190	184	458
75°	247	155	107	98	96	261
85°	58	31	25	25	25	68
90°	1	10	26	25	25	4
95°	39	46	48	48	46	45
105°	161	163	165	166	166	170
115°	300	304	303	302	300	296
125°	436	442	441	438	438	390
135°	564	572	574	573	571	436
145°	685	690	695	695	692	428
155°	783	785	788	791	789	360
165°	852	851	851	856	853	240
175°	886	884	883	888	884	84
180°	888	888	888	888	888	



TEST NUMBER: P331832-840

CATALOG NUMBER: S122RDIW-S865D710U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1480.8	1480.8	1480.8	1480.8	1480.8	1480.8	1480.8	1480.8	1480.8	1480.8	1480.8
2.5°	1486.1	1484.9	1483.7	1482.5	1481.4	1479.5	1476.8	1474.2	1471.6	1468.9	1471.4
5°	1480.8	1479.3	1477.7	1476.2	1474.8	1472.1	1468.2	1464.4	1460.5	1456.6	1459.3
7.5°	1465.4	1463.6	1461.8	1460.0	1458.0	1454.9	1450.4	1445.8	1441.3	1436.7	1437.5
10°	1452.6	1450.5	1448.4	1446.3	1444.2	1440.3	1434.3	1428.4	1422.4	1416.4	1415.5
12.5°	1436.5	1433.9	1431.4	1428.9	1426.2	1421.2	1413.5	1405.9	1398.3	1390.7	1389.1
15°	1408.4	1405.1	1401.8	1398.6	1395.2	1388.6	1378.5	1368.4	1358.2	1348.1	1342.4
17.5°	1373.8	1368.8	1363.8	1358.8	1353.8	1344.8	1331.8	1318.8	1305.9	1292.8	1286.2
20°	1348.1	1342.1	1336.2	1330.2	1324.2	1313.8	1298.9	1284.0	1269.2	1254.3	1246.8
22.5°	1320.2	1313.5	1306.9	1300.2	1293.5	1281.8	1265.0	1248.2	1231.4	1214.6	1205.0
25°	1278.4	1268.9	1259.3	1249.8	1240.3	1225.7	1206.0	1186.4	1166.7	1147.1	1134.9
27.5°	1228.0	1217.6	1207.3	1196.9	1186.6	1170.3	1148.1	1126.0	1103.8	1081.7	1067.4
30°	1192.7	1181.3	1170.0	1158.7	1147.4	1129.8	1106.0	1082.2	1058.3	1034.5	1019.4
32.5°	1158.3	1145.1	1131.9	1118.6	1105.4	1086.7	1062.4	1038.0	1013.8	989.5	972.2
35°	1101.5	1086.3	1071.2	1055.9	1040.8	1020.1	993.8	967.7	941.5	915.2	896.5
37.5°	1044.7	1028.0	1011.4	994.6	978.0	955.6	927.8	899.8	871.9	843.9	823.2
40°	1005.0	987.1	969.3	951.4	933.5	910.2	881.3	852.4	823.5	794.7	773.5
42.5°	964.3	945.4	926.7	907.9	889.0	864.6	834.9	805.0	775.2	745.3	723.5
45°	900.5	880.5	860.6	840.6	820.7	795.1	763.9	732.6	701.3	670.0	648.8
47.5°	838.3	817.2	796.1	774.9	753.8	727.0	694.8	662.5	630.2	597.9	576.9
50°	793.3	772.1	751.0	729.8	708.7	681.8	649.0	616.2	583.5	550.8	530.2
52.5°	749.3	727.2	705.2	683.1	661.0	633.9	601.9	569.8	537.8	505.7	485.8
55°	684.8	661.6	638.3	615.1	591.9	564.1	532.0	499.8	467.7	435.6	417.7
57.5°	618.5	594.7	570.9	547.0	523.3	495.9	464.9	434.0	403.1	372.2	355.9
60°	573.5	549.7	525.9	502.1	478.3	451.0	420.3	389.6	359.0	328.3	313.2
62.5°	529.6	505.7	481.9	458.1	434.2	407.8	378.5	349.3	320.0	290.7	276.3
65°	462.3	438.2	414.0	389.9	365.9	340.3	313.6	286.8	259.9	233.2	223.1
67.5°	397.5	373.5	349.6	325.6	301.6	277.6	253.6	229.4	205.3	181.2	176.5
70°	352.4	329.2	306.0	282.8	259.5	237.6	217.1	196.5	176.0	155.4	152.5
72.5°	309.5	287.3	265.0	242.8	220.5	201.1	184.6	168.0	151.6	135.1	132.6
75°	246.6	225.7	204.9	184.0	163.2	147.7	137.5	127.4	117.3	107.2	105.1
77.5°	184.7	166.3	148.0	129.8	111.5	100.0	95.0	90.2	85.3	80.4	79.2
80°	146.0	130.9	115.7	100.5	85.3	76.2	73.2	70.3	67.3	64.3	63.1
82.5°	110.7	98.9	86.9	75.1	63.3	56.4	54.3	52.3	50.3	48.3	47.6
85°	57.7	51.4	45.1	38.9	32.6	29.1	28.2	27.3	26.4	25.4	25.4
87.5°	17.3	15.8	14.3	12.8	11.3	10.9	11.6	12.3	13.1	13.8	13.5
90°	0.7	2.7	4.7	6.8	8.8	11.6	15.2	18.9	22.5	26.3	25.9
92.5°	13.3	14.8	16.3	17.8	19.2	20.4	21.2	22.1	22.9	23.8	23.9
95°	39.0	40.6	42.3	43.9	45.6	46.7	47.0	47.3	47.7	48.0	48.0
97.5°	71.2	72.6	74.1	75.5	77.1	78.1	78.8	79.4	80.0	80.6	80.6
100°	95.1	96.5	97.9	99.2	100.5	101.4	101.9	102.4	102.9	103.4	103.4
102.5°	120.4	121.4	122.5	123.5	124.6	125.4	126.1	126.7	127.3	127.9	128.2
105°	161.1	161.6	162.1	162.6	163.1	163.5	163.9	164.2	164.5	164.9	165.2
107.5°	202.2	202.9	203.7	204.4	205.1	205.5	205.5	205.5	205.5	205.5	205.6
110°	228.5	229.5	230.6	231.6	232.6	233.1	233.1	233.1	233.1	233.1	233.1



TEST NUMBER: P331832-840

CATALOG NUMBER: S122RDIW-S865D710U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	257.3	258.3	259.3	260.3	261.4	261.8	261.7	261.5	261.4	261.3	260.8
115°	299.7	300.7	301.7	302.8	303.8	304.1	303.8	303.4	303.1	302.8	302.6
117.5°	342.0	343.4	344.7	346.0	347.3	347.5	346.6	345.7	344.8	343.9	343.5
120°	370.2	371.5	372.8	374.2	375.5	375.5	374.2	372.8	371.5	370.2	370.2
122.5°	396.0	397.6	399.2	400.7	402.3	402.7	401.7	400.8	399.9	399.0	398.6
125°	436.2	437.7	439.1	440.6	442.1	442.6	442.1	441.6	441.1	440.6	440.1
127.5°	475.2	477.2	479.1	480.9	482.8	483.5	482.9	482.3	481.7	481.1	480.5
130°	499.8	502.0	504.1	506.3	508.5	509.4	509.1	508.8	508.4	508.1	507.8
132.5°	527.5	529.2	531.0	532.7	534.4	535.4	535.4	535.5	535.6	535.6	534.9
135°	564.3	566.1	567.9	569.8	571.6	572.7	573.0	573.4	573.7	574.0	573.8
137.5°	603.1	604.6	606.1	607.6	609.0	610.1	610.5	611.0	611.4	611.8	611.7
140°	626.5	627.9	629.4	631.0	632.5	633.6	634.5	635.3	636.1	636.9	636.9
142.5°	650.5	652.0	653.5	655.0	656.4	657.5	658.0	658.6	659.1	659.7	659.8
145°	684.9	686.1	687.2	688.4	689.6	690.6	691.7	692.7	693.7	694.7	694.8
147.5°	715.7	717.0	718.4	719.8	721.2	722.3	723.0	723.6	724.3	725.0	725.3
150°	736.6	737.6	738.6	739.6	740.6	741.4	742.1	742.8	743.5	744.2	744.7
152.5°	755.2	756.2	757.2	758.2	759.2	760.1	760.9	761.7	762.5	763.4	764.0
155°	783.0	783.6	784.1	784.6	785.1	785.6	786.1	786.6	787.1	787.6	788.4
157.5°	806.9	807.3	807.6	807.9	808.3	808.6	808.9	809.2	809.5	809.8	810.9
160°	821.3	821.6	821.9	822.3	822.6	822.9	823.0	823.2	823.3	823.5	824.6
162.5°	834.5	834.6	834.7	834.7	834.8	834.9	835.1	835.3	835.4	835.6	836.7
165°	852.0	851.8	851.7	851.5	851.4	851.3	851.3	851.3	851.3	851.3	852.4
167.5°	866.8	866.3	865.8	865.3	864.7	864.4	864.4	864.3	864.3	864.3	865.5
170°	874.5	874.0	873.5	873.0	872.5	872.2	872.0	871.8	871.7	871.5	872.7
172.5°	879.9	879.4	878.9	878.4	877.9	877.6	877.4	877.3	877.1	876.9	878.1
175°	886.5	886.1	885.6	885.0	884.5	884.1	883.7	883.4	883.1	882.7	883.9
177.5°	889.2	888.8	888.4	888.0	887.6	887.3	887.0	886.8	886.5	886.2	887.0
180°	888.0	888.0	888.0	888.0	888.0	888.0	888.0	888.0	888.0	888.0	888.0



TEST NUMBER: P331832-840

CATALOG NUMBER: S122RDIW-S865D710U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1480.8	1480.8	1480.8	1480.8	1480.8	1480.8	1480.8	1480.8
2.5°	1473.7	1476.1	1478.4	1479.5	1478.9	1478.4	1478.0	1477.5
5°	1462.0	1464.6	1467.3	1468.2	1467.3	1466.4	1465.5	1464.6
7.5°	1438.4	1439.1	1439.9	1439.5	1437.9	1436.4	1434.8	1433.3
10°	1414.6	1413.7	1412.8	1411.5	1409.7	1408.0	1406.1	1404.3
12.5°	1387.5	1385.8	1384.2	1382.0	1379.0	1376.0	1373.0	1370.1
15°	1336.8	1331.1	1325.4	1321.1	1318.2	1315.1	1312.2	1309.2
17.5°	1279.4	1272.6	1266.0	1260.0	1254.9	1249.8	1244.7	1239.5
20°	1239.4	1231.9	1224.5	1217.5	1210.9	1204.4	1197.8	1191.3
22.5°	1195.5	1185.9	1176.3	1169.0	1164.2	1159.2	1154.4	1149.5
25°	1122.7	1110.4	1098.2	1089.8	1085.4	1081.0	1076.5	1072.1
27.5°	1053.2	1038.9	1024.7	1014.1	1007.0	999.9	992.8	985.7
30°	1004.1	989.0	973.7	962.1	954.1	946.0	938.1	930.0
32.5°	954.8	937.5	920.2	907.7	900.2	892.6	885.0	877.5
35°	877.7	859.0	840.2	827.6	821.0	814.5	807.9	801.3
37.5°	802.6	781.9	761.3	747.2	739.7	732.2	724.7	717.2
40°	752.3	731.2	710.0	695.6	687.9	680.1	672.4	664.7
42.5°	701.7	679.7	657.9	643.2	635.7	628.2	620.7	613.2
45°	627.7	606.6	585.4	571.3	564.1	557.0	549.9	542.7
47.5°	555.8	534.8	513.8	500.1	493.6	487.1	480.6	474.1
50°	509.7	489.1	468.6	455.1	448.9	442.6	436.4	430.1
52.5°	466.1	446.3	426.4	413.6	407.8	402.0	396.3	390.5
55°	399.8	381.9	364.1	352.2	346.6	340.9	335.3	329.6
57.5°	339.5	323.2	306.8	296.2	291.4	286.6	281.9	277.1
60°	297.9	282.8	267.5	257.6	252.8	248.0	243.3	238.5
62.5°	261.9	247.4	232.9	224.2	221.4	218.5	215.6	212.8
65°	212.9	202.8	192.7	187.1	186.2	185.4	184.5	183.6
67.5°	171.9	167.2	162.6	159.8	158.9	157.8	156.9	156.0
70°	149.5	146.5	143.5	141.5	140.3	139.1	137.8	136.6
72.5°	130.1	127.5	125.0	123.5	122.7	122.0	121.3	120.6
75°	103.0	101.0	98.9	97.7	97.4	97.0	96.7	96.4
77.5°	78.1	76.9	75.6	74.8	74.3	73.8	73.4	72.9
80°	61.9	60.8	59.6	59.0	59.0	59.0	59.0	59.0
82.5°	46.9	46.0	45.3	45.0	45.0	45.0	45.0	45.0
85°	25.4	25.4	25.4	25.4	25.4	25.4	25.4	25.4
87.5°	13.2	12.9	12.6	12.4	12.5	12.5	12.5	12.6
90°	25.5	25.2	24.9	24.8	24.9	25.1	25.3	25.4
92.5°	23.9	24.0	24.1	24.1	24.1	24.2	24.2	24.2
95°	48.0	48.0	48.0	47.8	47.5	47.2	46.8	46.5
97.5°	80.6	80.6	80.6	80.6	80.6	80.6	80.5	80.5
100°	103.4	103.4	103.4	103.3	103.2	103.0	102.8	102.7
102.5°	128.3	128.4	128.6	128.6	128.4	128.2	128.1	127.8
105°	165.5	165.8	166.2	166.3	166.3	166.3	166.3	166.3
107.5°	205.7	205.9	206.0	205.7	204.9	204.2	203.4	202.7
110°	233.1	233.1	233.1	232.8	232.3	231.8	231.3	230.9



TEST NUMBER: P331832-840

CATALOG NUMBER: S122RDIW-S865D710U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	260.4	260.0	259.6	259.2	258.9	258.5	258.1	257.8
115°	302.5	302.3	302.1	301.7	301.2	300.7	300.2	299.7
117.5°	343.1	342.6	342.2	341.7	341.2	340.7	340.2	339.7
120°	370.2	370.2	370.2	369.9	369.4	368.9	368.4	367.9
122.5°	398.2	397.8	397.4	397.0	396.6	396.3	395.9	395.6
125°	439.6	439.1	438.6	438.3	438.2	438.0	437.8	437.7
127.5°	479.9	479.3	478.7	478.2	477.6	477.1	476.6	476.1
130°	507.5	507.1	506.8	506.2	505.5	504.9	504.2	503.6
132.5°	534.2	533.4	532.7	532.1	531.6	531.0	530.5	530.0
135°	573.7	573.5	573.4	573.0	572.5	572.0	571.5	571.0
137.5°	611.5	611.4	611.3	610.9	610.2	609.6	608.8	608.1
140°	636.9	636.9	636.9	636.6	636.0	635.3	634.6	634.0
142.5°	660.0	660.1	660.2	660.0	659.3	658.6	658.0	657.3
145°	695.0	695.2	695.3	695.1	694.4	693.8	693.1	692.5
147.5°	725.7	726.0	726.4	726.3	725.7	725.0	724.4	723.8
150°	745.1	745.6	746.1	746.1	745.6	745.1	744.7	744.2
152.5°	764.6	765.2	765.9	765.9	765.2	764.6	764.0	763.4
155°	789.2	790.1	790.9	791.1	790.6	790.1	789.6	789.1
157.5°	812.0	813.1	814.3	814.5	813.6	812.8	812.0	811.2
160°	825.6	826.6	827.6	827.7	827.1	826.4	825.8	825.1
162.5°	837.8	839.0	840.1	840.2	839.4	838.7	837.9	837.1
165°	853.6	854.7	856.0	856.2	855.3	854.4	853.6	852.8
167.5°	866.7	867.8	869.0	869.1	868.3	867.4	866.6	865.7
170°	873.8	875.0	876.2	876.3	875.3	874.2	873.2	872.2
172.5°	879.3	880.4	881.6	881.6	880.7	879.7	878.7	877.7
175°	885.0	886.3	887.5	887.5	886.5	885.6	884.5	883.5
177.5°	887.8	888.6	889.4	889.4	888.6	887.8	887.0	886.2
180°	888.0	888.0	888.0	888.0	888.0	888.0	888.0	888.0

(END OF REPORT)