

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331495-940

Luminaire Tested: **S122DIW-S485D435U940-4F0-1E-UDD-A**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331495-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S122DIW-S485D435U940-4F0-1E-UDD-A  
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 485 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 435 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3456.6 lumens  
Efficiency: N/A  
Efficacy: 114.5 lumens/watt  
Spacing Criteria (0/90/45): 1.08 / 1.16 / 1.23  
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 30.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331495-940

CATALOG NUMBER: S122DIW-S485D435U940-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

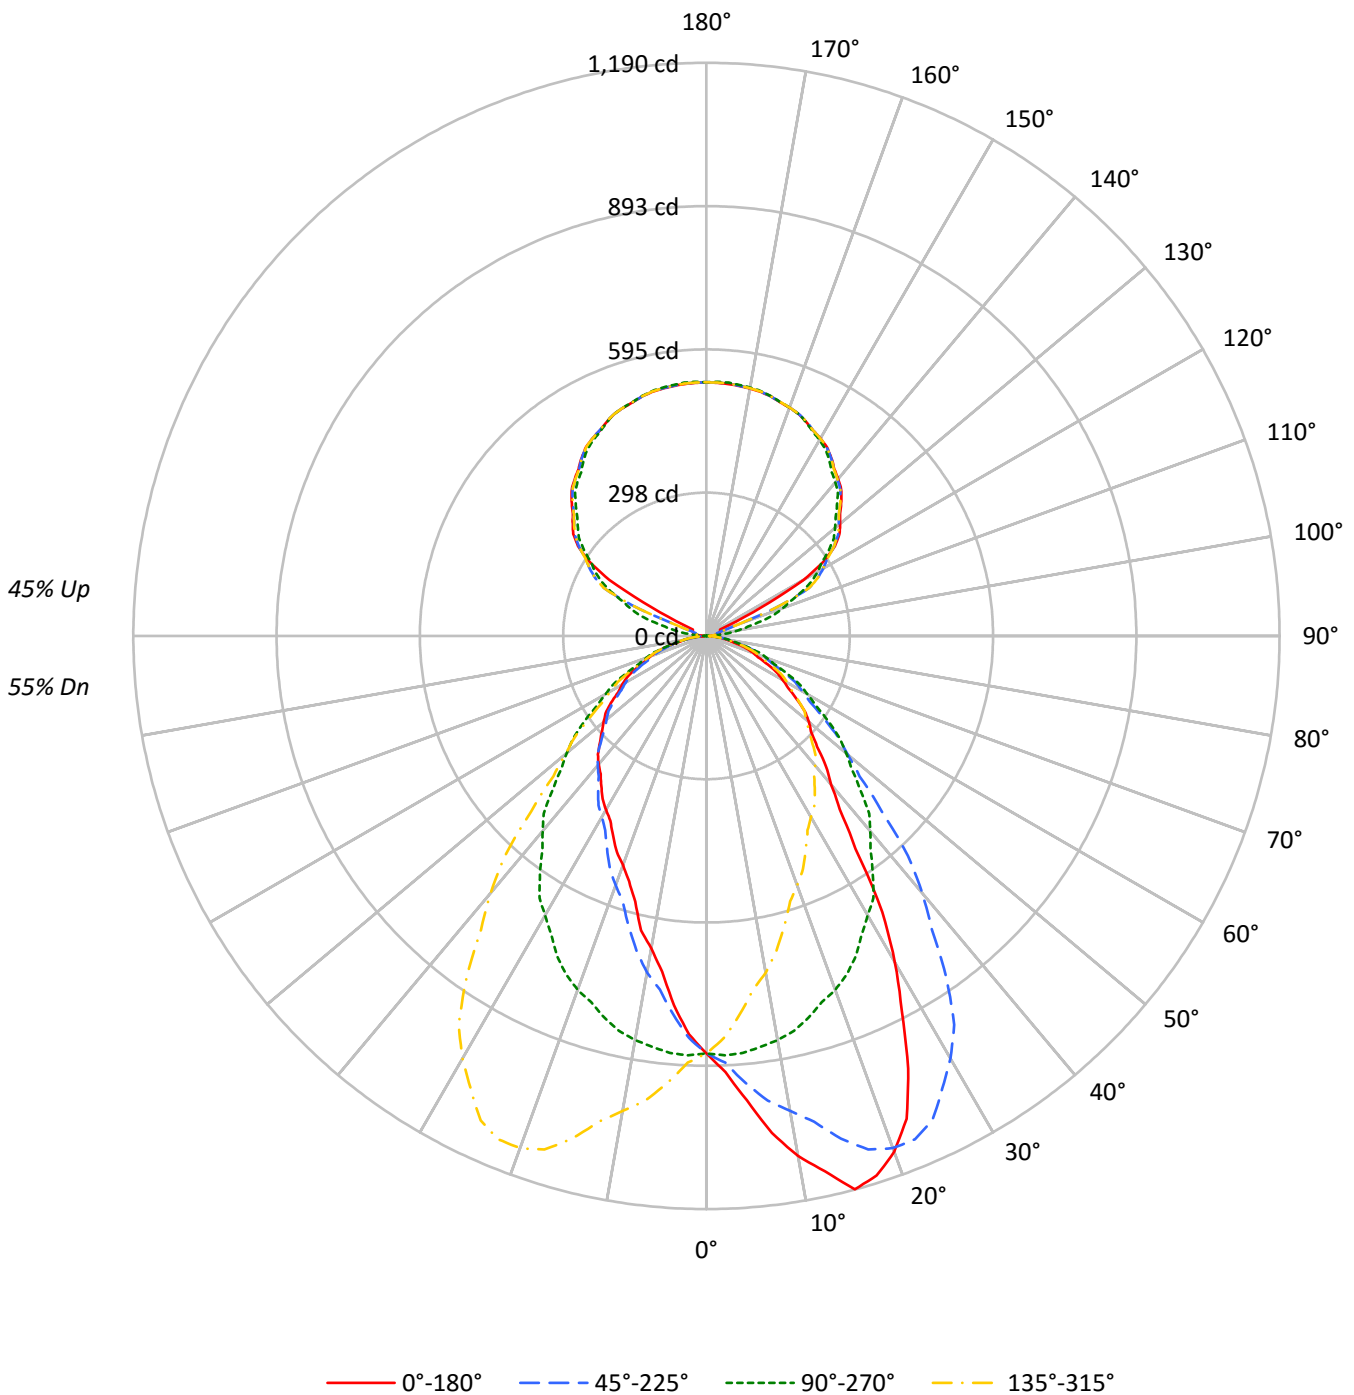



TEST NUMBER: P331495-940

CATALOG NUMBER: S122DIW-S485D435U940-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55								
1	100	95	92	88	92	89	86	83	76	74	72	65	64	62	55	54	53	48								
2	91	84	78	73	84	78	73	69	68	64	60	58	55	53	49	47	45	41								
3	83	74	67	61	77	69	63	58	60	55	51	52	48	45	44	41	39	35								
4	77	66	58	52	71	62	55	50	54	49	44	46	42	39	39	37	34	31								
5	71	59	51	45	65	55	48	43	48	43	39	42	38	34	36	33	30	27								
6	65	53	45	40	60	50	43	38	44	38	34	38	34	30	33	29	27	24								
7	60	48	41	35	56	45	38	33	40	34	30	35	30	27	30	27	24	21								
8	56	44	36	31	52	42	35	30	37	31	27	32	28	24	28	24	22	19								
9	52	40	33	28	49	38	31	27	34	28	24	30	25	22	26	22	20	18								
10	49	37	30	25	46	35	29	24	31	26	22	27	23	20	24	20	18	16								

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	13990	13990	13990	13990
5°	15686	14083	12478	14083
10°	17974	13967	10799	13967
15°	19883	13710	9541	13710
20°	19581	13435	8698	13435
25°	17655	13069	8165	13069
30°	14590	12486	7774	12486
35°	10634	11874	7496	11874
40°	8494	11152	7341	11152
45°	7421	10319	7133	10319
50°	6978	9510	6993	9510
55°	6432	8690	6804	8690
60°	5893	7818	6516	7818
65°	5368	7033	6235	7033
70°	4877	6274	5816	6274
75°	4323	5421	5153	5421
80°	3710	4491	4147	4491
85°	3335	3335	2464	3335



TEST NUMBER: P331495-940

CATALOG NUMBER: S122DIW-S485D435U940-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	82.5	2.4
10°-20°	239.9	6.9
20°-30°	348.2	10.1
30°-40°	367.4	10.6
40°-50°	325.3	9.4
50°-60°	259.6	7.5
60°-70°	176.5	5.1
70°-80°	90.5	2.6
80°-90°	23.1	0.7
90°-100°	17.6	0.5
100°-110°	64.4	1.9
110°-120°	172.2	5.0
120°-130°	284.3	8.2
130°-140°	302.4	8.7
140°-150°	281.0	8.1
150°-160°	225.9	6.5
160°-170°	145.6	4.2
170°-180°	50.1	1.4
0°-30°	670.6	19.4
0°-40°	1038.0	30.0
0°-60°	1623.0	47.0
0°-90°	1913.0	55.3
90°-120°	254.2	7.4
90°-150°	1121.9	32.5
90°-180°	1544.0	44.7
0°-180°	3456.6	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	866	866	866	866	866	
5°	968	869	770	869	968	97
15°	1190	820	571	820	1190	328
25°	991	734	458	734	991	448
35°	540	602	380	602	540	351
45°	325	452	312	452	325	256
55°	228	309	242	309	228	205
65°	140	184	163	184	140	140
75°	69	87	83	87	69	74
85°	18	18	13	18	18	20
90°	10	0	10	0	10	5
95°	16	25	16	25	16	15
105°	29	116	29	116	29	30
115°	31	219	31	219	31	78
125°	326	310	326	310	326	282
135°	396	383	396	383	396	305
145°	452	445	452	445	452	282
155°	490	490	490	490	490	226
165°	515	516	515	516	515	145
175°	525	528	525	528	525	50
180°	527	527	527	527	527	



TEST NUMBER: P331495-940

CATALOG NUMBER: S122DIW-S485D435U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5
2.5°	906.5	906.8	907.2	903.0	902.5	902.5	898.8	895.5	891.8	886.7	887.3
5°	967.8	971.4	972.8	968.8	962.8	962.1	956.4	947.1	938.4	931.5	926.5
7.5°	1040.9	1042.3	1039.1	1033.8	1029.4	1021.4	1010.8	1000.5	986.1	972.8	963.0
10°	1096.3	1098.3	1092.6	1084.9	1078.6	1069.3	1054.0	1038.3	1019.4	1001.0	986.4
12.5°	1138.4	1143.4	1136.0	1135.1	1124.2	1111.4	1093.1	1085.2	1058.5	1033.0	1017.3
15°	1189.5	1189.2	1189.9	1183.6	1175.5	1173.6	1154.2	1133.3	1095.6	1080.7	1054.6
17.5°	1174.7	1179.8	1182.1	1182.1	1181.9	1180.6	1174.4	1161.2	1142.3	1118.0	1088.1
20°	1139.6	1146.2	1147.3	1154.9	1159.2	1164.9	1167.2	1163.6	1151.9	1131.6	1105.6
22.5°	1085.2	1087.1	1090.2	1102.2	1111.5	1125.7	1133.1	1145.4	1140.9	1131.0	1109.4
25°	991.0	987.7	999.3	1005.4	1027.0	1049.6	1066.0	1084.0	1099.9	1109.6	1103.3
27.5°	878.0	873.0	890.5	906.3	923.9	948.4	973.8	1003.9	1028.9	1060.2	1070.9
30°	782.6	785.6	802.3	819.2	845.9	880.5	909.1	942.1	977.8	1012.7	1037.0
32.5°	679.8	691.3	701.8	727.8	751.3	789.9	831.9	873.1	917.6	957.3	994.9
35°	539.5	552.8	567.5	586.5	619.4	657.7	698.7	754.3	814.9	869.2	913.8
37.5°	454.1	452.0	460.4	474.1	500.8	531.7	578.8	633.8	705.2	768.9	831.9
40°	403.0	401.6	407.6	420.3	440.6	463.2	504.5	552.8	619.1	697.0	772.0
42.5°	367.7	368.5	371.9	380.8	394.8	413.4	444.3	485.4	546.1	619.5	700.0
45°	325.0	327.3	331.0	335.4	343.3	358.6	375.9	405.3	453.3	514.5	593.8
47.5°	294.3	294.4	298.0	301.8	306.6	315.2	329.4	347.8	381.6	431.5	499.6
50°	277.8	275.4	278.0	281.1	286.1	292.0	301.4	318.7	341.3	381.7	438.5
52.5°	257.5	257.5	259.9	261.1	265.6	271.5	280.1	292.0	312.5	344.1	390.9
55°	228.5	230.2	231.5	233.4	237.5	241.7	248.4	256.5	272.4	296.0	330.6
57.5°	201.2	201.7	203.0	206.8	209.4	213.3	219.6	226.9	237.3	254.9	280.9
60°	182.5	182.5	185.1	186.8	190.1	194.1	199.1	206.2	215.4	229.8	250.7
62.5°	165.4	165.1	166.2	169.0	171.5	175.2	180.2	186.2	194.9	207.7	224.9
65°	140.5	139.9	141.9	142.5	145.2	148.8	152.8	159.2	166.2	175.5	190.8
67.5°	116.5	117.3	118.4	119.7	121.2	125.0	127.7	132.2	138.0	145.8	156.2
70°	103.3	103.3	103.3	104.2	106.2	108.3	110.9	114.6	120.2	126.9	136.2
72.5°	88.3	89.3	90.4	89.9	92.4	93.5	96.8	98.8	104.2	108.5	116.7
75°	69.3	69.3	69.3	70.9	72.0	72.9	74.9	77.0	79.6	84.9	89.3
77.5°	51.7	51.5	51.9	52.3	53.3	54.6	55.1	57.0	59.4	61.9	65.5
80°	39.9	40.7	40.9	41.6	41.6	42.3	42.6	44.9	46.6	48.3	50.6
82.5°	30.9	31.0	31.1	31.2	31.5	31.9	32.7	33.5	34.1	35.5	37.3
85°	18.0	17.7	17.7	18.3	18.0	18.0	18.6	19.4	19.4	19.6	20.7
87.5°	9.0	8.9	9.2	8.9	8.8	9.1	9.0	8.6	8.8	9.0	9.1
90°	10.3	10.2	10.0	9.8	9.6	9.3	8.9	8.5	8.0	7.6	7.0
92.5°	10.3	10.2	10.1	10.0	9.9	9.7	9.5	9.3	9.1	8.8	8.5
95°	16.4	16.5	16.6	16.7	16.8	16.6	16.1	15.7	15.2	14.9	14.3
97.5°	21.8	21.8	21.7	21.6	21.5	21.2	21.0	20.6	20.2	19.9	18.5
100°	25.5	25.3	25.2	25.1	24.9	24.4	23.7	23.1	22.4	21.8	20.2
102.5°	27.4	27.1	26.9	26.7	26.4	25.9	25.0	24.1	23.2	22.3	34.4
105°	29.0	28.6	28.3	27.9	27.6	27.0	26.0	25.1	24.2	23.3	46.4
107.5°	29.8	29.4	29.2	28.8	28.4	28.7	29.7	30.7	31.6	32.5	60.3
110°	30.1	29.8	29.4	29.1	28.7	32.8	41.3	49.8	58.2	66.7	91.1



TEST NUMBER: P331495-940

CATALOG NUMBER: S122DIW-S485D435U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	30.4	30.1	29.9	29.6	29.3	44.7	75.5	106.5	137.3	168.3	174.2
115°	31.2	37.4	43.4	49.6	55.6	78.3	117.5	156.8	195.9	235.1	233.0
117.5°	127.6	147.7	167.6	187.7	207.8	222.5	232.0	241.5	251.0	260.5	259.0
120°	232.5	243.9	255.4	266.8	278.2	283.5	282.4	281.4	280.4	279.4	277.9
122.5°	290.1	292.3	294.5	296.8	299.0	299.8	299.2	298.5	298.0	297.4	295.7
125°	325.8	325.7	325.4	325.1	324.9	324.4	323.9	323.2	322.6	322.1	320.5
127.5°	348.4	348.4	348.3	348.3	348.2	347.8	346.9	346.1	345.2	344.3	343.1
130°	362.5	362.6	362.7	362.7	362.8	362.4	361.4	360.5	359.5	358.6	357.8
132.5°	376.2	376.3	376.3	376.4	376.5	376.1	375.3	374.6	373.8	373.0	372.0
135°	396.0	396.2	396.4	396.5	396.6	396.4	395.5	394.7	393.8	393.0	392.2
137.5°	414.0	414.4	414.6	414.9	415.2	414.9	414.1	413.3	412.4	411.6	410.7
140°	425.3	425.8	426.1	426.6	427.0	426.9	426.1	425.3	424.5	423.8	422.8
142.5°	436.3	436.8	437.2	437.6	438.0	437.9	437.2	436.5	435.8	435.1	434.0
145°	451.7	452.1	452.5	452.9	453.3	453.3	452.6	452.1	451.5	450.8	449.4
147.5°	465.1	465.5	465.8	466.2	466.5	466.5	466.1	465.7	465.2	464.8	463.3
150°	473.4	473.8	474.2	474.7	475.1	475.0	474.5	474.0	473.5	473.0	471.6
152.5°	480.4	480.9	481.5	482.1	482.6	482.7	482.1	481.6	481.1	480.6	479.3
155°	490.2	490.8	491.5	492.1	492.8	492.9	492.4	492.0	491.4	490.9	489.9
157.5°	499.1	499.7	500.3	501.1	501.7	501.8	501.1	500.6	500.0	499.4	498.7
160°	504.3	504.8	505.4	506.0	506.6	506.7	506.1	505.6	505.2	504.6	504.1
162.5°	508.5	509.3	510.0	510.7	511.4	511.5	511.0	510.3	509.8	509.2	508.7
165°	514.9	515.5	516.1	516.7	517.3	517.3	516.7	516.1	515.5	514.9	514.7
167.5°	519.0	519.7	520.5	521.2	522.0	522.1	521.5	520.9	520.3	519.7	519.5
170°	521.4	522.2	522.9	523.7	524.4	524.5	524.0	523.3	522.7	522.2	522.0
172.5°	523.3	524.0	524.8	525.5	526.3	526.4	525.8	525.1	524.6	524.0	523.8
175°	524.9	525.7	526.6	527.4	528.2	528.3	527.7	527.2	526.6	525.9	525.8
177.5°	525.8	526.4	527.0	527.6	528.2	528.3	527.8	527.4	526.9	526.4	526.4
180°	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7



TEST NUMBER: P331495-940

CATALOG NUMBER: S122DIW-S485D435U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5
2.5°	889.1	887.0	885.6	880.9	876.6	872.4	871.0	871.6	865.7	860.1	857.7
5°	923.8	917.1	910.8	901.8	891.2	879.5	873.5	868.9	857.2	844.5	837.2
7.5°	954.8	945.3	933.1	916.2	900.7	882.3	870.7	860.4	843.3	825.5	814.6
10°	973.7	960.7	945.1	924.4	905.4	883.2	867.5	851.9	831.9	810.6	797.3
12.5°	990.0	972.5	957.1	930.6	908.1	880.2	861.7	839.6	818.6	793.3	780.2
15°	1028.7	996.4	967.1	937.1	909.5	870.5	849.9	820.2	792.6	761.3	746.3
17.5°	1058.5	1022.3	976.2	938.1	905.8	862.6	832.3	796.8	764.1	728.3	708.0
20°	1075.7	1034.0	984.4	939.1	900.4	851.2	818.2	781.9	743.6	703.3	681.4
22.5°	1085.7	1042.1	992.9	935.1	889.8	841.9	800.4	760.6	721.8	678.3	655.2
25°	1089.0	1049.0	997.0	931.7	876.5	822.2	772.2	733.6	686.7	646.0	612.4
27.5°	1073.1	1044.5	994.5	925.5	861.1	797.6	742.0	698.2	648.6	604.6	570.7
30°	1053.6	1037.0	988.4	919.1	848.8	780.6	719.3	669.7	620.5	575.8	541.2
32.5°	1023.6	1019.9	977.2	910.1	835.8	759.0	695.6	645.4	590.8	547.0	514.0
35°	964.4	980.4	953.4	889.8	811.2	728.3	659.7	602.4	545.8	503.8	472.9
37.5°	885.2	924.9	917.8	860.1	778.0	694.9	619.1	559.3	505.3	463.0	432.6
40°	830.5	881.2	888.5	837.5	754.7	669.1	588.8	529.1	476.5	437.9	407.2
42.5°	772.0	831.1	851.2	810.4	729.1	641.9	561.6	499.9	447.8	410.2	383.1
45°	673.7	752.0	788.3	764.9	686.3	597.1	514.5	451.9	404.7	369.3	348.3
47.5°	581.8	667.4	716.2	707.9	638.8	550.5	468.9	408.8	362.7	334.6	315.8
50°	516.8	604.8	663.7	666.4	604.8	517.2	435.2	378.6	336.4	310.0	294.7
52.5°	460.4	544.3	608.6	622.7	566.7	482.5	405.1	348.8	311.6	287.4	273.7
55°	386.6	457.5	528.9	554.8	509.9	429.9	358.3	308.7	273.8	257.1	245.1
57.5°	321.5	380.6	446.4	475.1	447.4	379.0	311.8	268.8	240.4	225.8	216.6
60°	287.0	333.7	392.3	426.6	402.6	341.7	283.0	242.1	218.8	205.8	197.2
62.5°	255.1	296.4	345.9	377.3	364.3	306.7	254.3	218.1	198.0	185.8	179.6
65°	210.4	243.1	281.4	310.4	301.8	258.1	215.2	184.1	168.2	158.5	153.6
67.5°	173.3	196.9	223.5	248.8	241.8	210.9	176.5	152.3	140.4	132.1	129.1
70°	149.9	167.8	191.5	211.8	206.2	180.8	153.6	132.9	122.5	115.6	112.5
72.5°	127.5	142.2	160.3	176.9	173.1	152.0	129.3	113.7	105.8	99.3	96.8
75°	96.2	107.5	118.6	129.6	128.6	112.3	98.9	86.9	80.6	75.6	74.6
77.5°	71.1	77.4	84.9	91.4	89.6	80.3	69.8	63.0	58.3	54.9	54.4
80°	54.3	58.0	63.3	67.9	65.6	61.6	53.3	48.3	44.9	41.6	40.3
82.5°	39.3	43.1	46.2	48.8	47.0	43.2	38.1	34.7	32.7	30.4	29.9
85°	20.7	22.6	24.0	24.6	24.0	21.7	19.4	18.0	16.3	15.3	15.0
87.5°	9.3	9.1	9.0	9.4	8.4	8.2	7.0	6.0	5.9	5.8	5.4
90°	6.2	5.6	4.9	4.1	3.2	2.2	1.3	0.4	1.3	2.2	3.2
92.5°	8.2	7.8	7.5	7.4	7.4	7.5	7.6	7.7	7.6	7.5	7.4
95°	13.6	13.1	12.5	13.6	16.4	19.2	21.9	24.8	21.9	19.2	16.4
97.5°	17.1	15.8	14.4	17.7	25.5	33.4	41.3	49.1	41.3	33.4	25.5
100°	18.8	17.4	16.0	21.0	32.6	44.2	55.8	67.5	55.8	44.2	32.6
102.5°	46.5	58.5	70.5	77.8	80.3	82.7	85.2	87.6	85.2	82.7	80.3
105°	69.5	92.6	115.7	126.0	123.5	120.9	118.4	115.8	118.4	120.9	123.5
107.5°	88.0	115.7	143.5	156.3	154.3	152.2	150.2	148.1	150.2	152.2	154.3
110°	115.7	140.1	164.6	175.9	174.2	172.4	170.6	168.8	170.6	172.4	174.2





TEST NUMBER: P331495-940

CATALOG NUMBER: S122DIW-S485D435U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	180.3	186.4	192.4	194.7	193.1	191.5	189.9	188.3	189.9	191.5	193.1
115°	231.0	228.8	226.7	224.9	223.5	222.0	220.6	219.2	220.6	222.0	223.5
117.5°	257.5	256.1	254.7	253.1	251.5	249.9	248.3	246.6	248.3	249.9	251.5
120°	276.3	274.8	273.3	271.9	270.6	269.3	268.0	266.8	268.0	269.3	270.6
122.5°	294.0	292.4	290.7	289.2	287.8	286.5	285.2	283.8	285.2	286.5	287.8
125°	318.9	317.3	315.6	314.2	313.2	312.1	310.9	309.9	310.9	312.1	313.2
127.5°	341.9	340.7	339.5	338.3	337.1	335.8	334.7	333.4	334.7	335.8	337.1
130°	356.8	355.9	354.9	353.7	352.4	351.1	349.7	348.4	349.7	351.1	352.4
132.5°	371.1	370.1	369.3	368.2	367.0	365.9	364.7	363.6	364.7	365.9	367.0
135°	391.5	390.7	389.9	388.9	387.4	386.1	384.8	383.4	384.8	386.1	387.4
137.5°	409.9	409.0	408.1	407.2	406.4	405.4	404.4	403.5	404.4	405.4	406.4
140°	422.0	421.1	420.1	419.3	418.6	417.9	417.2	416.6	417.2	417.9	418.6
142.5°	432.9	431.9	430.9	430.0	429.4	428.7	428.2	427.6	428.2	428.7	429.4
145°	448.0	446.6	445.1	444.4	444.5	444.6	444.7	444.8	444.7	444.6	444.5
147.5°	461.9	460.5	459.1	458.5	458.9	459.1	459.5	459.8	459.5	459.1	458.9
150°	470.3	469.0	467.5	467.2	467.8	468.3	469.0	469.6	469.0	468.3	467.8
152.5°	478.0	476.7	475.5	475.1	475.8	476.4	477.2	477.8	477.2	476.4	475.8
155°	488.8	487.9	486.9	486.7	487.5	488.2	489.0	489.7	489.0	488.2	487.5
157.5°	498.0	497.3	496.6	496.6	497.2	497.8	498.5	499.1	498.5	497.8	497.2
160°	503.6	503.1	502.6	502.6	503.1	503.6	504.1	504.6	504.1	503.6	503.1
162.5°	508.3	507.8	507.5	507.5	508.0	508.5	509.0	509.5	509.0	508.5	508.0
165°	514.4	514.2	513.9	514.0	514.5	515.1	515.6	516.0	515.6	515.1	514.5
167.5°	519.2	519.0	518.8	518.9	519.4	520.0	520.4	520.9	520.4	520.0	519.4
170°	521.8	521.7	521.5	521.7	522.2	522.6	523.2	523.7	523.2	522.6	522.2
172.5°	523.6	523.4	523.3	523.4	524.0	524.5	525.0	525.5	525.0	524.5	524.0
175°	525.7	525.5	525.3	525.5	526.1	526.6	527.3	527.9	527.3	526.6	526.1
177.5°	526.3	526.2	526.1	526.4	526.8	527.3	527.8	528.2	527.8	527.3	526.8
180°	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7



TEST NUMBER: P331495-940

CATALOG NUMBER: S122DIW-S485D435U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5
2.5°	855.1	853.5	847.8	844.9	840.2	835.6	832.7	834.0	835.1	834.6	833.7
5°	830.5	824.2	814.6	806.2	800.2	789.3	784.6	782.3	780.2	777.9	775.6
7.5°	801.4	791.4	777.6	765.7	754.5	740.8	733.1	728.3	723.5	718.3	713.6
10°	780.6	766.6	752.0	735.3	722.0	709.6	698.7	691.3	684.7	678.3	673.7
12.5°	758.8	742.6	724.5	701.8	687.1	669.4	667.8	654.9	644.4	640.5	635.1
15°	724.0	701.3	678.3	651.4	639.7	623.8	613.8	603.8	594.8	588.4	586.7
17.5°	684.5	655.1	632.3	613.0	593.9	577.5	568.3	560.3	552.9	544.4	543.3
20°	654.3	629.1	604.1	587.1	567.5	550.8	539.5	531.5	525.1	520.1	515.9
22.5°	625.9	598.2	575.3	556.7	537.3	523.9	515.0	507.3	502.0	496.5	492.4
25°	580.1	558.5	533.5	512.6	496.5	487.9	480.5	473.9	470.6	466.9	462.3
27.5°	540.1	516.0	492.7	476.4	462.4	454.7	449.5	445.0	441.8	439.7	437.0
30°	511.8	487.5	469.2	453.3	441.6	433.9	430.6	427.9	424.3	422.9	421.6
32.5°	484.6	462.8	447.1	433.3	422.1	417.1	414.1	411.7	408.8	407.5	404.8
35°	446.2	427.9	412.6	404.9	395.9	391.6	389.3	385.9	383.3	382.0	381.7
37.5°	410.1	394.1	384.1	374.3	370.4	367.7	364.6	362.3	361.5	361.3	361.0
40°	386.6	373.6	364.6	356.7	355.0	351.0	348.3	346.3	346.3	346.7	346.3
42.5°	365.3	353.7	345.7	338.9	336.9	334.5	331.8	331.7	332.3	333.3	332.3
45°	333.1	324.7	319.1	315.7	312.0	309.7	309.3	310.4	310.7	311.0	312.0
47.5°	303.3	297.7	292.7	289.0	287.4	287.0	286.6	288.3	289.9	290.5	292.0
50°	285.7	279.4	275.1	272.8	271.4	270.7	271.4	273.4	274.7	276.4	277.4
52.5°	266.0	261.5	258.6	256.7	256.2	256.6	256.7	259.0	261.2	261.7	262.3
55°	238.8	235.4	234.8	231.8	233.1	232.7	234.4	235.8	237.7	239.8	240.1
57.5°	211.6	208.9	207.1	207.4	207.8	209.3	210.6	213.0	215.2	217.2	217.5
60°	193.5	192.2	191.2	191.2	191.8	193.9	195.5	197.8	199.1	200.5	201.4
62.5°	177.0	175.7	174.6	175.1	176.9	178.1	180.0	181.3	182.6	184.0	184.4
65°	150.9	150.2	151.2	151.9	152.2	153.8	156.2	157.2	158.5	159.2	161.5
67.5°	126.8	127.0	126.8	127.8	129.7	130.1	132.2	134.6	134.9	136.2	137.7
70°	110.6	111.2	111.9	112.5	114.2	114.9	116.5	117.5	118.9	119.8	120.9
72.5°	95.7	95.8	96.5	96.3	97.7	99.2	100.6	101.6	102.9	104.2	105.1
75°	73.6	73.6	74.3	74.6	76.2	77.9	77.6	78.3	79.6	81.0	81.6
77.5°	53.8	53.1	53.8	54.0	54.6	56.0	56.3	57.2	58.8	58.3	59.0
80°	40.9	39.9	40.9	41.3	41.3	43.0	43.0	43.6	44.6	43.6	44.6
82.5°	29.2	28.8	29.5	29.6	30.1	30.1	30.7	30.9	31.8	31.4	31.8
85°	14.6	14.4	14.6	14.4	14.6	15.0	15.0	14.6	14.6	15.3	14.4
87.5°	5.4	5.3	5.1	5.3	5.1	5.0	4.8	4.9	5.0	4.5	4.5
90°	4.1	4.9	5.6	6.2	7.0	7.6	8.0	8.5	8.9	9.3	9.6
92.5°	7.4	7.5	7.8	8.2	8.5	8.8	9.1	9.3	9.5	9.7	9.9
95°	13.6	12.5	13.1	13.6	14.3	14.9	15.2	15.7	16.1	16.6	16.8
97.5°	17.7	14.4	15.8	17.1	18.5	19.9	20.2	20.6	21.0	21.2	21.5
100°	21.0	16.0	17.4	18.8	20.2	21.8	22.4	23.1	23.7	24.4	24.9
102.5°	77.8	70.5	58.5	46.5	34.4	22.3	23.2	24.1	25.0	25.9	26.4
105°	126.0	115.7	92.6	69.5	46.4	23.3	24.2	25.1	26.0	27.0	27.6
107.5°	156.3	143.5	115.7	88.0	60.3	32.5	31.6	30.7	29.7	28.7	28.4
110°	175.9	164.6	140.1	115.7	91.1	66.7	58.2	49.8	41.3	32.8	28.7



TEST NUMBER: P331495-940

CATALOG NUMBER: S122DIW-S485D435U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	194.7	192.4	186.4	180.3	174.2	168.3	137.3	106.5	75.5	44.7	29.3
115°	224.9	226.7	228.8	231.0	233.0	235.1	195.9	156.8	117.5	78.3	55.6
117.5°	253.1	254.7	256.1	257.5	259.0	260.5	251.0	241.5	232.0	222.5	207.8
120°	271.9	273.3	274.8	276.3	277.9	279.4	280.4	281.4	282.4	283.5	278.2
122.5°	289.2	290.7	292.4	294.0	295.7	297.4	298.0	298.5	299.2	299.8	299.0
125°	314.2	315.6	317.3	318.9	320.5	322.1	322.6	323.2	323.9	324.4	324.9
127.5°	338.3	339.5	340.7	341.9	343.1	344.3	345.2	346.1	346.9	347.8	348.2
130°	353.7	354.9	355.9	356.8	357.8	358.6	359.5	360.5	361.4	362.4	362.8
132.5°	368.2	369.3	370.1	371.1	372.0	373.0	373.8	374.6	375.3	376.1	376.5
135°	388.9	389.9	390.7	391.5	392.2	393.0	393.8	394.7	395.5	396.4	396.6
137.5°	407.2	408.1	409.0	409.9	410.7	411.6	412.4	413.3	414.1	414.9	415.2
140°	419.3	420.1	421.1	422.0	422.8	423.8	424.5	425.3	426.1	426.9	427.0
142.5°	430.0	430.9	431.9	432.9	434.0	435.1	435.8	436.5	437.2	437.9	438.0
145°	444.4	445.1	446.6	448.0	449.4	450.8	451.5	452.1	452.6	453.3	453.3
147.5°	458.5	459.1	460.5	461.9	463.3	464.8	465.2	465.7	466.1	466.5	466.5
150°	467.2	467.5	469.0	470.3	471.6	473.0	473.5	474.0	474.5	475.0	475.1
152.5°	475.1	475.5	476.7	478.0	479.3	480.6	481.1	481.6	482.1	482.7	482.6
155°	486.7	486.9	487.9	488.8	489.9	490.9	491.4	492.0	492.4	492.9	492.8
157.5°	496.6	496.6	497.3	498.0	498.7	499.4	500.0	500.6	501.1	501.8	501.7
160°	502.6	502.6	503.1	503.6	504.1	504.6	505.2	505.6	506.1	506.7	506.6
162.5°	507.5	507.5	507.8	508.3	508.7	509.2	509.8	510.3	511.0	511.5	511.4
165°	514.0	513.9	514.2	514.4	514.7	514.9	515.5	516.1	516.7	517.3	517.3
167.5°	518.9	518.8	519.0	519.2	519.5	519.7	520.3	520.9	521.5	522.1	522.0
170°	521.7	521.5	521.7	521.8	522.0	522.2	522.7	523.3	524.0	524.5	524.4
172.5°	523.4	523.3	523.4	523.6	523.8	524.0	524.6	525.1	525.8	526.4	526.3
175°	525.5	525.3	525.5	525.7	525.8	525.9	526.6	527.2	527.7	528.3	528.2
177.5°	526.4	526.1	526.2	526.3	526.4	526.4	526.9	527.4	527.8	528.3	528.2
180°	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7



TEST NUMBER: P331495-940

CATALOG NUMBER: S122DIW-S485D435U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5
2.5°	831.1	830.5	830.5	828.1	830.5	830.5	831.1	833.7	834.6	835.1	834.0
5°	771.0	769.9	768.3	769.9	768.3	769.9	771.0	775.6	777.9	780.2	782.3
7.5°	711.5	707.5	706.9	702.9	706.9	707.5	711.5	713.6	718.3	723.5	728.3
10°	668.1	665.4	665.0	658.7	665.0	665.4	668.1	673.7	678.3	684.7	691.3
12.5°	635.0	628.6	629.9	626.2	629.9	628.6	635.0	635.1	640.5	644.4	654.9
15°	577.7	577.7	576.5	570.8	576.5	577.7	577.7	586.7	588.4	594.8	603.8
17.5°	536.7	536.0	532.8	534.4	532.8	536.0	536.7	543.3	544.4	552.9	560.3
20°	512.2	510.1	506.2	506.2	506.2	510.1	512.2	515.9	520.1	525.1	531.5
22.5°	489.0	488.8	484.6	486.0	484.6	488.8	489.0	492.4	496.5	502.0	507.3
25°	461.9	459.2	457.3	458.3	457.3	459.2	461.9	462.3	466.9	470.6	473.9
27.5°	436.2	434.7	434.6	431.9	434.6	434.7	436.2	437.0	439.7	441.8	445.0
30°	421.2	417.9	418.6	417.0	418.6	417.9	421.2	421.6	422.9	424.3	427.9
32.5°	404.2	403.1	402.3	400.9	402.3	403.1	404.2	404.8	407.5	408.8	411.7
35°	380.9	381.3	379.6	380.3	379.6	381.3	380.9	381.7	382.0	383.3	385.9
37.5°	360.7	361.8	361.0	361.1	361.0	361.8	360.7	361.0	361.3	361.5	362.3
40°	347.3	347.3	347.3	348.3	347.3	347.3	347.3	346.3	346.7	346.3	346.3
42.5°	334.6	334.0	333.5	333.4	333.5	334.0	334.6	332.3	333.3	332.3	331.7
45°	312.7	313.7	314.1	312.4	314.1	313.7	312.7	312.0	311.0	310.7	310.4
47.5°	292.9	293.0	292.9	294.4	292.9	293.0	292.9	292.0	290.5	289.9	288.3
50°	279.1	278.4	279.1	278.4	279.1	278.4	279.1	277.4	276.4	274.7	273.4
52.5°	264.4	264.6	264.1	264.0	264.1	264.6	264.4	262.3	261.7	261.2	259.0
55°	241.5	242.1	241.7	241.7	241.7	242.1	241.5	240.1	239.8	237.7	235.8
57.5°	217.7	218.3	218.7	217.2	218.7	218.3	217.7	217.5	217.2	215.2	213.0
60°	201.2	202.8	202.5	201.8	202.5	202.8	201.2	201.4	200.5	199.1	197.8
62.5°	185.9	186.5	186.5	186.4	186.5	186.5	185.9	184.4	184.0	182.6	181.3
65°	162.5	163.2	162.2	163.2	162.2	163.2	162.5	161.5	159.2	158.5	157.2
67.5°	137.2	137.5	138.2	138.7	138.2	137.5	137.2	137.7	136.2	134.9	134.6
70°	121.5	121.2	122.3	123.2	122.3	121.2	121.5	120.9	119.8	118.9	117.5
72.5°	105.0	105.8	105.4	106.2	105.4	105.8	105.0	105.1	104.2	102.9	101.6
75°	81.0	81.9	81.6	82.6	81.6	81.9	81.0	81.6	81.0	79.6	78.3
77.5°	58.5	58.6	58.5	59.0	58.5	58.6	58.5	59.0	58.3	58.8	57.2
80°	44.6	44.0	43.2	44.6	43.2	44.0	44.6	44.6	43.6	44.6	43.6
82.5°	31.0	31.5	30.8	30.8	30.8	31.5	31.0	31.8	31.4	31.8	30.9
85°	14.4	14.0	13.3	13.3	13.3	14.0	14.4	14.4	15.3	14.6	14.6
87.5°	4.6	4.4	4.5	4.2	4.5	4.4	4.6	4.5	4.5	5.0	4.9
90°	9.8	10.0	10.2	10.3	10.2	10.0	9.8	9.6	9.3	8.9	8.5
92.5°	10.0	10.1	10.2	10.3	10.2	10.1	10.0	9.9	9.7	9.5	9.3
95°	16.7	16.6	16.5	16.4	16.5	16.6	16.7	16.8	16.6	16.1	15.7
97.5°	21.6	21.7	21.8	21.8	21.8	21.7	21.6	21.5	21.2	21.0	20.6
100°	25.1	25.2	25.3	25.5	25.3	25.2	25.1	24.9	24.4	23.7	23.1
102.5°	26.7	26.9	27.1	27.4	27.1	26.9	26.7	26.4	25.9	25.0	24.1
105°	27.9	28.3	28.6	29.0	28.6	28.3	27.9	27.6	27.0	26.0	25.1
107.5°	28.8	29.2	29.4	29.8	29.4	29.2	28.8	28.4	28.7	29.7	30.7
110°	29.1	29.4	29.8	30.1	29.8	29.4	29.1	28.7	32.8	41.3	49.8



TEST NUMBER: P331495-940

CATALOG NUMBER: S122DIW-S485D435U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	29.6	29.9	30.1	30.4	30.1	29.9	29.6	29.3	44.7	75.5	106.5
115°	49.6	43.4	37.4	31.2	37.4	43.4	49.6	55.6	78.3	117.5	156.8
117.5°	187.7	167.6	147.7	127.6	147.7	167.6	187.7	207.8	222.5	232.0	241.5
120°	266.8	255.4	243.9	232.5	243.9	255.4	266.8	278.2	283.5	282.4	281.4
122.5°	296.8	294.5	292.3	290.1	292.3	294.5	296.8	299.0	299.8	299.2	298.5
125°	325.1	325.4	325.7	325.8	325.7	325.4	325.1	324.9	324.4	323.9	323.2
127.5°	348.3	348.3	348.4	348.4	348.4	348.3	348.3	348.2	347.8	346.9	346.1
130°	362.7	362.7	362.6	362.5	362.6	362.7	362.7	362.8	362.4	361.4	360.5
132.5°	376.4	376.3	376.3	376.2	376.3	376.3	376.4	376.5	376.1	375.3	374.6
135°	396.5	396.4	396.2	396.0	396.2	396.4	396.5	396.6	396.4	395.5	394.7
137.5°	414.9	414.6	414.4	414.0	414.4	414.6	414.9	415.2	414.9	414.1	413.3
140°	426.6	426.1	425.8	425.3	425.8	426.1	426.6	427.0	426.9	426.1	425.3
142.5°	437.6	437.2	436.8	436.3	436.8	437.2	437.6	438.0	437.9	437.2	436.5
145°	452.9	452.5	452.1	451.7	452.1	452.5	452.9	453.3	453.3	452.6	452.1
147.5°	466.2	465.8	465.5	465.1	465.5	465.8	466.2	466.5	466.5	466.1	465.7
150°	474.7	474.2	473.8	473.4	473.8	474.2	474.7	475.1	475.0	474.5	474.0
152.5°	482.1	481.5	480.9	480.4	480.9	481.5	482.1	482.6	482.7	482.1	481.6
155°	492.1	491.5	490.8	490.2	490.8	491.5	492.1	492.8	492.9	492.4	492.0
157.5°	501.1	500.3	499.7	499.1	499.7	500.3	501.1	501.7	501.8	501.1	500.6
160°	506.0	505.4	504.8	504.3	504.8	505.4	506.0	506.6	506.7	506.1	505.6
162.5°	510.7	510.0	509.3	508.5	509.3	510.0	510.7	511.4	511.5	511.0	510.3
165°	516.7	516.1	515.5	514.9	515.5	516.1	516.7	517.3	517.3	516.7	516.1
167.5°	521.2	520.5	519.7	519.0	519.7	520.5	521.2	522.0	522.1	521.5	520.9
170°	523.7	522.9	522.2	521.4	522.2	522.9	523.7	524.4	524.5	524.0	523.3
172.5°	525.5	524.8	524.0	523.3	524.0	524.8	525.5	526.3	526.4	525.8	525.1
175°	527.4	526.6	525.7	524.9	525.7	526.6	527.4	528.2	528.3	527.7	527.2
177.5°	527.6	527.0	526.4	525.8	526.4	527.0	527.6	528.2	528.3	527.8	527.4
180°	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7



TEST NUMBER: P331495-940

CATALOG NUMBER: S122DIW-S485D435U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5
2.5°	832.7	835.6	840.2	844.9	847.8	853.5	855.1	857.7	860.1	865.7	871.6
5°	784.6	789.3	800.2	806.2	814.6	824.2	830.5	837.2	844.5	857.2	868.9
7.5°	733.1	740.8	754.5	765.7	777.6	791.4	801.4	814.6	825.5	843.3	860.4
10°	698.7	709.6	722.0	735.3	752.0	766.6	780.6	797.3	810.6	831.9	851.9
12.5°	667.8	669.4	687.1	701.8	724.5	742.6	758.8	780.2	793.3	818.6	839.6
15°	613.8	623.8	639.7	651.4	678.3	701.3	724.0	746.3	761.3	792.6	820.2
17.5°	568.3	577.5	593.9	613.0	632.3	655.1	684.5	708.0	728.3	764.1	796.8
20°	539.5	550.8	567.5	587.1	604.1	629.1	654.3	681.4	703.3	743.6	781.9
22.5°	515.0	523.9	537.3	556.7	575.3	598.2	625.9	655.2	678.3	721.8	760.6
25°	480.5	487.9	496.5	512.6	533.5	558.5	580.1	612.4	646.0	686.7	733.6
27.5°	449.5	454.7	462.4	476.4	492.7	516.0	540.1	570.7	604.6	648.6	698.2
30°	430.6	433.9	441.6	453.3	469.2	487.5	511.8	541.2	575.8	620.5	669.7
32.5°	414.1	417.1	422.1	433.3	447.1	462.8	484.6	514.0	547.0	590.8	645.4
35°	389.3	391.6	395.9	404.9	412.6	427.9	446.2	472.9	503.8	545.8	602.4
37.5°	364.6	367.7	370.4	374.3	384.1	394.1	410.1	432.6	463.0	505.3	559.3
40°	348.3	351.0	355.0	356.7	364.6	373.6	386.6	407.2	437.9	476.5	529.1
42.5°	331.8	334.5	336.9	338.9	345.7	353.7	365.3	383.1	410.2	447.8	499.9
45°	309.3	309.7	312.0	315.7	319.1	324.7	333.1	348.3	369.3	404.7	451.9
47.5°	286.6	287.0	287.4	289.0	292.7	297.7	303.3	315.8	334.6	362.7	408.8
50°	271.4	270.7	271.4	272.8	275.1	279.4	285.7	294.7	310.0	336.4	378.6
52.5°	256.7	256.6	256.2	256.7	258.6	261.5	266.0	273.7	287.4	311.6	348.8
55°	234.4	232.7	233.1	231.8	234.8	235.4	238.8	245.1	257.1	273.8	308.7
57.5°	210.6	209.3	207.8	207.4	207.1	208.9	211.6	216.6	225.8	240.4	268.8
60°	195.5	193.9	191.8	191.2	191.2	192.2	193.5	197.2	205.8	218.8	242.1
62.5°	180.0	178.1	176.9	175.1	174.6	175.7	177.0	179.6	185.8	198.0	218.1
65°	156.2	153.8	152.2	151.9	151.2	150.2	150.9	153.6	158.5	168.2	184.1
67.5°	132.2	130.1	129.7	127.8	126.8	127.0	126.8	129.1	132.1	140.4	152.3
70°	116.5	114.9	114.2	112.5	111.9	111.2	110.6	112.5	115.6	122.5	132.9
72.5°	100.6	99.2	97.7	96.3	96.5	95.8	95.7	96.8	99.3	105.8	113.7
75°	77.6	77.9	76.2	74.6	74.3	73.6	73.6	74.6	75.6	80.6	86.9
77.5°	56.3	56.0	54.6	54.0	53.8	53.1	53.8	54.4	54.9	58.3	63.0
80°	43.0	43.0	41.3	41.3	40.9	39.9	40.9	40.3	41.6	44.9	48.3
82.5°	30.7	30.1	30.1	29.6	29.5	28.8	29.2	29.9	30.4	32.7	34.7
85°	15.0	15.0	14.6	14.4	14.6	14.4	14.6	15.0	15.3	16.3	18.0
87.5°	4.8	5.0	5.1	5.3	5.1	5.3	5.4	5.4	5.8	5.9	6.0
90°	8.0	7.6	7.0	6.2	5.6	4.9	4.1	3.2	2.2	1.3	0.4
92.5°	9.1	8.8	8.5	8.2	7.8	7.5	7.4	7.4	7.5	7.6	7.7
95°	15.2	14.9	14.3	13.6	13.1	12.5	13.6	16.4	19.2	21.9	24.8
97.5°	20.2	19.9	18.5	17.1	15.8	14.4	17.7	25.5	33.4	41.3	49.1
100°	22.4	21.8	20.2	18.8	17.4	16.0	21.0	32.6	44.2	55.8	67.5
102.5°	23.2	22.3	34.4	46.5	58.5	70.5	77.8	80.3	82.7	85.2	87.6
105°	24.2	23.3	46.4	69.5	92.6	115.7	126.0	123.5	120.9	118.4	115.8
107.5°	31.6	32.5	60.3	88.0	115.7	143.5	156.3	154.3	152.2	150.2	148.1
110°	58.2	66.7	91.1	115.7	140.1	164.6	175.9	174.2	172.4	170.6	168.8



TEST NUMBER: P331495-940

CATALOG NUMBER: S122DIW-S485D435U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	137.3	168.3	174.2	180.3	186.4	192.4	194.7	193.1	191.5	189.9	188.3
115°	195.9	235.1	233.0	231.0	228.8	226.7	224.9	223.5	222.0	220.6	219.2
117.5°	251.0	260.5	259.0	257.5	256.1	254.7	253.1	251.5	249.9	248.3	246.6
120°	280.4	279.4	277.9	276.3	274.8	273.3	271.9	270.6	269.3	268.0	266.8
122.5°	298.0	297.4	295.7	294.0	292.4	290.7	289.2	287.8	286.5	285.2	283.8
125°	322.6	322.1	320.5	318.9	317.3	315.6	314.2	313.2	312.1	310.9	309.9
127.5°	345.2	344.3	343.1	341.9	340.7	339.5	338.3	337.1	335.8	334.7	333.4
130°	359.5	358.6	357.8	356.8	355.9	354.9	353.7	352.4	351.1	349.7	348.4
132.5°	373.8	373.0	372.0	371.1	370.1	369.3	368.2	367.0	365.9	364.7	363.6
135°	393.8	393.0	392.2	391.5	390.7	389.9	388.9	387.4	386.1	384.8	383.4
137.5°	412.4	411.6	410.7	409.9	409.0	408.1	407.2	406.4	405.4	404.4	403.5
140°	424.5	423.8	422.8	422.0	421.1	420.1	419.3	418.6	417.9	417.2	416.6
142.5°	435.8	435.1	434.0	432.9	431.9	430.9	430.0	429.4	428.7	428.2	427.6
145°	451.5	450.8	449.4	448.0	446.6	445.1	444.4	444.5	444.6	444.7	444.8
147.5°	465.2	464.8	463.3	461.9	460.5	459.1	458.5	458.9	459.1	459.5	459.8
150°	473.5	473.0	471.6	470.3	469.0	467.5	467.2	467.8	468.3	469.0	469.6
152.5°	481.1	480.6	479.3	478.0	476.7	475.5	475.1	475.8	476.4	477.2	477.8
155°	491.4	490.9	489.9	488.8	487.9	486.9	486.7	487.5	488.2	489.0	489.7
157.5°	500.0	499.4	498.7	498.0	497.3	496.6	496.6	497.2	497.8	498.5	499.1
160°	505.2	504.6	504.1	503.6	503.1	502.6	502.6	503.1	503.6	504.1	504.6
162.5°	509.8	509.2	508.7	508.3	507.8	507.5	507.5	508.0	508.5	509.0	509.5
165°	515.5	514.9	514.7	514.4	514.2	513.9	514.0	514.5	515.1	515.6	516.0
167.5°	520.3	519.7	519.5	519.2	519.0	518.8	518.9	519.4	520.0	520.4	520.9
170°	522.7	522.2	522.0	521.8	521.7	521.5	521.7	522.2	522.6	523.2	523.7
172.5°	524.6	524.0	523.8	523.6	523.4	523.3	523.4	524.0	524.5	525.0	525.5
175°	526.6	525.9	525.8	525.7	525.5	525.3	525.5	526.1	526.6	527.3	527.9
177.5°	526.9	526.4	526.4	526.3	526.2	526.1	526.4	526.8	527.3	527.8	528.2
180°	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7



TEST NUMBER: P331495-940

CATALOG NUMBER: S122DIW-S485D435U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5	866.5
2.5°	871.0	872.4	876.6	880.9	885.6	887.0	889.1	887.3	886.7	891.8	895.5
5°	873.5	879.5	891.2	901.8	910.8	917.1	923.8	926.5	931.5	938.4	947.1
7.5°	870.7	882.3	900.7	916.2	933.1	945.3	954.8	963.0	972.8	986.1	1000.5
10°	867.5	883.2	905.4	924.4	945.1	960.7	973.7	986.4	1001.0	1019.4	1038.3
12.5°	861.7	880.2	908.1	930.6	957.1	972.5	990.0	1017.3	1033.0	1058.5	1085.2
15°	849.9	870.5	909.5	937.1	967.1	996.4	1028.7	1054.6	1080.7	1095.6	1133.3
17.5°	832.3	862.6	905.8	938.1	976.2	1022.3	1058.5	1088.1	1118.0	1142.3	1161.2
20°	818.2	851.2	900.4	939.1	984.4	1034.0	1075.7	1105.6	1131.6	1151.9	1163.6
22.5°	800.4	841.9	889.8	935.1	992.9	1042.1	1085.7	1109.4	1131.0	1140.9	1145.4
25°	772.2	822.2	876.5	931.7	997.0	1049.0	1089.0	1103.3	1109.6	1099.9	1084.0
27.5°	742.0	797.6	861.1	925.5	994.5	1044.5	1073.1	1070.9	1060.2	1028.9	1003.9
30°	719.3	780.6	848.8	919.1	988.4	1037.0	1053.6	1037.0	1012.7	977.8	942.1
32.5°	695.6	759.0	835.8	910.1	977.2	1019.9	1023.6	994.9	957.3	917.6	873.1
35°	659.7	728.3	811.2	889.8	953.4	980.4	964.4	913.8	869.2	814.9	754.3
37.5°	619.1	694.9	778.0	860.1	917.8	924.9	885.2	831.9	768.9	705.2	633.8
40°	588.8	669.1	754.7	837.5	888.5	881.2	830.5	772.0	697.0	619.1	552.8
42.5°	561.6	641.9	729.1	810.4	851.2	831.1	772.0	700.0	619.5	546.1	485.4
45°	514.5	597.1	686.3	764.9	788.3	752.0	673.7	593.8	514.5	453.3	405.3
47.5°	468.9	550.5	638.8	707.9	716.2	667.4	581.8	499.6	431.5	381.6	347.8
50°	435.2	517.2	604.8	666.4	663.7	604.8	516.8	438.5	381.7	341.3	318.7
52.5°	405.1	482.5	566.7	622.7	608.6	544.3	460.4	390.9	344.1	312.5	292.0
55°	358.3	429.9	509.9	554.8	528.9	457.5	386.6	330.6	296.0	272.4	256.5
57.5°	311.8	379.0	447.4	475.1	446.4	380.6	321.5	280.9	254.9	237.3	226.9
60°	283.0	341.7	402.6	426.6	392.3	333.7	287.0	250.7	229.8	215.4	206.2
62.5°	254.3	306.7	364.3	377.3	345.9	296.4	255.1	224.9	207.7	194.9	186.2
65°	215.2	258.1	301.8	310.4	281.4	243.1	210.4	190.8	175.5	166.2	159.2
67.5°	176.5	210.9	241.8	248.8	223.5	196.9	173.3	156.2	145.8	138.0	132.2
70°	153.6	180.8	206.2	211.8	191.5	167.8	149.9	136.2	126.9	120.2	114.6
72.5°	129.3	152.0	173.1	176.9	160.3	142.2	127.5	116.7	108.5	104.2	98.8
75°	98.9	112.3	128.6	129.6	118.6	107.5	96.2	89.3	84.9	79.6	77.0
77.5°	69.8	80.3	89.6	91.4	84.9	77.4	71.1	65.5	61.9	59.4	57.0
80°	53.3	61.6	65.6	67.9	63.3	58.0	54.3	50.6	48.3	46.6	44.9
82.5°	38.1	43.2	47.0	48.8	46.2	43.1	39.3	37.3	35.5	34.1	33.5
85°	19.4	21.7	24.0	24.6	24.0	22.6	20.7	20.7	19.6	19.4	19.4
87.5°	7.0	8.2	8.4	9.4	9.0	9.1	9.3	9.1	9.0	8.8	8.6
90°	1.3	2.2	3.2	4.1	4.9	5.6	6.2	7.0	7.6	8.0	8.5
92.5°	7.6	7.5	7.4	7.4	7.5	7.8	8.2	8.5	8.8	9.1	9.3
95°	21.9	19.2	16.4	13.6	12.5	13.1	13.6	14.3	14.9	15.2	15.7
97.5°	41.3	33.4	25.5	17.7	14.4	15.8	17.1	18.5	19.9	20.2	20.6
100°	55.8	44.2	32.6	21.0	16.0	17.4	18.8	20.2	21.8	22.4	23.1
102.5°	85.2	82.7	80.3	77.8	70.5	58.5	46.5	34.4	22.3	23.2	24.1
105°	118.4	120.9	123.5	126.0	115.7	92.6	69.5	46.4	23.3	24.2	25.1
107.5°	150.2	152.2	154.3	156.3	143.5	115.7	88.0	60.3	32.5	31.6	30.7
110°	170.6	172.4	174.2	175.9	164.6	140.1	115.7	91.1	66.7	58.2	49.8





TEST NUMBER: P331495-940

CATALOG NUMBER: S122DIW-S485D435U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	189.9	191.5	193.1	194.7	192.4	186.4	180.3	174.2	168.3	137.3	106.5
115°	220.6	222.0	223.5	224.9	226.7	228.8	231.0	233.0	235.1	195.9	156.8
117.5°	248.3	249.9	251.5	253.1	254.7	256.1	257.5	259.0	260.5	251.0	241.5
120°	268.0	269.3	270.6	271.9	273.3	274.8	276.3	277.9	279.4	280.4	281.4
122.5°	285.2	286.5	287.8	289.2	290.7	292.4	294.0	295.7	297.4	298.0	298.5
125°	310.9	312.1	313.2	314.2	315.6	317.3	318.9	320.5	322.1	322.6	323.2
127.5°	334.7	335.8	337.1	338.3	339.5	340.7	341.9	343.1	344.3	345.2	346.1
130°	349.7	351.1	352.4	353.7	354.9	355.9	356.8	357.8	358.6	359.5	360.5
132.5°	364.7	365.9	367.0	368.2	369.3	370.1	371.1	372.0	373.0	373.8	374.6
135°	384.8	386.1	387.4	388.9	389.9	390.7	391.5	392.2	393.0	393.8	394.7
137.5°	404.4	405.4	406.4	407.2	408.1	409.0	409.9	410.7	411.6	412.4	413.3
140°	417.2	417.9	418.6	419.3	420.1	421.1	422.0	422.8	423.8	424.5	425.3
142.5°	428.2	428.7	429.4	430.0	430.9	431.9	432.9	434.0	435.1	435.8	436.5
145°	444.7	444.6	444.5	444.4	445.1	446.6	448.0	449.4	450.8	451.5	452.1
147.5°	459.5	459.1	458.9	458.5	459.1	460.5	461.9	463.3	464.8	465.2	465.7
150°	469.0	468.3	467.8	467.2	467.5	469.0	470.3	471.6	473.0	473.5	474.0
152.5°	477.2	476.4	475.8	475.1	475.5	476.7	478.0	479.3	480.6	481.1	481.6
155°	489.0	488.2	487.5	486.7	486.9	487.9	488.8	489.9	490.9	491.4	492.0
157.5°	498.5	497.8	497.2	496.6	496.6	497.3	498.0	498.7	499.4	500.0	500.6
160°	504.1	503.6	503.1	502.6	502.6	503.1	503.6	504.1	504.6	505.2	505.6
162.5°	509.0	508.5	508.0	507.5	507.5	507.8	508.3	508.7	509.2	509.8	510.3
165°	515.6	515.1	514.5	514.0	513.9	514.2	514.4	514.7	514.9	515.5	516.1
167.5°	520.4	520.0	519.4	518.9	518.8	519.0	519.2	519.5	519.7	520.3	520.9
170°	523.2	522.6	522.2	521.7	521.5	521.7	521.8	522.0	522.2	522.7	523.3
172.5°	525.0	524.5	524.0	523.4	523.3	523.4	523.6	523.8	524.0	524.6	525.1
175°	527.3	526.6	526.1	525.5	525.3	525.5	525.7	525.8	525.9	526.6	527.2
177.5°	527.8	527.3	526.8	526.4	526.1	526.2	526.3	526.4	526.4	526.9	527.4
180°	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7



TEST NUMBER: P331495-940

CATALOG NUMBER: S122DIW-S485D435U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	866.5	866.5	866.5	866.5	866.5	866.5	866.5
2.5°	898.8	902.5	902.5	903.0	907.2	906.8	906.5
5°	956.4	962.1	962.8	968.8	972.8	971.4	967.8
7.5°	1010.8	1021.4	1029.4	1033.8	1039.1	1042.3	1040.9
10°	1054.0	1069.3	1078.6	1084.9	1092.6	1098.3	1096.3
12.5°	1093.1	1111.4	1124.2	1135.1	1136.0	1143.4	1138.4
15°	1154.2	1173.6	1175.5	1183.6	1189.9	1189.2	1189.5
17.5°	1174.4	1180.6	1181.9	1182.1	1182.1	1179.8	1174.7
20°	1167.2	1164.9	1159.2	1154.9	1147.3	1146.2	1139.6
22.5°	1133.1	1125.7	1111.5	1102.2	1090.2	1087.1	1085.2
25°	1066.0	1049.6	1027.0	1005.4	999.3	987.7	991.0
27.5°	973.8	948.4	923.9	906.3	890.5	873.0	878.0
30°	909.1	880.5	845.9	819.2	802.3	785.6	782.6
32.5°	831.9	789.9	751.3	727.8	701.8	691.3	679.8
35°	698.7	657.7	619.4	586.5	567.5	552.8	539.5
37.5°	578.8	531.7	500.8	474.1	460.4	452.0	454.1
40°	504.5	463.2	440.6	420.3	407.6	401.6	403.0
42.5°	444.3	413.4	394.8	380.8	371.9	368.5	367.7
45°	375.9	358.6	343.3	335.4	331.0	327.3	325.0
47.5°	329.4	315.2	306.6	301.8	298.0	294.4	294.3
50°	301.4	292.0	286.1	281.1	278.0	275.4	277.8
52.5°	280.1	271.5	265.6	261.1	259.9	257.5	257.5
55°	248.4	241.7	237.5	233.4	231.5	230.2	228.5
57.5°	219.6	213.3	209.4	206.8	203.0	201.7	201.2
60°	199.1	194.1	190.1	186.8	185.1	182.5	182.5
62.5°	180.2	175.2	171.5	169.0	166.2	165.1	165.4
65°	152.8	148.8	145.2	142.5	141.9	139.9	140.5
67.5°	127.7	125.0	121.2	119.7	118.4	117.3	116.5
70°	110.9	108.3	106.2	104.2	103.3	103.3	103.3
72.5°	96.8	93.5	92.4	89.9	90.4	89.3	88.3
75°	74.9	72.9	72.0	70.9	69.3	69.3	69.3
77.5°	55.1	54.6	53.3	52.3	51.9	51.5	51.7
80°	42.6	42.3	41.6	41.6	40.9	40.7	39.9
82.5°	32.7	31.9	31.5	31.2	31.1	31.0	30.9
85°	18.6	18.0	18.0	18.3	17.7	17.7	18.0
87.5°	9.0	9.1	8.8	8.9	9.2	8.9	9.0
90°	8.9	9.3	9.6	9.8	10.0	10.2	10.3
92.5°	9.5	9.7	9.9	10.0	10.1	10.2	10.3
95°	16.1	16.6	16.8	16.7	16.6	16.5	16.4
97.5°	21.0	21.2	21.5	21.6	21.7	21.8	21.8
100°	23.7	24.4	24.9	25.1	25.2	25.3	25.5
102.5°	25.0	25.9	26.4	26.7	26.9	27.1	27.4
105°	26.0	27.0	27.6	27.9	28.3	28.6	29.0
107.5°	29.7	28.7	28.4	28.8	29.2	29.4	29.8
110°	41.3	32.8	28.7	29.1	29.4	29.8	30.1



TEST NUMBER: P331495-940

CATALOG NUMBER: S122DIW-S485D435U940-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	75.5	44.7	29.3	29.6	29.9	30.1	30.4
115°	117.5	78.3	55.6	49.6	43.4	37.4	31.2
117.5°	232.0	222.5	207.8	187.7	167.6	147.7	127.6
120°	282.4	283.5	278.2	266.8	255.4	243.9	232.5
122.5°	299.2	299.8	299.0	296.8	294.5	292.3	290.1
125°	323.9	324.4	324.9	325.1	325.4	325.7	325.8
127.5°	346.9	347.8	348.2	348.3	348.3	348.4	348.4
130°	361.4	362.4	362.8	362.7	362.7	362.6	362.5
132.5°	375.3	376.1	376.5	376.4	376.3	376.3	376.2
135°	395.5	396.4	396.6	396.5	396.4	396.2	396.0
137.5°	414.1	414.9	415.2	414.9	414.6	414.4	414.0
140°	426.1	426.9	427.0	426.6	426.1	425.8	425.3
142.5°	437.2	437.9	438.0	437.6	437.2	436.8	436.3
145°	452.6	453.3	453.3	452.9	452.5	452.1	451.7
147.5°	466.1	466.5	466.5	466.2	465.8	465.5	465.1
150°	474.5	475.0	475.1	474.7	474.2	473.8	473.4
152.5°	482.1	482.7	482.6	482.1	481.5	480.9	480.4
155°	492.4	492.9	492.8	492.1	491.5	490.8	490.2
157.5°	501.1	501.8	501.7	501.1	500.3	499.7	499.1
160°	506.1	506.7	506.6	506.0	505.4	504.8	504.3
162.5°	511.0	511.5	511.4	510.7	510.0	509.3	508.5
165°	516.7	517.3	517.3	516.7	516.1	515.5	514.9
167.5°	521.5	522.1	522.0	521.2	520.5	519.7	519.0
170°	524.0	524.5	524.4	523.7	522.9	522.2	521.4
172.5°	525.8	526.4	526.3	525.5	524.8	524.0	523.3
175°	527.7	528.3	528.2	527.4	526.6	525.7	524.9
177.5°	527.8	528.3	528.2	527.6	527.0	526.4	525.8
180°	526.7	526.7	526.7	526.7	526.7	526.7	526.7

(END OF REPORT)