

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331505-940

Luminaire Tested: **S122DIW-S485D710U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331505-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S485D710U940-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 710 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4292.4 lumens
Efficiency: N/A
Efficacy: 114.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 37.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331505-940

CATALOG NUMBER: S122DIW-S485D710U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

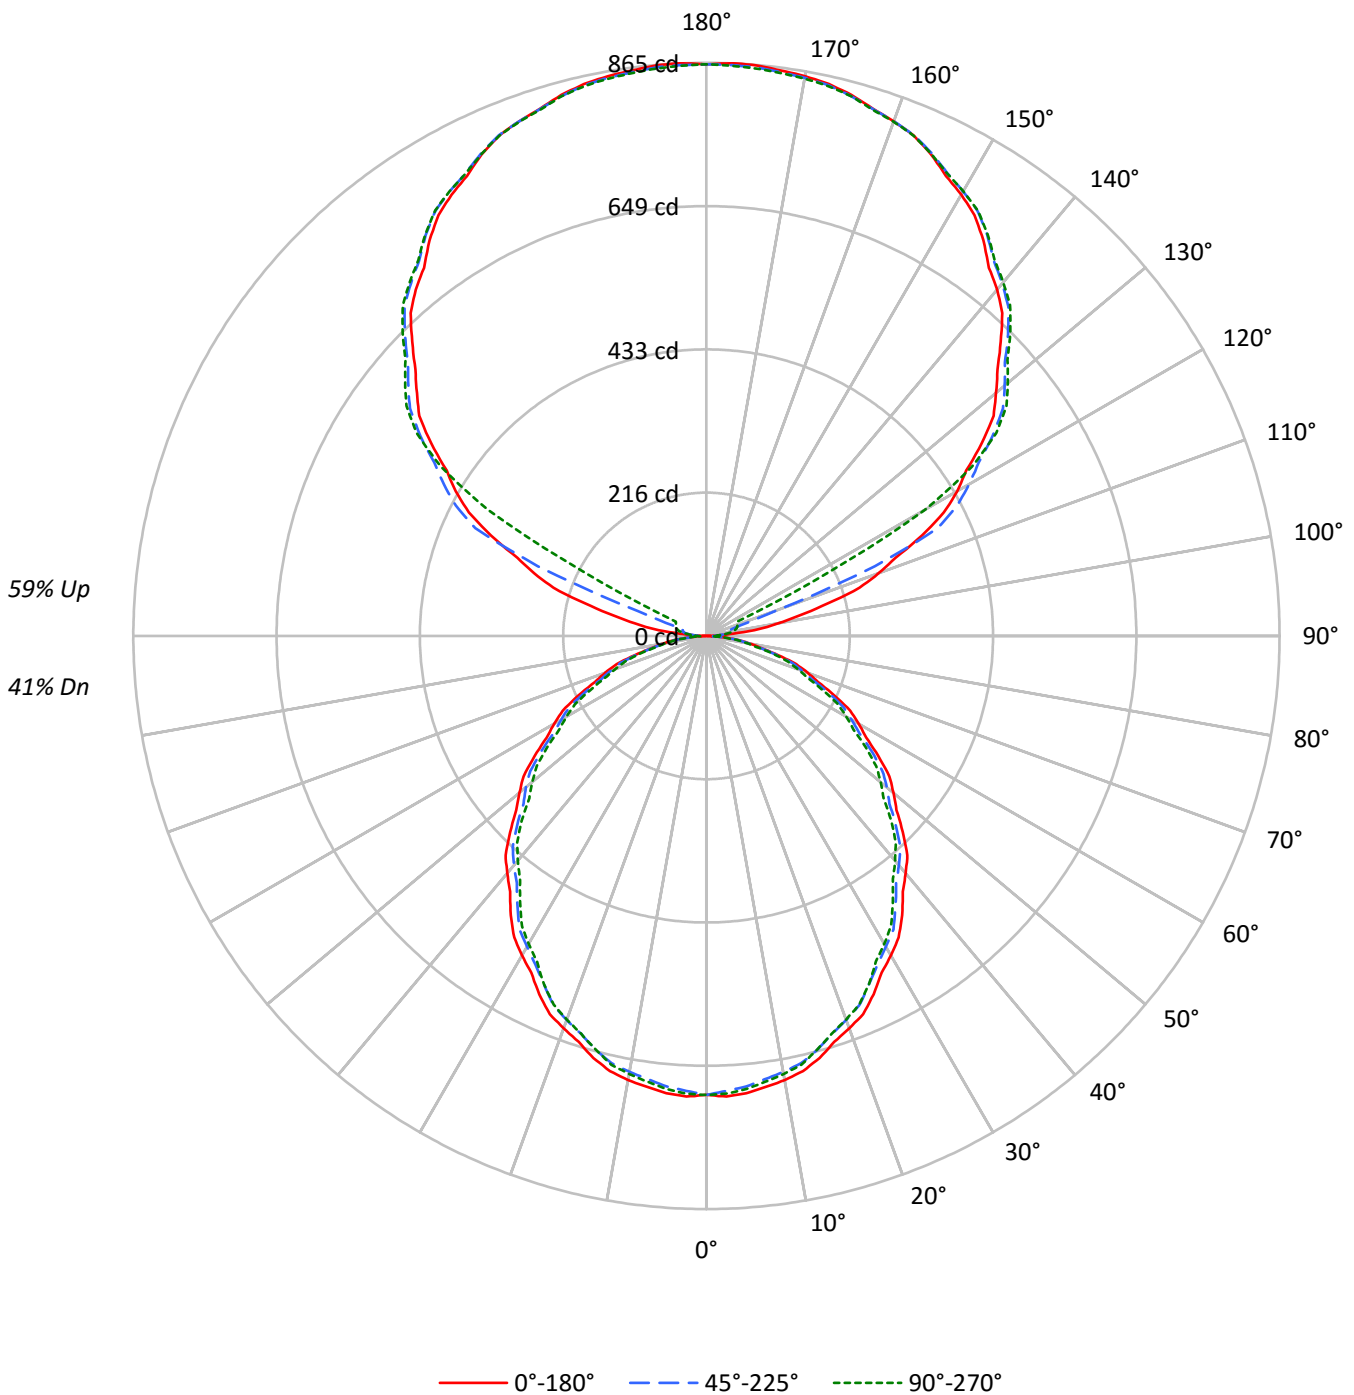



TEST NUMBER: P331505-940

CATALOG NUMBER: S122DIW-S485D710U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	105	105	105	105	96	96	96	96	78	78	78	63	63	63	48	48	48	41																			
1	96	92	88	84	87	84	80	77	69	66	64	55	53	52	42	41	40	35																			
2	87	80	74	69	79	73	68	63	60	56	53	48	46	43	37	36	34	29																			
3	80	70	63	57	72	64	58	53	53	48	45	43	39	37	33	31	29	25																			
4	73	62	54	48	66	57	50	45	47	42	38	38	34	31	30	27	25	21																			
5	67	55	47	41	61	51	44	38	42	37	33	34	30	27	27	24	22	18																			
6	61	50	42	36	56	45	38	33	38	33	29	31	27	24	24	21	19	16																			
7	57	45	37	31	52	41	34	29	34	29	25	28	24	21	22	19	17	14																			
8	53	40	33	28	48	37	31	26	31	26	22	26	22	19	20	17	15	13																			
9	49	37	30	25	45	34	27	23	29	23	20	23	20	17	19	16	14	12																			
10	46	34	27	22	42	31	25	21	26	21	18	22	18	15	17	14	12	10																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11183	11183	11183
5°	11225	11063	11128
10°	11158	10952	11006
15°	11020	10810	10798
20°	10825	10596	10584
25°	10630	10334	10334
30°	10381	10094	10006
35°	10147	9806	9662
40°	9853	9518	9333
45°	9565	9229	9001
50°	9251	8932	8616
55°	8923	8586	8267
60°	8557	8173	7869
65°	8164	7759	7404
70°	7671	7260	6916
75°	6981	6687	6525
80°	6192	6007	5700
85°	5057	4798	4316



TEST NUMBER: P331505-940

CATALOG NUMBER: S122DIW-S485D710U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	65.1	1.5
10°-20°	183.3	4.3
20°-30°	269.4	6.3
30°-40°	312.9	7.3
40°-50°	312.5	7.3
50°-60°	272.6	6.3
60°-70°	201.5	4.7
70°-80°	114.1	2.7
80°-90°	32.8	0.8
90°-100°	28.8	0.7
100°-110°	105.5	2.5
110°-120°	282.1	6.6
120°-130°	465.6	10.8
130°-140°	495.2	11.5
140°-150°	460.3	10.7
150°-160°	370.1	8.6
160°-170°	238.5	5.6
170°-180°	82.1	1.9
0°-30°	517.7	12.1
0°-40°	830.6	19.4
0°-60°	1415.7	33.0
0°-90°	1764.2	41.1
90°-120°	416.4	9.7
90°-150°	1837.6	42.8
90°-180°	2528.0	58.9
0°-180°	4292.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	693	693	693	693	693	
5°	693	690	683	688	687	66
15°	659	655	647	649	646	186
25°	597	591	580	581	580	274
35°	515	508	498	494	490	321
45°	419	414	404	397	394	323
55°	317	313	305	297	294	283
65°	214	210	203	197	194	211
75°	112	110	107	104	105	120
85°	27	27	26	24	23	31
90°	1	7	12	16	17	3
95°	41	21	24	27	27	50
105°	190	198	38	45	47	203
115°	359	370	385	110	51	353
125°	508	516	527	532	534	452
135°	628	638	644	649	649	485
145°	728	728	738	742	740	455
155°	802	797	804	807	803	369
165°	845	842	843	847	843	239
175°	865	860	862	865	860	82
180°	863	863	863	863	863	



TEST NUMBER: P331505-940

CATALOG NUMBER: S122DIW-S485D710U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	692.6	692.6	692.6	692.6	692.6	692.6	692.6	692.6	692.6	692.6	692.6
2.5°	695.8	695.2	694.6	694.0	693.4	692.5	691.2	689.9	688.6	687.2	688.5
5°	692.6	692.0	691.4	690.8	690.3	689.1	687.5	685.9	684.2	682.6	683.8
7.5°	686.4	685.5	684.7	683.7	682.8	681.5	679.8	678.2	676.5	674.8	676.1
10°	680.6	679.6	678.5	677.5	676.5	675.0	673.2	671.5	669.8	668.0	669.1
12.5°	672.6	671.7	670.7	669.9	669.0	667.6	665.8	664.1	662.3	660.5	661.3
15°	659.3	658.4	657.5	656.7	655.8	654.3	652.4	650.5	648.5	646.7	647.2
17.5°	642.2	641.4	640.5	639.6	638.7	637.3	635.3	633.4	631.4	629.5	630.2
20°	630.0	629.1	628.2	627.3	626.4	625.0	622.9	620.8	618.8	616.7	617.2
22.5°	617.8	616.5	615.3	614.0	612.8	611.2	609.2	607.3	605.3	603.3	603.4
25°	596.7	595.5	594.3	593.2	592.0	590.1	587.6	585.1	582.6	580.1	580.3
27.5°	572.7	571.7	570.6	569.5	568.5	566.9	565.0	562.9	561.0	559.0	558.6
30°	556.8	555.5	554.4	553.2	552.0	550.3	548.0	545.9	543.7	541.4	541.0
32.5°	539.7	538.8	537.8	536.8	535.9	534.2	531.9	529.6	527.3	525.0	524.1
35°	514.8	513.3	511.8	510.3	508.9	506.9	504.6	502.2	499.8	497.5	496.6
37.5°	486.7	485.4	484.1	482.8	481.4	479.7	477.2	474.9	472.5	470.2	469.0
40°	467.5	466.3	465.1	464.0	462.8	461.0	458.6	456.3	453.9	451.6	450.2
42.5°	448.9	447.6	446.5	445.3	444.2	442.4	440.0	437.7	435.2	432.8	431.4
45°	418.9	417.9	416.8	415.8	414.7	413.1	410.9	408.7	406.4	404.2	402.6
47.5°	389.1	388.1	387.1	386.1	385.1	383.5	381.2	378.9	376.6	374.3	372.6
50°	368.3	367.6	366.8	366.0	365.3	363.9	361.9	359.8	357.7	355.6	353.6
52.5°	348.0	347.1	346.1	345.1	344.1	342.7	340.7	338.8	336.8	334.8	333.1
55°	317.0	316.1	315.2	314.3	313.4	312.1	310.3	308.5	306.7	305.0	303.3
57.5°	285.8	285.1	284.4	283.7	283.0	281.7	279.7	277.8	275.8	273.8	272.1
60°	265.0	264.5	263.9	263.2	262.7	261.4	259.3	257.2	255.1	253.1	251.5
62.5°	244.8	243.9	242.9	241.9	241.0	239.8	238.2	236.6	235.0	233.4	231.8
65°	213.7	212.9	212.0	211.1	210.3	209.0	207.6	206.1	204.6	203.1	201.8
67.5°	182.2	181.5	180.7	180.0	179.3	178.3	177.0	175.7	174.3	173.0	172.0
70°	162.5	161.9	161.3	160.7	160.2	159.2	157.8	156.5	155.2	153.8	152.8
72.5°	142.2	141.7	141.1	140.4	139.9	139.2	138.3	137.4	136.6	135.7	134.6
75°	111.9	111.6	111.3	111.0	110.7	110.2	109.4	108.7	108.0	107.2	106.3
77.5°	84.7	84.2	83.7	83.2	82.7	82.3	82.0	81.7	81.4	81.1	80.7
80°	66.6	66.4	66.3	66.2	66.0	65.8	65.5	65.2	64.9	64.6	64.1
82.5°	49.6	49.5	49.5	49.5	49.4	49.3	49.1	49.0	48.8	48.6	48.1
85°	27.3	27.2	27.0	26.8	26.8	26.6	26.4	26.3	26.1	25.9	25.5
87.5°	9.7	9.8	9.8	9.9	10.0	10.0	10.0	10.0	10.0	10.0	9.7
90°	0.6	2.1	3.7	5.2	6.7	8.0	9.2	10.3	11.4	12.5	13.2
92.5°	12.6	12.5	12.3	12.2	12.0	12.3	12.8	13.4	13.9	14.4	14.8
95°	40.6	36.0	31.4	26.8	22.3	20.4	21.4	22.4	23.4	24.3	25.1
97.5°	80.5	67.6	54.8	41.8	28.9	23.6	25.9	28.1	30.3	32.5	33.2
100°	110.5	91.5	72.5	53.5	34.5	26.1	28.5	30.9	33.3	35.6	36.6
102.5°	143.5	139.5	135.4	131.3	127.3	115.5	95.8	76.1	56.3	36.6	38.0
105°	189.8	193.9	198.1	202.2	206.4	189.6	151.7	113.8	76.0	38.1	39.6
107.5°	242.5	245.9	249.3	252.6	256.0	235.0	189.6	144.2	98.7	53.3	51.7
110°	276.5	279.5	282.4	285.3	288.2	269.6	229.5	189.4	149.4	109.2	95.4



TEST NUMBER: P331505-940

CATALOG NUMBER: S122DIW-S485D710U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	308.5	311.1	313.7	316.2	318.8	315.1	305.2	295.3	285.4	275.5	225.0
115°	358.9	361.3	363.6	366.0	368.4	371.3	374.8	378.3	381.7	385.1	320.9
117.5°	404.0	406.6	409.3	411.9	414.6	417.1	419.5	421.9	424.2	426.6	411.1
120°	436.9	439.1	441.1	443.2	445.3	447.5	450.0	452.5	455.0	457.5	459.2
122.5°	464.9	467.2	469.3	471.5	473.7	476.2	478.8	481.6	484.3	487.1	488.0
125°	507.5	509.3	511.1	512.9	514.7	516.9	519.6	522.2	524.9	527.4	528.4
127.5°	546.1	548.0	550.1	552.1	554.1	556.1	558.0	560.0	562.0	563.9	565.3
130°	570.5	572.7	575.0	577.2	579.4	581.3	582.8	584.3	585.9	587.5	589.0
132.5°	595.6	597.4	599.3	601.2	603.1	604.8	606.3	607.8	609.4	610.9	612.2
135°	628.0	630.2	632.4	634.6	636.9	638.6	639.9	641.1	642.4	643.6	645.0
137.5°	660.8	662.4	664.0	665.5	667.0	668.5	669.9	671.4	672.8	674.2	675.6
140°	682.3	683.4	684.5	685.6	686.7	688.0	689.6	691.1	692.6	694.2	695.4
142.5°	700.3	701.2	702.3	703.3	704.3	705.6	707.4	709.2	710.9	712.7	713.8
145°	728.5	728.3	728.3	728.1	727.9	729.1	731.4	733.8	736.1	738.5	739.5
147.5°	753.0	752.6	752.1	751.5	751.0	751.9	754.2	756.5	758.8	761.2	762.0
150°	769.1	768.1	767.1	766.2	765.2	765.8	768.0	770.3	772.5	774.7	775.5
152.5°	782.6	781.5	780.4	779.3	778.2	778.7	780.9	782.9	785.1	787.2	788.0
155°	802.2	800.9	799.7	798.4	797.2	797.4	799.1	800.7	802.4	804.1	804.9
157.5°	817.5	816.5	815.4	814.3	813.3	813.3	814.5	815.6	816.8	818.0	818.9
160°	826.5	825.6	824.8	824.0	823.1	823.1	824.0	824.8	825.6	826.5	827.3
162.5°	834.5	833.7	832.9	832.0	831.2	831.1	831.8	832.6	833.3	834.0	834.9
165°	845.3	844.4	843.6	842.8	841.9	841.7	842.1	842.5	842.9	843.4	844.4
167.5°	853.2	852.4	851.6	850.7	849.9	849.7	850.1	850.4	850.9	851.2	852.2
170°	857.7	856.8	856.0	855.2	854.3	854.1	854.3	854.7	855.0	855.2	856.2
172.5°	860.7	859.9	859.1	858.2	857.4	857.1	857.4	857.6	857.9	858.2	859.2
175°	864.6	863.6	862.6	861.7	860.7	860.3	860.6	860.9	861.2	861.5	862.5
177.5°	865.2	864.4	863.6	862.9	862.1	861.7	861.8	862.0	862.1	862.2	863.0
180°	862.7	862.7	862.7	862.7	862.7	862.7	862.7	862.7	862.7	862.7	862.7



TEST NUMBER: P331505-940

CATALOG NUMBER: S122DIW-S485D710U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	692.6	692.6	692.6	692.6	692.6	692.6	692.6	692.6
2.5°	689.6	690.8	692.0	692.5	692.2	692.0	691.8	691.5
5°	685.0	686.2	687.3	687.8	687.5	687.2	686.9	686.6
7.5°	677.3	678.4	679.7	680.0	679.8	679.4	679.0	678.8
10°	670.3	671.5	672.7	673.1	672.6	672.2	671.7	671.3
12.5°	662.2	663.0	663.8	664.1	663.7	663.4	663.1	662.7
15°	647.8	648.5	649.0	648.9	648.2	647.5	646.8	646.0
17.5°	630.8	631.5	632.2	632.1	631.4	630.8	630.1	629.4
20°	617.6	618.0	618.5	618.4	617.8	617.2	616.6	616.0
22.5°	603.5	603.6	603.7	603.6	603.2	602.9	602.5	602.2
25°	580.7	580.9	581.2	581.2	580.9	580.7	580.3	580.1
27.5°	558.1	557.7	557.2	556.7	556.0	555.3	554.6	553.8
30°	540.6	540.1	539.7	539.1	538.5	538.0	537.3	536.7
32.5°	523.3	522.5	521.7	521.0	520.4	519.9	519.2	518.6
35°	495.7	494.8	493.9	493.1	492.4	491.6	490.9	490.2
37.5°	468.0	466.9	465.8	464.8	464.1	463.4	462.7	462.1
40°	448.9	447.5	446.2	445.2	444.6	444.1	443.4	442.8
42.5°	430.0	428.6	427.0	426.0	425.1	424.3	423.5	422.6
45°	401.0	399.4	397.7	396.6	396.0	395.5	394.8	394.2
47.5°	370.9	369.1	367.4	366.1	365.2	364.4	363.6	362.7
50°	351.5	349.4	347.3	345.9	345.2	344.5	343.7	343.0
52.5°	331.4	329.7	328.0	326.6	325.7	324.7	323.7	322.7
55°	301.5	299.7	297.9	296.7	295.9	295.2	294.4	293.7
57.5°	270.4	268.6	266.9	265.7	265.1	264.6	264.0	263.4
60°	249.8	248.2	246.6	245.5	245.0	244.6	244.2	243.7
62.5°	230.3	228.8	227.3	226.3	225.7	225.2	224.6	224.0
65°	200.5	199.1	197.8	196.7	196.0	195.3	194.6	193.8
67.5°	170.9	169.9	168.9	168.1	167.5	166.8	166.3	165.7
70°	151.8	150.7	149.7	148.9	148.3	147.7	147.1	146.5
72.5°	133.7	132.6	131.6	130.8	130.4	129.8	129.4	128.9
75°	105.4	104.6	103.7	103.3	103.7	104.0	104.2	104.6
77.5°	80.3	79.8	79.4	78.9	78.5	78.1	77.7	77.2
80°	63.7	63.2	62.9	62.4	62.2	61.9	61.5	61.3
82.5°	47.5	46.9	46.4	46.0	46.0	45.9	45.8	45.8
85°	25.1	24.6	24.2	23.9	23.7	23.6	23.5	23.3
87.5°	9.5	9.3	9.1	8.9	8.9	8.8	8.7	8.7
90°	13.9	14.5	15.2	15.8	16.1	16.3	16.6	16.9
92.5°	15.2	15.6	16.0	16.2	16.3	16.5	16.7	16.9
95°	25.8	26.4	27.1	27.4	27.3	27.1	27.0	26.8
97.5°	33.7	34.2	34.8	35.1	35.3	35.5	35.7	35.8
100°	37.8	38.9	40.0	40.8	41.0	41.3	41.6	41.8
102.5°	39.5	40.9	42.4	43.2	43.7	44.1	44.4	44.9
105°	41.1	42.6	44.1	45.2	45.7	46.4	46.9	47.4
107.5°	50.2	48.7	47.1	46.6	47.2	47.7	48.2	48.8
110°	81.5	67.6	53.8	47.1	47.6	48.2	48.8	49.3



TEST NUMBER: P331505-940

CATALOG NUMBER: S122DIW-S485D710U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	174.3	123.8	73.1	48.1	48.5	49.0	49.4	49.8
115°	256.7	192.4	128.2	91.1	81.1	71.2	61.2	51.2
117.5°	395.6	380.0	364.4	340.3	307.5	274.6	241.8	209.0
120°	460.9	462.5	464.2	455.7	436.9	418.2	399.5	380.8
122.5°	489.0	490.0	491.1	489.7	486.1	482.4	478.8	475.2
125°	529.4	530.4	531.4	532.1	532.4	532.9	533.3	533.7
127.5°	566.8	568.2	569.6	570.3	570.4	570.5	570.6	570.7
130°	590.5	592.0	593.5	594.2	594.1	594.0	593.8	593.7
132.5°	613.5	614.8	616.1	616.7	616.5	616.4	616.3	616.2
135°	646.4	647.7	649.2	649.7	649.4	649.2	648.9	648.6
137.5°	676.9	678.2	679.7	680.1	679.6	679.1	678.7	678.1
140°	696.7	697.9	699.2	699.5	698.7	698.0	697.3	696.7
142.5°	714.9	716.0	717.2	717.4	716.8	716.0	715.3	714.6
145°	740.4	741.4	742.3	742.5	741.8	741.1	740.4	739.8
147.5°	762.7	763.4	764.1	764.2	763.6	763.0	762.4	761.8
150°	776.3	777.2	778.0	778.1	777.4	776.7	776.0	775.3
152.5°	788.8	789.7	790.5	790.5	789.5	788.6	787.7	786.8
155°	805.7	806.6	807.4	807.2	806.1	805.0	803.9	802.8
157.5°	819.9	820.8	821.8	821.7	820.6	819.6	818.5	817.3
160°	828.1	829.0	829.8	829.7	828.8	827.8	826.9	825.9
162.5°	835.9	836.8	837.8	837.7	836.4	835.3	834.0	832.9
165°	845.3	846.2	847.2	847.2	846.2	845.3	844.4	843.4
167.5°	853.2	854.2	855.1	855.0	853.7	852.5	851.2	850.0
170°	857.2	858.1	859.1	859.0	857.7	856.5	855.2	854.0
172.5°	860.1	861.1	862.1	861.9	860.7	859.4	858.2	856.9
175°	863.4	864.3	865.3	865.1	863.7	862.4	860.9	859.6
177.5°	863.8	864.5	865.3	865.2	864.2	863.2	862.2	861.2
180°	862.7	862.7	862.7	862.7	862.7	862.7	862.7	862.7

(END OF REPORT)