

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331553-940

Luminaire Tested: **S122DIW-S675D1440U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331553-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S122DIW-S675D1440U940-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1440 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7549.2 lumens
Efficiency: N/A
Efficacy: 110.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 68.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331553-940

CATALOG NUMBER: S122DIW-S675D1440U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

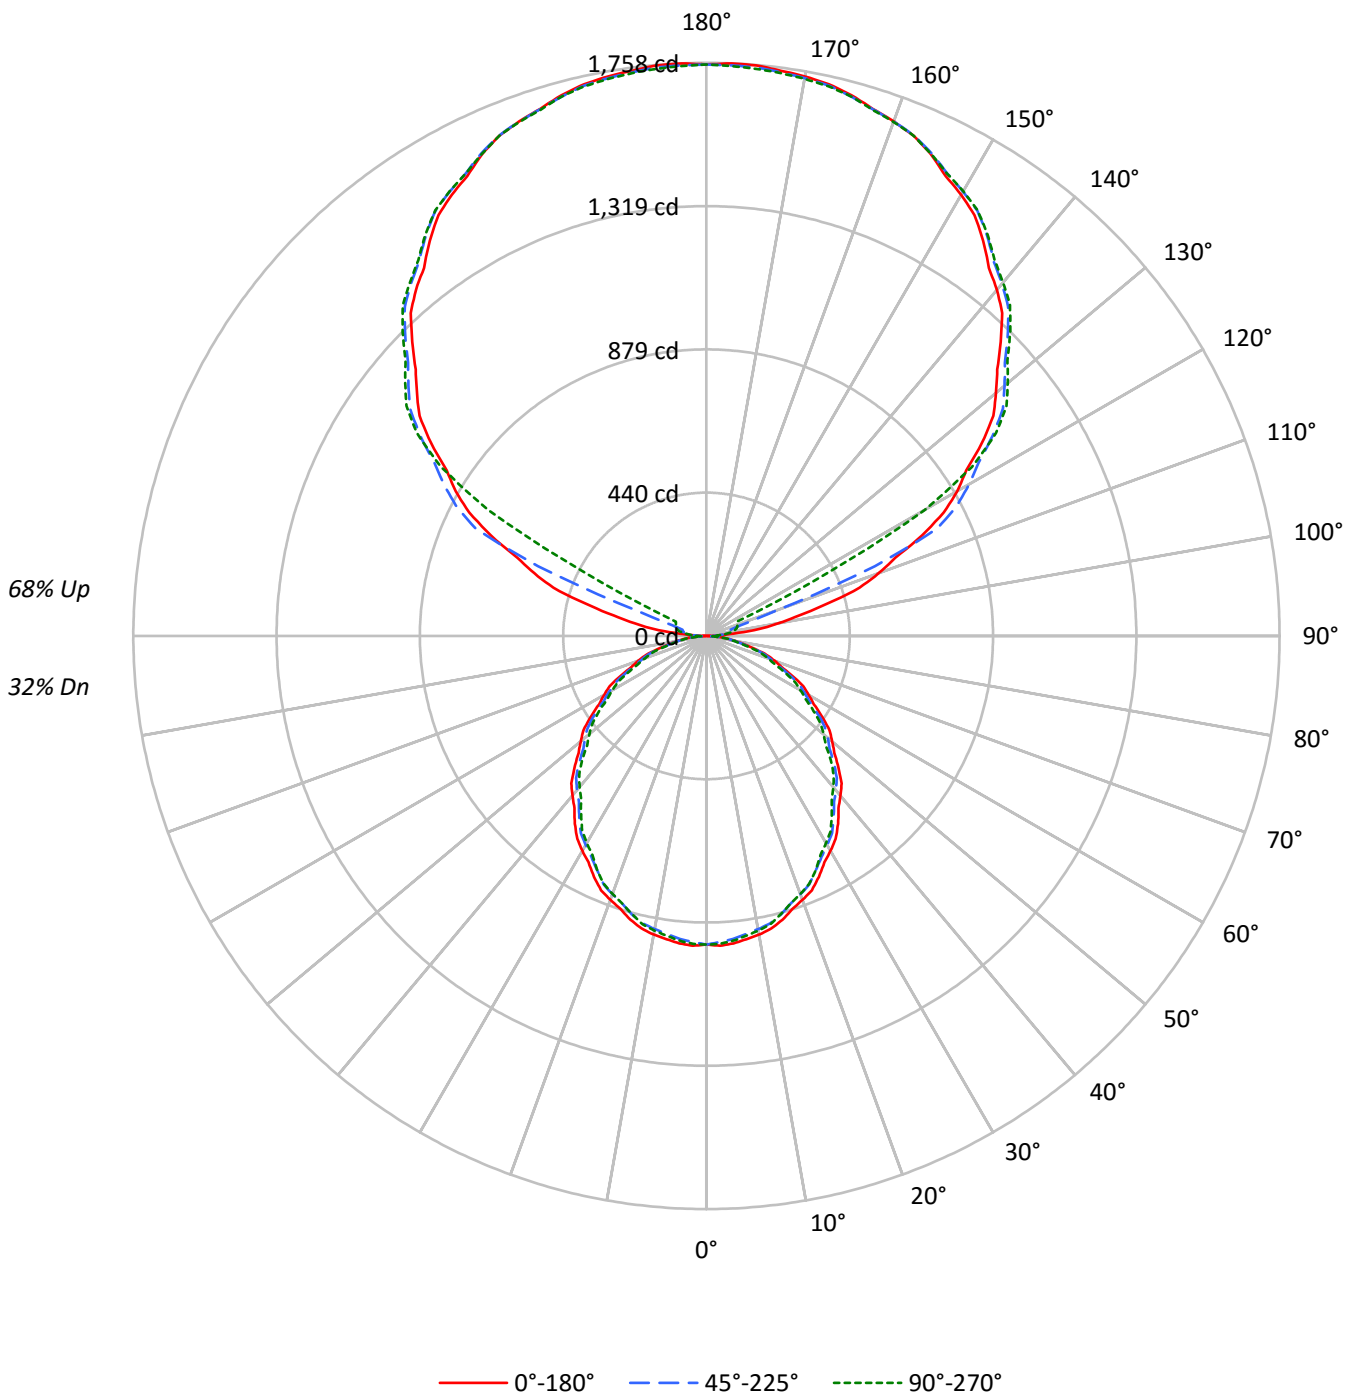



TEST NUMBER: P331553-940

CATALOG NUMBER: S122DIW-S675D1440U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	73	73	73	56	56	56	40	40	40	32
1	94	90	86	82	84	81	78	75	64	62	60	49	48	46	35	34	33	27
2	85	78	72	67	77	70	65	61	56	53	50	43	41	39	31	29	28	23
3	78	69	62	56	70	62	56	51	49	45	42	38	35	33	27	25	24	19
4	71	61	53	47	64	55	48	43	44	39	35	34	31	28	24	22	21	16
5	65	54	46	40	58	49	42	37	39	34	30	30	27	24	22	20	18	14
6	60	48	40	35	54	44	37	32	35	30	26	27	24	21	20	18	16	13
7	55	43	36	30	50	39	33	28	32	27	23	25	21	19	18	16	14	11
8	51	39	32	27	46	36	29	25	29	24	20	23	19	16	17	14	12	10
9	48	36	29	24	43	33	26	22	26	22	18	21	17	15	15	13	11	9
10	44	33	26	21	40	30	24	19	24	20	16	19	16	13	14	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	15285	15285	15285
5°	15344	15123	15211
10°	15252	14969	15044
15°	15064	14775	14760
20°	14795	14483	14467
25°	14530	14125	14125
30°	14188	13798	13679
35°	13868	13403	13204
40°	13468	13009	12760
45°	13075	12618	12305
50°	12645	12210	11776
55°	12197	11738	11299
60°	11699	11170	10756
65°	11163	10609	10120
70°	10485	9928	9456
75°	9538	9145	8914
80°	8461	8210	7782
85°	6928	6576	5891



TEST NUMBER: P331553-940

CATALOG NUMBER: S122DIW-S675D1440U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	89.0	1.2
10°-20°	250.5	3.3
20°-30°	368.2	4.9
30°-40°	427.7	5.7
40°-50°	427.2	5.7
50°-60°	372.6	4.9
60°-70°	275.5	3.6
70°-80°	156.0	2.1
80°-90°	46.3	0.6
90°-100°	58.5	0.8
100°-110°	214.4	2.8
110°-120°	573.1	7.6
120°-130°	946.0	12.5
130°-140°	1006.1	13.3
140°-150°	935.1	12.4
150°-160°	751.8	10.0
160°-170°	484.5	6.4
170°-180°	166.8	2.2
0°-30°	707.7	9.4
0°-40°	1135.4	15.0
0°-60°	1935.1	25.6
0°-90°	2412.9	32.0
90°-120°	846.0	11.2
90°-150°	3733.2	49.5
90°-180°	5136.0	68.0
0°-180°	7549.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	947	947	947	947	947	
5°	947	943	933	940	938	90
15°	901	895	884	887	883	254
25°	816	808	793	794	793	375
35°	704	694	680	675	670	439
45°	573	566	553	543	539	442
55°	433	428	417	406	401	387
65°	292	286	278	270	265	289
75°	153	151	147	142	143	163
85°	37	36	36	33	32	43
90°	1	15	25	32	34	6
95°	82	43	50	55	55	101
105°	386	402	77	91	96	412
115°	729	751	782	223	104	718
125°	1031	1048	1072	1080	1084	919
135°	1276	1296	1308	1319	1318	985
145°	1480	1480	1500	1508	1503	925
155°	1630	1620	1633	1640	1631	751
165°	1717	1710	1713	1721	1713	485
175°	1756	1748	1750	1758	1746	167
180°	1753	1753	1753	1753	1753	



TEST NUMBER: P331553-940

CATALOG NUMBER: S122DIW-S675D1440U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	946.7	946.7	946.7	946.7	946.7	946.7	946.7	946.7	946.7	946.7	946.7
2.5°	951.1	950.3	949.5	948.7	947.9	946.6	944.8	943.0	941.2	939.4	941.0
5°	946.7	945.9	945.1	944.3	943.5	942.0	939.8	937.5	935.3	933.1	934.7
7.5°	938.3	937.1	935.9	934.6	933.4	931.6	929.3	927.0	924.8	922.5	924.1
10°	930.3	928.9	927.5	926.0	924.7	922.7	920.3	917.9	915.4	913.0	914.6
12.5°	919.4	918.2	916.9	915.6	914.4	912.6	910.1	907.7	905.3	902.9	904.0
15°	901.2	900.0	898.8	897.6	896.3	894.4	891.8	889.1	886.5	883.9	884.8
17.5°	877.9	876.6	875.5	874.2	873.1	871.1	868.4	865.8	863.1	860.4	861.4
20°	861.1	860.0	858.7	857.5	856.3	854.3	851.4	848.6	845.8	842.9	843.6
22.5°	844.4	842.7	841.0	839.3	837.6	835.4	832.8	830.1	827.4	824.7	824.8
25°	815.6	814.0	812.4	810.7	809.1	806.6	803.2	799.8	796.3	792.9	793.3
27.5°	782.8	781.4	780.0	778.5	777.0	775.0	772.2	769.5	766.8	764.1	763.5
30°	761.0	759.4	757.8	756.2	754.6	752.2	749.2	746.2	743.2	740.1	739.5
32.5°	737.7	736.4	735.1	733.8	732.5	730.3	727.1	723.9	720.7	717.5	716.4
35°	703.6	701.7	699.6	697.6	695.5	692.9	689.7	686.4	683.2	680.0	678.8
37.5°	665.2	663.4	661.6	659.9	658.2	655.6	652.4	649.2	646.0	642.7	641.1
40°	639.0	637.4	635.8	634.2	632.6	630.2	626.9	623.7	620.5	617.2	615.4
42.5°	613.6	611.9	610.3	608.7	607.1	604.7	601.4	598.2	594.9	591.7	589.7
45°	572.6	571.1	569.7	568.4	566.9	564.7	561.7	558.7	555.6	552.6	550.4
47.5°	531.8	530.5	529.1	527.8	526.5	524.2	521.0	517.9	514.8	511.6	509.3
50°	503.4	502.4	501.4	500.3	499.4	497.4	494.6	491.8	488.9	486.1	483.3
52.5°	475.7	474.4	473.1	471.7	470.4	468.4	465.7	463.1	460.4	457.7	455.4
55°	433.3	432.1	430.9	429.6	428.5	426.6	424.2	421.8	419.4	417.0	414.5
57.5°	390.7	389.8	388.8	387.8	386.8	385.0	382.4	379.7	377.0	374.3	371.9
60°	362.3	361.5	360.7	359.9	359.1	357.2	354.5	351.6	348.7	345.9	343.7
62.5°	334.7	333.3	332.1	330.7	329.5	327.7	325.6	323.3	321.2	319.0	316.9
65°	292.2	291.0	289.8	288.6	287.3	285.7	283.7	281.7	279.6	277.7	275.8
67.5°	249.1	248.1	247.1	246.1	245.1	243.8	241.9	240.1	238.4	236.5	235.1
70°	222.1	221.3	220.5	219.7	218.9	217.6	215.7	213.9	212.1	210.3	208.8
72.5°	194.5	193.6	192.8	192.0	191.2	190.2	189.0	187.9	186.7	185.5	184.1
75°	152.9	152.5	152.1	151.7	151.3	150.6	149.6	148.6	147.6	146.6	145.3
77.5°	115.8	115.1	114.4	113.7	113.1	112.5	112.1	111.6	111.3	110.8	110.3
80°	91.0	90.9	90.6	90.4	90.2	89.9	89.5	89.1	88.7	88.3	87.7
82.5°	67.8	67.7	67.7	67.6	67.6	67.4	67.1	67.0	66.7	66.4	65.7
85°	37.4	37.1	36.9	36.7	36.5	36.3	36.1	35.9	35.7	35.5	34.9
87.5°	13.4	13.6	13.9	14.3	14.5	14.8	14.9	15.0	15.2	15.2	15.1
90°	1.2	4.4	7.5	10.6	13.6	16.3	18.6	20.9	23.1	25.3	26.8
92.5°	25.6	25.3	25.1	24.8	24.5	24.9	26.0	27.2	28.3	29.4	30.1
95°	82.4	73.1	63.8	54.6	45.2	41.6	43.5	45.5	47.5	49.5	50.8
97.5°	163.6	137.4	111.2	85.0	58.8	48.0	52.5	57.1	61.6	66.2	67.3
100°	224.4	185.8	147.2	108.6	70.0	53.1	57.9	62.7	67.5	72.3	74.5
102.5°	291.4	283.3	275.1	266.9	258.8	234.6	194.6	154.4	114.4	74.3	77.2
105°	385.6	394.0	402.4	410.9	419.4	385.1	308.2	231.2	154.3	77.4	80.4
107.5°	492.8	499.6	506.5	513.3	520.1	477.4	385.1	292.8	200.5	108.3	105.1
110°	561.9	567.8	573.6	579.6	585.5	547.7	466.3	384.9	303.4	221.9	193.8



TEST NUMBER: P331553-940

CATALOG NUMBER: S122DIW-S675D1440U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	626.8	632.0	637.2	642.5	647.7	640.2	620.2	600.0	579.9	559.8	457.0
115°	729.2	734.1	738.8	743.6	748.4	754.3	761.3	768.4	775.4	782.5	652.0
117.5°	820.8	826.2	831.5	836.9	842.2	847.3	852.1	857.0	861.8	866.7	835.2
120°	887.8	892.0	896.2	900.4	904.6	909.3	914.4	919.4	924.5	929.6	933.0
122.5°	944.6	949.0	953.5	958.0	962.4	967.4	972.9	978.4	983.9	989.4	991.5
125°	1031.1	1034.7	1038.4	1042.1	1045.7	1050.3	1055.6	1061.0	1066.3	1071.7	1073.6
127.5°	1109.5	1113.5	1117.6	1121.6	1125.7	1129.7	1133.7	1137.7	1141.7	1145.8	1148.6
130°	1159.1	1163.7	1168.1	1172.7	1177.2	1181.0	1184.1	1187.2	1190.3	1193.4	1196.5
132.5°	1209.9	1213.7	1217.5	1221.4	1225.2	1228.7	1231.8	1234.8	1238.0	1241.1	1243.8
135°	1275.9	1280.3	1284.9	1289.3	1293.9	1297.4	1299.9	1302.4	1305.0	1307.5	1310.4
137.5°	1342.6	1345.7	1348.9	1352.0	1355.1	1358.2	1361.0	1364.0	1366.8	1369.7	1372.4
140°	1386.2	1388.4	1390.7	1392.9	1395.2	1397.8	1401.0	1404.1	1407.2	1410.2	1412.8
142.5°	1422.7	1424.7	1426.7	1428.8	1430.8	1433.6	1437.2	1440.7	1444.2	1447.8	1450.1
145°	1480.1	1479.7	1479.4	1479.2	1478.9	1481.1	1485.9	1490.8	1495.5	1500.3	1502.3
147.5°	1530.0	1528.9	1527.9	1526.8	1525.7	1527.5	1532.2	1537.0	1541.8	1546.5	1547.9
150°	1562.5	1560.5	1558.5	1556.6	1554.5	1555.9	1560.3	1564.9	1569.3	1573.9	1575.6
152.5°	1589.8	1587.7	1585.5	1583.2	1581.1	1582.1	1586.4	1590.6	1594.9	1599.2	1600.9
155°	1629.7	1627.1	1624.6	1622.0	1619.5	1620.0	1623.4	1626.7	1630.1	1633.4	1635.1
157.5°	1660.9	1658.8	1656.6	1654.5	1652.3	1652.4	1654.7	1657.2	1659.5	1661.9	1663.8
160°	1679.1	1677.4	1675.8	1674.1	1672.4	1672.4	1674.1	1675.8	1677.4	1679.1	1680.8
162.5°	1695.3	1693.7	1692.0	1690.3	1688.6	1688.5	1690.0	1691.4	1692.9	1694.3	1696.3
165°	1717.2	1715.5	1713.8	1712.1	1710.4	1710.0	1710.8	1711.6	1712.5	1713.3	1715.4
167.5°	1733.4	1731.7	1730.0	1728.3	1726.6	1726.2	1727.0	1727.8	1728.6	1729.4	1731.3
170°	1742.6	1740.9	1739.2	1737.5	1735.8	1735.2	1735.8	1736.3	1736.9	1737.5	1739.5
172.5°	1748.6	1747.0	1745.3	1743.6	1741.9	1741.3	1741.9	1742.4	1743.0	1743.6	1745.5
175°	1756.5	1754.5	1752.6	1750.6	1748.6	1747.9	1748.5	1749.0	1749.6	1750.2	1752.1
177.5°	1757.7	1756.2	1754.6	1753.0	1751.4	1750.8	1751.0	1751.2	1751.4	1751.7	1753.3
180°	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7



TEST NUMBER: P331553-940

CATALOG NUMBER: S122DIW-S675D1440U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	946.7	946.7	946.7	946.7	946.7	946.7	946.7	946.7
2.5°	942.6	944.3	945.9	946.6	946.2	945.9	945.6	945.3
5°	936.3	937.9	939.5	940.1	939.8	939.3	939.0	938.5
7.5°	925.8	927.4	929.0	929.5	929.1	928.7	928.3	927.8
10°	916.2	917.9	919.5	920.0	919.4	918.8	918.2	917.6
12.5°	905.1	906.2	907.4	907.7	907.2	906.9	906.4	906.0
15°	885.6	886.4	887.2	887.1	886.0	885.0	884.0	883.0
17.5°	862.3	863.2	864.2	864.2	863.2	862.2	861.2	860.2
20°	844.2	844.8	845.3	845.3	844.5	843.6	842.8	842.0
22.5°	825.0	825.1	825.2	825.0	824.6	824.0	823.6	823.1
25°	793.7	794.1	794.5	794.5	794.1	793.7	793.3	792.9
27.5°	762.9	762.3	761.7	760.9	759.9	758.9	758.0	757.0
30°	738.9	738.2	737.6	736.9	736.1	735.3	734.5	733.7
32.5°	715.3	714.3	713.1	712.2	711.4	710.6	709.7	708.9
35°	677.6	676.4	675.1	674.0	673.1	672.0	671.0	669.9
37.5°	639.7	638.2	636.7	635.4	634.5	633.5	632.6	631.6
40°	613.6	611.7	609.9	608.6	607.8	607.0	606.2	605.4
42.5°	587.7	585.8	583.8	582.2	581.0	580.0	578.8	577.7
45°	548.1	545.9	543.7	542.2	541.4	540.6	539.8	538.9
47.5°	506.9	504.5	502.2	500.4	499.3	498.1	497.0	495.8
50°	480.5	477.6	474.7	472.9	471.8	470.8	469.8	468.8
52.5°	453.0	450.7	448.4	446.5	445.1	443.8	442.5	441.1
55°	412.1	409.7	407.2	405.5	404.5	403.5	402.4	401.4
57.5°	369.5	367.1	364.8	363.2	362.4	361.7	360.9	360.1
60°	341.4	339.2	337.0	335.6	335.0	334.4	333.8	333.1
62.5°	314.9	312.8	310.8	309.3	308.5	307.7	307.0	306.2
65°	274.0	272.2	270.4	268.9	268.0	266.9	265.9	264.9
67.5°	233.6	232.3	230.9	229.7	228.9	228.1	227.3	226.5
70°	207.4	206.1	204.6	203.5	202.7	201.9	201.1	200.3
72.5°	182.7	181.3	179.9	178.8	178.2	177.5	176.9	176.2
75°	144.1	142.9	141.7	141.3	141.7	142.1	142.5	142.9
77.5°	109.7	109.1	108.4	107.9	107.3	106.7	106.2	105.6
80°	87.1	86.5	85.9	85.3	85.0	84.5	84.2	83.7
82.5°	64.9	64.1	63.4	63.0	62.9	62.8	62.7	62.6
85°	34.3	33.7	33.1	32.6	32.5	32.3	32.1	31.8
87.5°	14.9	14.6	14.4	14.4	14.3	14.3	14.2	14.1
90°	28.2	29.6	31.0	32.0	32.5	33.1	33.7	34.2
92.5°	30.9	31.7	32.4	32.9	33.3	33.5	33.9	34.2
95°	52.3	53.7	55.1	55.6	55.4	55.1	54.8	54.6
97.5°	68.5	69.6	70.7	71.4	71.8	72.1	72.5	72.8
100°	76.8	79.1	81.3	82.8	83.3	83.8	84.4	85.0
102.5°	80.2	83.1	86.1	87.9	88.7	89.4	90.2	91.0
105°	83.6	86.7	89.8	91.8	93.0	94.2	95.2	96.4
107.5°	102.0	98.8	95.7	94.7	95.8	96.9	98.1	99.2
110°	165.6	137.4	109.2	95.7	96.8	97.9	99.1	100.2



TEST NUMBER: P331553-940

CATALOG NUMBER: S122DIW-S675D1440U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	354.2	251.4	148.6	97.6	98.5	99.4	100.3	101.2
115°	521.6	391.0	260.6	185.1	164.9	144.5	124.3	104.0
117.5°	803.6	772.0	740.5	691.3	624.6	557.9	491.2	424.6
120°	936.4	939.8	943.2	925.8	887.8	849.7	811.6	773.6
122.5°	993.5	995.6	997.6	994.9	987.5	980.2	972.8	965.4
125°	1075.6	1077.5	1079.5	1080.9	1081.8	1082.6	1083.5	1084.3
127.5°	1151.5	1154.3	1157.2	1158.8	1158.9	1159.0	1159.2	1159.4
130°	1199.6	1202.7	1205.8	1207.2	1206.9	1206.7	1206.4	1206.0
132.5°	1246.3	1249.0	1251.7	1252.9	1252.6	1252.3	1252.1	1251.7
135°	1313.1	1316.0	1318.8	1319.9	1319.4	1318.8	1318.2	1317.7
137.5°	1375.2	1378.0	1380.7	1381.6	1380.6	1379.7	1378.8	1377.8
140°	1415.3	1417.9	1420.4	1420.9	1419.6	1418.2	1416.8	1415.3
142.5°	1452.4	1454.7	1457.1	1457.5	1456.1	1454.6	1453.3	1451.9
145°	1504.2	1506.2	1508.2	1508.5	1507.1	1505.7	1504.2	1502.9
147.5°	1549.4	1550.9	1552.4	1552.5	1551.3	1550.2	1548.9	1547.7
150°	1577.3	1579.0	1580.6	1580.7	1579.4	1578.0	1576.5	1575.1
152.5°	1602.6	1604.3	1606.0	1605.9	1604.0	1602.2	1600.4	1598.5
155°	1636.8	1638.5	1640.2	1639.9	1637.7	1635.5	1633.2	1630.9
157.5°	1665.7	1667.6	1669.6	1669.4	1667.2	1665.0	1662.8	1660.6
160°	1682.5	1684.2	1685.9	1685.8	1683.8	1681.8	1679.8	1677.8
162.5°	1698.2	1700.1	1702.0	1701.7	1699.3	1696.9	1694.5	1692.1
165°	1717.3	1719.3	1721.3	1721.3	1719.3	1717.3	1715.4	1713.3
167.5°	1733.3	1735.3	1737.2	1737.0	1734.5	1731.9	1729.4	1726.8
170°	1741.4	1743.4	1745.3	1745.1	1742.6	1740.0	1737.5	1734.9
172.5°	1747.5	1749.4	1751.4	1751.1	1748.6	1746.1	1743.6	1741.0
175°	1754.1	1756.0	1758.0	1757.7	1754.8	1751.9	1749.2	1746.3
177.5°	1754.8	1756.4	1758.0	1757.7	1755.7	1753.7	1751.7	1749.6
180°	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7	1752.7

(END OF REPORT)